


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.5V I:0.3700A P:44.00W PF:0.9950 Lamp Flux:6042.63x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*3	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 137.33 lm/W			
MODEL		Imax(cd)	2008	S/MH(C0/180)	1.29
NOMINAL POWER(W)	44	LOR(%)	100.0	S/MH(C90/270)	1.21
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	6042.6	□ UP,DN(C0-180)	2.2,48.2
NOMINAL FLUX(lm)	6042.63	CIE CLASS	DIRECT	□ UP,DN(C180-360)	2.3,47.3
LAMPS INSIDE	1	□ up(%)	4.5	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	119.5	□ down(%)	95.5	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

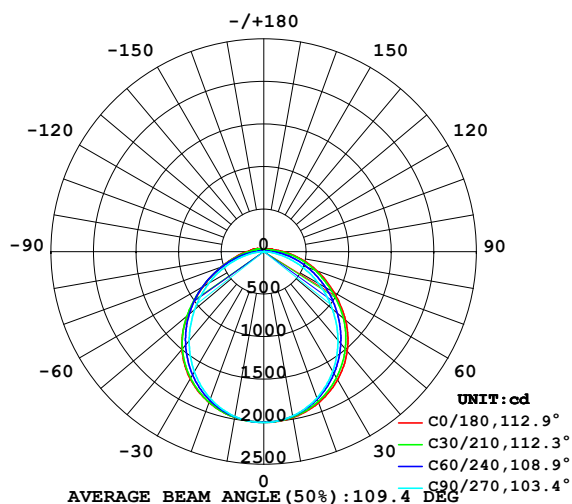

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

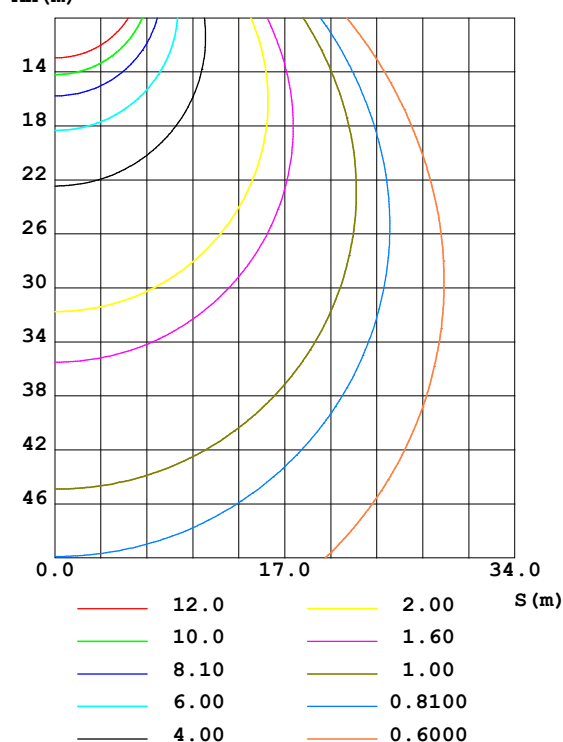


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1170-38-PV
源磊A-档
3500K

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	zone	total	%lum, lamp
5	2001	1997	1996	1999	1999	1999	1998	1997	0- 5	47.89	47.89	0.79,0.79
10	1980	1969	1961	1974	1978	1975	1967	1969	5- 10	142.0	189.9	3.14,3.14
15	1943	1922	1906	1930	1941	1932	1912	1920	10- 15	231.2	421.1	6.97,6.97
20	1889	1858	1831	1868	1886	1871	1838	1854	15- 20	312.2	733.3	12.1,12.1
25	1820	1778	1736	1788	1815	1792	1744	1771	20- 25	382.1	1115	18.5,18.5
30	1737	1682	1624	1691	1728	1697	1632	1672	25- 30	438.5	1554	25.7,25.7
35	1639	1572	1497	1578	1623	1586	1505	1559	30- 35	479.3	2033	33.6,33.6
40	1526	1450	1358	1453	1497	1460	1365	1433	35- 40	503.2	2536	42,42
45	1397	1318	1209	1314	1347	1320	1217	1299	40- 45	509.3	3046	50.4,50.4
50	1255	1177	1053	1163	1170	1163	1062	1154	45- 50	497.2	3543	58.6,58.6
55	1101	1028	897.2	1002	992.4	998.5	905.2	1005	50- 55	467.5	4010	66.4,66.4
60	951.2	878.1	739.9	840.7	824.1	834.4	747.9	855.3	55- 60	424.2	4435	73.4,73.4
65	806.8	733.9	585.3	683.1	672.2	675.5	593.3	710.6	60- 65	371.1	4806	79.5,79.5
70	671.3	595.7	434.4	533.7	537.0	526.4	439.5	573.2	65- 70	311.9	5118	84.7,84.7
75	538.6	464.9	291.2	398.1	418.3	393.5	295.4	440.0	70- 75	249.4	5367	88.8,88.8
80	414.3	342.1	158.1	276.8	322.3	278.4	165.5	319.1	75- 80	187.1	5554	91.9,91.9
85	312.5	233.5	51.60	186.2	254.4	192.6	59.80	210.7	80- 85	130.5	5685	94.1,94.1
90	231.8	152.0	0.9211	124.5	197.8	130.7	1.306	128.8	85- 90	85.80	5770	95.5,95.5
95	175.0	103.2	1.887	92.22	162.6	103.8	1.616	83.24	90- 95	58.66	5829	96.5,96.5
100	125.9	74.37	2.207	77.59	141.0	87.99	2.068	60.87	95-100	44.49	5874	97.2,97.2
105	104.3	61.57	2.366	63.92	122.5	73.17	1.760	50.00	100-105	35.69	5909	97.8,97.8
110	88.69	49.27	0.9842	52.66	103.0	59.15	1.059	40.34	105-110	28.86	5938	98.3,98.3
115	74.84	39.93	1.213	44.87	89.12	49.50	1.267	31.65	110-115	23.04	5961	98.7,98.7
120	60.92	33.41	1.609	40.08	71.82	43.10	1.731	26.30	115-120	18.50	5980	99,99
125	50.66	26.99	1.296	36.64	61.41	39.53	1.660	21.73	120-125	15.03	5995	99.2,99.2
130	42.13	22.41	0.8234	33.42	56.19	36.86	1.561	17.62	125-130	12.38	6007	99.4,99.4
135	34.62	18.25	0.8809	30.30	50.65	33.52	1.520	14.17	130-135	10.14	6017	99.6,99.6
140	28.01	14.24	0.9115	27.11	45.10	29.52	1.486	11.84	135-140	8.056	6025	99.7,99.7
145	22.21	11.39	0.9402	23.61	39.74	25.01	1.448	9.105	140-145	6.171	6031	99.8,99.8
150	17.17	8.463	1.276	19.17	32.63	19.75	1.827	7.295	145-150	4.486	6036	99.9,99.9
155	13.11	6.554	1.903	14.48	24.20	14.58	1.752	6.222	150-155	3.032	6039	99.9,99.9
160	10.34	5.720	1.788	10.33	16.62	10.08	1.689	5.153	155-160	1.904	6041	100,100
165	9.025	4.393	1.643	6.517	9.798	6.221	1.603	4.055	160-165	1.086	6042	100,100
170	6.820	3.111	1.487	4.155	4.501	3.466	1.505	2.478	165-170	0.5274	6042	100,100
175	2.306	1.569	1.309	2.187	1.762	1.885	1.337	1.325	170-175	0.1815	6043	100,100
180	1.228	1.214	1.206	1.248	1.231	1.213	1.218	1.249	175-180	0.0349	6043	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

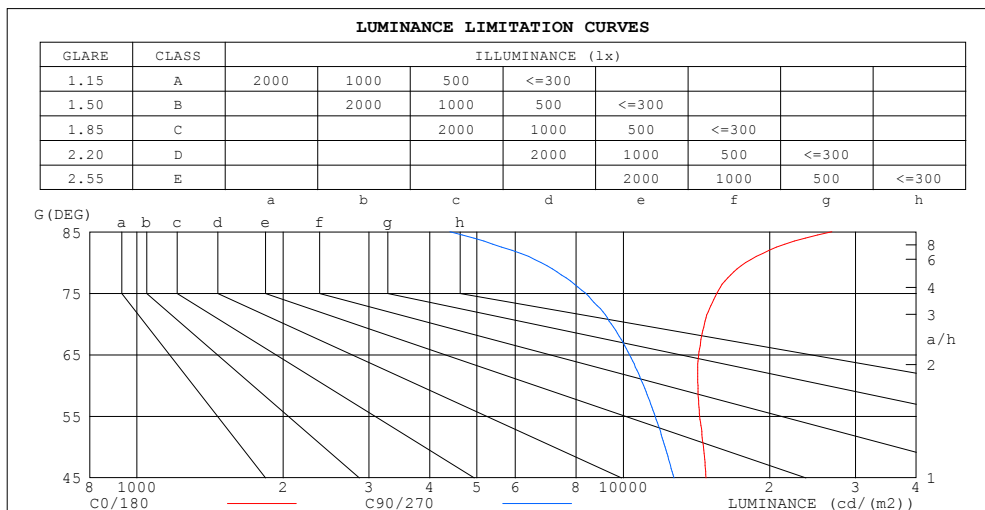

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	26832	4403
80	17852	6772
75	15572	8368
70	14687	9447
65	14287	10301
60	14237	11006
55	14359	11635
50	14612	12187
45	14786	12712


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1170-38-PV
源磊A-档
3500K

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.5V I:0.3700A P:44.00W PF:0.9950 Lamp Flux:6042.63x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*3	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.03	1.03	1.03	.98	.98	.98	.95
1.0	1.02	.97	.93	.99	.95	.91	.94	.91	.88	.89	.87	.84	.85	.83	.81	.78
2.0	.89	.82	.76	.86	.80	.74	.82	.77	.72	.78	.74	.70	.74	.71	.67	.65
3.0	.78	.69	.63	.76	.68	.62	.72	.66	.60	.69	.63	.59	.66	.61	.57	.55
4.0	.69	.60	.53	.67	.59	.52	.64	.57	.51	.61	.55	.50	.59	.53	.49	.47
5.0	.61	.52	.46	.60	.52	.45	.57	.50	.44	.55	.48	.43	.53	.47	.43	.40
6.0	.55	.46	.40	.54	.46	.40	.52	.44	.39	.50	.43	.38	.48	.42	.37	.35
7.0	.50	.41	.35	.49	.41	.35	.47	.40	.34	.45	.39	.34	.44	.38	.33	.31
8.0	.46	.37	.31	.45	.37	.31	.43	.36	.31	.42	.35	.30	.40	.34	.30	.28
9.0	.42	.34	.28	.41	.33	.28	.40	.33	.28	.38	.32	.27	.37	.31	.27	.25
10.0	.39	.31	.26	.38	.30	.25	.37	.30	.25	.36	.29	.25	.34	.29	.24	.23

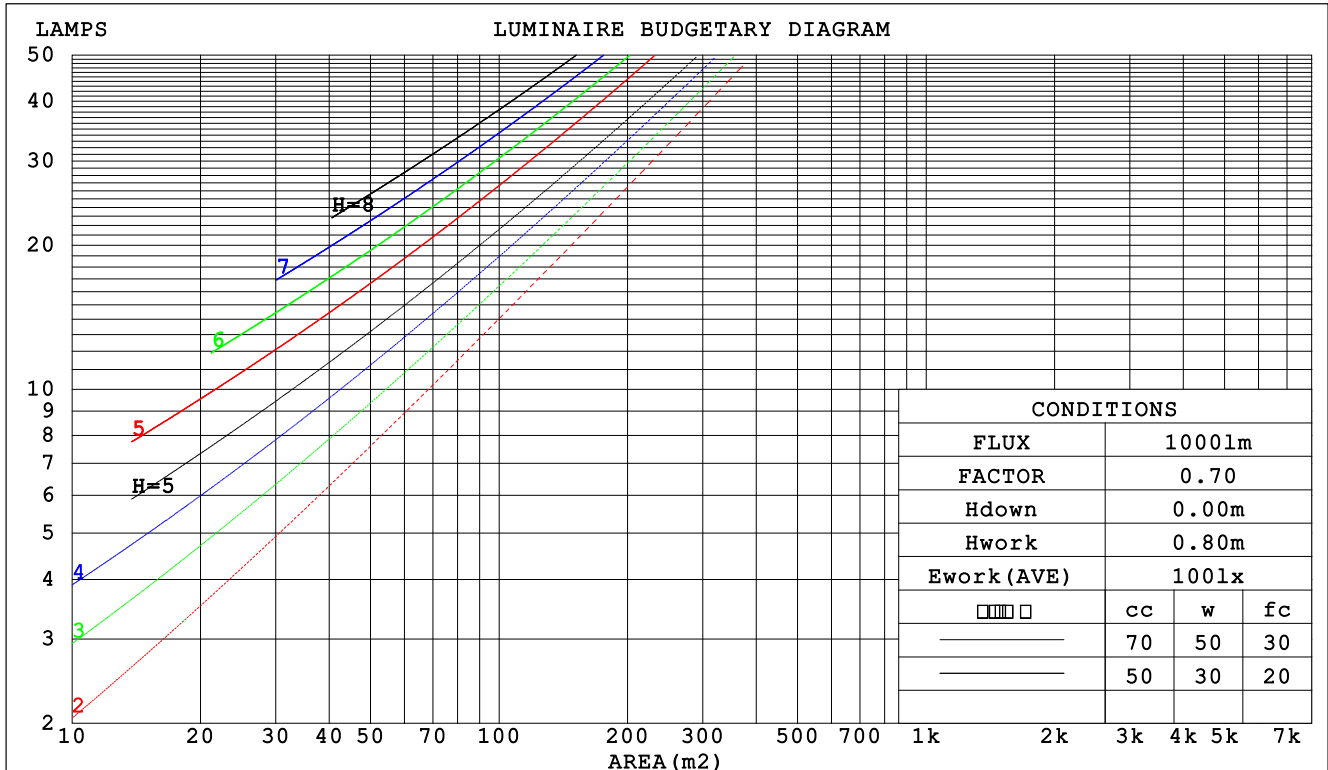

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

□ Range: 0 - 180DEG
 □ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: BQE46-1170-38-PV
 源磊A-档
 3500K

WEC AND CCEC

Test:U:119.5V I:0.3700A P:44.00W PF:0.9950 Lamp Flux:6042.63x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*3	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

□cc	80%	70%	50%	30%	10%	0
□w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
□fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.327 .186 .059	.318 .182 .058	.302 .173 .055	.288 .166 .053	.274 .159 .051	
2.0	.299 .164 .050	.292 .161 .049	.277 .154 .048	.264 .148 .046	.252 .143 .045	
3.0	.274 .146 .044	.267 .143 .043	.254 .138 .042	.243 .133 .041	.232 .128 .040	
4.0	.251 .130 .038	.245 .128 .038	.234 .124 .037	.223 .120 .036	.213 .116 .035	
5.0	.231 .118 .034	.226 .116 .034	.216 .112 .033	.206 .109 .032	.197 .105 .032	
6.0	.214 .107 .031	.209 .106 .030	.200 .102 .030	.191 .099 .029	.183 .097 .029	
7.0	.199 .098 .028	.194 .097 .028	.186 .094 .027	.178 .091 .027	.171 .089 .026	
8.0	.185 .091 .025	.181 .089 .025	.174 .087 .025	.167 .085 .024	.161 .082 .024	
9.0	.173 .084 .023	.170 .083 .023	.163 .081 .023	.157 .079 .023	.151 .077 .022	
10.0	.163 .078 .022	.160 .077 .022	.154 .075 .021	.148 .073 .021	.142 .072 .021	

□cc	80%	70%	50%	30%	10%	0
□w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
□fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.225 .225 .225	.192 .192 .192	.131 .131 .131	.075 .075 .075	.024 .024 .024	
1.0	.216 .191 .168	.185 .164 .144	.126 .113 .100	.073 .065 .058	.023 .021 .019	
2.0	.208 .167 .132	.178 .144 .114	.122 .099 .080	.070 .058 .047	.023 .019 .015	
3.0	.200 .149 .109	.172 .129 .094	.118 .090 .066	.068 .052 .039	.022 .017 .013	
4.0	.192 .136 .093	.165 .118 .081	.114 .082 .057	.066 .048 .034	.021 .016 .011	
5.0	.185 .126 .082	.159 .109 .072	.109 .076 .051	.063 .045 .030	.020 .015 .010	
6.0	.178 .118 .075	.153 .102 .065	.105 .071 .046	.061 .042 .027	.020 .014 .009	
7.0	.171 .111 .069	.147 .096 .060	.102 .067 .042	.059 .040 .025	.019 .013 .008	
8.0	.164 .105 .064	.141 .091 .056	.098 .064 .040	.057 .038 .024	.018 .012 .008	
9.0	.158 .100 .061	.136 .087 .053	.094 .061 .038	.055 .036 .022	.018 .012 .007	
10.0	.153 .096 .058	.132 .083 .051	.091 .059 .036	.053 .035 .022	.017 .011 .007	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

□ Range: 0 - 180DEG
 □ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: BQE46-1170-38-PV
 源磊A-档
 3500K

Uncorrected UGR Table

Test:U:119.5V I:0.3700A P:44.00W PF:0.9950 Lamp Flux:6042.63x1 lm										
NAME: 磁铁灯条					TYPE:T5窄灯条 3500K			WEIGHT:		
DIM.: 4FT*3					SPEC.:乳白PC罩			SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co,ltd					SUR.:1.22*0.11m			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.0	23.5	22.3	23.7	24.0	21.1	22.5	21.4	22.8	23.1
3H	23.8	25.2	24.2	25.5	25.8	22.4	23.8	22.8	24.1	24.4
4H	24.7	26.0	25.1	26.3	26.7	22.9	24.2	23.3	24.6	24.9
6H	25.6	26.8	26.0	27.2	27.5	23.3	24.5	23.7	24.8	25.2
8H	26.0	27.2	26.5	27.6	28.0	23.3	24.5	23.8	24.9	25.3
12H	26.5	27.7	27.0	28.0	28.4	23.4	24.5	23.8	24.9	25.3
4H 2H	22.5	23.8	22.9	24.2	24.5	21.8	23.1	22.2	23.4	23.8
3H	24.6	25.7	25.0	26.1	26.5	23.4	24.6	23.8	24.9	25.3
4H	25.7	26.7	26.1	27.1	27.5	24.1	25.1	24.6	25.6	26.0
6H	26.7	27.7	27.2	28.1	28.5	24.6	25.5	25.1	26.0	26.4
8H	27.3	28.1	27.8	28.6	29.1	24.8	25.6	25.2	26.1	26.6
12H	27.9	28.7	28.4	29.1	29.7	24.8	25.6	25.3	26.1	26.6
8H 4H	26.0	26.8	26.4	27.3	27.8	24.6	25.5	25.1	25.9	26.4
6H	27.3	28.0	27.8	28.5	29.0	25.4	26.1	25.9	26.6	27.1
8H	28.0	28.6	28.5	29.1	29.7	25.7	26.3	26.2	26.8	27.4
12H	28.8	29.4	29.4	29.9	30.5	25.9	26.4	26.4	27.0	27.5
12H 4H	26.0	26.8	26.5	27.2	27.7	24.7	25.5	25.2	26.0	26.5
6H	27.4	28.0	27.9	28.5	29.1	25.6	26.3	26.2	26.8	27.3
8H	28.2	28.7	28.7	29.2	29.8	26.0	26.6	26.6	27.1	27.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117 Corrected 6043 lm Total Lamp Luminous Flux.(8log(F/F0) = 6.2)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1170-38-PV
源磊A-档
3500K

UTILIZATION FACTORS TABLE

Test:U:119.5V I:0.3700A P:44.00W PF:0.9950 Lamp Flux:6042.63x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*3	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	56	44	37	55	44	37	54	43	37	30
0.80	66	54	46	64	53	46	62	52	46	39
1.00	74	62	55	72	62	55	70	63	54	46
1.25	81	70	62	79	69	62	76	67	61	53
1.50	86	75	68	84	74	67	80	72	66	58
2.00	93	83	77	90	82	76	86	79	74	65
2.50	97	88	82	94	87	81	90	83	78	69
3.00	100	92	87	97	91	85	93	87	83	73
4.00	104	98	93	101	96	91	96	92	88	78
5.00	107	101	97	104	99	95	98	95	91	81
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: BQE46-1170-38-PV
 源磊A-档
 3500K

ISOCANDELA DIAGRAM

Test:U:119.5V I:0.3700A P:44.00W PF:0.9950 Lamp Flux:6042.63x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*3	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

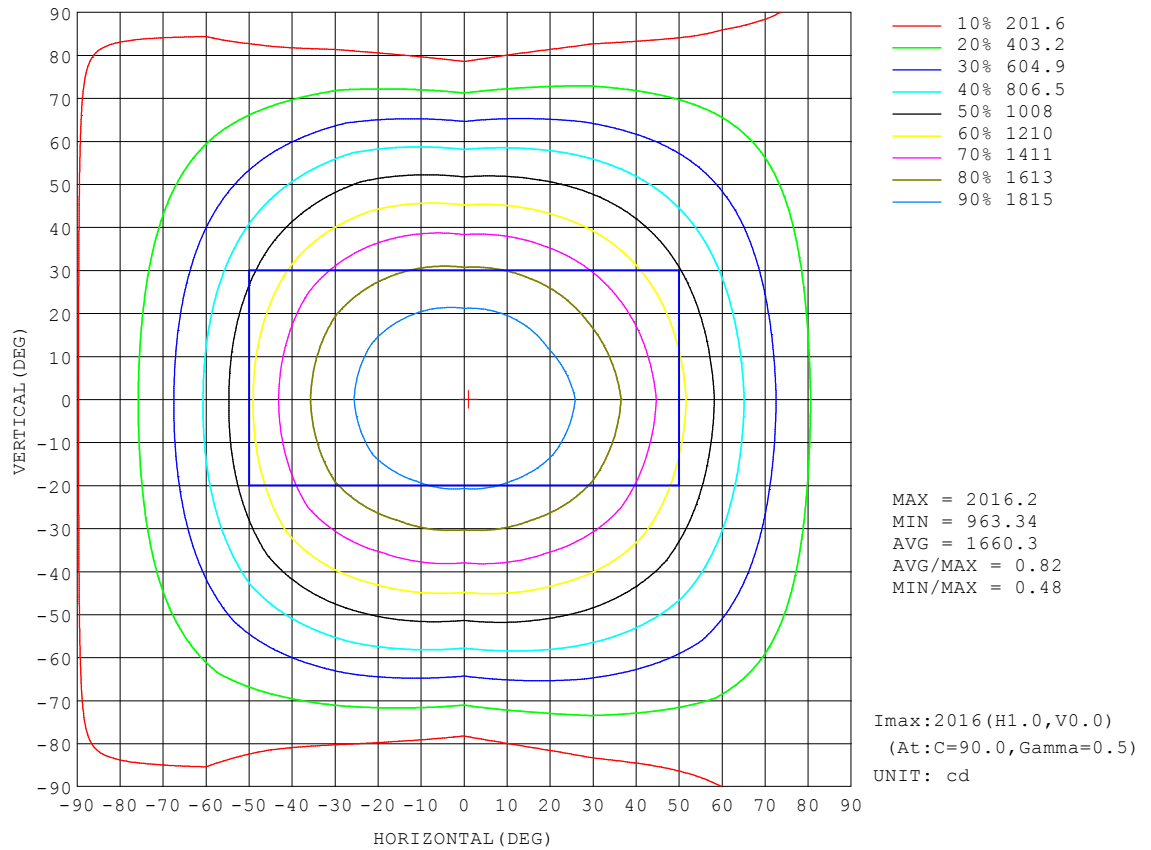


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1170-38-PV
源磊A-档
3500K

AAI Figure

Test:U:119.5V I:0.3700A P:44.00W PF:0.9950 Lamp Flux:6042.63x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*3	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

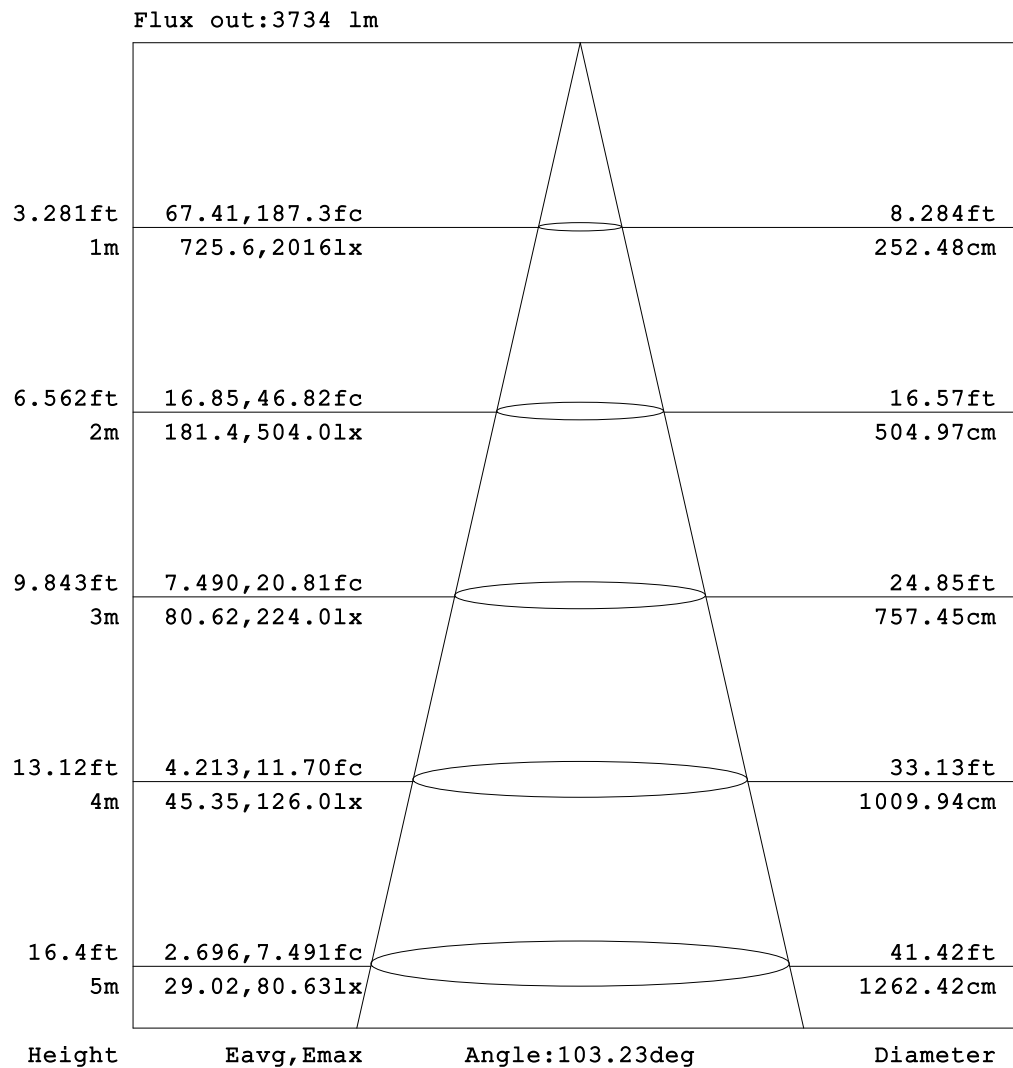


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1170-38-PV
源磊A-档
3500K

ISOLUX DIAGRAM


Test:U:119.5V I:0.3700A P:44.00W PF:0.9950 Lamp Flux:6042.63x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*3	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

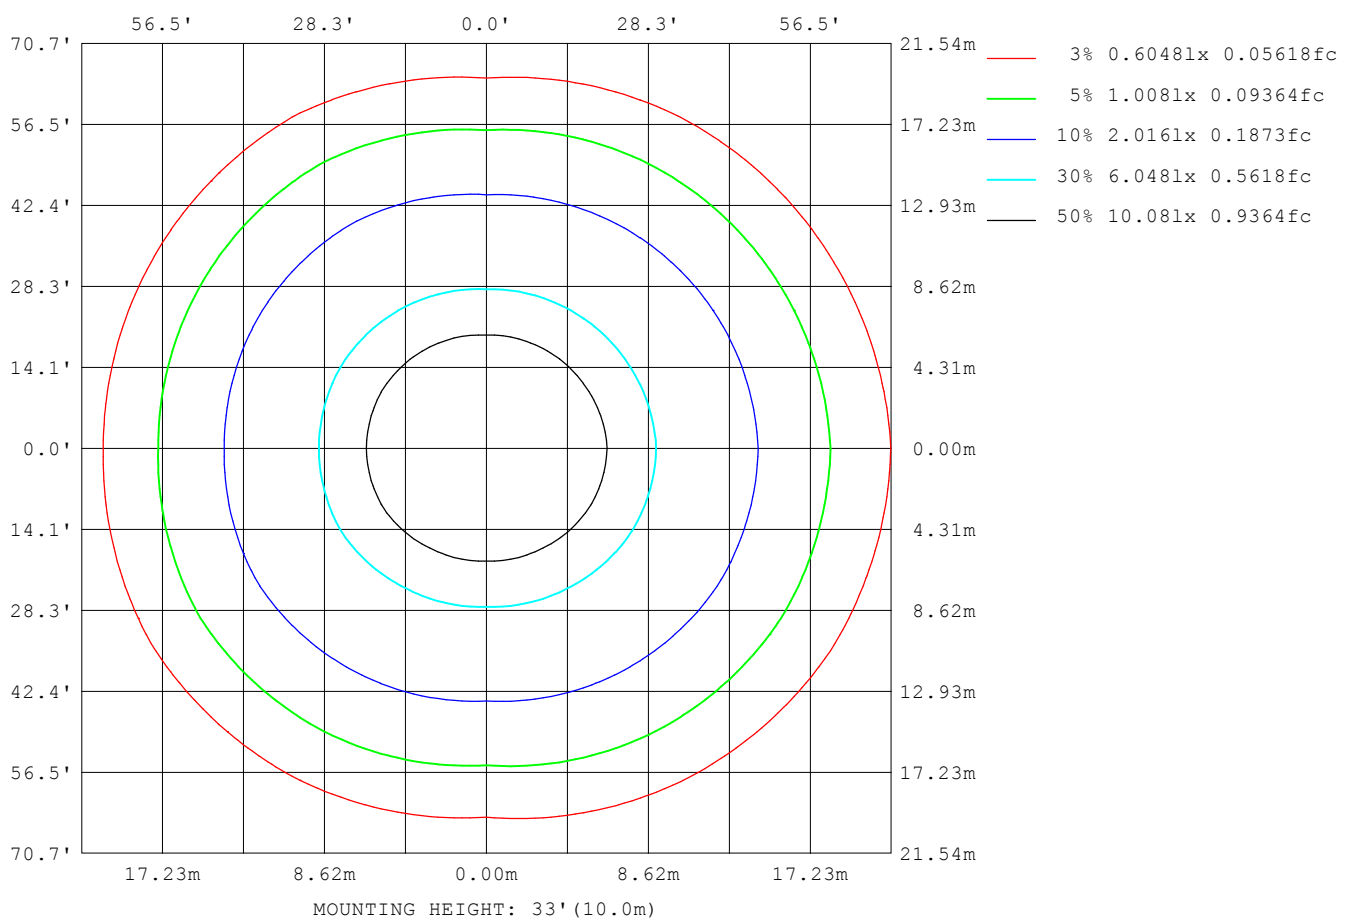

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1170-38-PV
源磊A-档
3500K

Planar Illuminance Curve

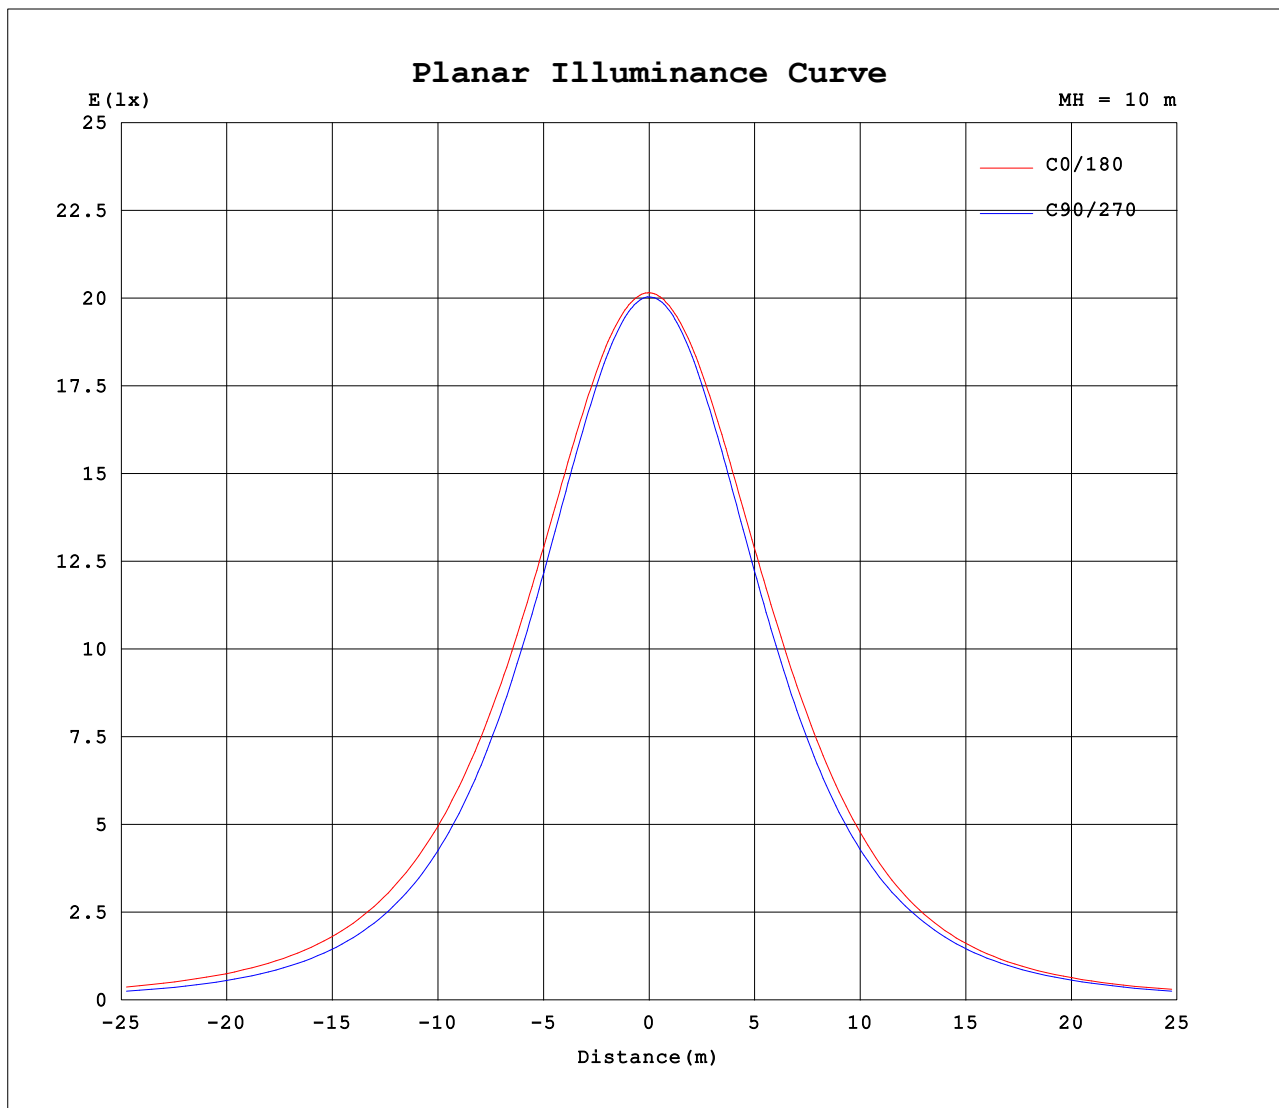

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: BQE46-1170-38-PV
源磊A-档
3500K

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.5V I:0.3700A P:44.00W PF:0.9950 Lamp Flux:6042.63x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*3	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2007	2007	2007	2007	2007	2007	2007	2007	2007	2007	2007	2007						
5	2001	1999	1995	1996	1997	2002	1999	2000	1999	1998	1997	1997						
10	1980	1974	1963	1961	1967	1981	1978	1979	1971	1967	1968	1969						
15	1943	1932	1912	1906	1916	1943	1941	1940	1925	1912	1917	1923						
20	1889	1873	1843	1831	1847	1888	1886	1883	1860	1838	1847	1861						
25	1820	1799	1756	1736	1760	1815	1815	1809	1776	1744	1759	1784						
30	1737	1709	1654	1624	1655	1726	1728	1720	1675	1632	1653	1691						
35	1639	1607	1537	1497	1536	1620	1623	1613	1558	1505	1533	1585						
40	1526	1492	1408	1358	1406	1499	1497	1489	1431	1365	1403	1464						
45	1397	1364	1272	1209	1265	1363	1347	1346	1294	1217	1265	1333						
50	1255	1224	1130	1053	1119	1208	1170	1181	1145	1062	1117	1190						
55	1101	1072	983	897	968	1037	992	1005	992	905	969	1040						
60	951	920	836	740	814	867	824	833	836	748	823	888						
65	807	777	691	585	660	706	672	675	676	593	678	744						
70	671	641	550	434	507	560	537	530	523	439	539	608						
75	539	511	418	291	366	431	418	406	381	295	405	475						
80	414	388	296	158	237	317	322	301	256	166	284	355						
85	313	281	186	51.6	135	238	254	229	156	59.8	171	250						
90	232	202	102	0.92	74.5	175	198	170	91.1	1.31	81.6	176						
95	175	146	59.9	1.89	51.8	133	163	139	68.7	1.62	42.1	124						
100	126	103	45.8	2.21	41.2	114	141	120	55.5	2.07	32.1	89.7						
105	104	86.8	36.3	2.37	32.1	95.8	122	103	43.8	1.76	24.6	75.5						
110	88.7	73.4	25.1	0.98	24.1	81.2	103	85.2	33.1	1.06	17.7	63.0						
115	74.8	58.7	21.1	1.21	22.8	67.0	89.1	71.3	27.7	1.27	14.8	48.5						
120	60.9	48.7	18.1	1.61	23.1	57.1	71.8	58.7	27.5	1.73	12.7	39.9						
125	50.7	40.9	13.0	1.30	22.7	50.6	61.4	52.0	27.0	1.66	10.6	32.9						
130	42.1	34.0	10.8	0.82	21.2	45.7	56.2	47.7	26.0	1.56	8.42	26.9						
135	34.6	28.1	8.42	0.88	18.4	42.2	50.6	44.2	22.8	1.52	6.87	21.5						
140	28.0	21.7	6.77	0.91	15.5	38.8	45.1	40.1	18.9	1.49	5.90	17.8						
145	22.2	17.2	5.62	0.94	12.7	34.6	39.7	34.8	15.3	1.45	5.49	12.7						
150	17.2	12.1	4.87	1.28	10.0	28.3	32.6	27.6	11.9	1.83	5.42	9.18						
155	13.1	8.42	4.69	1.90	7.65	21.3	24.2	20.3	8.83	1.75	5.20	7.25						
160	10.3	6.01	5.43	1.79	5.76	14.9	16.6	13.8	6.39	1.69	3.98	6.33						
165	9.02	4.87	3.91	1.64	3.56	9.48	9.80	8.45	3.99	1.60	3.02	5.10						
170	6.82	3.61	2.62	1.49	2.72	5.60	4.50	4.13	2.80	1.51	1.73	3.23						
175	2.31	1.84	1.30	1.31	1.73	2.64	1.76	2.14	1.63	1.34	1.31	1.34						
180	1.23	1.22	1.21	1.21	1.22	1.27	1.23	1.22	1.21	1.22	1.22	1.28						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

□ Range: 0 - 180DEG
 □ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: BQE46-1170-38-PV
 源磊A-档
 3500K