


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.80V I:0.3610A P:43.000W PF:0.9930 Freq:50.00Hz Lamp Flux:5181.75x1 lm		
NAME: WL-RTST345D(40K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.06	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 120.51 lm/W			
MODEL		I _{max} (cd)	2512	S/MH(C0/180)	1.13
NOMINAL POWER(W)	45	LOR(%)	100.0	S/MH(C90/270)	1.15
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	5181.7	η UP, DN(C0-180)	0.1, 51.2
NOMINAL FLUX(lm)	5181.75	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1, 48.7
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	219.7	η down(%)	99.8	CIBSE SHR MAX	1.25

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

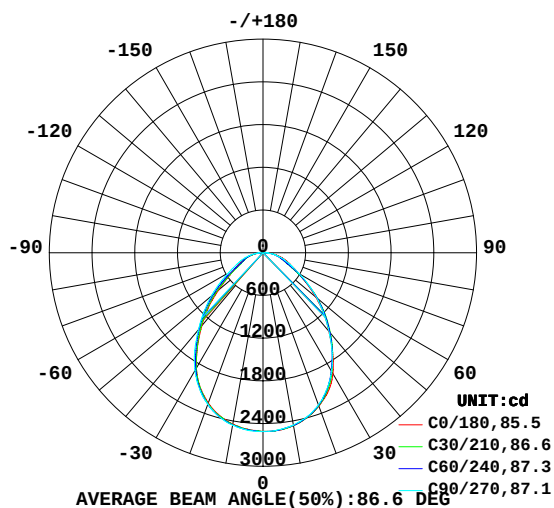

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

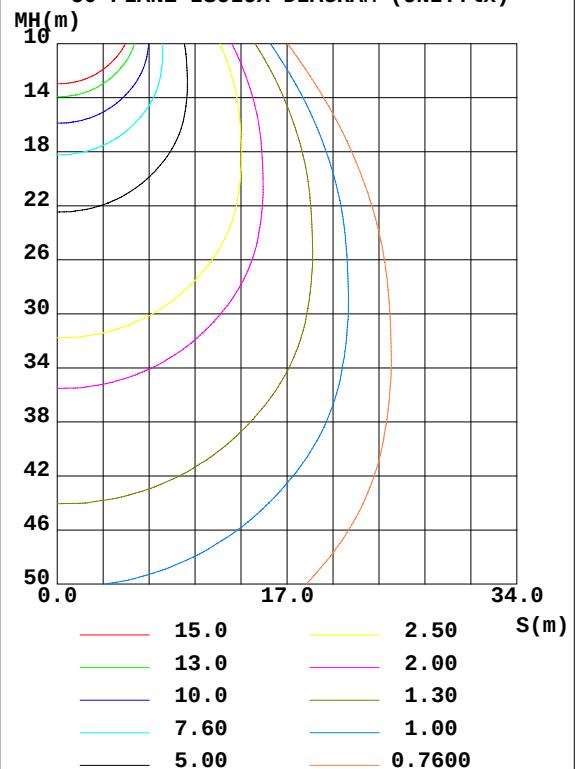

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity: 50.0%
 Test Distance: 6.770m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2466	2463	2458	2456	2442	2453	2458	2456	0- 10	237.1	237.1	4.58, 4.58
20	2293	2285	2275	2282	2246	2260	2265	2261	10- 20	671.0	908.1	17.5, 17.5
30	1966	1927	1927	1929	1870	1881	1911	1878	20- 30	970.0	1878	36.2, 36.2
40	1441	1467	1442	1433	1338	1375	1411	1410	30- 40	1039	2917	56.3, 56.3
50	967.8	996.4	983.9	943.8	814.6	880.0	948.1	937.3	40- 50	905.6	3822	73.8, 73.8
60	569.5	553.8	586.3	496.7	460.9	449.0	552.8	509.4	50- 60	636.3	4459	86, 86
70	361.3	301.6	341.5	292.6	292.1	274.7	328.7	285.3	60- 70	387.5	4846	93.5, 93.5
80	192.6	172.3	171.3	163.0	141.1	140.0	161.2	151.2	70- 80	246.1	5092	98.3, 98.3
90	9.023	5.150	1.750	0.2815	0.3007	0.3056	0.3373	0.3256	80- 90	81.42	5174	99.8, 99.8
100	0.3325	0.4928	0.9213	0.5485	0.5628	0.6161	0.6908	0.4845	90-100	0.5047	5174	99.9, 99.9
110	0.5666	1.035	1.528	1.092	0.7420	1.122	0.8535	0.9874	100-110	0.7951	5175	99.9, 99.9
120	1.047	1.538	1.770	1.665	1.164	1.660	1.019	1.373	110-120	1.220	5176	99.9, 99.9
130	1.475	1.880	1.938	1.917	1.596	1.798	1.210	1.111	120-130	1.418	5178	99.9, 99.9
140	1.510	2.028	2.068	2.094	1.700	2.018	1.388	0.8878	130-140	1.321	5179	99.9, 99.9
150	1.682	2.032	2.194	2.241	1.788	2.364	1.910	1.166	140-150	1.140	5180	100, 100
160	1.860	2.066	2.201	2.398	1.917	2.541	2.569	2.000	150-160	0.9569	5181	100, 100
170	1.987	2.245	2.069	2.298	2.205	2.159	2.093	2.007	160-170	0.6222	5182	100, 100
180	1.856	1.883	1.863	1.870	1.856	1.881	1.870	1.878	170-180	0.1953	5182	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity: 50.0%
 Test Distance: 6.770m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.80V I:0.3610A P:43.000W PF:0.9930 Freq:50.00Hz Lamp Flux:5181.75x1 lm		
NAME: WL-RTST345D(40K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.06	Shielding Angle:

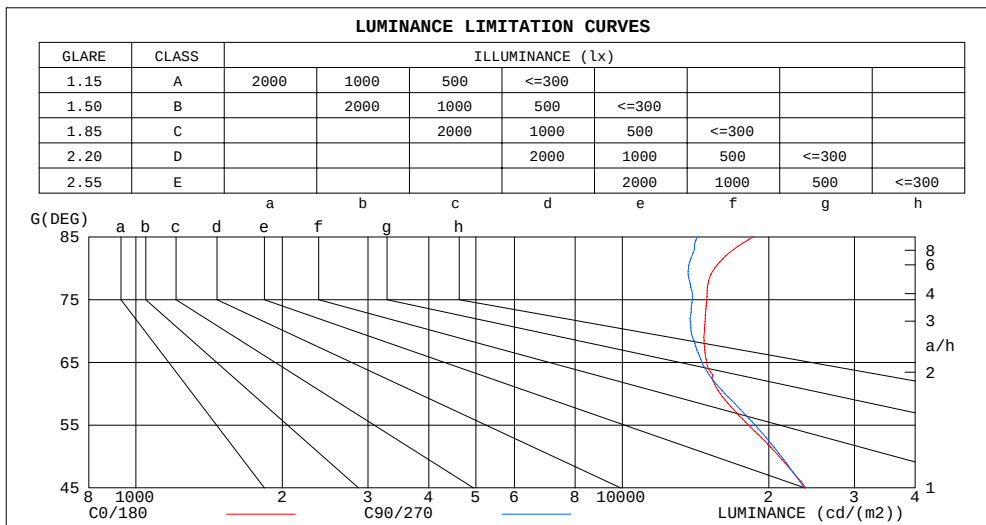


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.80V I:0.3610A P:43.000W PF:0.9930 Freq:50.00Hz Lamp Flux:5181.75x1 lm		
NAME: WL-RTST345D(40K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.06	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.06	1.02	.98	1.03	.99	.97	.99	.96	.94	.95	.93	.91	.92	.90	.88	.86
2.0	.94	.88	.83	.92	.86	.82	.88	.84	.80	.85	.81	.78	.82	.79	.76	.74
3.0	.84	.76	.71	.82	.75	.70	.79	.74	.69	.77	.72	.68	.74	.70	.66	.64
4.0	.75	.67	.61	.74	.67	.61	.72	.65	.60	.69	.64	.59	.67	.62	.58	.56
5.0	.68	.60	.54	.67	.59	.54	.65	.58	.53	.63	.57	.52	.61	.56	.52	.50
6.0	.62	.54	.48	.61	.53	.48	.59	.52	.47	.58	.52	.47	.56	.51	.46	.44
7.0	.57	.49	.43	.56	.48	.43	.54	.47	.42	.53	.47	.42	.52	.46	.42	.40
8.0	.52	.44	.39	.51	.44	.39	.50	.43	.38	.49	.43	.38	.48	.42	.38	.36
9.0	.48	.40	.35	.48	.40	.35	.46	.40	.35	.45	.39	.35	.44	.39	.35	.33
10.0	.45	.37	.32	.44	.37	.32	.43	.37	.32	.42	.36	.32	.41	.36	.32	.30

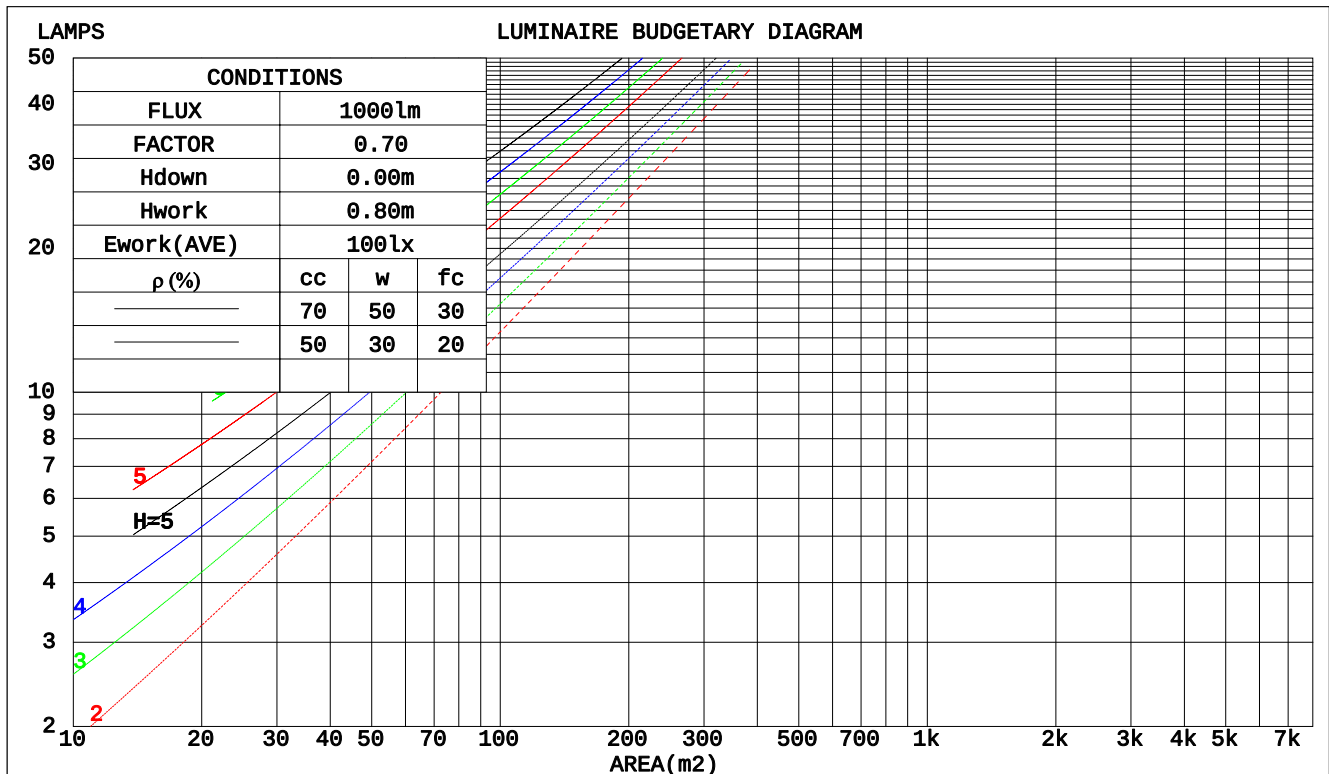

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 γ Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.80V I:0.3610A P:43.000W PF:0.9930 Freq:50.00Hz Lamp Flux:5181.75x1 lm									
NAME: WL-RTST345D(40K)					TYPE:			WEIGHT:	
SPEC.:					DIM.:			SERIAL No.:	
MFR.: Shenzhen Wisdom Light Co., ltd					SUR.:1.2*0.06			Shielding Angle:	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.274	.156	.049	.267	.152	.048	.254	.146	.047	.242	.139	.045	.231	.134	.043	
2.0	.259	.142	.043	.253	.139	.043	.241	.134	.042	.230	.129	.040	.221	.125	.039	
3.0	.241	.128	.038	.236	.126	.038	.226	.122	.037	.216	.119	.036	.208	.115	.036	
4.0	.225	.117	.034	.220	.115	.034	.211	.112	.033	.203	.109	.033	.195	.106	.032	
5.0	.209	.107	.031	.205	.105	.031	.197	.103	.030	.190	.100	.030	.183	.098	.029	
6.0	.196	.098	.028	.192	.097	.028	.185	.095	.028	.178	.093	.027	.172	.091	.027	
7.0	.183	.091	.026	.180	.090	.026	.174	.088	.025	.168	.086	.025	.163	.084	.025	
8.0	.172	.084	.024	.169	.083	.024	.164	.082	.023	.159	.080	.023	.154	.079	.023	
9.0	.163	.079	.022	.160	.078	.022	.155	.077	.022	.150	.075	.022	.146	.074	.021	
10.0	.154	.074	.020	.151	.073	.020	.147	.072	.020	.142	.071	.020	.138	.070	.020	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.179	.158	.138	.153	.135	.119	.105	.093	.082	.060	.054	.048	.019	.017	.015	
2.0	.169	.133	.103	.145	.115	.089	.099	.079	.062	.057	.046	.036	.018	.015	.012	
3.0	.160	.115	.080	.137	.099	.069	.094	.069	.048	.054	.040	.029	.017	.013	.009	
4.0	.152	.102	.063	.130	.088	.055	.090	.061	.039	.052	.036	.023	.017	.012	.008	
5.0	.144	.091	.052	.124	.079	.045	.085	.055	.032	.050	.032	.019	.016	.011	.006	
6.0	.137	.082	.043	.118	.071	.037	.081	.050	.026	.047	.029	.016	.015	.010	.005	
7.0	.131	.075	.037	.113	.065	.032	.078	.046	.023	.045	.027	.013	.015	.009	.004	
8.0	.125	.070	.032	.107	.060	.028	.074	.042	.020	.043	.025	.012	.014	.008	.004	
9.0	.119	.065	.028	.103	.056	.024	.071	.039	.017	.041	.023	.010	.013	.008	.003	
10.0	.114	.060	.025	.098	.052	.022	.068	.037	.015	.040	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.80V I:0.3610A P:43.000W PF:0.9930 Freq:50.00Hz Lamp Flux:5181.75x1 lm											
NAME: WL-RTST345D(40K)					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: Shenzhen Wisdom Light Co., ltd					SUR.:1.2*0.06			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.4	23.8	22.7	24.0	24.2	22.5	23.9	22.7	24.1	24.3	
	3H	23.5	24.8	23.8	25.0	25.2	23.5	24.7	23.7	24.9	
	4H	24.1	25.3	24.4	25.5	25.8	24.0	25.2	24.3	25.4	
	6H	24.6	25.7	24.9	26.0	26.3	24.4	25.6	24.8	25.8	
	8H	24.9	26.0	25.2	26.2	26.5	24.6	25.7	25.0	26.0	
	12H	25.1	26.2	25.4	26.4	26.7	24.8	25.8	25.1	26.1	
4H	2H	22.7	23.9	23.1	24.2	24.4	22.8	24.0	23.1	24.2	
	3H	24.0	25.0	24.3	25.3	25.6	24.0	25.0	24.3	25.3	
	4H	24.7	25.7	25.1	26.0	26.3	24.6	25.6	25.0	25.9	
	6H	25.5	26.3	25.9	26.7	27.0	25.3	26.1	25.7	26.5	
	8H	25.8	26.6	26.2	27.0	27.3	25.5	26.3	26.0	26.7	
	12H	26.1	26.9	26.6	27.2	27.6	25.8	26.5	26.2	26.9	
8H	4H	24.9	25.7	25.3	26.1	26.5	24.8	25.6	25.3	26.0	
	6H	25.9	26.5	26.3	26.9	27.3	25.7	26.3	26.1	26.7	
	8H	26.3	26.9	26.8	27.3	27.8	26.1	26.6	26.5	27.1	
	12H	26.8	27.3	27.3	27.7	28.2	26.4	26.9	26.9	27.3	
12H	4H	25.0	25.7	25.4	26.1	26.5	24.9	25.6	25.3	26.0	
	6H	25.9	26.5	26.4	26.9	27.4	25.8	26.3	26.2	26.8	
	8H	26.5	27.0	26.9	27.4	27.9	26.2	26.7	26.7	27.1	
Variations with the observer position at spacings:											
S = 1.0H	+ 0.3 / - 0.3					+ 0.3 / - 0.3					
1.5H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					
2.0H	+ 0.5 / - 0.5					+ 0.5 / - 0.5					

CIE Pub.117, 5182 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 5.7$)
Area: 0.072 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 γ Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.80V I:0.3610A P:43.000W PF:0.9930 Freq:50.00Hz Lamp Flux:5181.75x1 lm		
NAME: WL-RTST345D(40K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.06	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	64	54	48	64	54	48	63	53	47	42
0.80	74	64	57	73	64	57	72	63	57	51
1.00	82	72	66	81	72	66	79	73	65	59
1.25	88	79	73	87	79	73	85	77	72	65
1.50	93	84	78	91	84	78	88	82	77	70
2.00	99	91	86	97	90	85	94	88	84	76
2.50	102	95	90	100	94	89	96	91	87	80
3.00	105	99	94	103	97	93	99	94	91	83
4.00	108	103	99	106	101	98	102	98	95	87
5.00	110	106	102	108	104	101	103	100	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.80V I:0.3610A P:43.000W PF:0.9930 Freq:50.00Hz Lamp Flux:5181.75x1 lm		
NAME: WL-RTST345D(40K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.06	Shielding Angle:

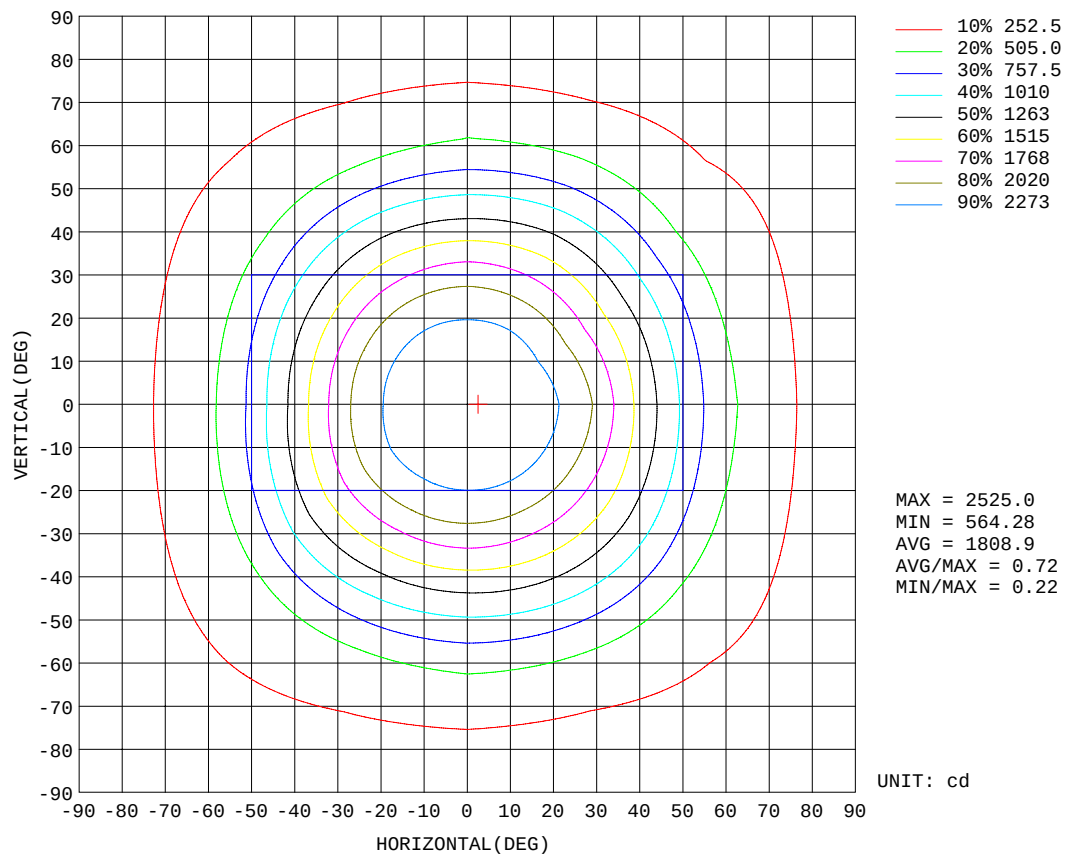


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

AAI Figure

Test:U:119.80V I:0.3610A P:43.000W PF:0.9930 Freq:50.00Hz Lamp Flux:5181.75x1 lm		
NAME: WL-RTST345D(40K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.06	Shielding Angle:

Flux out:3210 lm

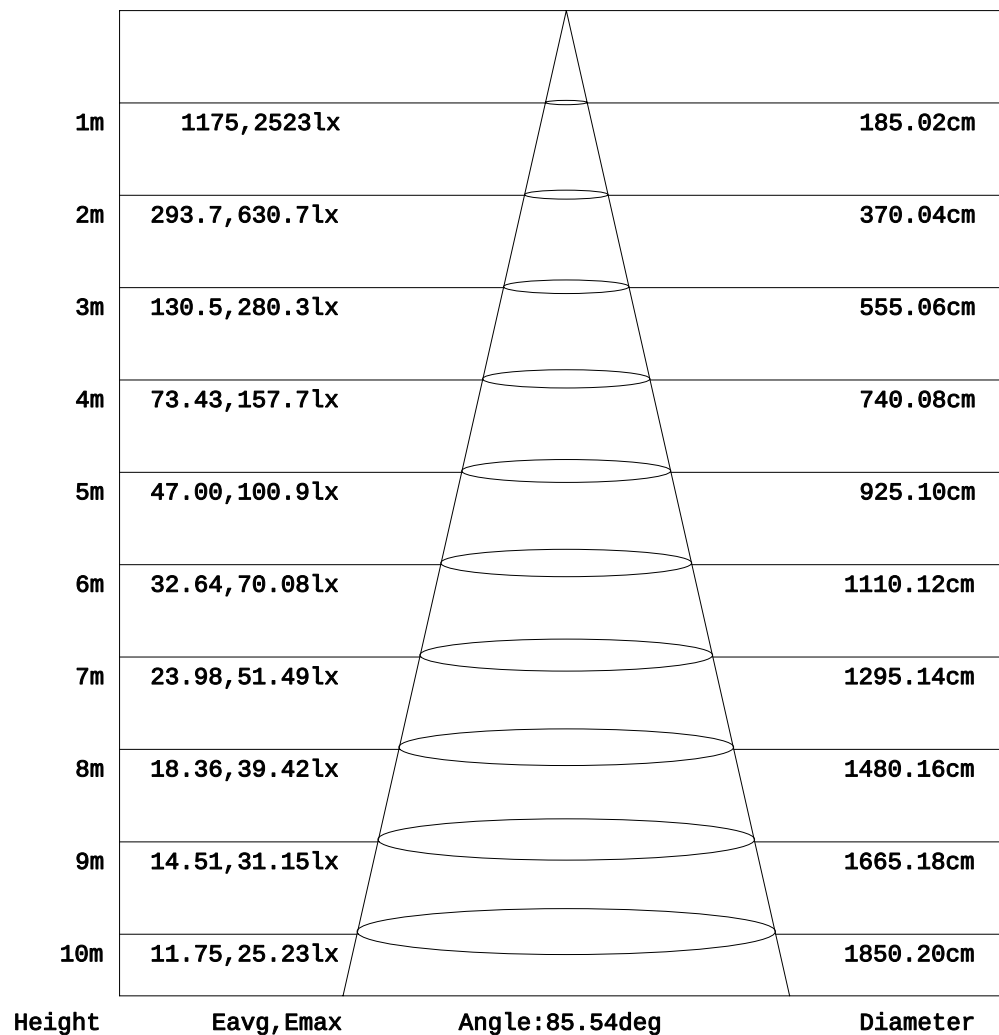


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity: 50.0%
 Test Distance: 6.770m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.80V I:0.3610A P:43.000W PF:0.9930 Freq:50.00Hz Lamp Flux:5181.75x1 lm		
NAME: WL-RTST345D(40K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.06	Shielding Angle:

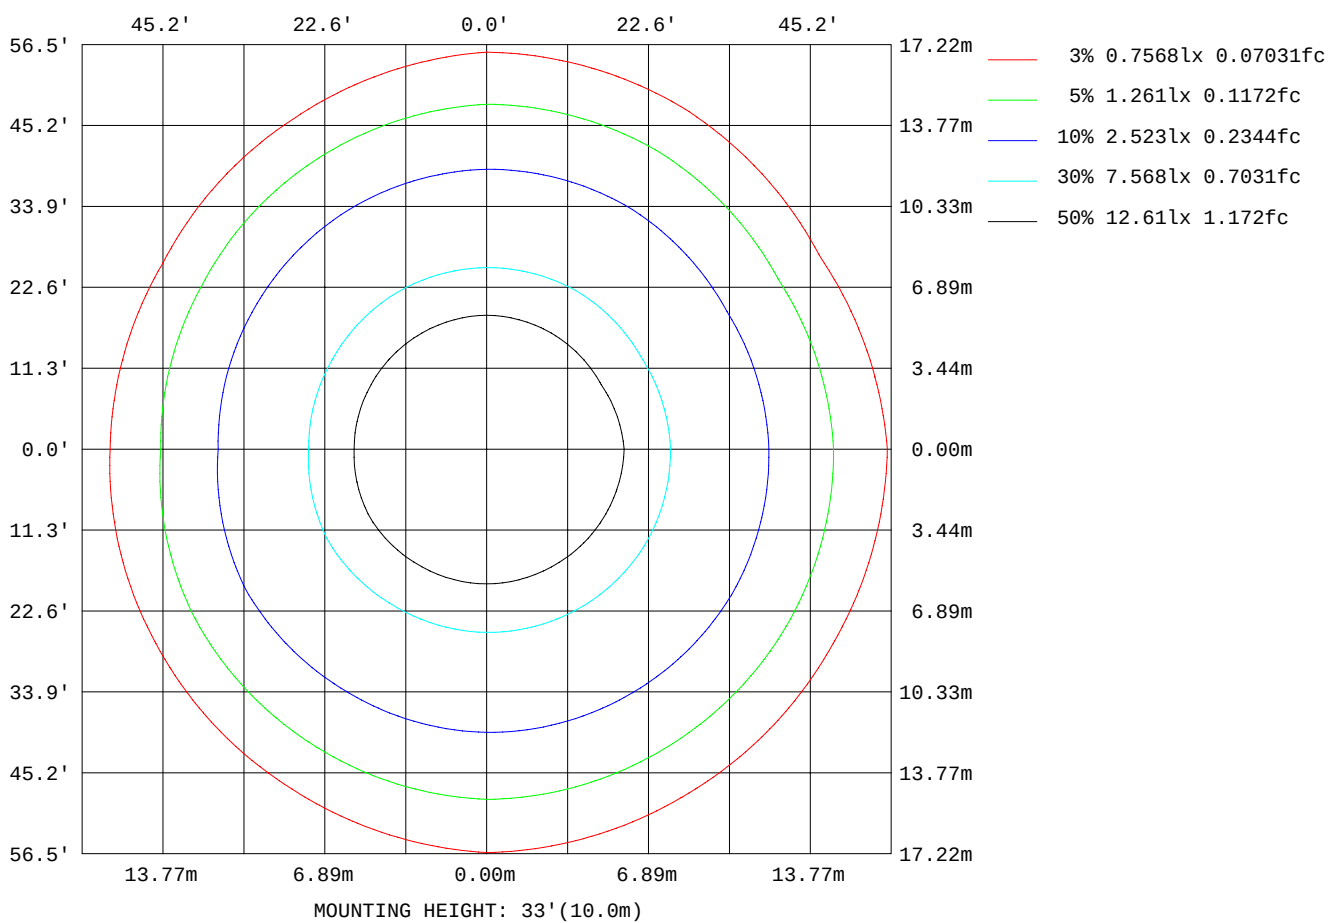

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.80V I:0.3610A P:43.000W PF:0.9930 Freq:50.00Hz Lamp Flux:5181.75x1 lm		
NAME: WL-RTST345D(40K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.06	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	13444
L_0~180(75)av	13193
L_0~180(85)av	13035
L_90~270(65)av	14247
L_90~270(75)av	13597
L_90~270(85)av	13631
L_45(65)av	11663
L_45(75)av	11996
L_45(85)av	10639

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks:

Planar Illuminance Curve

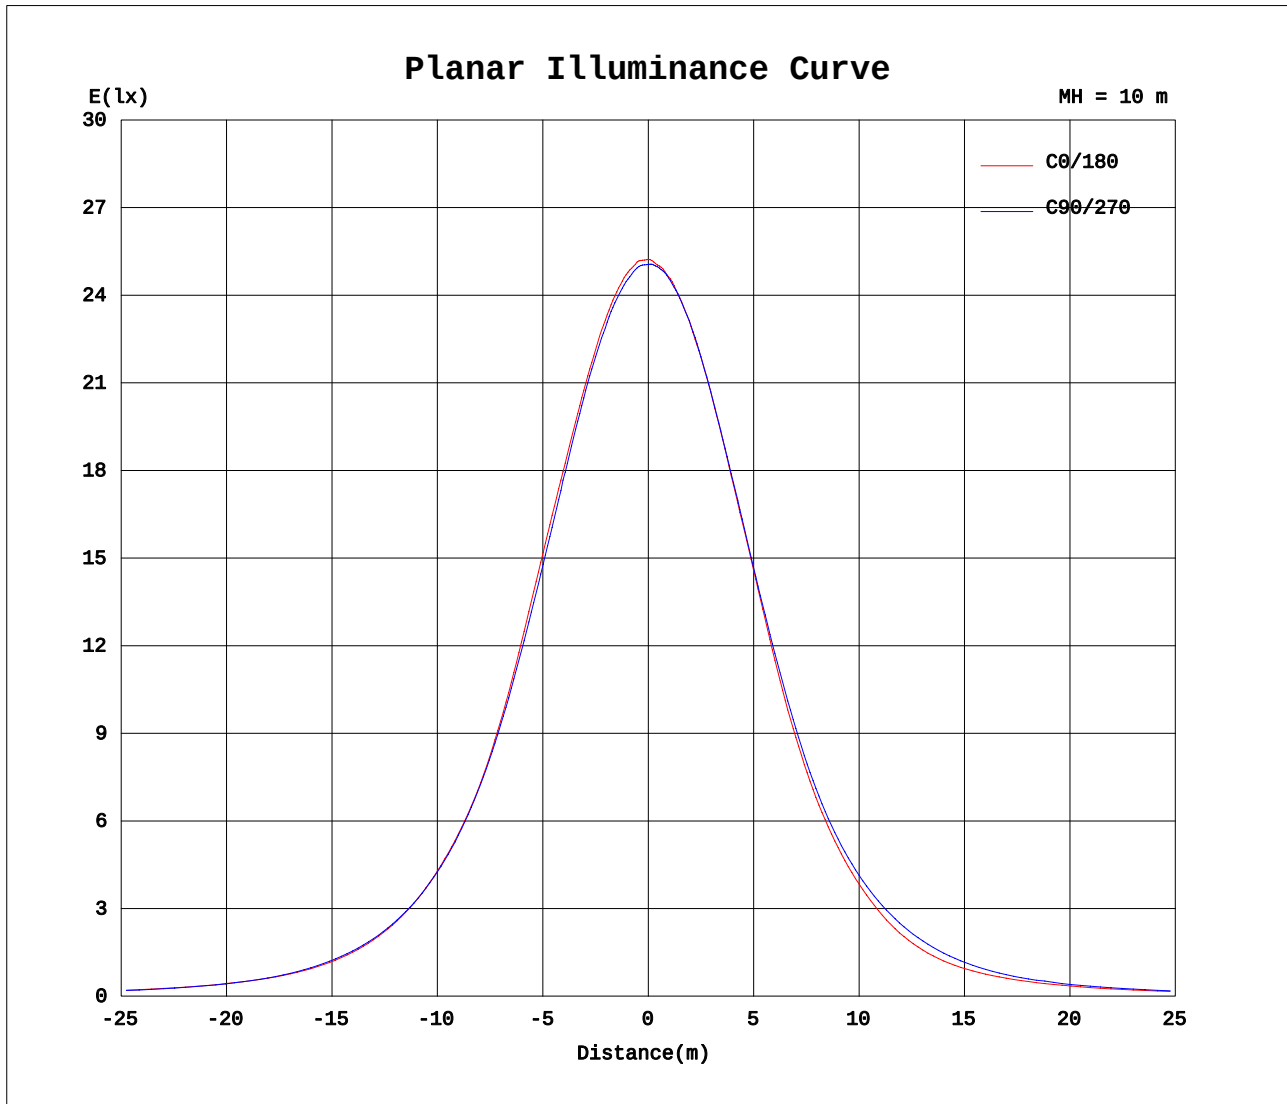

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity: 50.0%
Test Distance: 6.770m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.80V I:0.3610A P:43.000W PF:0.9930 Freq:50.00Hz Lamp Flux:5181.75x1 lm																	
NAME: WL-RTST345D(40K)									TYPE:			WEIGHT:					
SPEC.:									DIM.:			SERIAL No.:					
MFR.: Shenzhen Wisdom Light Co., ltd									SUR.:1.2*0.06			Shielding Angle:					

Table--1

UNIT: cd

C(°) γ (°)	C(°)																
	0	30	60	90	120	150	180	210	240	270	300	330					
0	2510	2510	2510	2510	2510	2510	2510	2510	2510	2510	2510	2510					
5	2503	2500	2501	2496	2495	2495	2488	2491	2496	2502	2503	2495					
10	2466	2464	2461	2458	2453	2458	2442	2452	2455	2458	2460	2451					
15	2397	2396	2390	2387	2383	2392	2365	2372	2383	2384	2384	2369					
20	2293	2288	2282	2275	2275	2289	2246	2256	2264	2265	2269	2253					
25	2158	2138	2123	2118	2119	2140	2087	2092	2104	2111	2104	2086					
30	1966	1937	1918	1927	1920	1938	1870	1873	1889	1911	1892	1863					
35	1705	1704	1693	1693	1669	1692	1605	1610	1642	1670	1660	1627					
40	1441	1473	1462	1442	1422	1443	1338	1355	1396	1411	1428	1392					
45	1207	1241	1229	1208	1178	1196	1081	1107	1151	1173	1196	1158					
50	968	1001	992	984	951	937	815	852	908	948	957	918					
55	746	763	764	776	725	682	596	613	672	735	728	684					
60	570	547	561	586	518	475	461	426	472	553	534	485					
65	451	386	398	444	365	347	367	328	339	423	388	347					
70	361	302	302	341	297	288	292	271	278	329	297	274					
75	277	238	231	260	236	236	215	211	220	247	225	214					
80	193	175	169	171	163	163	141	132	148	161	155	147					
85	116	92.0	83.0	89.5	72.4	69.1	47.4	41.9	60.7	81.6	68.7	61.4					
90	9.02	6.18	4.12	1.75	0.29	0.27	0.30	0.30	0.31	0.34	0.34	0.31					
95	0.24	0.28	0.34	0.46	0.37	0.31	0.40	0.41	0.40	0.49	0.37	0.35					
100	0.33	0.43	0.56	0.92	0.57	0.53	0.56	0.63	0.60	0.69	0.45	0.52					
105	0.46	0.58	0.81	1.27	0.92	0.63	0.61	0.75	0.70	0.63	0.66	0.66					
110	0.57	0.79	1.28	1.53	1.31	0.87	0.74	0.98	1.26	0.85	1.13	0.84					
115	0.82	1.12	1.54	1.64	1.45	1.24	0.92	1.15	1.46	1.03	1.23	1.12					
120	1.05	1.43	1.65	1.77	1.74	1.59	1.16	1.61	1.71	1.02	1.37	1.38					
125	1.23	1.77	1.85	1.86	2.07	1.81	1.46	1.72	1.65	1.16	0.97	1.62					
130	1.48	1.88	1.88	1.94	1.94	1.89	1.60	1.91	1.68	1.21	0.76	1.46					
135	1.54	1.84	1.98	2.00	1.86	2.02	1.70	2.17	1.83	1.36	0.81	1.56					
140	1.51	1.88	2.18	2.07	1.96	2.23	1.70	2.25	1.78	1.39	0.89	0.88					
145	1.57	2.02	2.12	2.15	2.25	2.37	1.79	2.20	2.15	1.32	0.93	0.76					
150	1.68	2.05	2.02	2.19	2.38	2.10	1.79	2.07	2.66	1.91	1.53	0.80					
155	1.73	1.99	2.14	2.25	2.46	1.97	1.68	2.13	2.79	2.48	2.52	0.85					
160	1.86	1.90	2.23	2.20	2.56	2.24	1.92	2.38	2.70	2.57	2.59	1.41					
165	1.84	1.88	2.37	2.12	2.48	2.23	2.09	2.19	2.49	2.47	2.44	1.49					
170	1.99	2.14	2.35	2.07	2.28	2.31	2.21	2.14	2.18	2.09	1.96	2.05					
175	2.10	2.14	2.04	1.99	2.07	2.21	1.96	1.99	1.92	1.79	1.79	1.87					
180	1.86	1.89	1.88	1.86	1.86	1.88	1.86	1.88	1.88	1.87	1.86	1.90					

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks: