


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.5V I:0.4710A P:55.60W PF:0.9870 Lamp Flux:7616.12x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*4	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 136.98 lm/W			
MODEL		Imax(cd)	2607	S/MH(C0/180)	1.28
NOMINAL POWER(W)	56	LOR(%)	100.0	S/MH(C90/270)	1.21
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	7616.1	□ UP,DN(C0-180)	1.5,48.3
NOMINAL FLUX(lm)	7616.12	CIE CLASS	DIRECT	□ UP,DN(C180-360)	1.5,48.7
LAMPS INSIDE	1	□ up(%)	3.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	119.5	□ down(%)	97.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

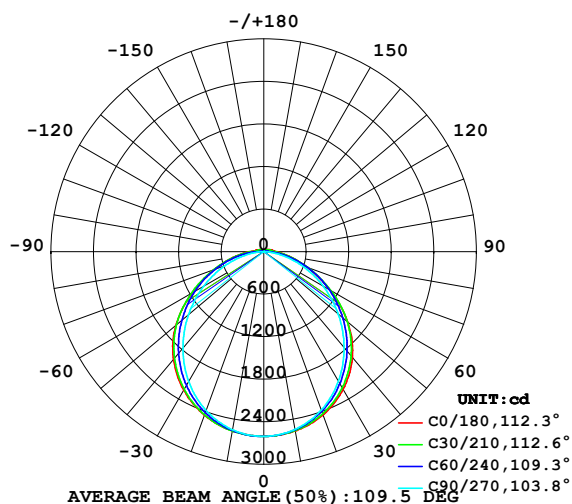

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

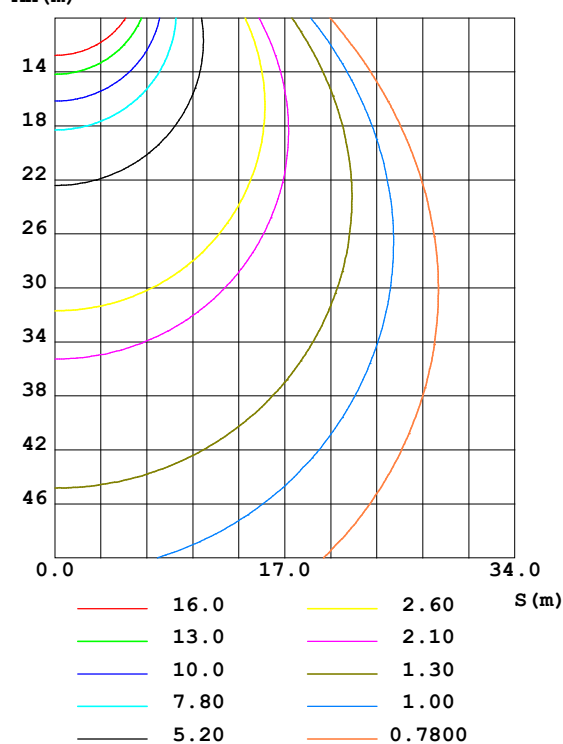


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE65-1500-43-PV
源磊A-档
3500K

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	zone	total	%lum, lamp
5	2594	2593	2589	2594	2592	2596	2591	2593	0- 5	62.15	62.15	0.82,0.82
10	2567	2558	2545	2560	2568	2566	2551	2558	5- 10	184.3	246.5	3.24,3.24
15	2519	2497	2474	2505	2521	2511	2480	2494	10- 15	300.2	546.7	7.18,7.18
20	2449	2414	2376	2426	2455	2432	2383	2409	15- 20	405.4	952.1	12.5,12.5
25	2358	2310	2254	2325	2366	2333	2261	2300	20- 25	496.4	1448	19,19
30	2241	2182	2108	2203	2257	2211	2117	2170	25- 30	569.8	2018	26.5,26.5
35	2105	2035	1944	2061	2129	2072	1954	2019	30- 35	622.9	2641	34.7,34.7
40	1945	1872	1764	1902	1983	1914	1775	1854	35- 40	654.3	3295	43.3,43.3
45	1761	1693	1572	1730	1814	1745	1585	1669	40- 45	662.8	3958	52,52
50	1548	1498	1372	1547	1619	1559	1386	1473	45- 50	648.0	4606	60.5,60.5
55	1312	1290	1168	1351	1400	1360	1184	1266	50- 55	610.2	5216	68.5,68.5
60	1077	1076	963.8	1145	1168	1152	981.3	1053	55- 60	551.4	5768	75.7,75.7
65	853.9	862.6	761.7	938.8	949.3	944.5	781.2	845.4	60- 65	477.0	6245	82,82
70	659.2	662.6	564.6	735.6	746.2	743.0	585.6	650.1	65- 70	393.2	6638	87.2,87.2
75	492.0	480.1	378.1	547.6	567.5	554.1	394.4	469.1	70- 75	305.6	6944	91.2,91.2
80	350.0	321.3	205.9	376.7	416.1	386.3	222.7	310.9	75- 80	220.0	7164	94.1,94.1
85	239.2	190.0	66.91	230.0	289.9	241.9	82.42	177.9	80- 85	142.2	7306	95.9,95.9
90	179.4	116.4	0.8349	122.9	198.9	136.4	2.095	98.11	85- 90	81.37	7387	97,97
95	134.6	81.98	1.505	76.07	132.2	83.91	1.480	71.05	90- 95	48.90	7436	97.6,97.6
100	114.3	68.56	1.726	63.42	112.5	68.87	2.000	58.01	95-100	37.08	7473	98.1,98.1
105	97.92	57.08	1.719	51.55	93.42	56.49	2.037	47.57	100-105	30.43	7503	98.5,98.5
110	83.48	46.07	0.7927	41.56	79.65	44.64	1.401	38.49	105-110	24.47	7528	98.8,98.8
115	70.80	36.89	1.016	33.68	67.81	36.59	1.570	30.38	110-115	19.51	7547	99.1,99.1
120	57.40	31.49	1.307	27.31	54.00	29.40	2.035	26.20	115-120	15.26	7563	99.3,99.3
125	48.45	27.53	1.420	23.77	44.93	24.81	1.978	22.80	120-125	12.28	7575	99.5,99.5
130	40.90	23.67	0.9651	20.64	38.70	21.49	1.964	19.65	125-130	9.906	7585	99.6,99.6
135	34.99	20.10	1.015	18.52	32.00	18.94	1.983	18.09	130-135	7.970	7593	99.7,99.7
140	30.10	17.92	1.070	16.87	25.83	17.01	1.976	16.34	135-140	6.416	7599	99.8,99.8
145	26.20	16.13	1.122	16.06	20.72	15.78	1.957	13.62	140-145	5.128	7604	99.8,99.8
150	23.11	13.39	1.393	15.82	17.71	15.72	2.228	10.82	145-150	4.037	7608	99.9,99.9
155	21.45	10.87	1.959	14.42	16.77	14.84	2.173	7.507	150-155	3.096	7612	99.9,99.9
160	17.87	8.000	1.930	12.82	16.83	13.19	2.131	4.894	155-160	2.238	7614	100,100
165	11.81	4.778	1.882	10.14	15.53	9.584	2.062	2.626	160-165	1.405	7615	100,100
170	4.029	2.173	1.830	5.950	7.305	5.137	1.962	1.926	165-170	0.6584	7616	100,100
175	1.777	1.615	1.731	3.562	2.365	2.982	1.789	1.576	170-175	0.2131	7616	100,100
180	1.498	1.613	1.672	1.870	1.503	1.605	1.672	1.894	175-180	0.0479	7616	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

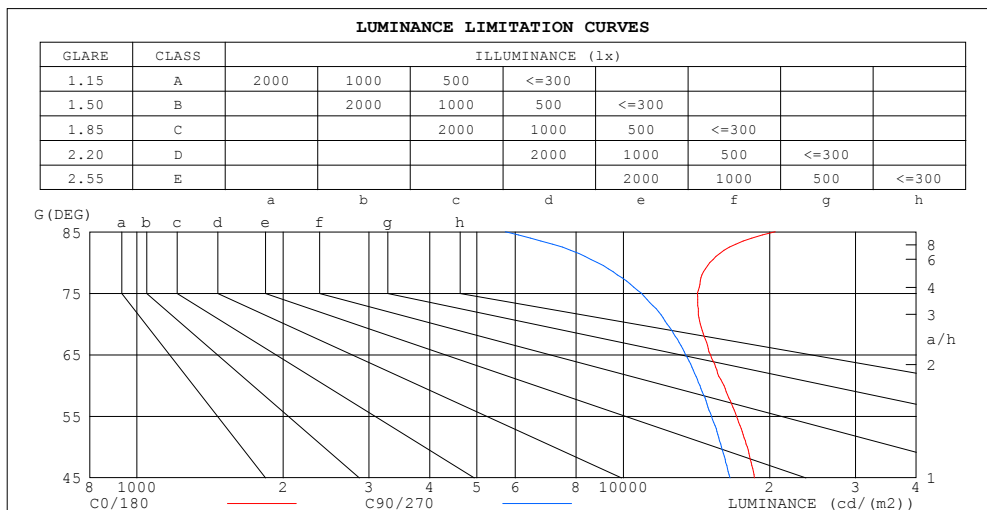

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	20512	5722
80	15065	8838
75	14209	10888
70	14406	12304
65	15102	13434
60	16102	14367
55	17091	15177
50	17996	15908
45	18610	16572


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE65-1500-43-PV
源磊A-档
3500K

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.5V I:0.4710A P:55.60W PF:0.9870 Lamp Flux:7616.12x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*4	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.03	.98	.94	1.00	.96	.92	.95	.92	.89	.91	.88	.86	.87	.85	.83	.80
2.0	.89	.82	.77	.87	.81	.75	.83	.78	.73	.79	.75	.71	.76	.72	.69	.67
3.0	.79	.70	.64	.77	.69	.63	.73	.67	.61	.70	.65	.60	.67	.63	.59	.56
4.0	.70	.61	.54	.68	.60	.53	.65	.58	.52	.62	.56	.51	.60	.55	.50	.48
5.0	.62	.53	.46	.61	.52	.46	.58	.51	.45	.56	.50	.44	.54	.48	.44	.42
6.0	.56	.47	.41	.55	.46	.40	.53	.45	.40	.51	.44	.39	.49	.43	.38	.36
7.0	.51	.42	.36	.50	.41	.36	.48	.40	.35	.46	.40	.35	.45	.39	.34	.32
8.0	.46	.38	.32	.45	.37	.32	.44	.37	.31	.42	.36	.31	.41	.35	.31	.29
9.0	.42	.34	.29	.42	.34	.29	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.37	.30	.26	.36	.30	.25	.35	.29	.25	.23

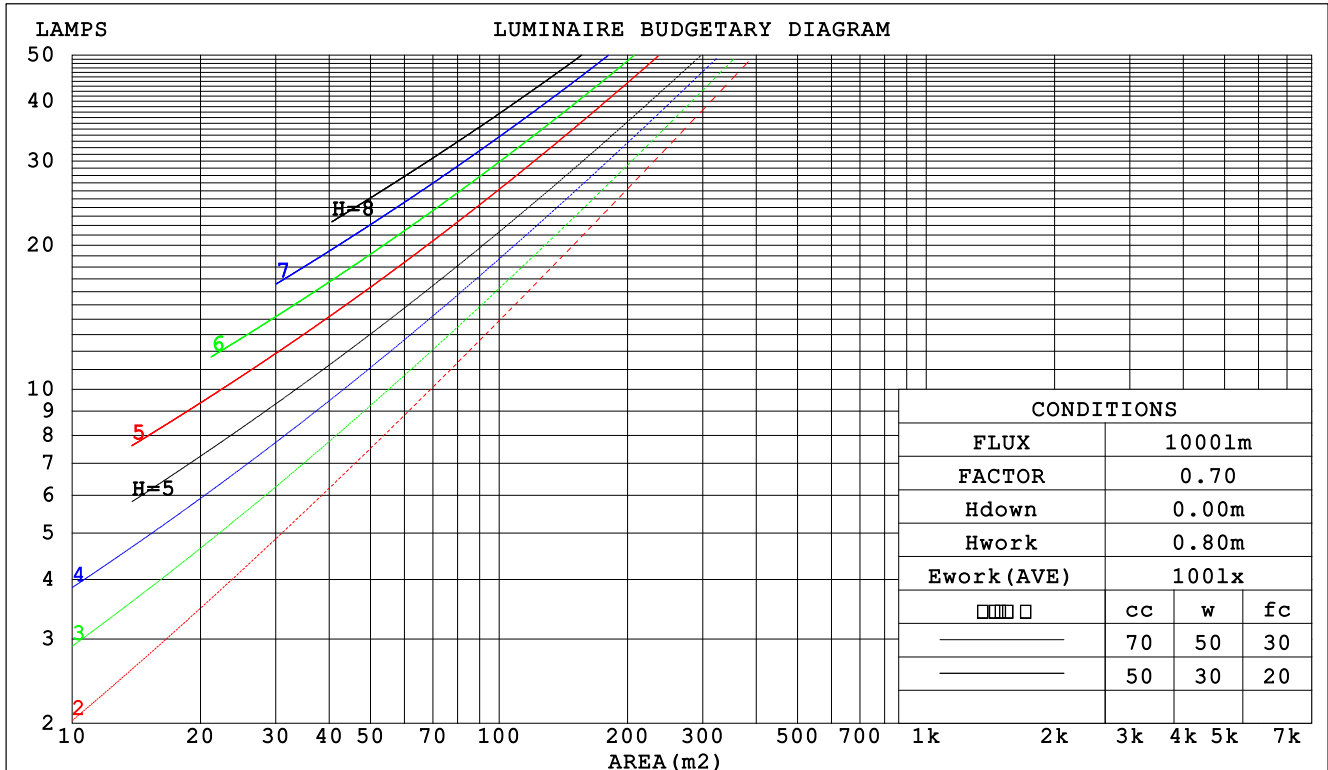

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

□ Range: 0 - 180DEG
 □ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: BQE65-1500-43-PV
 源磊A-档
 3500K

WEC AND CCEC

Test:U:119.5V I:0.4710A P:55.60W PF:0.9870 Lamp Flux:7616.12x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*4	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

□cc	80%	70%	50%	30%	10%	0
□w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
□fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.318 .181 .057	.310 .177 .056	.295 .169 .054	.282 .162 .052	.269 .156 .050	
2.0	.295 .161 .050	.287 .158 .049	.274 .152 .047	.262 .147 .046	.251 .142 .045	
3.0	.271 .144 .043	.264 .142 .043	.253 .137 .042	.242 .132 .041	.232 .128 .040	
4.0	.249 .129 .038	.243 .127 .038	.233 .124 .037	.223 .120 .036	.214 .116 .035	
5.0	.230 .117 .034	.225 .115 .034	.215 .112 .033	.207 .109 .032	.198 .106 .032	
6.0	.213 .107 .031	.208 .105 .030	.200 .103 .030	.192 .100 .029	.185 .097 .029	
7.0	.198 .098 .028	.194 .097 .028	.186 .094 .027	.179 .092 .027	.173 .090 .026	
8.0	.185 .090 .025	.181 .089 .025	.174 .087 .025	.168 .085 .025	.162 .083 .024	
9.0	.173 .084 .023	.170 .083 .023	.164 .081 .023	.158 .079 .023	.152 .077 .022	
10.0	.163 .078 .022	.160 .077 .022	.154 .076 .021	.149 .074 .021	.144 .072 .021	

□cc	80%	70%	50%	30%	10%	0
□w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
□fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.213 .213 .213	.182 .182 .182	.124 .124 .124	.072 .072 .072	.023 .023 .023	
1.0	.204 .179 .157	.175 .154 .135	.119 .106 .093	.069 .061 .054	.022 .020 .018	
2.0	.196 .155 .121	.168 .134 .105	.115 .092 .073	.066 .054 .043	.021 .017 .014	
3.0	.188 .138 .098	.161 .119 .085	.111 .083 .059	.064 .048 .035	.021 .016 .011	
4.0	.180 .124 .082	.155 .108 .071	.106 .075 .050	.062 .044 .030	.020 .014 .010	
5.0	.173 .114 .071	.148 .099 .062	.102 .069 .043	.059 .041 .026	.019 .013 .009	
6.0	.166 .106 .063	.142 .092 .055	.098 .064 .039	.057 .038 .023	.018 .012 .008	
7.0	.159 .099 .057	.137 .086 .050	.094 .060 .035	.055 .035 .021	.018 .012 .007	
8.0	.152 .093 .053	.131 .081 .046	.091 .057 .032	.053 .033 .019	.017 .011 .006	
9.0	.146 .088 .049	.126 .077 .043	.087 .054 .030	.051 .032 .018	.016 .010 .006	
10.0	.141 .084 .046	.121 .073 .040	.084 .051 .029	.049 .030 .017	.016 .010 .006	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

□ Range: 0 - 180DEG
 □ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: BQE65-1500-43-PV
 源磊A-档
 3500K

Uncorrected UGR Table

Test:U:119.5V I:0.4710A P:55.60W PF:0.9870 Lamp Flux:7616.12x1 lm										
NAME: 磁铁灯条					TYPE:T5窄灯条 3500K			WEIGHT:		
DIM.: 4FT*4					SPEC.:乳白PC罩			SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co,ltd					SUR.:1.22*0.11m			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.5	24.0	22.8	24.2	24.5	22.0	23.5	22.3	23.8	24.0
3H	23.9	25.2	24.2	25.5	25.8	23.4	24.7	23.7	25.0	25.3
4H	24.5	25.8	24.9	26.1	26.4	23.8	25.1	24.2	25.5	25.8
6H	25.1	26.3	25.4	26.6	27.0	24.2	25.4	24.5	25.7	26.0
8H	25.3	26.5	25.7	26.9	27.2	24.2	25.4	24.6	25.7	26.1
12H	25.6	26.8	26.0	27.1	27.5	24.2	25.4	24.6	25.7	26.1
4H 2H	23.0	24.3	23.4	24.6	24.9	22.7	24.0	23.0	24.3	24.6
3H	24.6	25.8	25.0	26.1	26.5	24.2	25.4	24.6	25.7	26.1
4H	25.4	26.4	25.8	26.8	27.2	24.9	25.9	25.3	26.3	26.7
6H	26.1	27.0	26.6	27.4	27.9	25.3	26.2	25.7	26.6	27.1
8H	26.5	27.3	26.9	27.7	28.2	25.4	26.3	25.9	26.7	27.2
12H	26.8	27.6	27.3	28.1	28.5	25.5	26.3	26.0	26.7	27.2
8H 4H	25.7	26.5	26.1	26.9	27.4	25.2	26.0	25.6	26.5	26.9
6H	26.6	27.3	27.1	27.8	28.2	25.8	26.5	26.3	27.0	27.5
8H	27.1	27.7	27.6	28.2	28.7	26.1	26.7	26.6	27.2	27.7
12H	27.6	28.1	28.1	28.6	29.2	26.2	26.8	26.7	27.3	27.8
12H 4H	25.7	26.5	26.1	26.9	27.4	25.2	26.0	25.7	26.5	26.9
6H	26.7	27.3	27.2	27.8	28.3	25.9	26.6	26.4	27.1	27.6
8H	27.2	27.8	27.7	28.3	28.8	26.2	26.8	26.8	27.3	27.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117 Corrected 7616 lm Total Lamp Luminous Flux.(8log(F/F0) = 7.1)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE65-1500-43-PV
源磊A-档
3500K

UTILIZATION FACTORS TABLE

Test:U:119.5V I:0.4710A P:55.60W PF:0.9870 Lamp Flux:7616.12x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*4	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	45	38	56	45	38	55	44	38	31
0.80	66	55	47	65	54	47	63	53	47	40
1.00	75	64	56	73	63	56	71	64	55	48
1.25	82	71	64	80	70	63	77	69	62	55
1.50	87	77	69	85	76	69	82	74	68	60
2.00	94	85	78	92	83	77	88	81	75	67
2.50	97	89	83	95	88	82	91	85	80	71
3.00	101	94	88	98	92	87	94	89	84	75
4.00	105	99	94	102	97	92	98	93	89	80
5.00	107	102	98	105	100	96	100	96	93	83
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: BQE65-1500-43-PV
 源磊A-档
 3500K

ISOCANDELA DIAGRAM

Test:U:119.5V I:0.4710A P:55.60W PF:0.9870 Lamp Flux:7616.12x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*4	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

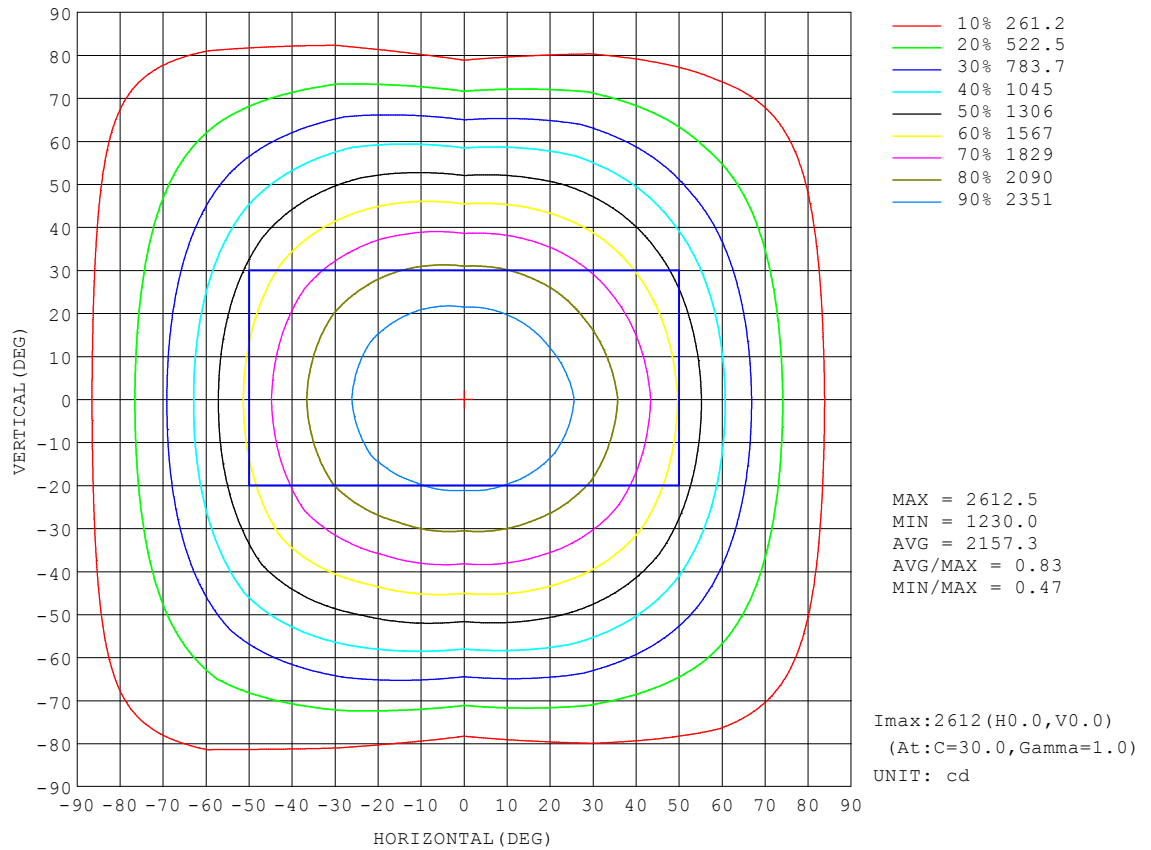


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE65-1500-43-PV
源磊A-档
3500K

AAI Figure

Test:U:119.5V I:0.4710A P:55.60W PF:0.9870 Lamp Flux:7616.12x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*4	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

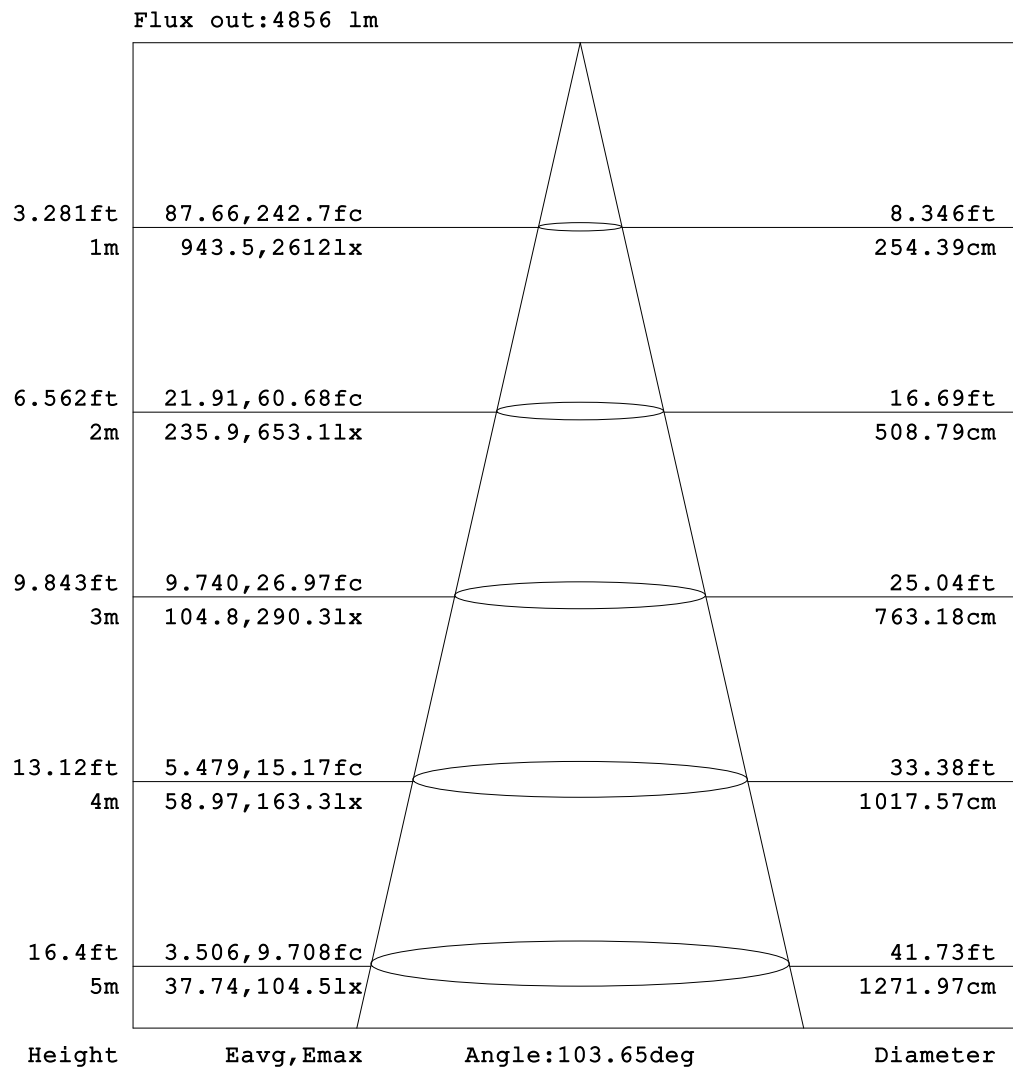


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE65-1500-43-PV
源磊A-档
3500K

ISOLUX DIAGRAM


Test:U:119.5V I:0.4710A P:55.60W PF:0.9870 Lamp Flux:7616.12x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*4	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

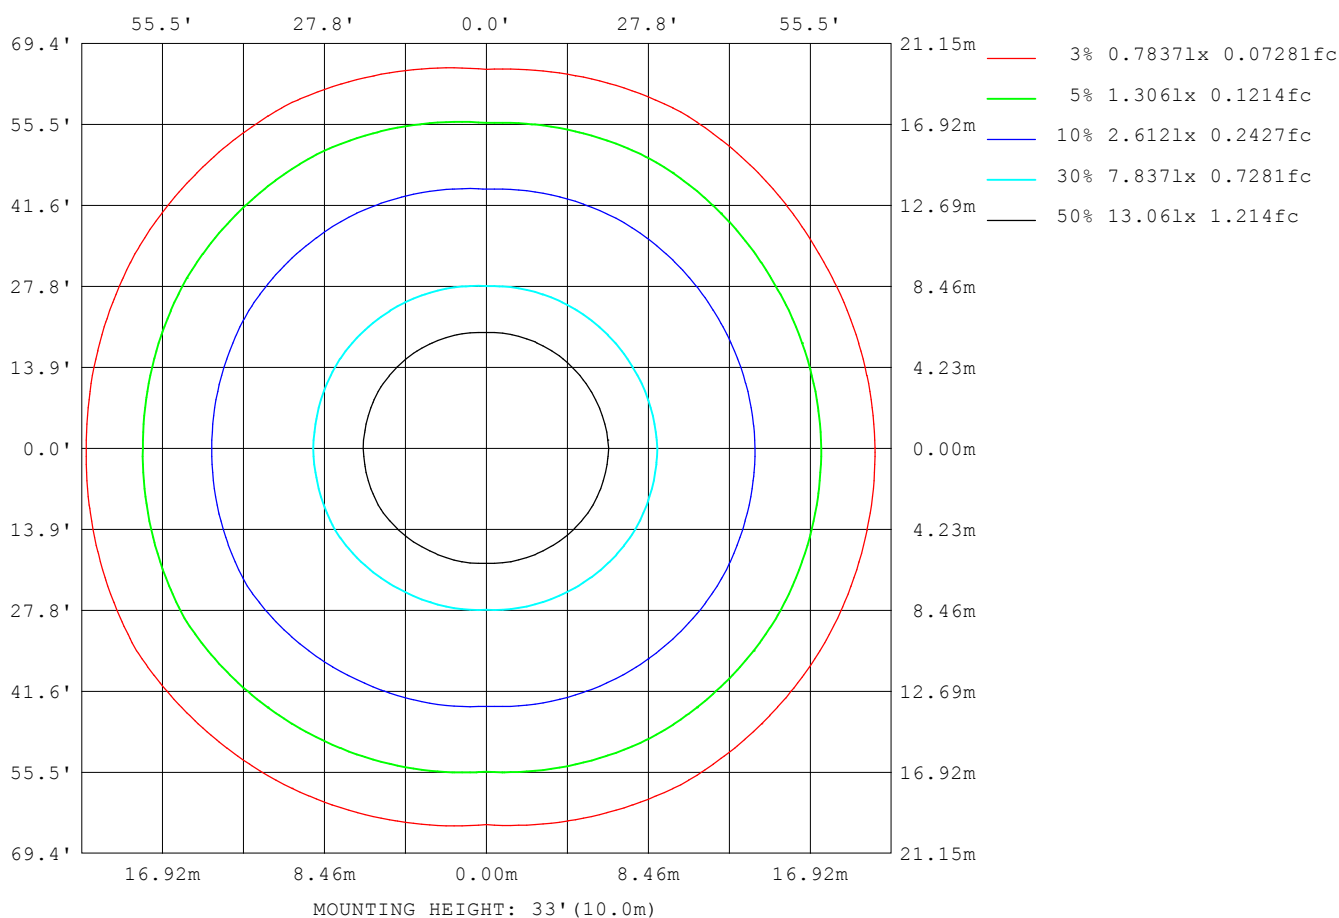

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE65-1500-43-PV
源磊A-档
3500K

Planar Illuminance Curve

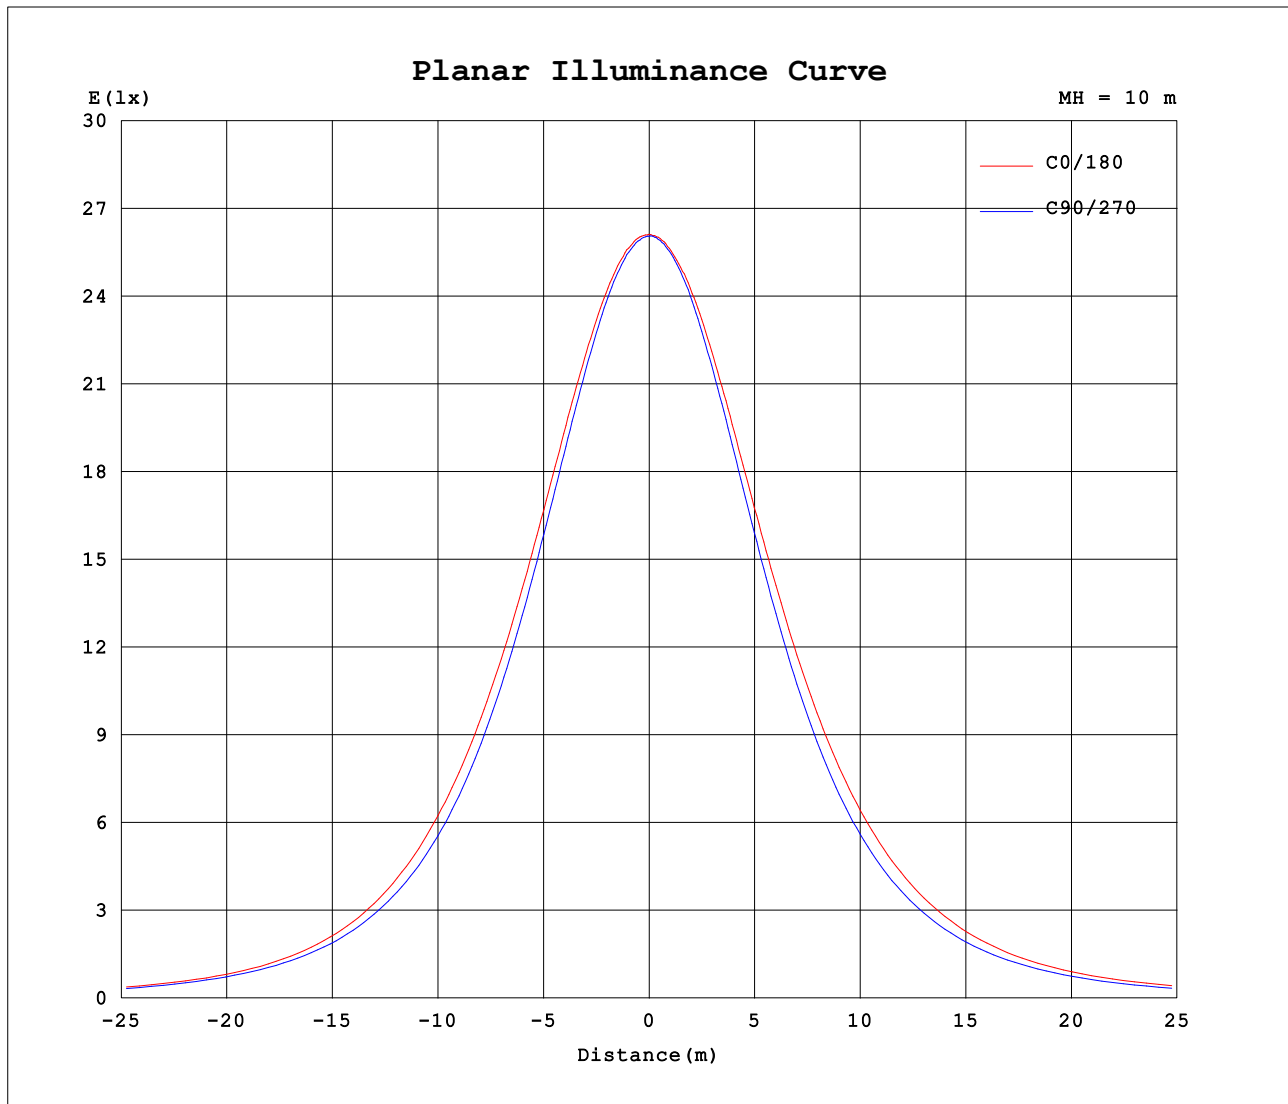

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: BQE65-1500-43-PV
源磊A-档
3500K

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.5V I:0.4710A P:55.60W PF:0.9870 Lamp Flux:7616.12x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*4	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2604	2604	2604	2604	2604	2604	2604	2604	2604	2604	2604	2604						
5	2594	2595	2592	2589	2592	2597	2592	2597	2595	2591	2594	2592						
10	2567	2563	2552	2545	2551	2569	2568	2572	2560	2551	2556	2559						
15	2519	2508	2485	2474	2490	2520	2521	2521	2501	2480	2489	2498						
20	2449	2432	2396	2376	2402	2450	2455	2448	2416	2383	2400	2418						
25	2358	2335	2286	2254	2290	2360	2366	2357	2309	2261	2285	2315						
30	2241	2215	2149	2108	2158	2248	2257	2242	2181	2117	2150	2189						
35	2105	2075	1995	1944	2005	2117	2129	2111	2033	1954	1995	2042						
40	1945	1917	1827	1764	1836	1967	1983	1960	1869	1775	1827	1881						
45	1761	1739	1648	1572	1655	1804	1814	1794	1696	1585	1643	1696						
50	1548	1540	1456	1372	1469	1626	1619	1609	1509	1386	1452	1495						
55	1312	1320	1260	1168	1275	1427	1400	1403	1318	1184	1257	1276						
60	1077	1092	1060	964	1082	1207	1168	1181	1124	981	1057	1049						
65	854	866	859	762	890	988	949	962	927	781	860	831						
70	659	667	658	565	694	777	746	757	729	586	667	633						
75	492	492	468	378	506	589	568	570	539	394	480	458						
80	350	343	300	206	332	422	416	408	364	223	310	312						
85	239	221	159	66.9	181	279	290	272	212	82.4	163	193						
90	179	155	77.7	0.83	71.1	175	199	176	97.0	2.09	63.0	133						
95	135	112	52.2	1.51	44.3	108	132	112	55.5	1.48	40.5	102						
100	114	95.9	41.2	1.73	33.7	93.2	113	96.0	41.7	2.00	30.8	85.3						
105	97.9	81.5	32.6	1.72	25.3	77.8	93.4	79.4	33.6	2.04	23.7	71.4						
110	83.5	68.3	23.8	0.79	18.1	65.0	79.6	65.8	23.5	1.40	17.3	59.7						
115	70.8	54.9	18.9	1.02	14.9	52.5	67.8	53.8	19.4	1.57	14.7	46.1						
120	57.4	45.3	17.6	1.31	13.0	41.6	54.0	42.3	16.5	2.04	13.6	38.8						
125	48.5	38.4	16.7	1.42	11.9	35.6	44.9	35.4	14.2	1.98	12.9	32.7						
130	40.9	32.8	14.6	0.97	11.7	29.6	38.7	30.1	12.9	1.96	11.6	27.7						
135	35.0	28.2	12.0	1.01	12.4	24.7	32.0	25.0	12.9	1.98	11.8	24.4						
140	30.1	23.9	12.0	1.07	13.1	20.6	25.8	20.6	13.4	1.98	10.4	22.3						
145	26.2	21.3	11.0	1.12	14.2	17.9	20.7	17.4	14.1	1.96	7.82	19.4						
150	23.1	18.1	8.64	1.39	14.3	17.3	17.7	16.2	15.2	2.23	5.74	15.9						
155	21.5	14.9	6.83	1.96	11.8	17.0	16.8	16.3	13.4	2.17	3.13	11.9						
160	17.9	10.8	5.15	1.93	8.15	17.5	16.8	16.8	9.58	2.13	2.46	7.33						
165	11.8	6.92	2.63	1.88	5.67	14.6	15.5	13.3	5.85	2.06	2.00	3.25						
170	4.03	2.46	1.89	1.83	4.16	7.74	7.30	6.18	4.09	1.96	1.70	2.15						
175	1.78	1.65	1.58	1.73	2.94	4.19	2.37	3.27	2.70	1.79	1.58	1.58						
180	1.50	1.61	1.62	1.67	1.79	1.95	1.50	1.60	1.61	1.67	1.80	1.99						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE65-1500-43-PV
源磊A-档
3500K