


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.5V I:0.6520A P:77.20W PF:0.9900 Lamp Flux:9845.65x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*4	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.017*1.16m	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 127.53 lm/W			
MODEL		Imax(cd)	3371	S/MH(C0/180)	1.27
NOMINAL POWER(W)	78	LOR(%)	100.0	S/MH(C90/270)	1.21
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	9845.6	□ UP,DN(C0-180)	1.5,48.3
NOMINAL FLUX(lm)	9845.65	CIE CLASS	DIRECT	□ UP,DN(C180-360)	1.5,48.7
LAMPS INSIDE	1	□ up(%)	3.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	119.4	□ down(%)	97.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

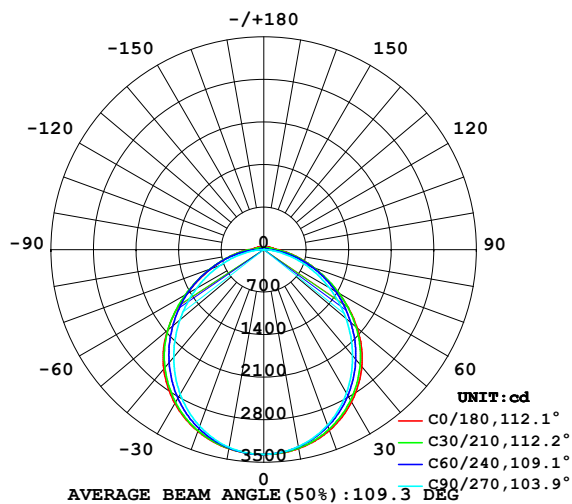

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

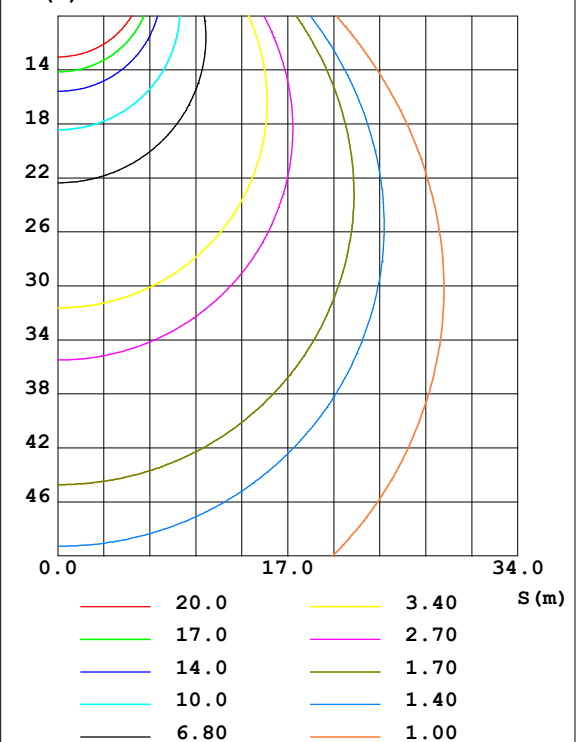


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE85-2000-40-PV
源磊A-档
3500K

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	zone	total	%lum, lamp
5	3360	3352	3347	3357	3357	3357	3354	3354	0- 5	80.39	80.39	0.82,0.82
10	3323	3306	3290	3312	3325	3317	3302	3308	5- 10	238.4	318.8	3.24,3.24
15	3259	3226	3197	3239	3265	3247	3213	3228	10- 15	388.3	707.1	7.18,7.18
20	3164	3118	3071	3135	3179	3149	3091	3119	15- 20	524.5	1232	12.5,12.5
25	3044	2981	2914	3002	3066	3021	2933	2979	20- 25	642.2	1874	19,19
30	2891	2815	2724	2843	2924	2865	2750	2811	25- 30	737.0	2611	26.5,26.5
35	2713	2624	2510	2657	2755	2683	2538	2618	30- 35	805.4	3416	34.7,34.7
40	2510	2411	2276	2450	2561	2479	2308	2403	35- 40	845.7	4262	43.3,43.3
45	2275	2180	2027	2227	2335	2255	2061	2167	40- 45	856.4	5118	52,52
50	2007	1925	1768	1988	2068	2009	1805	1913	45- 50	836.5	5955	60.5,60.5
55	1722	1663	1504	1731	1774	1745	1542	1646	50- 55	786.7	6741	68.5,68.5
60	1423	1393	1239	1467	1473	1476	1279	1375	55- 60	711.3	7453	75.7,75.7
65	1137	1123	976.7	1202	1188	1205	1020	1107	60- 65	615.8	8069	82,82
70	884.6	865.5	721.7	940.3	929.6	945.7	767.3	853.8	65- 70	507.5	8576	87.1,87.1
75	664.1	631.8	480.8	699.6	707.2	705.2	522.9	620.8	70- 75	395.2	8971	91.1,91.1
80	477.9	424.6	259.0	479.8	515.5	491.1	297.9	412.8	75- 80	285.2	9256	94,94
85	321.8	251.0	81.66	293.2	359.4	308.8	112.8	239.1	80- 85	184.5	9441	95.9,95.9
90	234.0	154.9	0.9962	159.5	242.7	177.6	3.596	134.4	85- 90	105.8	9547	97,97
95	174.5	106.8	1.794	100.4	175.0	110.6	1.786	92.53	90- 95	63.65	9610	97.6,97.6
100	145.5	87.97	2.144	82.80	151.0	92.40	2.109	75.19	95-100	48.57	9659	98.1,98.1
105	124.3	72.85	2.097	67.09	129.5	76.48	2.520	61.74	100-105	40.01	9699	98.5,98.5
110	106.3	58.81	0.9676	53.87	109.9	61.31	1.902	49.93	105-110	32.29	9731	98.8,98.8
115	90.21	47.15	1.294	44.00	87.13	46.11	1.902	39.28	110-115	25.47	9757	99.1,99.1
120	73.15	39.83	1.715	35.56	70.61	38.33	2.481	33.37	115-120	19.61	9776	99.3,99.3
125	61.36	34.42	1.801	30.47	60.38	32.93	2.453	28.80	120-125	15.87	9792	99.5,99.5
130	50.89	29.63	1.255	26.93	52.43	30.45	2.427	24.61	125-130	12.81	9805	99.6,99.6
135	41.85	24.25	1.332	24.18	43.57	27.38	2.454	21.92	130-135	10.35	9815	99.7,99.7
140	34.22	20.47	1.399	22.21	36.42	25.07	2.454	20.32	135-140	8.239	9824	99.8,99.8
145	28.46	18.15	1.458	21.20	31.32	24.70	2.435	17.07	140-145	6.626	9830	99.8,99.8
150	23.99	15.96	1.833	20.73	28.36	24.10	2.803	13.99	145-150	5.320	9836	99.9,99.9
155	21.66	13.18	2.517	18.89	26.05	21.68	2.746	9.896	150-155	4.082	9840	99.9,99.9
160	20.68	10.39	2.473	16.59	25.77	18.81	2.690	6.453	155-160	2.959	9843	100,100
165	16.09	6.631	2.402	13.00	20.95	12.52	2.617	3.382	160-165	1.883	9844	100,100
170	5.265	2.854	2.339	7.439	9.542	6.514	2.497	2.513	165-170	0.8636	9845	100,100
175	2.255	2.099	2.209	4.417	3.096	3.677	2.274	2.024	170-175	0.2703	9846	100,100
180	1.940	2.079	2.146	2.340	1.948	2.080	2.117	2.376	175-180	0.0608	9846	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

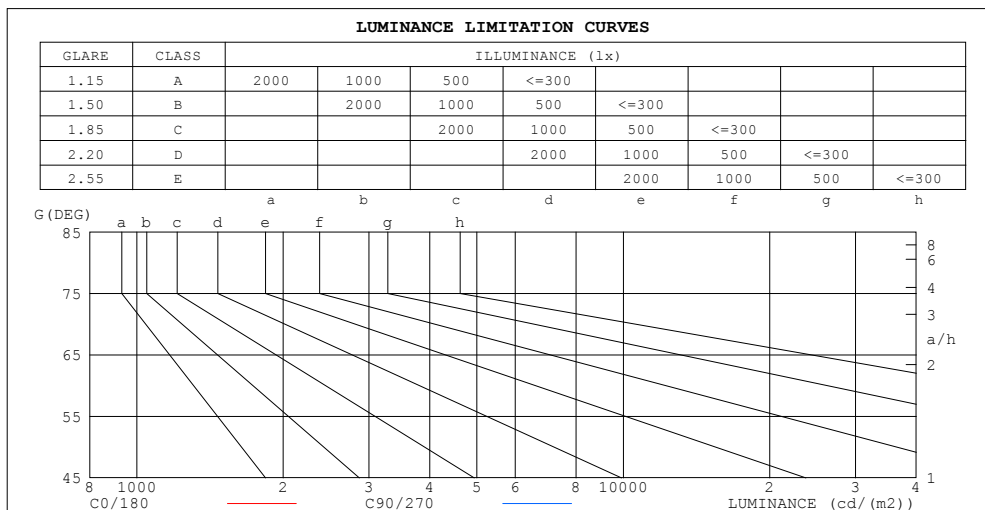

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	186238	46733
80	138826	74384
75	129434	92666
70	130459	105245
65	135733	115280
60	143574	123624
55	151392	130793
50	157467	137162
45	162272	142994


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE85-2000-40-PV
源磊A-档
3500K

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.5V I:0.6520A P:77.20W PF:0.9900 Lamp Flux:9845.65x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*4	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.017*1.16m	PROTECTION ANGLE:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.03	.98	.94	1.00	.96	.92	.95	.92	.89	.91	.88	.86	.87	.85	.83	.80
2.0	.89	.82	.77	.87	.81	.75	.83	.78	.73	.79	.75	.71	.76	.72	.69	.67
3.0	.79	.70	.64	.77	.69	.63	.73	.67	.61	.70	.65	.60	.67	.63	.59	.56
4.0	.70	.61	.54	.68	.60	.53	.65	.58	.52	.62	.56	.51	.60	.55	.50	.48
5.0	.62	.53	.46	.61	.52	.46	.58	.51	.45	.56	.50	.44	.54	.48	.44	.42
6.0	.56	.47	.41	.55	.46	.40	.53	.45	.40	.51	.44	.39	.49	.43	.38	.36
7.0	.51	.42	.36	.50	.41	.36	.48	.41	.35	.46	.40	.35	.45	.39	.34	.32
8.0	.46	.38	.32	.45	.37	.32	.44	.37	.31	.42	.36	.31	.41	.35	.31	.29
9.0	.42	.34	.29	.42	.34	.29	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.37	.30	.26	.36	.30	.25	.35	.29	.25	.23

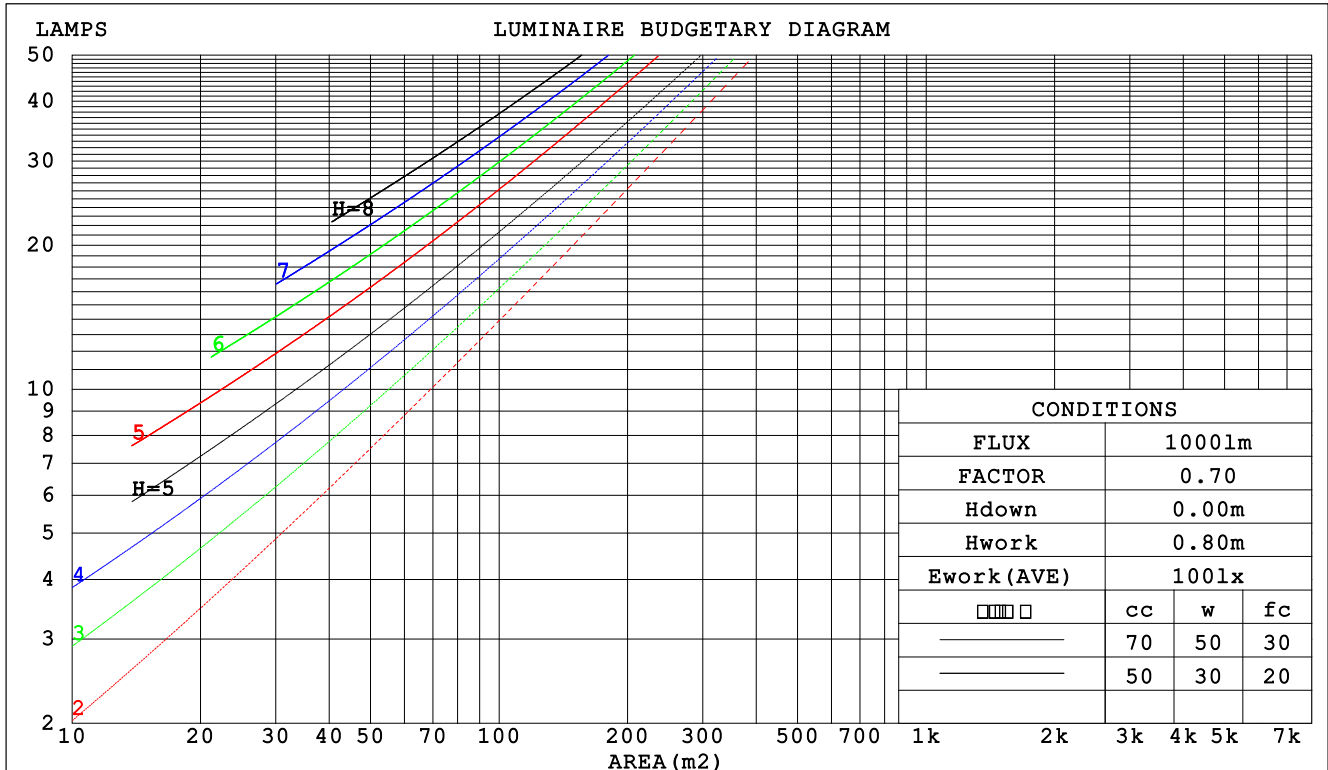

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

□ Range: 0 - 180DEG
 □ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: BQE85-2000-40-PV
 源磊A-档
 3500K

WEC AND CCEC

Test:U:119.5V I:0.6520A P:77.20W PF:0.9900 Lamp Flux:9845.65x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*4	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.017*1.16m	PROTECTION ANGLE:

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients (WEC)					
0.0						
1.0	.319 .181 .057	.311 .177 .056	.295 .170 .054	.282 .162 .052	.269 .156 .050	
2.0	.295 .161 .050	.287 .158 .049	.274 .152 .047	.262 .147 .046	.251 .142 .045	
3.0	.271 .144 .043	.264 .142 .043	.253 .137 .042	.242 .132 .041	.231 .128 .040	
4.0	.249 .129 .038	.243 .127 .038	.233 .123 .037	.223 .120 .036	.214 .116 .035	
5.0	.230 .117 .034	.225 .115 .034	.215 .112 .033	.207 .109 .032	.198 .106 .032	
6.0	.213 .107 .031	.208 .105 .030	.200 .102 .030	.192 .100 .029	.185 .097 .029	
7.0	.198 .098 .028	.194 .097 .028	.186 .094 .027	.179 .092 .027	.173 .090 .026	
8.0	.185 .090 .025	.181 .089 .025	.174 .087 .025	.168 .085 .025	.162 .083 .024	
9.0	.173 .084 .023	.170 .083 .023	.164 .081 .023	.158 .079 .023	.152 .077 .022	
10.0	.163 .078 .022	.160 .077 .022	.154 .076 .021	.149 .074 .021	.144 .072 .021	

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients (CCEC)					
0.0	.214 .214 .214	.183 .183 .183	.125 .125 .125	.072 .072 .072	.023 .023 .023	
1.0	.204 .179 .157	.175 .154 .135	.120 .106 .093	.069 .061 .054	.022 .020 .018	
2.0	.196 .155 .121	.168 .134 .105	.115 .093 .073	.066 .054 .043	.021 .017 .014	
3.0	.188 .138 .098	.161 .119 .085	.111 .083 .059	.064 .048 .035	.021 .016 .011	
4.0	.181 .125 .082	.155 .108 .071	.107 .075 .050	.062 .044 .030	.020 .014 .010	
5.0	.173 .114 .071	.149 .099 .062	.102 .069 .044	.059 .041 .026	.019 .013 .009	
6.0	.166 .106 .063	.143 .092 .055	.098 .064 .039	.057 .038 .023	.018 .012 .008	
7.0	.159 .099 .057	.137 .086 .050	.095 .060 .035	.055 .036 .021	.018 .012 .007	
8.0	.153 .093 .053	.131 .081 .046	.091 .057 .033	.053 .034 .019	.017 .011 .006	
9.0	.147 .088 .049	.126 .077 .043	.087 .054 .031	.051 .032 .018	.017 .010 .006	
10.0	.141 .084 .047	.121 .073 .041	.084 .051 .029	.049 .030 .017	.016 .010 .006	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE85-2000-40-PV
源磊A-档
3500K

Uncorrected UGR Table

Test:U:119.5V I:0.6520A P:77.20W PF:0.9900 Lamp Flux:9845.65x1 lm										
NAME: 磁铁灯条					TYPE:T5窄灯条 3500K			WEIGHT:		
DIM.: 4FT*4					SPEC.:乳白PC罩			SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co,ltd					SUR.:0.017*1.16m			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	30.1	31.5	30.4	31.8	32.1	29.5	31.0	29.8	31.2	31.5
3H	31.5	32.9	31.9	33.2	33.5	30.8	32.2	31.1	32.5	32.8
4H	32.2	33.5	32.5	33.8	34.1	31.3	32.6	31.6	32.9	33.2
6H	32.8	34.0	33.2	34.3	34.7	31.6	32.8	32.0	33.1	33.5
8H	33.1	34.2	33.5	34.6	34.9	31.7	32.8	32.0	33.2	33.5
12H	33.4	34.5	33.8	34.9	35.2	31.7	32.8	32.1	33.2	33.5
4H 2H	30.6	31.9	31.0	32.2	32.5	30.2	31.4	30.5	31.8	32.1
3H	32.3	33.4	32.7	33.7	34.1	31.7	32.8	32.1	33.2	33.5
4H	33.1	34.1	33.5	34.5	34.9	32.3	33.4	32.7	33.7	34.1
6H	33.8	34.8	34.3	35.2	35.6	32.8	33.7	33.2	34.1	34.5
8H	34.2	35.1	34.7	35.5	35.9	32.9	33.7	33.3	34.2	34.6
12H	34.6	35.4	35.1	35.8	36.3	32.9	33.7	33.4	34.2	34.6
8H 4H	33.3	34.2	33.8	34.6	35.1	32.7	33.5	33.1	34.0	34.4
6H	34.3	35.0	34.8	35.5	36.0	33.3	34.0	33.8	34.5	35.0
8H	34.8	35.4	35.3	35.9	36.4	33.5	34.2	34.0	34.7	35.2
12H	35.4	35.9	35.9	36.4	37.0	33.7	34.2	34.2	34.7	35.3
12H 4H	33.3	34.1	33.8	34.6	35.0	32.7	33.5	33.2	34.0	34.4
6H	34.4	35.0	34.9	35.5	36.0	33.4	34.1	33.9	34.5	35.1
8H	34.9	35.5	35.5	36.0	36.5	33.7	34.3	34.2	34.8	35.3
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117 Corrected 9846 lm Total Lamp Luminous Flux.(8log(F/F0) = 7.9)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE85-2000-40-PV
源磊A-档
3500K

UTILIZATION FACTORS TABLE

Test:U:119.5V I:0.6520A P:77.20W PF:0.9900 Lamp Flux:9845.65x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*4	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.017*1.16m	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	45	38	56	45	38	55	44	38	31
0.80	67	55	47	65	54	47	63	53	47	40
1.00	75	64	56	73	63	56	71	64	55	48
1.25	82	71	64	80	70	63	77	69	62	55
1.50	87	77	69	85	76	69	82	74	68	60
2.00	94	85	78	92	83	77	88	81	75	67
2.50	97	89	83	95	88	82	91	85	80	71
3.00	101	94	88	98	92	87	94	89	84	75
4.00	105	99	94	102	97	92	98	93	89	80
5.00	107	102	98	105	100	96	100	96	93	83
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE85-2000-40-PV
源磊A-档
3500K

ISOCANDELA DIAGRAM

Test:U:119.5V I:0.6520A P:77.20W PF:0.9900 Lamp Flux:9845.65x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*4	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.017*1.16m	PROTECTION ANGLE:

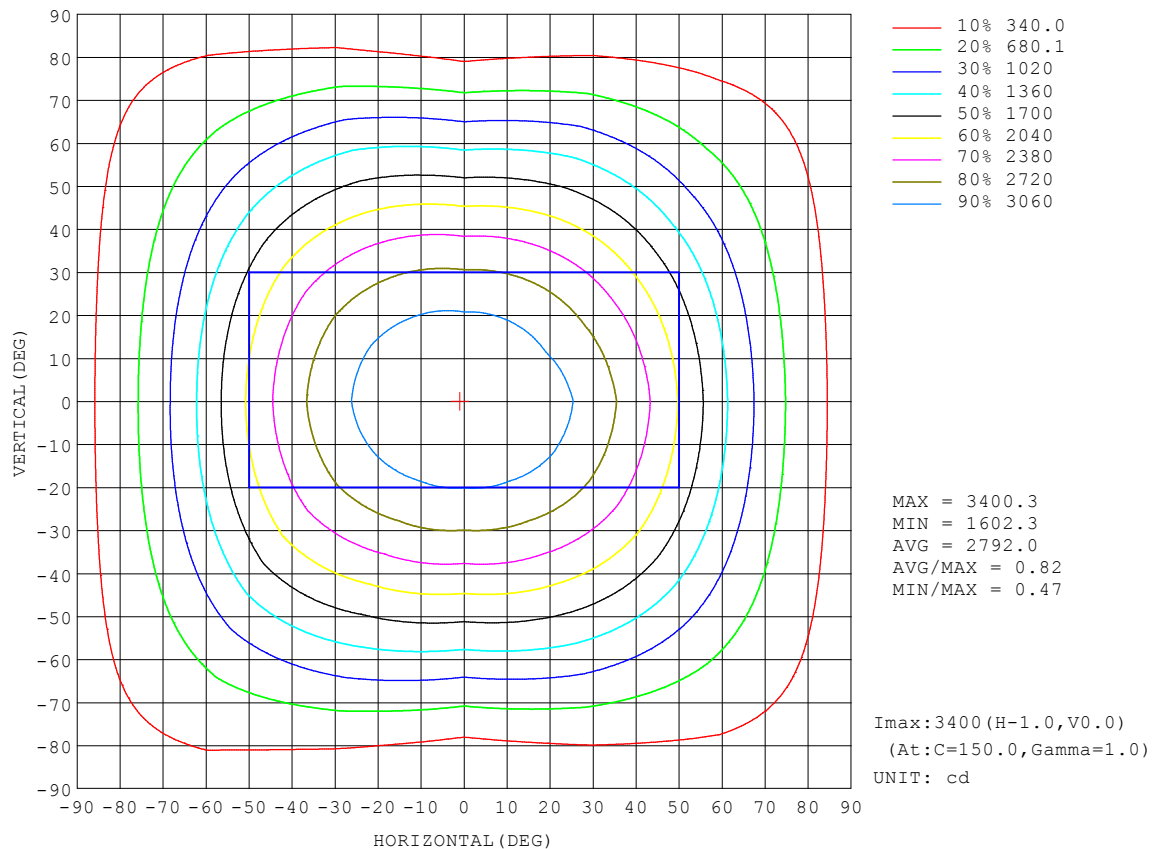


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE85-2000-40-PV
源磊A-档
3500K

AAI Figure

Test:U:119.5V I:0.6520A P:77.20W PF:0.9900 Lamp Flux:9845.65x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*4	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.017*1.16m	PROTECTION ANGLE:

Flux out:6277 lm

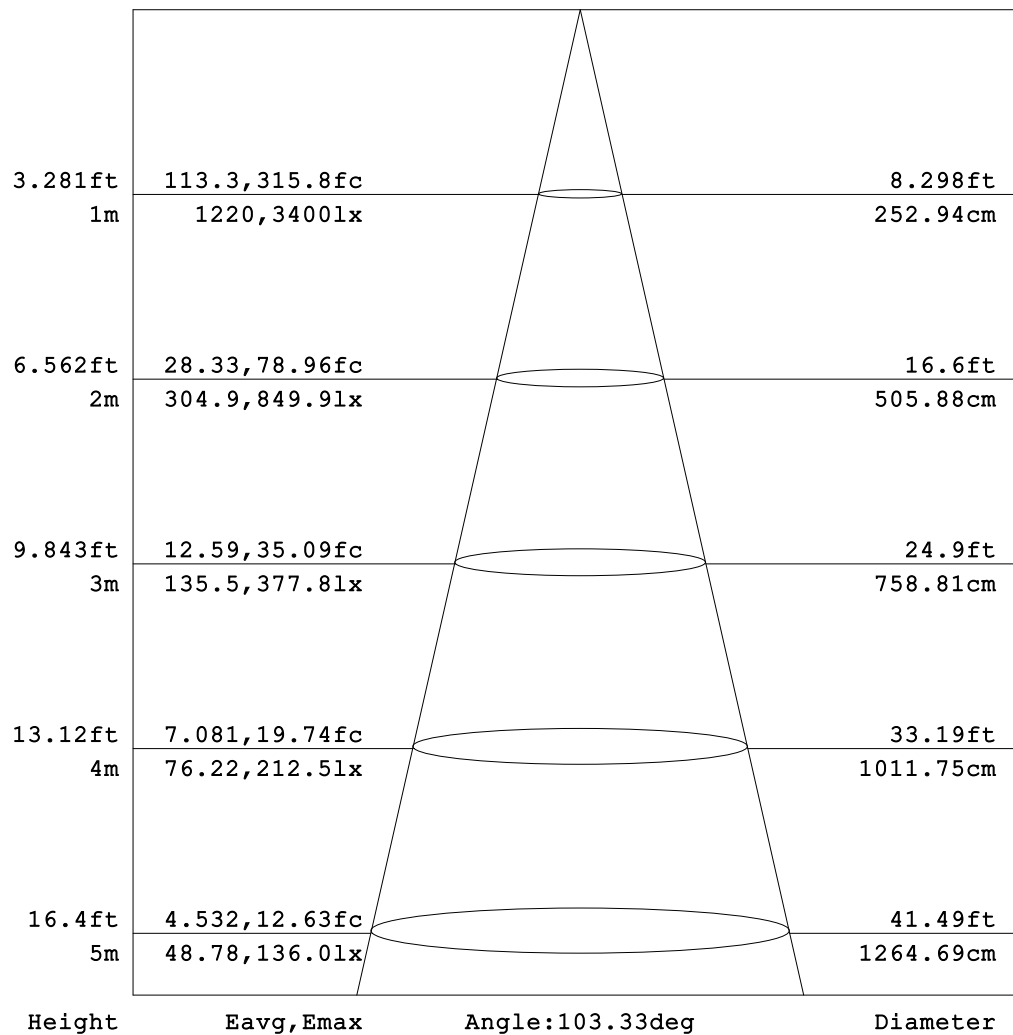


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE85-2000-40-PV
源磊A-档
3500K

ISOLUX DIAGRAM


Test:U:119.5V I:0.6520A P:77.20W PF:0.9900 Lamp Flux:9845.65x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*4	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.017*1.16m	PROTECTION ANGLE:

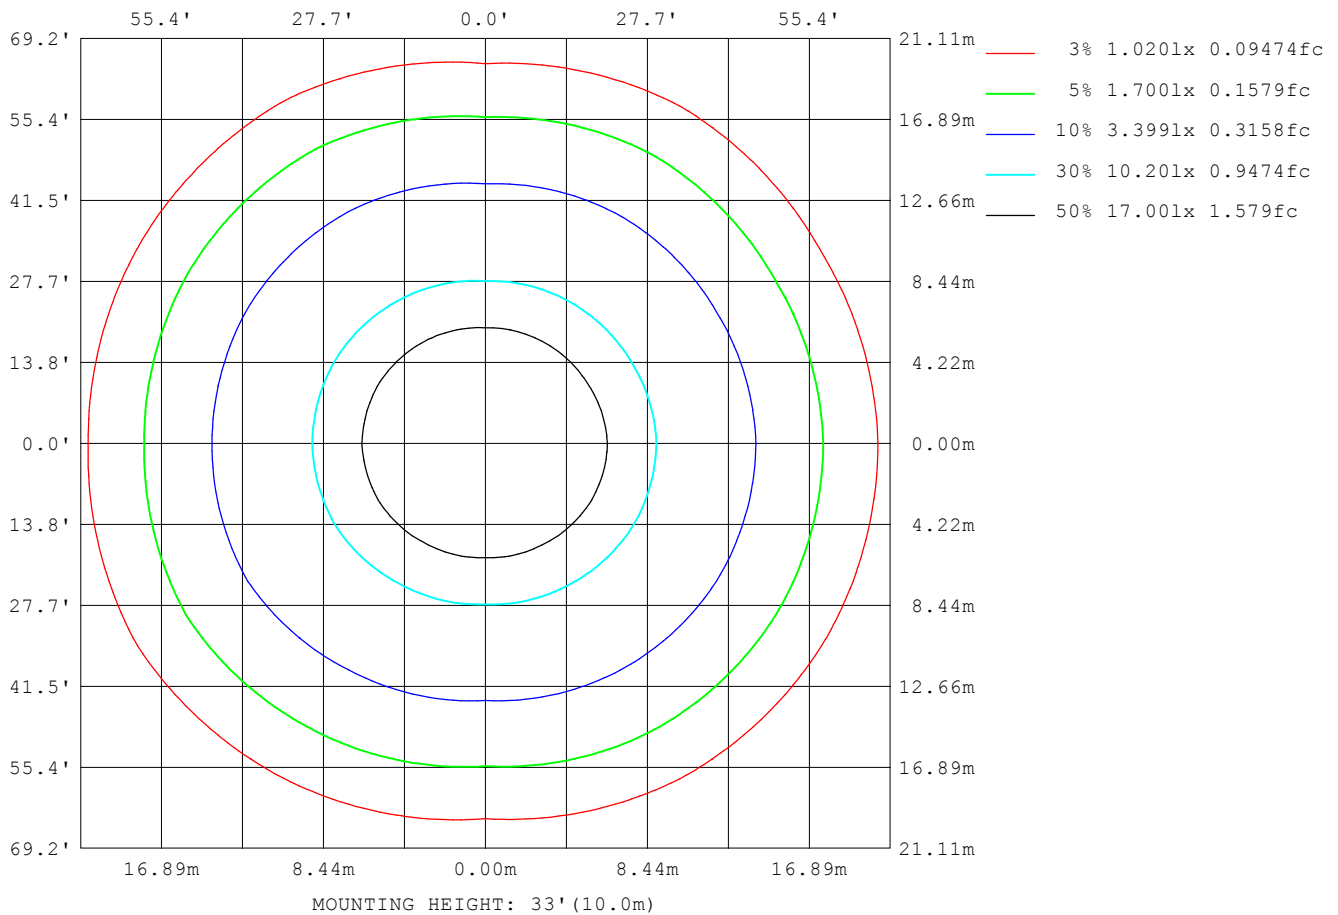

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE85-2000-40-PV
源磊A-档
3500K

Planar Illuminance Curve

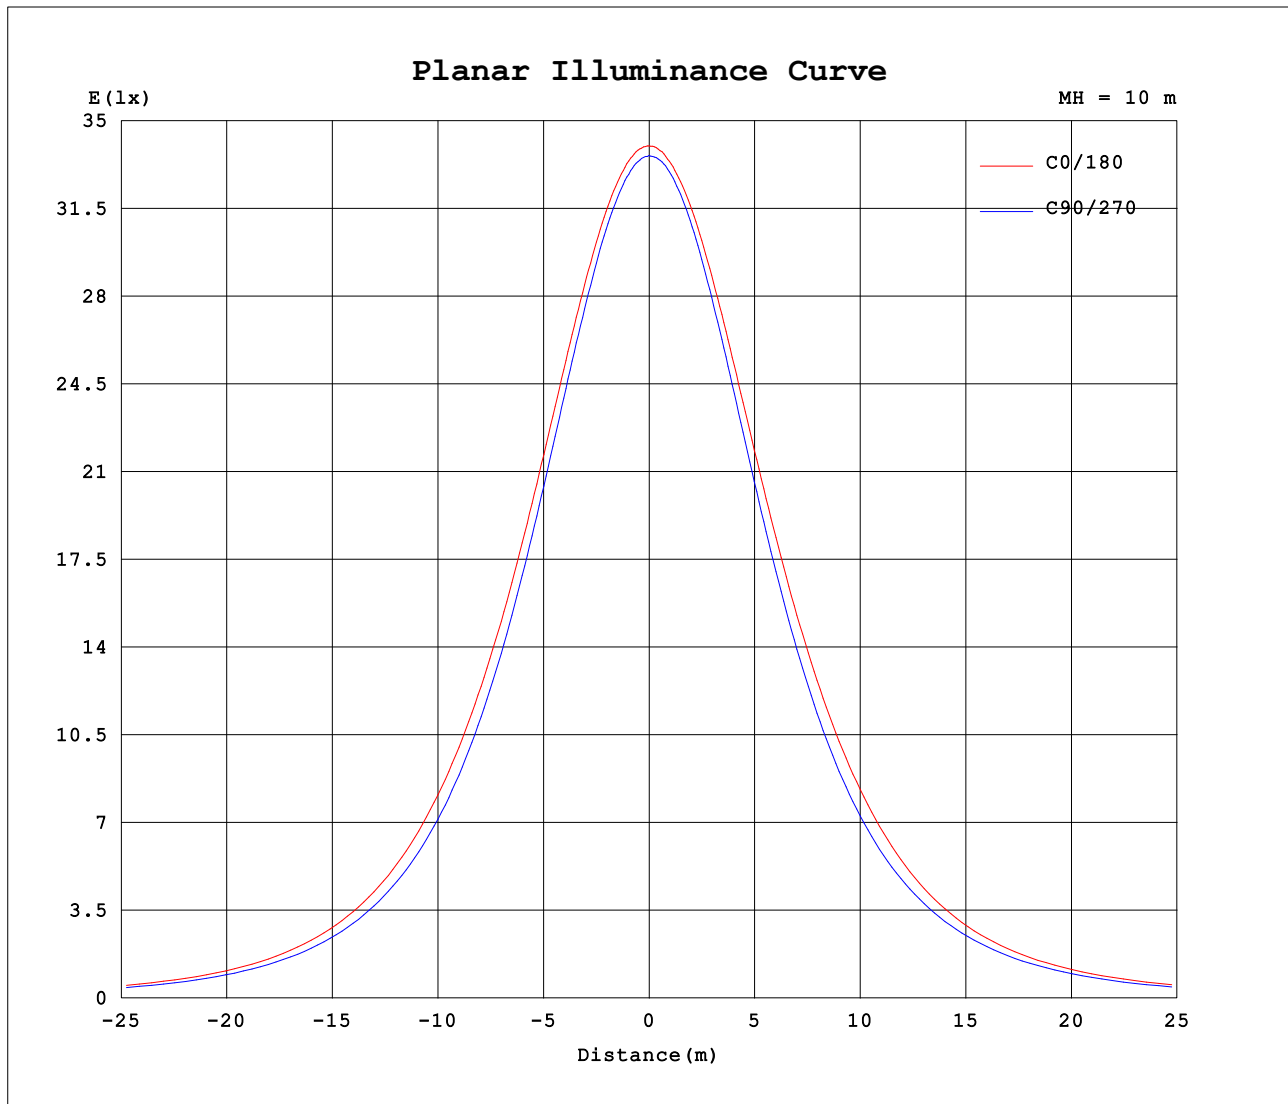

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: BQE85-2000-40-PV
源磊A-档
3500K

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.5V I:0.6520A P:77.20W PF:0.9900 Lamp Flux:9845.65x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*4	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.017*1.16m	PROTECTION ANGLE:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	3370	3370	3370	3370	3370	3370	3370	3370	3370	3370	3370	3370							
5	3360	3355	3349	3347	3355	3358	3357	3356	3357	3354	3353	3355							
10	3323	3317	3295	3290	3301	3322	3325	3321	3313	3302	3307	3309							
15	3259	3244	3209	3197	3219	3258	3265	3258	3236	3213	3223	3234							
20	3164	3145	3092	3071	3103	3168	3179	3169	3129	3091	3109	3130							
25	3044	3016	2945	2914	2956	3048	3066	3051	2991	2933	2962	2995							
30	2891	2860	2770	2724	2784	2901	2924	2904	2825	2750	2787	2835							
35	2713	2676	2573	2510	2584	2730	2755	2730	2636	2538	2590	2646							
40	2510	2468	2354	2276	2366	2535	2561	2533	2425	2308	2370	2436							
45	2275	2239	2122	2027	2134	2320	2335	2312	2198	2061	2136	2198							
50	2007	1981	1869	1768	1890	2086	2068	2062	1957	1805	1888	1938							
55	1722	1708	1618	1504	1636	1827	1774	1783	1707	1542	1635	1658							
60	1423	1426	1361	1239	1389	1545	1473	1495	1457	1279	1380	1370							
65	1137	1143	1102	977	1139	1265	1188	1211	1198	1020	1122	1092							
70	885	884	847	722	887	993	930	950	941	767	873	835							
75	664	656	607	481	647	752	707	715	695	523	630	612							
80	478	460	389	259	421	539	516	512	470	298	409	417							
85	322	296	205	81.7	228	358	359	343	274	113	218	260							
90	234	206	103	1.00	91.2	228	243	224	131	3.60	87.1	182							
95	175	147	66.9	1.79	57.1	144	175	148	73.1	1.79	53.0	132							
100	146	123	52.9	2.14	43.1	123	151	127	57.9	2.11	40.1	110							
105	124	104	41.9	2.10	32.5	102	130	107	45.5	2.52	31.0	92.5							
110	106	87.0	30.5	0.97	22.8	84.9	110	89.9	32.7	1.90	22.5	77.4							
115	90.2	70.2	24.0	1.29	18.9	69.1	87.1	67.9	24.3	1.90	18.7	59.8							
120	73.1	58.2	21.4	1.72	16.9	54.3	70.6	55.9	20.7	2.48	16.9	49.9							
125	61.4	48.8	20.0	1.80	15.5	45.5	60.4	45.6	20.2	2.45	16.1	41.5							
130	50.9	40.9	18.3	1.26	15.5	38.3	52.4	40.9	20.0	2.43	14.2	35.0							
135	41.8	32.7	15.8	1.33	16.4	32.0	43.6	34.5	20.2	2.45	13.8	30.1							
140	34.2	27.5	13.4	1.40	17.4	27.0	36.4	29.9	20.3	2.45	13.1	27.6							
145	28.5	22.9	13.4	1.46	18.7	23.7	31.3	27.9	21.5	2.44	10.7	23.5							
150	24.0	19.3	12.6	1.83	18.4	23.0	28.4	26.4	21.7	2.80	7.91	20.1							
155	21.7	16.4	9.93	2.52	15.2	22.5	26.0	25.7	17.6	2.75	4.03	15.8							
160	20.7	14.0	6.80	2.47	10.2	23.0	25.8	25.5	12.1	2.69	3.09	9.82							
165	16.1	9.90	3.35	2.40	7.04	19.0	21.0	17.7	7.35	2.62	2.64	4.12							
170	5.27	3.21	2.50	2.34	5.16	9.72	9.54	7.93	5.10	2.50	2.20	2.83							
175	2.25	2.13	2.06	2.21	3.61	5.22	3.10	4.01	3.34	2.27	2.01	2.04							
180	1.94	2.10	2.06	2.15	2.24	2.44	1.95	2.08	2.08	2.12	2.25	2.50							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

□ Range: 0 - 180DEG
 □ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: BQE85-2000-40-PV
 源磊A-档
 3500K