


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.90V I:0.6360A P:75.600W PF:0.9920 Freq:50.00Hz Lamp Flux:8366.85x1 lm		
NAME: WL-RTST480D(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.6	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 110.67 lm/W			
MODEL		I _{max} (cd)	4100	S/MH(C0/180)	1.14
NOMINAL POWER(W)	80	LOR(%)	100.0	S/MH(C90/270)	1.17
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	8366.8	η UP, DN(C0-180)	0.1, 49.2
NOMINAL FLUX(lm)	8366.85	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1, 50.6
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	219.7	η down(%)	99.8	CIBSE SHR MAX	1.25

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

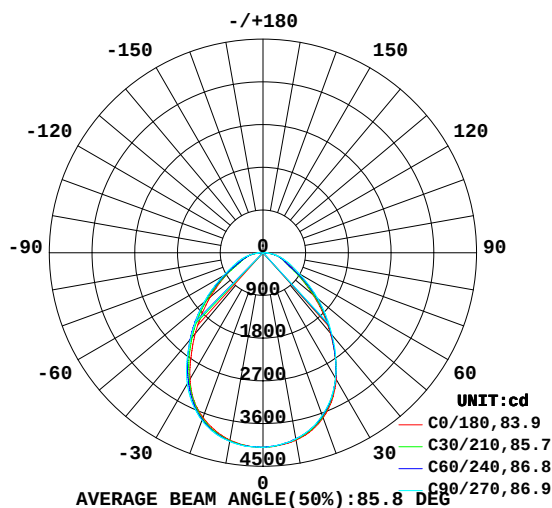

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

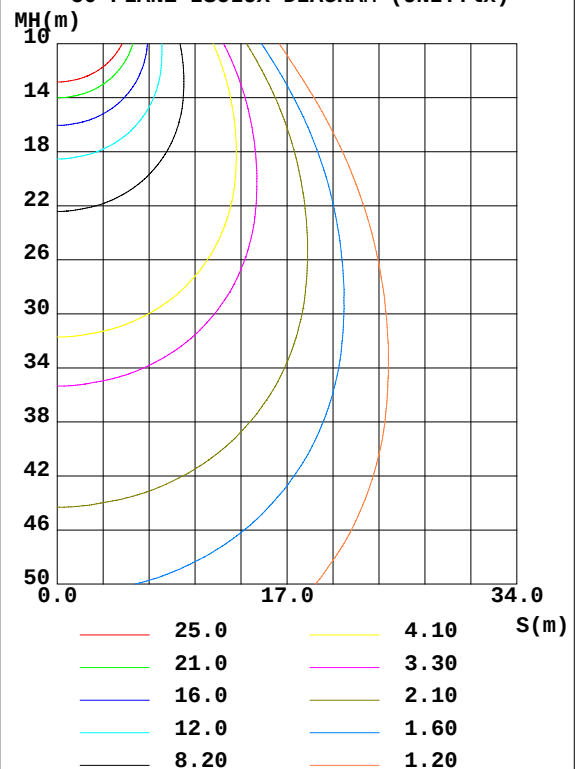

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-05-05

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity: 50.0%
 Test Distance: 6.770m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	4007	3987	3982	4001	4009	4027	4036	4021	0- 10	386.9	386.9	4.62, 4.62
20	3698	3670	3648	3678	3696	3729	3758	3727	10- 20	1094	1481	17.7, 17.7
30	3083	3058	3060	3053	3077	3126	3190	3091	20- 30	1575	3056	36.5, 36.5
40	2208	2238	2263	2277	2223	2358	2379	2271	30- 40	1677	4733	56.6, 56.6
50	1380	1446	1510	1512	1452	1575	1619	1451	40- 50	1449	6182	73.9, 73.9
60	794.9	764.7	800.3	825.2	864.0	869.2	959.3	765.8	50- 60	1018	7201	86.1, 86.1
70	496.8	457.4	524.0	464.6	551.8	478.3	559.0	466.2	60- 70	626.2	7827	93.5, 93.5
80	251.5	243.2	254.5	248.3	278.1	264.7	281.1	245.2	70- 80	395.8	8223	98.3, 98.3
90	1.808	0.6615	0.4116	3.096	3.475	2.427	3.265	0.5162	80- 90	129.5	8352	99.8, 99.8
100	0.7590	1.024	1.354	0.8800	0.8157	0.9823	1.246	1.004	90-100	0.7738	8353	99.8, 99.8
110	1.082	2.067	2.013	1.805	1.066	2.291	1.673	1.921	100-110	1.436	8354	99.9, 99.9
120	1.815	2.986	2.816	2.944	1.832	3.076	2.090	3.029	110-120	2.240	8357	99.9, 99.9
130	2.611	3.747	3.378	3.623	2.360	3.317	1.771	2.818	120-130	2.630	8359	99.9, 99.9
140	2.993	3.988	3.756	3.846	2.812	3.274	1.887	2.996	130-140	2.569	8362	99.9, 99.9
150	3.166	4.310	4.072	3.511	3.544	3.572	2.588	2.556	140-150	2.068	8364	100, 100
160	3.833	4.624	3.844	2.819	2.646	2.934	4.140	2.972	150-160	1.566	8366	100, 100
170	3.977	4.210	3.744	2.925	2.709	2.877	3.731	3.826	160-170	0.9624	8367	100, 100
180	3.310	3.334	3.338	3.283	3.331	3.334	3.333	3.275	170-180	0.3246	8367	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-05-05

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 γ Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity: 50.0%
 Test Distance: 6.770m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.90V I:0.6360A P:75.600W PF:0.9920 Freq:50.00Hz Lamp Flux:8366.85x1 lm		
NAME: WL-RTST480D(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.6	Shielding Angle:

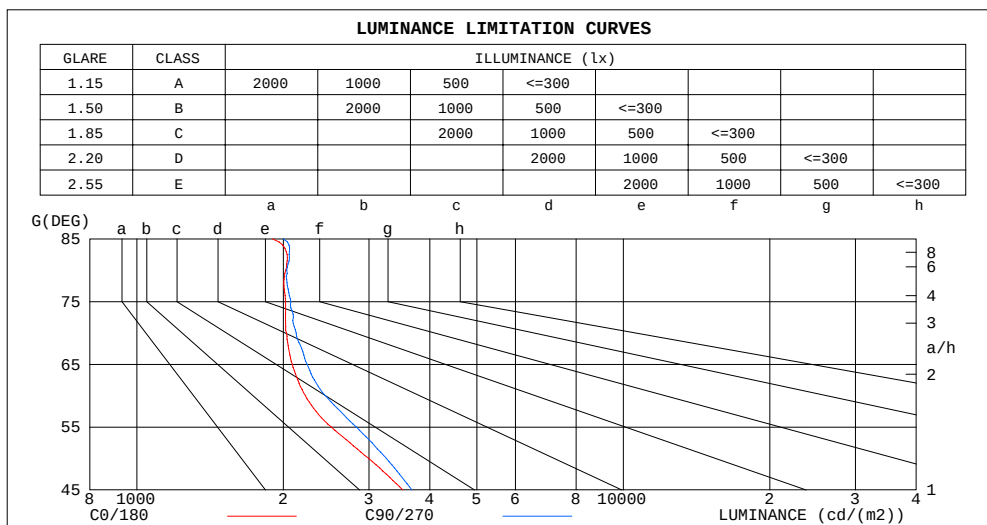

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	1899	1999
80	2023	2032
75	2021	2073
70	2029	2125
65	2087	2239
60	2221	2442
55	2511	2826
50	2998	3258
45	3520	3677


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.90V I:0.6360A P:75.600W PF:0.9920 Freq:50.00Hz Lamp Flux:8366.85x1 lm		
NAME: WL-RTST480D(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.6	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.06	1.02	.99	1.03	1.00	.97	.99	.96	.94	.95	.93	.91	.92	.90	.88	.86
2.0	.94	.88	.83	.92	.86	.82	.89	.84	.80	.85	.81	.78	.82	.79	.76	.74
3.0	.84	.77	.71	.82	.76	.70	.79	.74	.69	.77	.72	.68	.74	.70	.67	.64
4.0	.75	.67	.61	.74	.67	.61	.72	.65	.60	.69	.64	.59	.67	.63	.59	.57
5.0	.68	.60	.54	.67	.59	.54	.65	.58	.53	.63	.57	.53	.61	.56	.52	.50
6.0	.62	.54	.48	.61	.53	.48	.59	.53	.47	.58	.52	.47	.56	.51	.47	.45
7.0	.57	.49	.43	.56	.48	.43	.55	.48	.43	.53	.47	.42	.52	.46	.42	.40
8.0	.52	.44	.39	.52	.44	.39	.50	.43	.39	.49	.43	.38	.48	.42	.38	.36
9.0	.48	.41	.35	.48	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.33
10.0	.45	.37	.32	.44	.37	.32	.43	.37	.32	.42	.36	.32	.42	.36	.32	.30

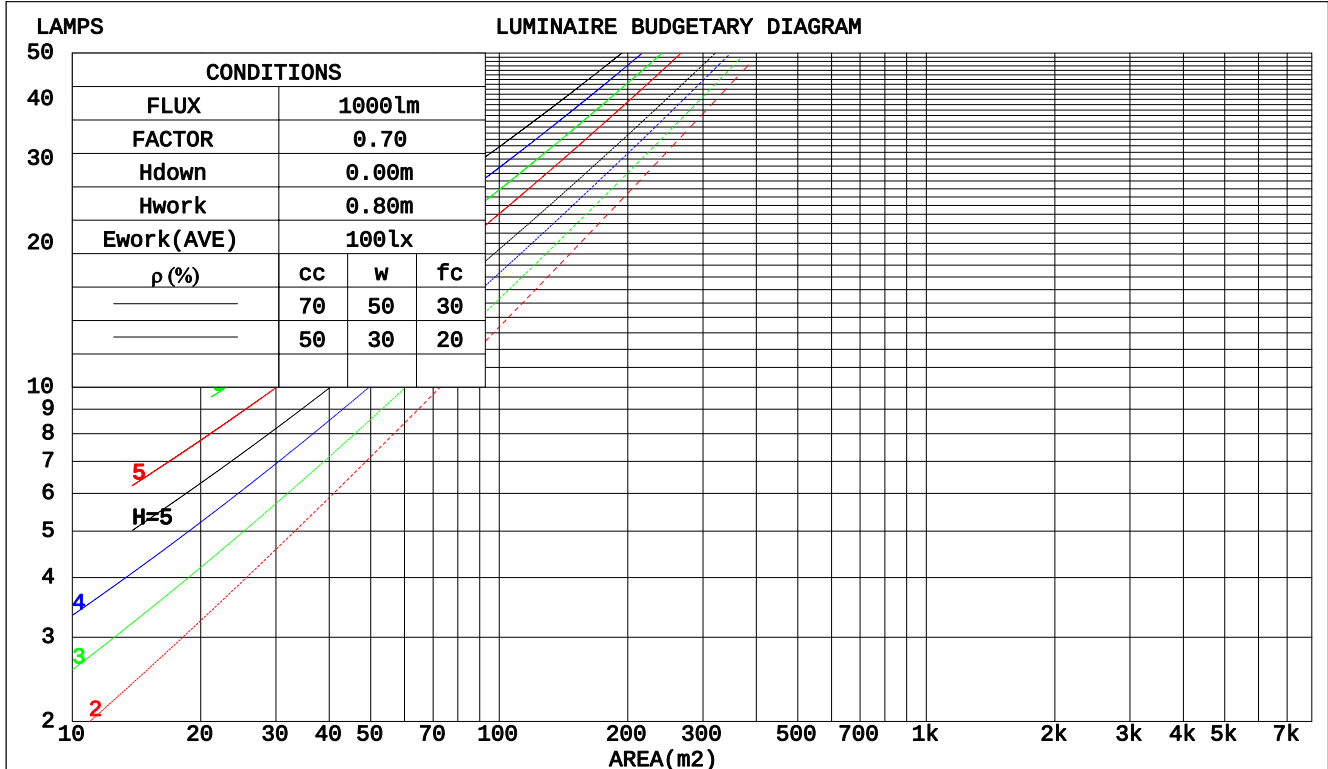

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-05

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 γ Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.90V I:0.6360A P:75.600W PF:0.9920 Freq:50.00Hz Lamp Flux:8366.85x1 lm									
NAME: WL-RTST480D(4000K)					TYPE:			WEIGHT:	
SPEC.:					DIM.:			SERIAL No.:	
MFR.: Shenzhen Wisdom Light Co., ltd					SUR.:1.2*0.6			Shielding Angle:	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.273	.155	.049	.266	.152	.048	.253	.145	.046	.241	.139	.045	.230	.133	.043	
2.0	.258	.141	.043	.252	.139	.043	.240	.134	.042	.230	.129	.040	.220	.124	.039	
3.0	.241	.128	.038	.235	.126	.038	.225	.122	.037	.216	.118	.036	.207	.115	.036	
4.0	.224	.116	.034	.219	.115	.034	.210	.112	.033	.202	.109	.033	.195	.106	.032	
5.0	.209	.106	.031	.205	.105	.031	.197	.103	.030	.190	.100	.030	.183	.098	.029	
6.0	.195	.098	.028	.192	.097	.028	.185	.095	.028	.178	.093	.027	.172	.091	.027	
7.0	.183	.091	.026	.180	.090	.026	.174	.088	.025	.168	.086	.025	.162	.084	.025	
8.0	.172	.084	.024	.169	.083	.024	.164	.082	.023	.158	.080	.023	.153	.079	.023	
9.0	.162	.078	.022	.160	.078	.022	.155	.076	.022	.150	.075	.021	.145	.074	.021	
10.0	.153	.073	.020	.151	.073	.020	.146	.072	.020	.142	.071	.020	.138	.069	.020	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.179	.158	.139	.153	.135	.119	.105	.093	.082	.060	.054	.048	.019	.017	.016	
2.0	.169	.133	.103	.145	.115	.089	.099	.079	.062	.057	.046	.037	.018	.015	.012	
3.0	.160	.115	.080	.137	.100	.069	.094	.069	.049	.054	.040	.029	.017	.013	.009	
4.0	.152	.102	.063	.130	.088	.055	.090	.061	.039	.052	.036	.023	.017	.012	.008	
5.0	.144	.091	.052	.124	.079	.045	.085	.055	.032	.050	.032	.019	.016	.011	.006	
6.0	.137	.083	.043	.118	.071	.038	.081	.050	.027	.047	.029	.016	.015	.010	.005	
7.0	.131	.076	.037	.113	.065	.032	.078	.046	.023	.045	.027	.013	.015	.009	.004	
8.0	.125	.070	.032	.107	.060	.028	.074	.042	.020	.043	.025	.012	.014	.008	.004	
9.0	.119	.065	.028	.103	.056	.024	.071	.039	.017	.041	.023	.010	.013	.008	.003	
10.0	.114	.060	.025	.098	.052	.022	.068	.037	.015	.040	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-05

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.90V I:0.6360A P:75.600W PF:0.9920 Freq:50.00Hz Lamp Flux:8366.85x1 lm										
NAME: WL-RTST480D(4000K)					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co., ltd					SUR.:1.2*0.6			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.2	16.6	15.5	16.8	17.0	15.6	17.0	15.9	17.2	17.4
3H	16.3	17.5	16.6	17.8	18.0	16.6	17.9	16.9	18.1	18.3
4H	16.8	18.0	17.1	18.3	18.5	17.1	18.3	17.4	18.6	18.8
6H	17.3	18.4	17.6	18.7	19.0	17.6	18.7	17.9	19.0	19.3
8H	17.5	18.6	17.9	18.9	19.2	17.8	18.9	18.1	19.1	19.4
12H	17.6	18.7	18.0	19.0	19.3	17.9	19.0	18.3	19.2	19.5
4H 2H	15.5	16.7	15.9	17.0	17.2	15.8	17.0	16.1	17.3	17.5
3H	16.8	17.9	17.2	18.1	18.4	17.1	18.1	17.4	18.4	18.7
4H	17.5	18.5	17.9	18.8	19.1	17.8	18.7	18.2	19.1	19.4
6H	18.2	19.1	18.6	19.4	19.8	18.4	19.3	18.8	19.6	20.0
8H	18.5	19.3	18.9	19.6	20.0	18.7	19.5	19.1	19.8	20.2
12H	18.7	19.4	19.1	19.8	20.2	18.9	19.6	19.3	20.0	20.4
8H 4H	17.8	18.6	18.2	19.0	19.3	18.0	18.8	18.4	19.2	19.6
6H	18.6	19.3	19.1	19.7	20.1	18.8	19.5	19.3	19.9	20.3
8H	19.0	19.6	19.5	20.0	20.5	19.2	19.8	19.6	20.2	20.6
12H	19.3	19.8	19.7	20.2	20.7	19.5	20.0	19.9	20.4	20.9
12H 4H	17.8	18.6	18.3	18.9	19.3	18.0	18.8	18.5	19.1	19.6
6H	18.7	19.3	19.2	19.7	20.2	18.9	19.5	19.4	19.9	20.3
8H	19.1	19.6	19.6	20.0	20.5	19.3	19.8	19.8	20.2	20.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.3				
1.5H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
2.0H	+ 0.6 / - 0.6					+ 0.6 / - 0.6				

CIE Pub.117, 8367 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 7.4$)
Area: 0.72 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-05

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 γ Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.90V I:0.6360A P:75.600W PF:0.9920 Freq:50.00Hz Lamp Flux:8366.85x1 lm		
NAME: WL-RTST480D(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.6	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	65	54	48	64	54	48	63	53	48	42
0.80	74	64	58	73	64	57	72	63	57	51
1.00	82	72	66	81	72	66	79	73	65	59
1.25	89	79	73	87	79	73	85	77	72	66
1.50	93	84	79	91	84	78	89	82	77	70
2.00	99	91	86	97	90	85	94	88	84	76
2.50	102	95	90	100	94	89	96	91	87	80
3.00	105	99	94	103	97	93	99	94	91	83
4.00	108	103	99	106	101	98	102	98	95	87
5.00	110	106	102	108	104	101	103	100	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-05-05

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.90V I:0.6360A P:75.600W PF:0.9920 Freq:50.00Hz Lamp Flux:8366.85x1 lm		
NAME: WL-RTST480D(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.6	Shielding Angle:

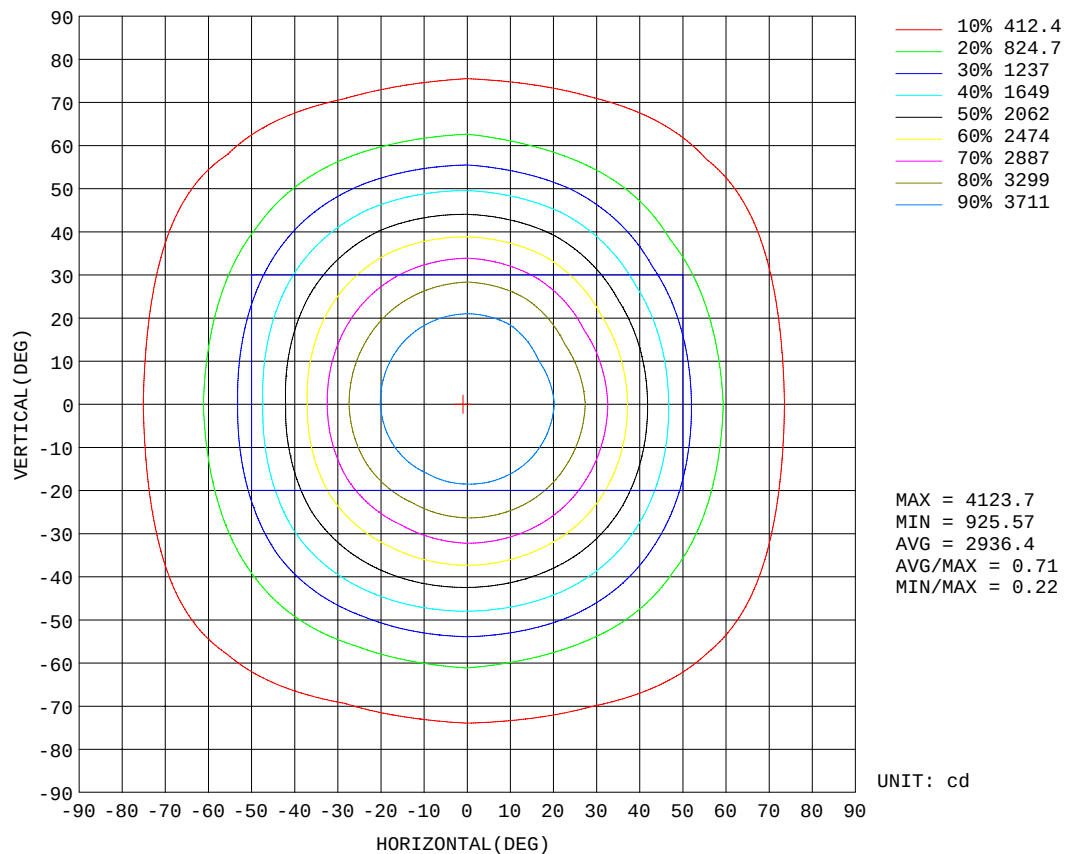


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

AAI Figure

Test:U:119.90V I:0.6360A P:75.600W PF:0.9920 Freq:50.00Hz Lamp Flux:8366.85x1 lm		
NAME: WL-RTST480D(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.6	Shielding Angle:

Flux out:5049 lm

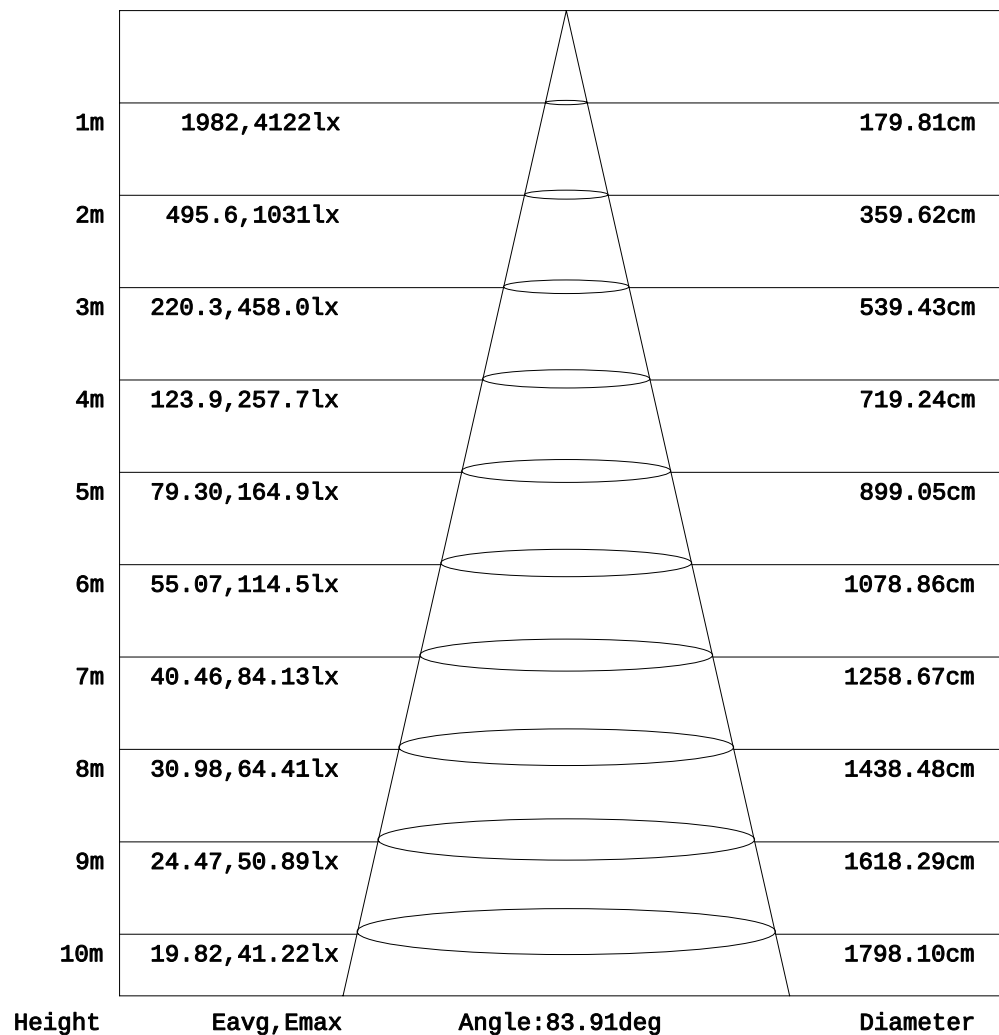


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-05-05

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity: 50.0%
 Test Distance: 6.770m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.90V I:0.6360A P:75.600W PF:0.9920 Freq:50.00Hz Lamp Flux:8366.85x1 lm		
NAME: WL-RTST480D(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.6	Shielding Angle:

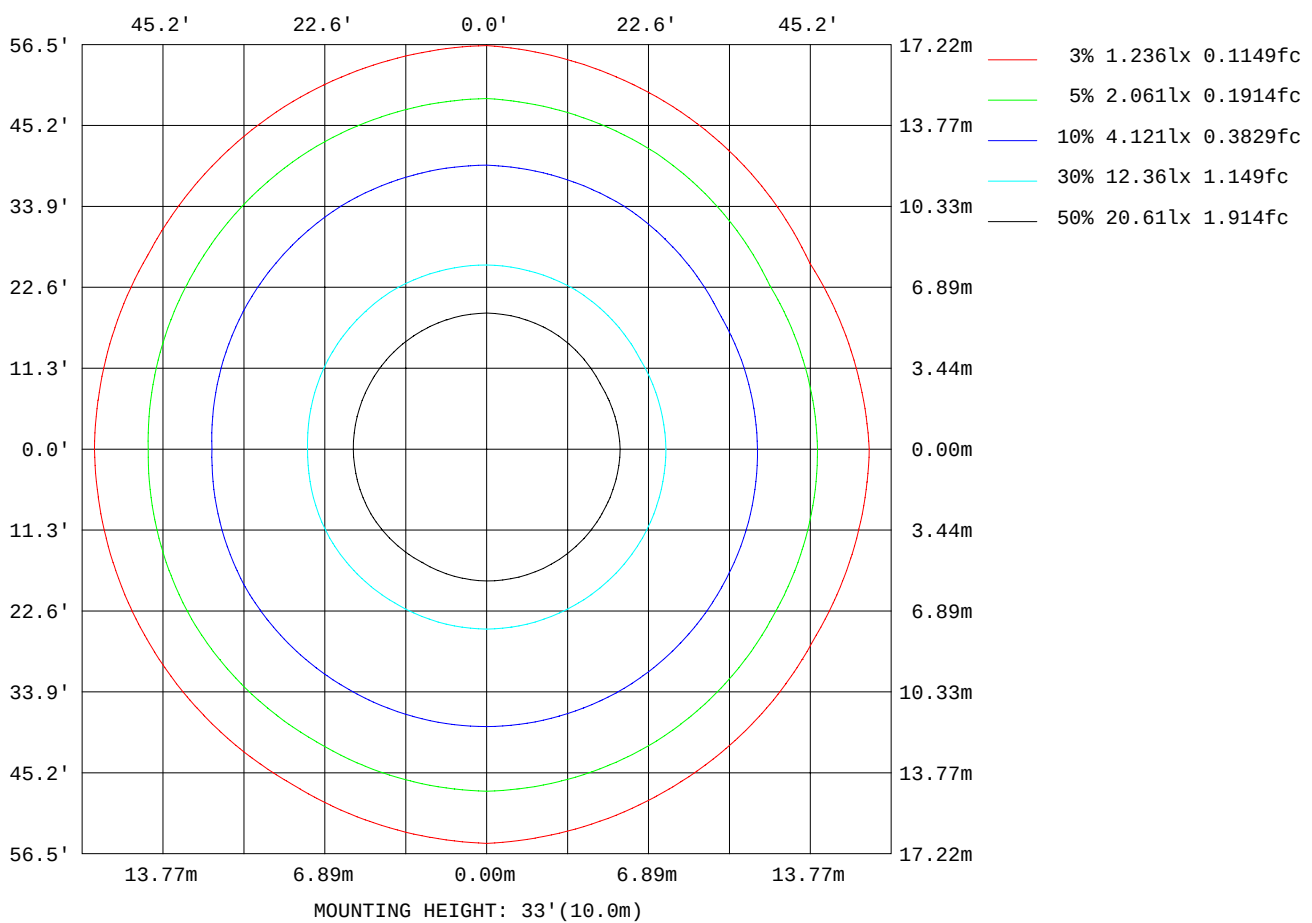

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-05-05

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity: 50.0%
Test Distance: 6.770m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.90V I:0.6360A P:75.600W PF:0.9920 Freq:50.00Hz Lamp Flux:8366.85x1 lm		
NAME: WL-RTST480D(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.6	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	2179
L_0~180(75)av	2113
L_0~180(85)av	2040
L_90~270(65)av	2317
L_90~270(75)av	2184
L_90~270(85)av	2207
L_45(65)av	1889
L_45(75)av	1934
L_45(85)av	1700

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

Planar Illuminance Curve

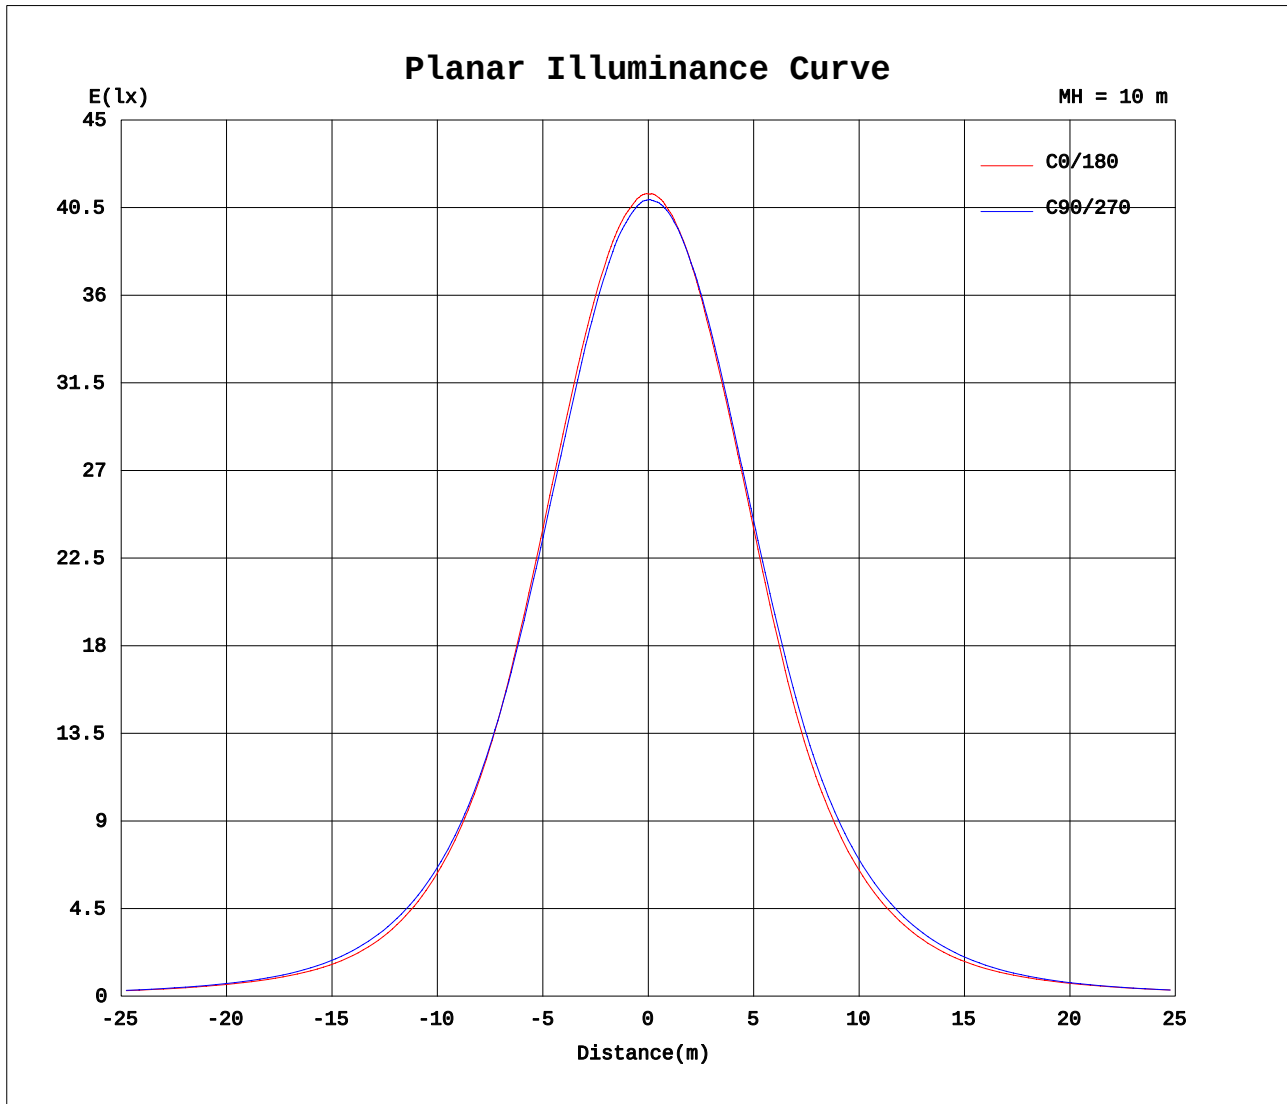

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-05-05

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity: 50.0%
Test Distance: 6.770m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.90V I:0.6360A P:75.600W PF:0.9920 Freq:50.00Hz Lamp Flux:8366.85x1 lm											
NAME: WL-RTST480D(4000K)						TYPE:			WEIGHT:		
SPEC.:						DIM.:			SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co., ltd						SUR.:1.2*0.6			Shielding Angle:		

Table--1

UNIT: cd

C(DEC) γ (DEC)	0	30	60	90	120	150	180	210	240	270	300	330							
0	4097	4097	4097	4097	4097	4097	4097	4097	4097	4097	4097	4097							
5	4068	4065	4061	4059	4064	4081	4075	4084	4085	4089	4090	4071							
10	4007	3993	3980	3982	3987	4015	4009	4021	4033	4036	4026	4015							
15	3889	3867	3851	3850	3851	3894	3881	3905	3923	3930	3923	3891							
20	3698	3677	3662	3648	3651	3706	3696	3718	3740	3758	3754	3700							
25	3437	3405	3396	3390	3371	3439	3440	3450	3482	3512	3492	3414							
30	3083	3053	3063	3060	3016	3089	3077	3107	3145	3190	3141	3040							
35	2650	2652	2656	2667	2639	2690	2638	2718	2773	2794	2738	2628							
40	2208	2235	2241	2263	2262	2292	2223	2324	2393	2379	2333	2208							
45	1781	1824	1848	1875	1886	1908	1822	1934	2006	1988	1930	1782							
50	1380	1412	1480	1510	1502	1522	1452	1541	1610	1619	1536	1366							
55	1031	1038	1117	1169	1128	1157	1116	1168	1234	1271	1161	992							
60	795	738	791	880	818	832	864	834	904	959	827	705							
65	631	549	568	682	594	602	695	595	650	728	594	543							
70	497	454	461	524	458	471	552	464	492	559	484	449							
75	374	363	367	387	347	366	413	363	373	427	385	354							
80	251	240	246	254	239	257	278	257	272	281	269	222							
85	118	91.9	103	126	104	124	138	118	131	151	127	79.0							
90	1.81	0.87	0.46	0.41	0.43	5.77	3.47	3.85	1.00	3.26	0.55	0.49							
95	0.45	0.53	0.74	0.65	0.60	0.45	0.58	0.58	0.64	0.80	0.70	0.60							
100	0.76	0.97	1.08	1.35	0.98	0.78	0.82	0.96	1.01	1.25	0.97	1.04							
105	1.12	1.25	1.54	1.72	1.35	1.16	1.08	1.44	1.38	1.46	1.19	1.32							
110	1.08	1.57	2.57	2.01	2.25	1.36	1.07	1.94	2.64	1.67	2.18	1.66							
115	1.35	2.15	2.91	2.55	2.91	1.84	1.34	2.52	2.84	1.84	2.19	2.13							
120	1.82	2.77	3.20	2.82	3.33	2.56	1.83	3.04	3.11	2.09	3.20	2.85							
125	2.26	3.42	3.51	3.16	3.45	3.05	2.20	3.46	2.90	1.68	3.07	3.28							
130	2.61	3.90	3.60	3.38	3.86	3.38	2.36	3.12	3.52	1.77	2.01	3.63							
135	2.95	3.99	3.80	3.59	4.57	3.65	2.67	3.43	4.02	1.79	2.12	3.91							
140	2.99	3.73	4.24	3.76	3.80	3.89	2.81	3.67	2.88	1.89	2.01	3.98							
145	2.99	4.06	4.38	3.92	2.94	4.13	2.95	3.94	2.35	1.92	1.94	3.34							
150	3.17	4.26	4.36	4.07	2.85	4.17	3.54	4.40	2.74	2.59	2.02	3.09							
155	3.37	4.42	4.64	4.02	2.66	3.31	3.64	3.18	2.87	3.87	2.79	1.64							
160	3.83	4.44	4.81	3.84	2.78	2.86	2.65	2.72	3.15	4.14	4.44	1.50							
165	3.91	4.02	4.54	3.79	2.73	2.71	2.58	2.61	3.11	4.09	4.31	1.98							
170	3.98	4.27	4.15	3.74	2.95	2.90	2.71	2.67	3.09	3.73	3.95	3.70							
175	3.72	3.89	3.71	3.56	3.15	2.93	2.79	2.77	3.13	3.38	3.45	3.57							
180	3.31	3.35	3.32	3.34	3.30	3.27	3.33	3.35	3.32	3.33	3.30	3.25							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks: