


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.70V I:0.2030A P:24.700W PF:0.9980 Freq:50.00Hz Lamp Flux:2762.56x1 lm		
NAME: WL-RTST124D(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.6	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 111.84 lm/W			
MODEL		I _{max} (cd)	1333	S/MH(C0/180)	1.14
NOMINAL POWER(W)	24	LOR(%)	100.0	S/MH(C90/270)	1.17
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	2762.6	η UP, DN(C0-180)	0.1, 50.2
NOMINAL FLUX(lm)	2762.56	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1, 49.6
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	119.9	η down(%)	99.8	CIBSE SHR MAX	1.25

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

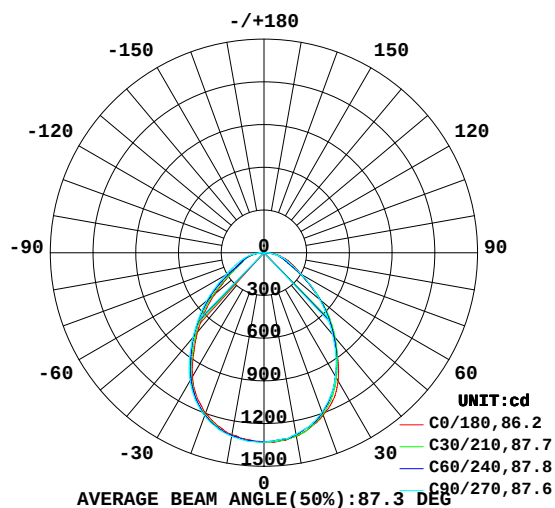

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

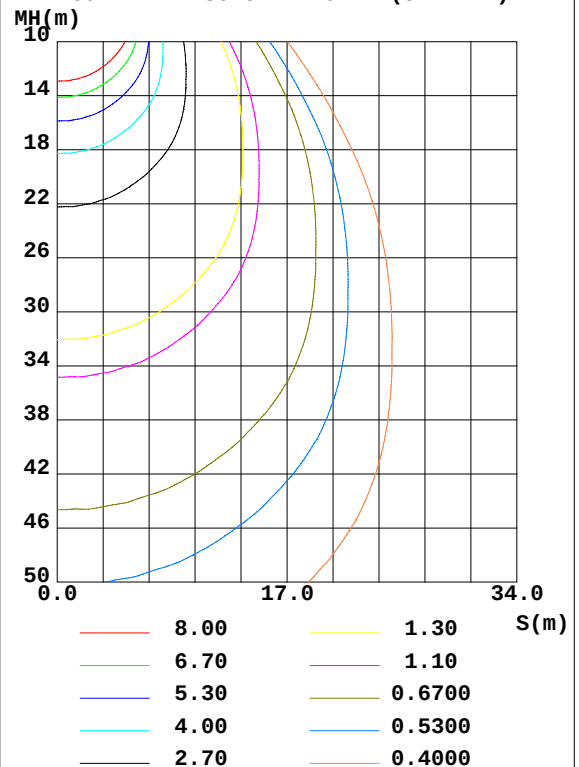

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-05-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity: 50.0%
 Test Distance: 6.770m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1309	1301	1294	1296	1298	1303	1310	1305	0- 10	125.6	125.6	4.55,4.55
20	1214	1201	1192	1201	1200	1212	1217	1211	10- 20	356.0	481.5	17.4,17.4
30	1041	1010	1007	1012	1003	1022	1038	1010	20- 30	515.7	997.2	36.1,36.1
40	766.6	770.3	747.9	750.3	727.0	756.6	775.9	765.7	30- 40	554.4	1552	56.2,56.2
50	512.8	520.5	510.0	489.5	448.5	491.3	527.1	510.4	40- 50	485.6	2037	73.7,73.7
60	300.3	287.0	300.3	252.4	250.3	252.2	307.8	276.6	50- 60	340.0	2377	86.1,86.1
70	191.8	156.9	175.0	152.8	159.6	151.3	180.3	155.0	60- 70	206.4	2584	93.5,93.5
80	100.6	87.95	84.87	82.36	77.86	80.25	90.49	82.79	70- 80	131.3	2715	98.3,98.3
90	4.225	1.233	0.2393	0.2088	0.1657	0.1588	0.2158	0.1804	80- 90	42.77	2758	99.8,99.8
100	0.1767	0.2465	0.4133	0.2900	0.2741	0.3096	0.3461	0.2469	90-100	0.2574	2758	99.8,99.8
110	0.2777	0.4996	0.6124	0.5618	0.3371	0.7052	0.4303	0.5980	100-110	0.3971	2758	99.8,99.8
120	0.4147	0.8715	0.8511	0.9204	0.5635	0.9952	0.4998	1.022	110-120	0.6712	2759	99.9,99.9
130	0.6773	1.303	1.014	1.232	0.8945	1.135	0.5337	0.8213	120-130	0.8366	2760	99.9,99.9
140	1.087	1.470	1.132	1.431	1.247	1.421	0.6824	1.027	130-140	0.8780	2761	99.9,99.9
150	1.406	1.632	1.159	1.295	1.406	1.611	0.9365	0.6472	140-150	0.7938	2761	100,100
160	1.350	1.352	1.145	1.120	1.243	1.464	1.469	1.187	150-160	0.6068	2762	100,100
170	1.278	1.245	1.103	0.9802	0.9608	1.104	1.305	1.266	160-170	0.3463	2762	100,100
180	1.064	1.092	1.098	0.9937	1.070	1.096	1.092	0.9985	170-180	0.1066	2763	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-05-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:121.70V I:0.2030A P:24.700W PF:0.9980 Freq:50.00Hz Lamp Flux:2762.56x1 lm		
NAME: WL-RTST124D(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.6	Shielding Angle:

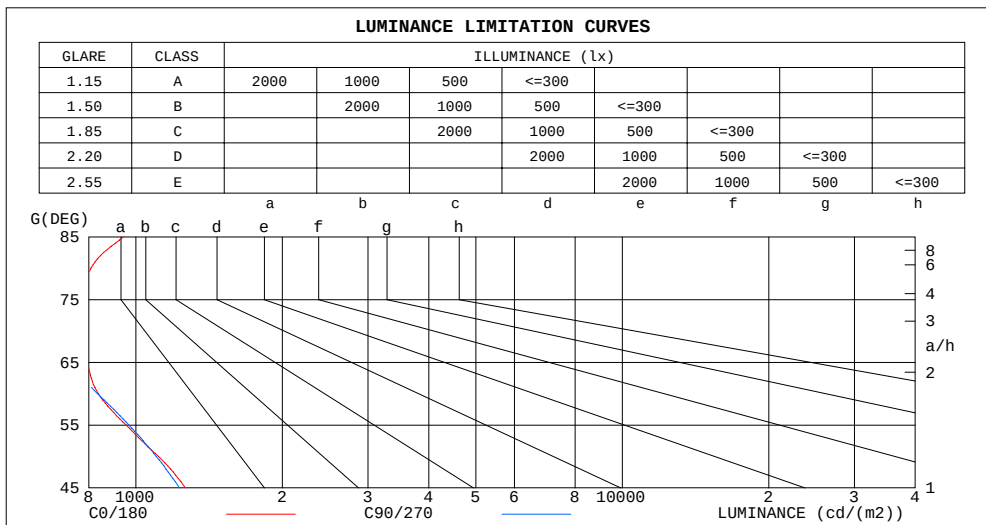

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	943	656
80	808	678
75	786	716
70	782	710
65	794	748
60	838	834
55	955	967
50	1113	1101
45	1264	1229


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-10

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.70V I:0.2030A P:24.700W PF:0.9980 Freq:50.00Hz Lamp Flux:2762.56x1 lm		
NAME: WL-RTST124D(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.6	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.06	1.02	.98	1.03	.99	.97	.99	.96	.94	.95	.93	.91	.92	.90	.88	.86
2.0	.94	.88	.83	.92	.86	.82	.88	.84	.80	.85	.81	.78	.82	.79	.76	.74
3.0	.84	.76	.71	.82	.75	.70	.79	.74	.69	.77	.72	.68	.74	.70	.66	.64
4.0	.75	.67	.61	.74	.67	.61	.72	.65	.60	.69	.64	.59	.67	.62	.58	.56
5.0	.68	.60	.54	.67	.59	.54	.65	.58	.53	.63	.57	.52	.61	.56	.52	.50
6.0	.62	.54	.48	.61	.53	.48	.59	.52	.47	.58	.51	.47	.56	.51	.46	.44
7.0	.57	.49	.43	.56	.48	.43	.54	.47	.42	.53	.47	.42	.52	.46	.42	.40
8.0	.52	.44	.39	.51	.44	.39	.50	.43	.38	.49	.43	.38	.48	.42	.38	.36
9.0	.48	.40	.35	.48	.40	.35	.46	.40	.35	.45	.39	.35	.44	.39	.35	.33
10.0	.45	.37	.32	.44	.37	.32	.43	.37	.32	.42	.36	.32	.41	.36	.32	.30

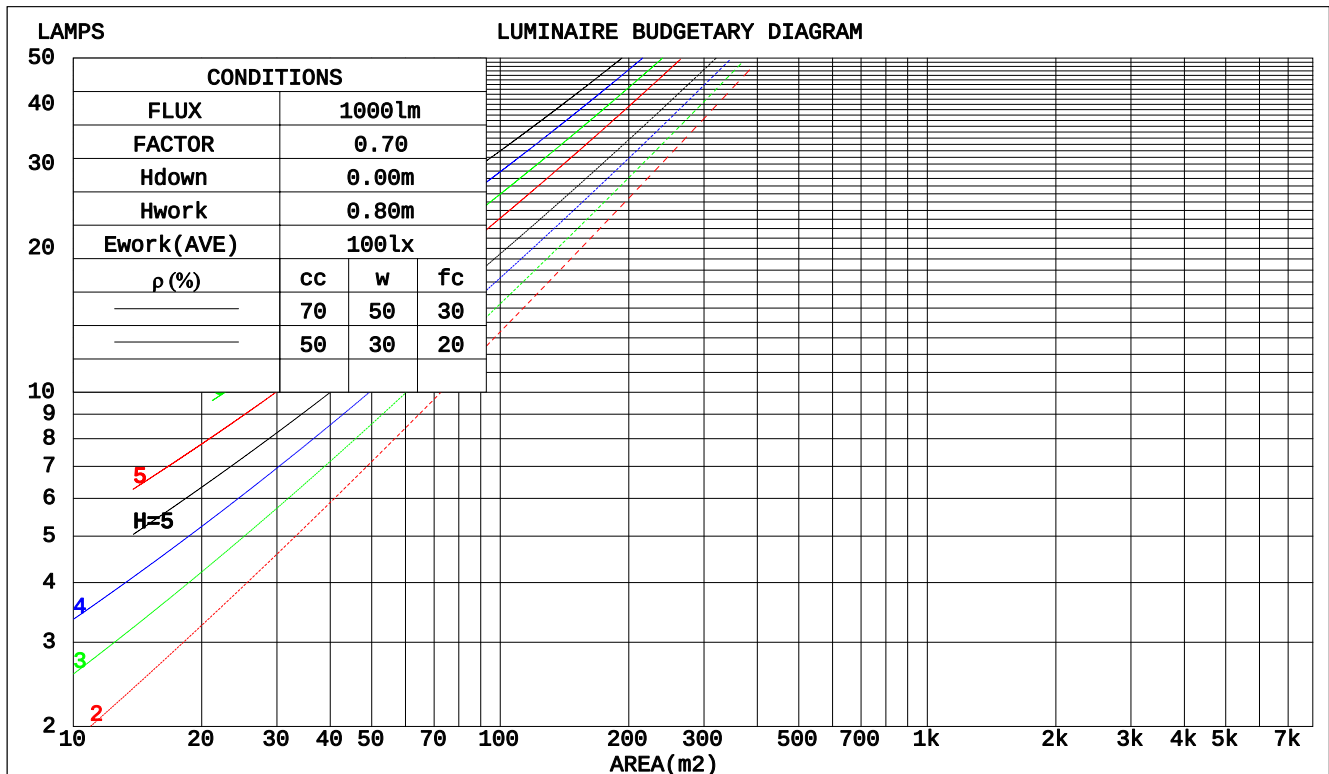

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-05-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 γ Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity: 50.0%
Test Distance: 6.770m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:121.70V I:0.2030A P:24.700W PF:0.9980 Freq:50.00Hz Lamp Flux:2762.56x1 lm									
NAME: WL-RTST124D(4000K)					TYPE:			WEIGHT:	
SPEC.:					DIM.:			SERIAL No.:	
MFR.: Shenzhen Wisdom Light Co., ltd					SUR.:1.2*0.6			Shielding Angle:	

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.274	.156	.049	.267	.152	.048	.254	.146	.046	.242	.139	.045	.230	.134	.043		
2.0	.259	.142	.044	.253	.139	.043	.241	.134	.042	.231	.129	.040	.221	.125	.039		
3.0	.241	.128	.038	.236	.126	.038	.226	.122	.037	.217	.119	.036	.208	.115	.036		
4.0	.225	.117	.034	.220	.115	.034	.211	.112	.033	.203	.109	.033	.195	.106	.032		
5.0	.210	.107	.031	.205	.105	.031	.197	.103	.030	.190	.100	.030	.183	.098	.029		
6.0	.196	.098	.028	.192	.097	.028	.185	.095	.028	.179	.093	.027	.172	.091	.027		
7.0	.184	.091	.026	.180	.090	.026	.174	.088	.025	.168	.086	.025	.163	.084	.025		
8.0	.173	.084	.024	.170	.084	.024	.164	.082	.023	.159	.080	.023	.154	.079	.023		
9.0	.163	.079	.022	.160	.078	.022	.155	.077	.022	.150	.075	.022	.146	.074	.021		
10.0	.154	.074	.020	.151	.073	.020	.147	.072	.020	.142	.071	.020	.138	.070	.020		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.179	.158	.139	.153	.135	.119	.105	.093	.082	.060	.054	.048	.019	.017	.016	
2.0	.169	.133	.103	.145	.115	.089	.099	.079	.062	.057	.046	.037	.018	.015	.012	
3.0	.160	.115	.080	.137	.100	.069	.094	.069	.048	.055	.040	.029	.018	.013	.009	
4.0	.152	.102	.063	.131	.088	.055	.090	.061	.039	.052	.036	.023	.017	.012	.008	
5.0	.145	.091	.052	.124	.079	.045	.086	.055	.032	.050	.032	.019	.016	.011	.006	
6.0	.138	.083	.043	.118	.072	.038	.082	.050	.027	.047	.029	.016	.015	.010	.005	
7.0	.131	.076	.037	.113	.065	.032	.078	.046	.023	.045	.027	.013	.015	.009	.004	
8.0	.125	.070	.032	.108	.060	.028	.074	.042	.020	.043	.025	.012	.014	.008	.004	
9.0	.119	.065	.028	.103	.056	.024	.071	.039	.017	.041	.023	.010	.013	.008	.003	
10.0	.114	.060	.025	.098	.053	.022	.068	.037	.015	.040	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:121.70V I:0.2030A P:24.700W PF:0.9980 Freq:50.00Hz Lamp Flux:2762.56x1 lm											
NAME: WL-RTST124D(4000K)					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: Shenzhen Wisdom Light Co., ltd					SUR.:1.2*0.6			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	12.1	13.5	12.4	13.7	13.9	12.1	13.5	12.4	13.7	13.9	
	3H	13.2	14.5	13.5	14.7	14.9	13.1	14.3	13.4	14.6	14.8
	4H	13.8	15.0	14.1	15.2	15.5	13.6	14.8	13.9	15.0	15.3
	6H	14.3	15.5	14.6	15.7	16.0	14.0	15.1	14.3	15.4	15.7
	8H	14.6	15.7	14.9	15.9	16.2	14.2	15.3	14.5	15.6	15.8
	12H	14.8	15.8	15.1	16.1	16.4	14.3	15.4	14.6	15.6	15.9
4H	2H	12.4	13.6	12.7	13.9	14.1	12.4	13.6	12.7	13.9	14.1
	3H	13.7	14.7	14.0	15.0	15.3	13.6	14.6	13.9	14.9	15.2
	4H	14.4	15.4	14.8	15.7	16.0	14.2	15.2	14.6	15.5	15.8
	6H	15.1	16.0	15.5	16.3	16.7	14.8	15.7	15.2	16.0	16.4
	8H	15.5	16.3	15.9	16.6	17.0	15.1	15.9	15.5	16.2	16.6
	12H	15.8	16.5	16.2	16.9	17.3	15.3	16.0	15.7	16.4	16.8
8H	4H	14.6	15.4	15.0	15.8	16.2	14.5	15.2	14.9	15.6	16.0
	6H	15.5	16.2	16.0	16.6	17.0	15.3	15.9	15.7	16.3	16.7
	8H	16.0	16.6	16.4	17.0	17.4	15.6	16.2	16.1	16.6	17.1
	12H	16.4	16.9	16.9	17.3	17.8	15.9	16.4	16.4	16.8	17.3
12H	4H	14.6	15.4	15.1	15.8	16.2	14.5	15.2	14.9	15.6	16.0
	6H	15.6	16.2	16.1	16.6	17.1	15.3	15.9	15.8	16.3	16.8
	8H	16.1	16.6	16.6	17.0	17.5	15.7	16.2	16.2	16.7	17.2
Variations with the observer position at spacings:											
S = 1.0H	+ 0.3 / - 0.3					+ 0.3 / - 0.3					
1.5H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					
2.0H	+ 0.5 / - 0.5					+ 0.5 / - 0.5					

CIE Pub.117, 2763 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 3.5$)
Area: 0.72 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 γ Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:121.70V I:0.2030A P:24.700W PF:0.9980 Freq:50.00Hz Lamp Flux:2762.56x1 lm		
NAME: WL-RTST124D(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.6	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	64	54	48	64	54	48	62	53	47	42
0.80	74	64	57	73	63	57	71	63	57	51
1.00	82	72	66	81	72	66	79	73	65	59
1.25	88	79	73	87	79	73	85	77	72	65
1.50	93	84	78	91	83	78	88	82	77	70
2.00	99	91	86	97	90	85	94	88	83	76
2.50	102	95	90	100	94	89	96	91	87	79
3.00	105	99	94	103	97	93	99	94	91	83
4.00	108	103	99	106	101	98	102	98	95	87
5.00	110	106	102	108	104	101	103	100	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-05-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:121.70V I:0.2030A P:24.700W PF:0.9980 Freq:50.00Hz Lamp Flux:2762.56x1 lm		
NAME: WL-RTST124D(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.6	Shielding Angle:

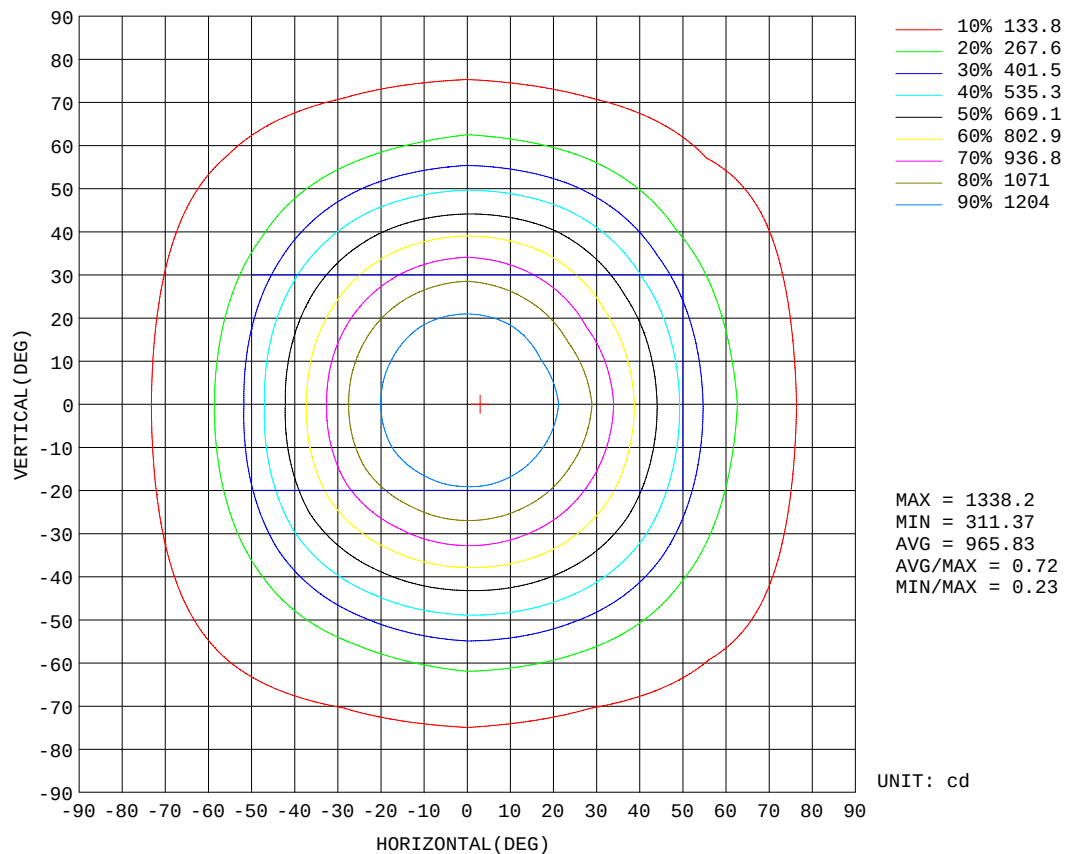


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-05-10

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity: 50.0%
Test Distance: 6.770m [K=1.0000]
Remarks:

AAI Figure

Test:U:121.70V I:0.2030A P:24.700W PF:0.9980 Freq:50.00Hz Lamp Flux:2762.56x1 lm		
NAME: WL-RTST124D(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.6	Shielding Angle:

Flux out:1734 lm

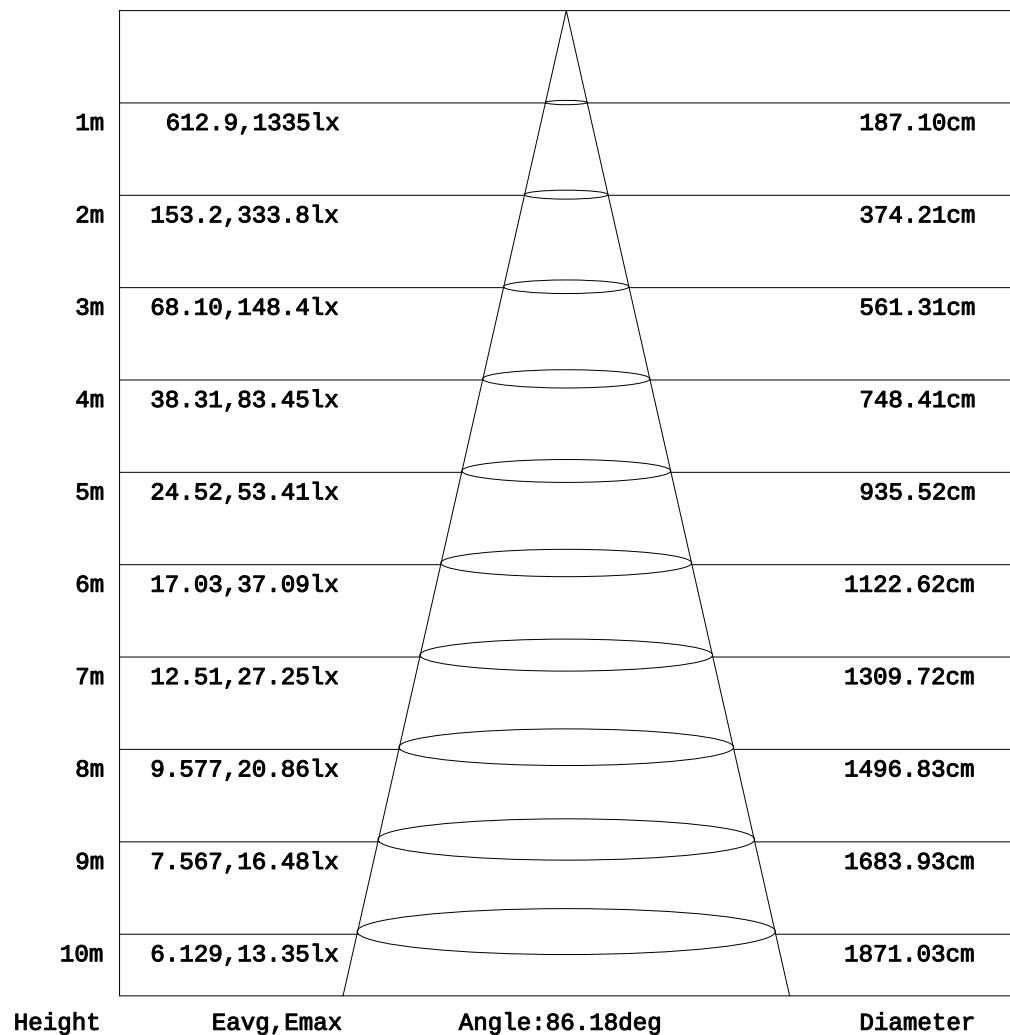


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-05-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity: 50.0%
 Test Distance: 6.770m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:121.70V I:0.2030A P:24.700W PF:0.9980 Freq:50.00Hz Lamp Flux:2762.56x1 lm		
NAME: WL-RTST124D(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.6	Shielding Angle:

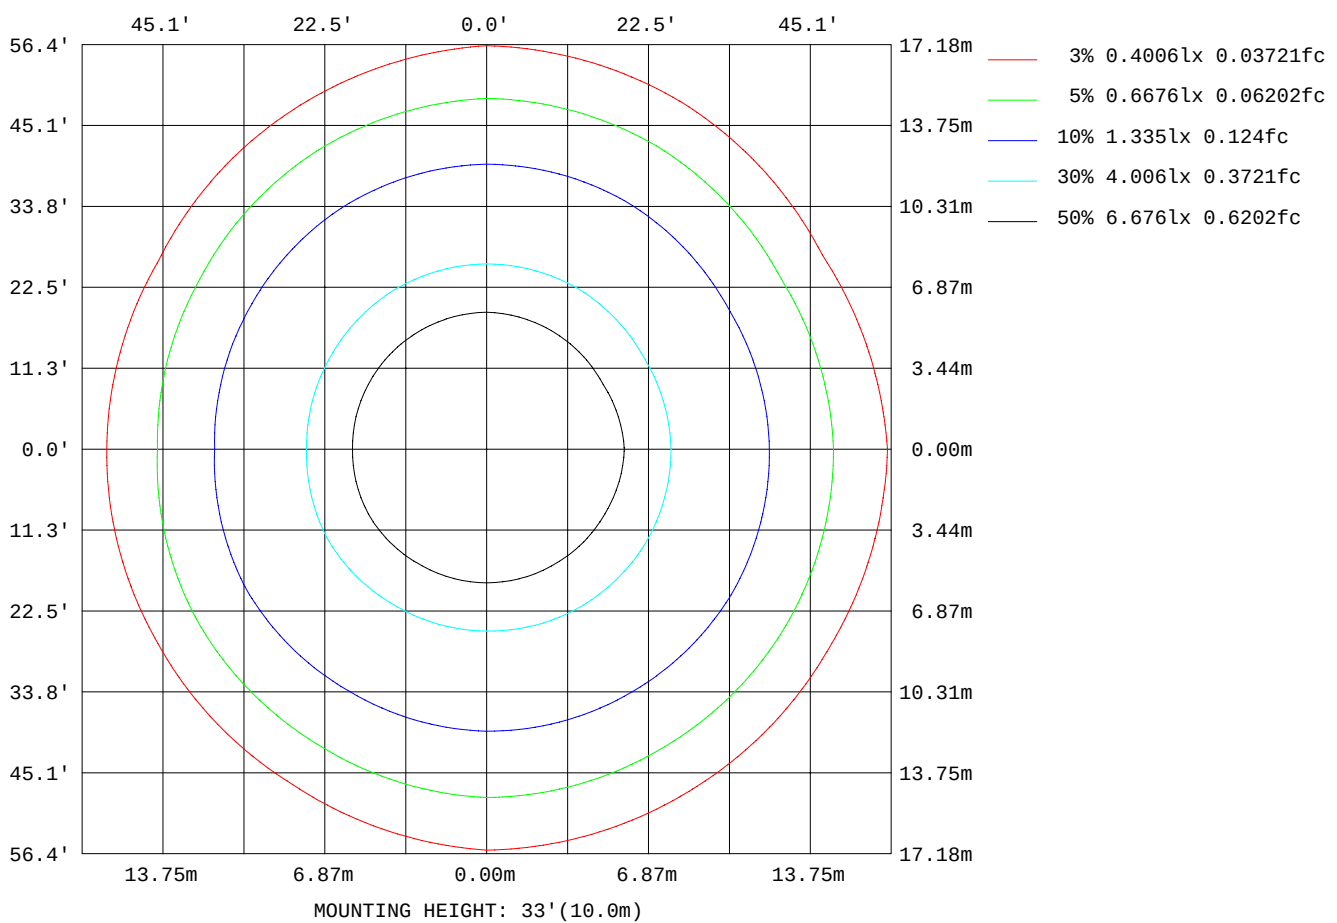

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-10

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:121.70V I:0.2030A P:24.700W PF:0.9980 Freq:50.00Hz Lamp Flux:2762.56x1 lm		
NAME: WL-RTST124D(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.6	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	724
L_0~180(75)av	707
L_0~180(85)av	685
L_90~270(65)av	760
L_90~270(75)av	725
L_90~270(85)av	706
L_45(65)av	619
L_45(75)av	640
L_45(85)av	578

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-05-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks:

Planar Illuminance Curve

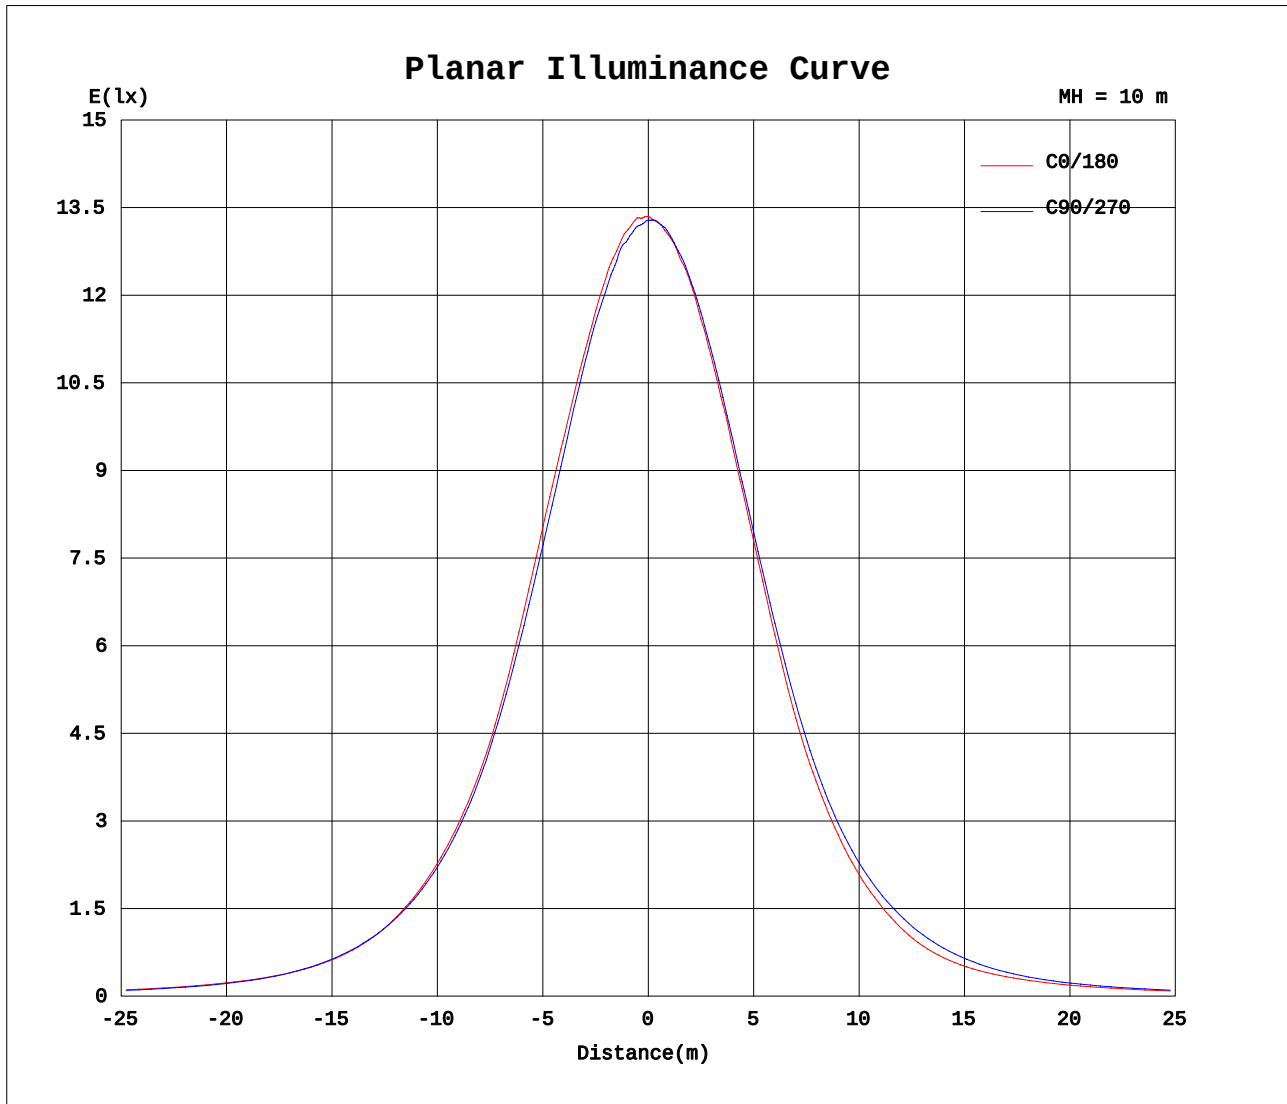

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-05-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity: 50.0%
Test Distance: 6.770m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.70V I:0.2030A P:24.700W PF:0.9980 Freq:50.00Hz Lamp Flux:2762.56x1 lm																	
NAME: WL-RTST124D(4000K)									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co., ltd									SUR.:1.2*0.6						Shielding Angle:		

Table--1

UNIT: cd

C(DEC) γ (DEC)																	
	0	30	60	90	120	150	180	210	240	270	300	330					
0	1330	1330	1330	1330	1330	1330	1330	1330	1330	1330	1330	1330					
5	1326	1326	1318	1318	1316	1319	1316	1326	1323	1328	1326	1325					
10	1309	1305	1297	1294	1292	1300	1298	1302	1304	1310	1304	1306					
15	1268	1265	1258	1256	1252	1268	1258	1264	1269	1273	1278	1266					
20	1214	1206	1196	1192	1194	1208	1200	1209	1215	1217	1217	1206					
25	1144	1127	1112	1108	1109	1127	1116	1130	1131	1140	1128	1120					
30	1041	1015	1005	1007	1002	1021	1003	1018	1026	1038	1018	1003					
35	902	898	887	880	874	890	861	880	897	912	898	878					
40	767	776	764	748	744	757	727	746	768	776	777	754					
45	641	654	638	626	615	629	587	615	637	647	652	629					
50	513	526	515	510	490	489	448	474	508	527	523	498					
55	393	399	394	400	369	354	325	341	381	410	398	370					
60	300	284	290	300	259	245	250	236	268	308	291	262					
65	241	200	207	228	185	182	200	177	189	235	210	189					
70	192	156	157	175	153	153	160	148	154	180	161	149					
75	146	124	119	134	120	124	118	118	123	137	123	116					
80	101	90.1	85.8	84.9	81.9	82.8	77.9	75.4	85.0	90.5	86.3	79.2					
85	58.9	45.0	39.5	41.2	35.4	36.1	27.1	29.4	38.2	47.4	39.3	34.0					
90	4.23	2.03	0.44	0.24	0.14	0.28	0.17	0.16	0.16	0.22	0.17	0.19					
95	0.12	0.14	0.19	0.23	0.20	0.17	0.22	0.21	0.21	0.24	0.19	0.19					
100	0.18	0.23	0.27	0.41	0.31	0.27	0.27	0.32	0.30	0.35	0.24	0.26					
105	0.25	0.30	0.38	0.48	0.43	0.35	0.29	0.45	0.27	0.33	0.36	0.35					
110	0.28	0.37	0.63	0.61	0.71	0.41	0.34	0.72	0.69	0.43	0.65	0.55					
115	0.31	0.48	0.88	0.75	0.89	0.54	0.42	0.96	0.76	0.51	0.80	0.84					
120	0.41	0.67	1.07	0.85	1.09	0.75	0.56	1.07	0.92	0.50	1.00	1.05					
125	0.54	0.86	1.29	0.94	1.47	0.95	0.74	1.05	1.01	0.50	1.01	1.08					
130	0.68	1.11	1.50	1.01	1.41	1.05	0.89	1.14	1.13	0.53	0.57	1.07					
135	0.88	1.31	1.71	1.07	1.36	1.24	1.04	1.35	1.24	0.61	0.59	1.29					
140	1.09	1.42	1.52	1.13	1.35	1.51	1.25	1.54	1.31	0.68	0.62	1.44					
145	1.28	1.54	1.41	1.16	1.33	1.71	1.52	1.62	1.34	0.67	0.67	0.99					
150	1.41	1.83	1.44	1.16	1.22	1.37	1.41	1.74	1.48	0.94	0.75	0.54					
155	1.67	1.47	1.48	1.20	1.08	1.28	1.30	1.61	1.50	1.35	1.44	0.55					
160	1.35	1.27	1.43	1.15	1.05	1.19	1.24	1.46	1.47	1.47	1.72	0.66					
165	1.36	1.25	1.33	1.13	0.91	1.03	1.19	1.22	1.25	1.48	1.60	0.70					
170	1.28	1.25	1.24	1.10	1.00	0.96	0.96	0.97	1.23	1.30	1.28	1.25					
175	1.18	1.15	1.11	1.11	1.01	1.03	1.04	1.03	1.11	1.10	1.03	1.12					
180	1.06	1.10	1.08	1.10	0.98	1.01	1.07	1.11	1.08	1.09	0.98	1.01					

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-10

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks: