


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.7V I:0.0870A P:10.40W PF:0.9970 Freq:60.00Hz Lamp Flux:1122.37x1 lm		
NAME: 1FT 偏光	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 107.92 lm/W			
MODEL		Imax(cd)	1667	S/MH(C0/180)	0.58
NOMINAL POWER(W)	10W	LOR(%)	100.0	S/MH(C90/270)	0.95
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	1122.4	η UP,DN(C0-180)	0.0,50.5
NOMINAL FLUX(lm)	1122.37	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.4
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

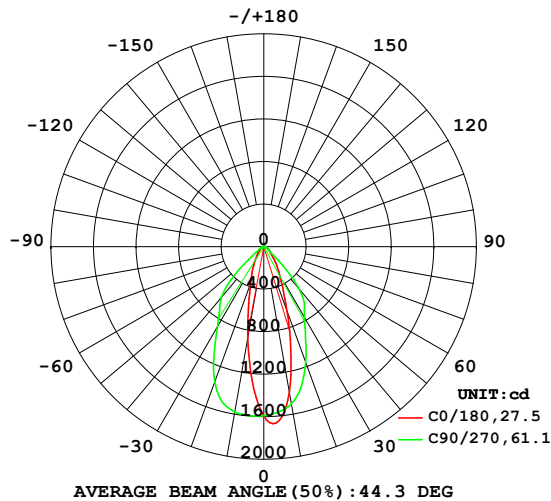

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

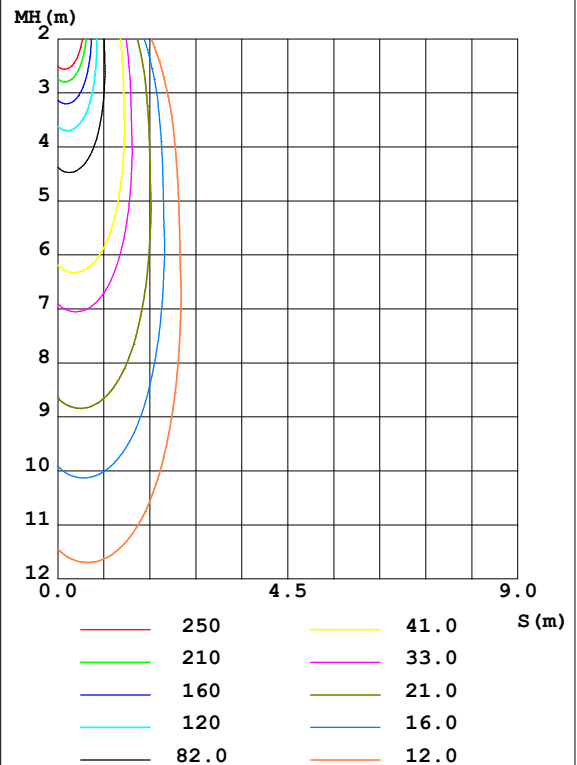

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1388	1545	1502	1136	867.0	1083	1579	1440	0- 10	138.1	138.1	12.3,12.3
20	641.6	948.9	1154	558.3	368.9	546.6	1353	846.6	10- 20	292.8	430.9	38.4,38.4
30	294.4	408.2	765.0	254.1	183.4	264.0	875.9	375.9	20- 30	270.1	701.0	62.5,62.5
40	146.6	177.3	514.7	124.6	90.75	132.7	619.8	173.6	30- 40	205.4	906.4	80.8,80.8
50	78.99	88.07	94.10	65.26	56.12	70.84	172.7	87.73	40- 50	124.7	1031	91.9,91.9
60	48.56	46.42	39.05	33.13	26.46	36.88	47.04	46.57	50- 60	53.21	1084	96.6,96.6
70	20.57	18.44	15.01	11.22	8.455	12.82	18.03	18.80	60- 70	26.20	1111	98.9,98.9
80	5.601	4.718	3.599	2.057	1.319	2.371	5.392	4.868	70- 80	9.263	1120	99.8,99.8
90	0.6485	0.2956	0.0001	0	0	0	0.0956	0.3633	80- 90	1.534	1121	99.9,99.9
100	0	0	0	0	0	0	0	0	90-100	0.0231	1121	99.9,99.9
110	0	0	0.0048	0	0	0	0	0	100-110	0.0001	1121	99.9,99.9
120	0.0098	0.0148	0.1086	0.0403	0.0123	0.0123	0.0412	0	110-120	0.0119	1121	99.9,99.9
130	0.0514	0.0763	0.2414	0.1350	0.0687	0.1055	0.1403	0.0473	120-130	0.0576	1121	99.9,99.9
140	0.1320	0.2090	0.4275	0.3434	0.1814	0.2701	0.2661	0.1419	130-140	0.1302	1122	99.9,99.9
150	0.3132	0.4130	0.6137	0.6322	0.4216	0.5354	0.4449	0.3193	140-150	0.2158	1122	99.9,99.9
160	0.6804	0.6562	0.7515	0.8710	0.7571	0.7591	0.6382	0.5299	150-160	0.2674	1122	100,100
170	0.9574	0.8355	0.8651	0.9395	0.9331	0.8795	0.7903	0.7311	160-170	0.2230	1122	100,100
180	0.9796	0.9140	0.8894	0.8733	0.9796	0.9165	0.8942	0.8756	170-180	0.0852	1122	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.7V I:0.0870A P:10.40W PF:0.9970 Freq:60.00Hz Lamp Flux:1122.37x1 lm		
NAME: 1FT 偏光	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

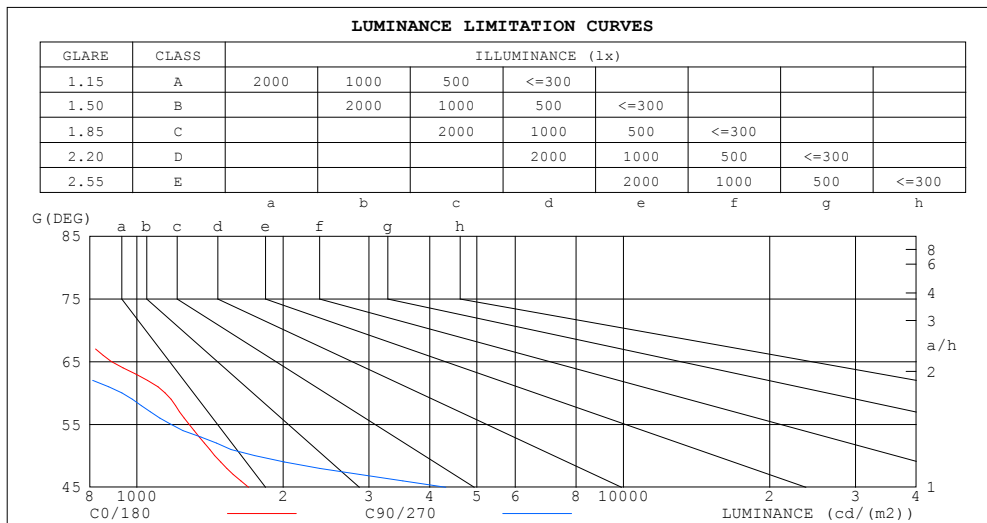

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	305	112
80	380	247
75	517	398
70	708	524
65	886	652
60	1143	932
55	1281	1174
50	1447	1746
45	1697	4316


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.7V I:0.0870A P:10.40W PF:0.9970 Freq:60.00Hz Lamp Flux:1122.37x1 lm		
NAME: 1FT 偏光	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.10	1.07	1.05	1.08	1.05	1.03	1.04	1.02	.00	.00	.98	.97	.96	.95	.94	.92
2.0	1.01	.97	.93	.99	.95	.92	.96	.93	.90	.93	.90	.88	.90	.88	.86	.84
3.0	.94	.88	.84	.92	.87	.83	.89	.85	.82	.87	.83	.80	.85	.82	.79	.78
4.0	.87	.81	.76	.86	.80	.76	.83	.79	.75	.81	.77	.74	.79	.76	.73	.71
5.0	.81	.75	.70	.80	.74	.70	.78	.73	.69	.76	.72	.68	.75	.71	.68	.66
6.0	.76	.69	.65	.75	.69	.64	.73	.68	.64	.72	.67	.63	.70	.66	.63	.61
7.0	.71	.64	.60	.70	.64	.60	.69	.63	.59	.68	.63	.59	.66	.62	.59	.57
8.0	.67	.60	.56	.66	.60	.56	.65	.59	.56	.64	.59	.55	.63	.58	.55	.54
9.0	.63	.57	.53	.62	.56	.52	.61	.56	.52	.60	.56	.52	.60	.55	.52	.50
10.0	.60	.53	.49	.59	.53	.49	.58	.53	.49	.57	.52	.49	.57	.52	.49	.48

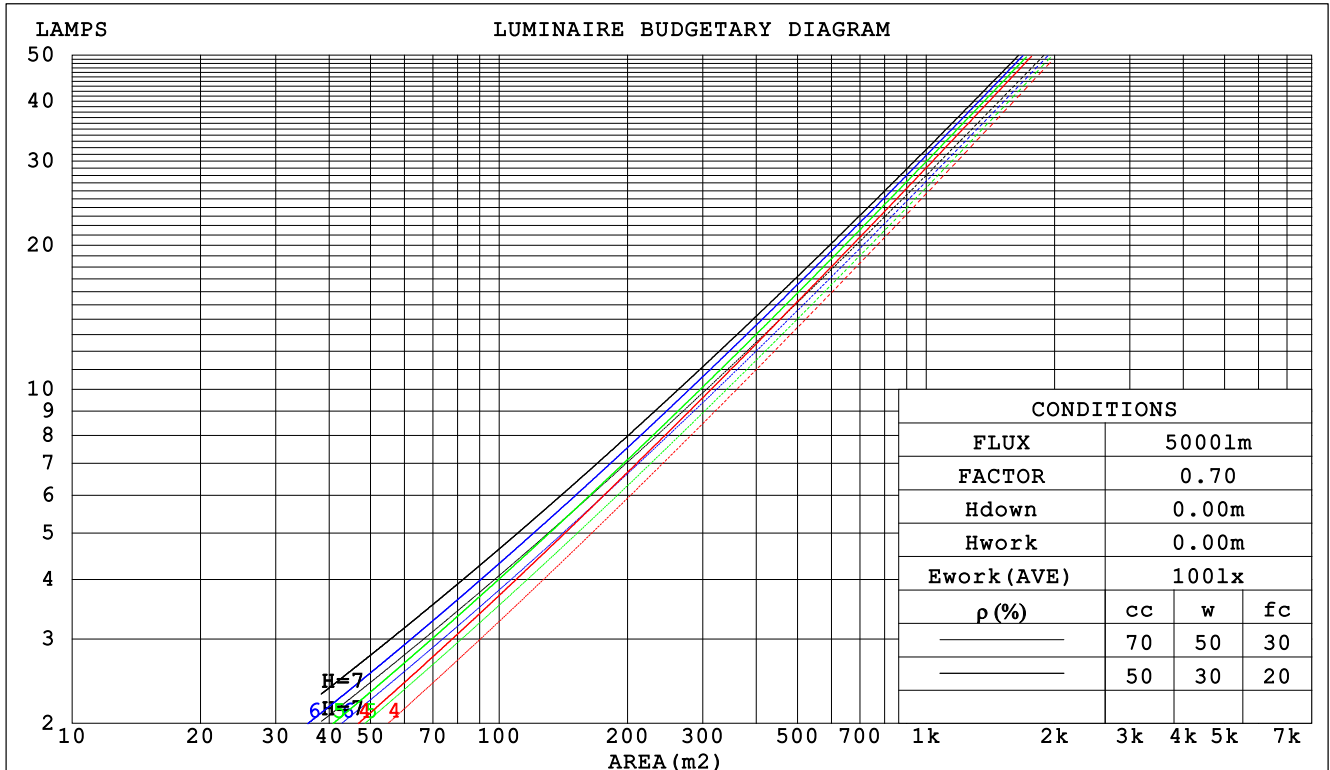

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.7V I:0.0870A P:10.40W PF:0.9970 Freq:60.00Hz Lamp Flux:1122.37x1 lm					
NAME: 1FT 偏光			TYPE:3000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.196	.111	.035	.189	.108	.034	.176	.101	.032	.164	.095	.030	.153	.089	.029		
2.0	.188	.103	.032	.182	.100	.031	.171	.095	.030	.162	.091	.028	.152	.086	.027		
3.0	.179	.095	.028	.174	.093	.028	.164	.089	.027	.156	.085	.026	.148	.082	.025		
4.0	.169	.088	.026	.165	.086	.026	.157	.083	.025	.149	.080	.024	.142	.077	.024		
5.0	.160	.082	.024	.157	.080	.023	.150	.078	.023	.143	.075	.022	.137	.073	.022		
6.0	.152	.076	.022	.149	.075	.022	.142	.073	.021	.137	.071	.021	.131	.069	.021		
7.0	.144	.071	.020	.141	.070	.020	.136	.069	.020	.131	.067	.020	.126	.065	.019		
8.0	.137	.067	.019	.135	.066	.019	.130	.065	.019	.125	.063	.018	.121	.062	.018		
9.0	.131	.063	.018	.128	.063	.018	.124	.061	.017	.120	.060	.017	.116	.059	.017		
10.0	.125	.060	.017	.123	.059	.017	.119	.058	.016	.115	.057	.016	.111	.056	.016		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.112	.112	.112	.064	.064	.064	.020	.020	.020	
1.0	.173	.158	.144	.148	.135	.124	.101	.093	.086	.058	.054	.050	.019	.017	.016	
2.0	.159	.133	.111	.136	.115	.096	.093	.079	.067	.054	.046	.039	.017	.015	.013	
3.0	.148	.114	.088	.127	.099	.076	.087	.069	.053	.050	.040	.032	.016	.013	.010	
4.0	.138	.100	.071	.118	.086	.062	.081	.060	.043	.047	.035	.026	.015	.011	.008	
5.0	.129	.089	.058	.111	.077	.051	.077	.053	.036	.044	.031	.021	.014	.010	.007	
6.0	.122	.079	.049	.105	.069	.042	.072	.048	.030	.042	.028	.018	.014	.009	.006	
7.0	.116	.072	.041	.099	.062	.036	.069	.044	.026	.040	.026	.015	.013	.008	.005	
8.0	.110	.066	.036	.094	.057	.031	.065	.040	.022	.038	.024	.013	.012	.008	.004	
9.0	.104	.061	.031	.090	.053	.027	.062	.037	.019	.036	.022	.011	.012	.007	.004	
10.0	.100	.056	.027	.086	.049	.024	.060	.034	.017	.035	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.7V I:0.0870A P:10.40W PF:0.9970 Freq:60.00Hz Lamp Flux:1122.37x1 lm										
NAME: 1FT 偏光					TYPE:3000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	10.6	11.7	10.9	11.9	12.0	13.5	14.5	13.7	14.7	14.9
3H	11.1	12.1	11.4	12.3	12.5	13.5	14.5	13.8	14.7	14.9
4H	11.2	12.2	11.5	12.4	12.6	13.5	14.4	13.8	14.6	14.9
6H	11.3	12.1	11.6	12.4	12.6	13.4	14.3	13.8	14.5	14.8
8H	11.3	12.1	11.6	12.3	12.6	13.4	14.2	13.7	14.5	14.8
12H	11.2	12.0	11.6	12.3	12.6	13.4	14.1	13.7	14.4	14.7
4H 2H	10.8	11.7	11.1	12.0	12.2	13.4	14.4	13.7	14.6	14.8
3H	11.4	12.2	11.8	12.5	12.8	13.5	14.3	13.9	14.6	14.9
4H	11.6	12.3	12.0	12.6	12.9	13.5	14.2	13.9	14.6	14.9
6H	11.7	12.3	12.1	12.6	13.0	13.5	14.1	13.9	14.5	14.8
8H	11.7	12.3	12.1	12.6	13.0	13.5	14.0	13.9	14.4	14.8
12H	11.7	12.2	12.1	12.6	13.0	13.4	13.9	13.8	14.3	14.7
8H 4H	11.6	12.2	12.0	12.5	12.9	13.5	14.0	13.9	14.4	14.8
6H	11.7	12.2	12.1	12.6	13.0	13.4	13.9	13.9	14.3	14.7
8H	11.7	12.1	12.2	12.5	13.0	13.4	13.8	13.9	14.3	14.7
12H	11.7	12.1	12.2	12.5	13.0	13.4	13.7	13.8	14.2	14.6
12H 4H	11.5	12.1	12.0	12.4	12.8	13.4	13.9	13.8	14.3	14.7
6H	11.7	12.1	12.1	12.5	12.9	13.4	13.8	13.9	14.2	14.7
8H	11.7	12.0	12.2	12.5	13.0	13.4	13.7	13.8	14.2	14.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.8 / - 1.0					+ 3.4 / - 4.2				
1.5H	+ 0.9 / - 0.7					+ 5.0 / - 3.5				
2.0H	+ 1.0 / - 1.0					+ 5.6 / - 2.5				

CIE Pub.117 Corrected 1122 lm Total Lamp Luminous Flux.(8log(F/F0) = 0.4)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.7V I:0.0870A P:10.40W PF:0.9970 Freq:60.00Hz Lamp Flux:1122.37x1 lm		
NAME: 1FT 偏光	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	79	72	67	79	71	67	78	71	67	62
0.80	88	81	76	87	80	76	86	80	75	71
1.00	94	87	82	93	86	82	91	87	82	77
1.25	99	92	88	98	92	88	95	91	87	82
1.50	102	96	92	101	95	92	98	94	90	85
2.00	106	101	97	104	100	96	101	98	95	89
2.50	108	103	100	106	102	99	103	100	97	90
3.00	110	106	102	108	104	101	104	102	99	92
4.00	112	109	106	110	107	105	106	104	102	95
5.00	114	111	109	111	109	107	107	106	104	96
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.7V I:0.0870A P:10.40W PF:0.9970 Freq:60.00Hz Lamp Flux:1122.37x1 lm		
NAME: 1FT 偏光	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

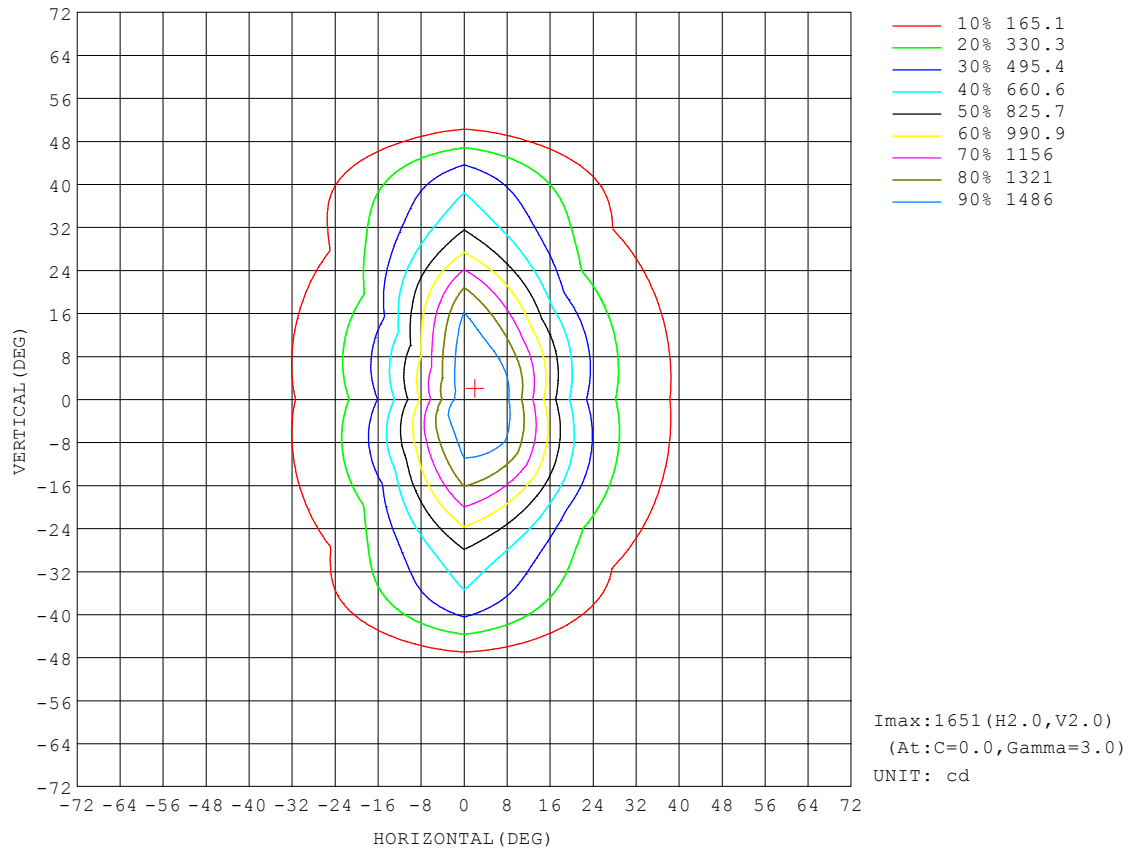


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.7V I:0.0870A P:10.40W PF:0.9970 Freq:60.00Hz Lamp Flux:1122.37x1 lm		
NAME: 1FT 偏光	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

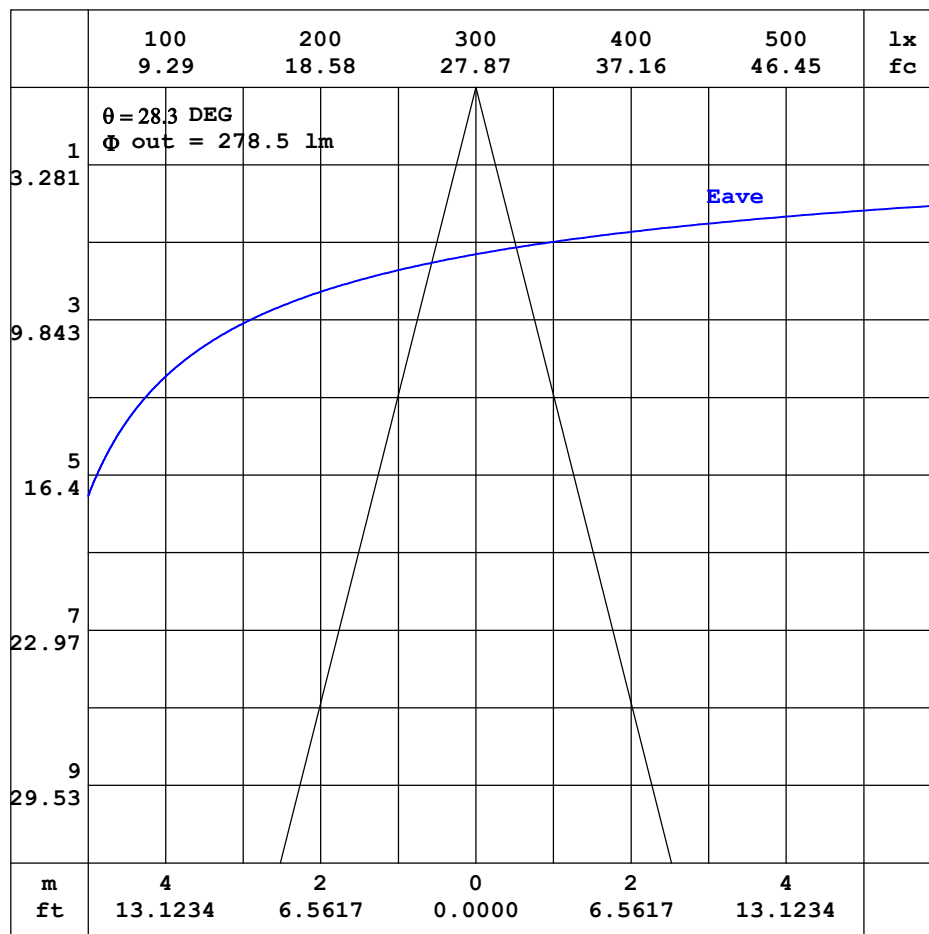


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.7V I:0.0870A P:10.40W PF:0.9970 Freq:60.00Hz Lamp Flux:1122.37x1 lm		
NAME: 1FT 偏光	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

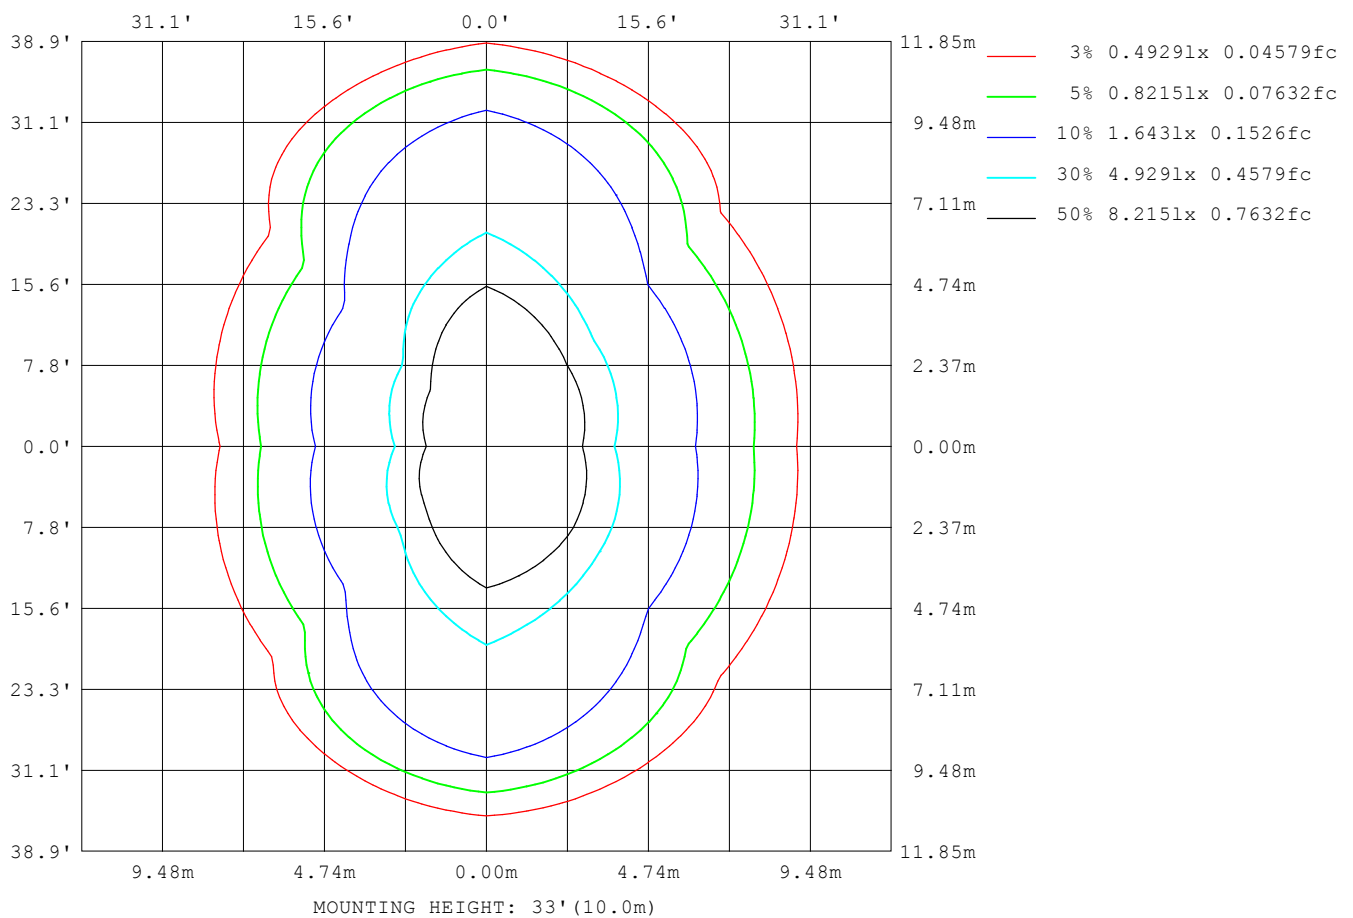

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.7V I:0.0870A P:10.40W PF:0.9970 Freq:60.00Hz Lamp Flux:1122.37x1 lm		
NAME: 1FT 偏光	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	672
L_0~180 (75) av	352
L_0~180 (85) av	170
L_90~270 (65) av	726
L_90~270 (75) av	450
L_90~270 (85) av	156
L_45 (65) av	743
L_45 (75) av	374
L_45 (85) av	149

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

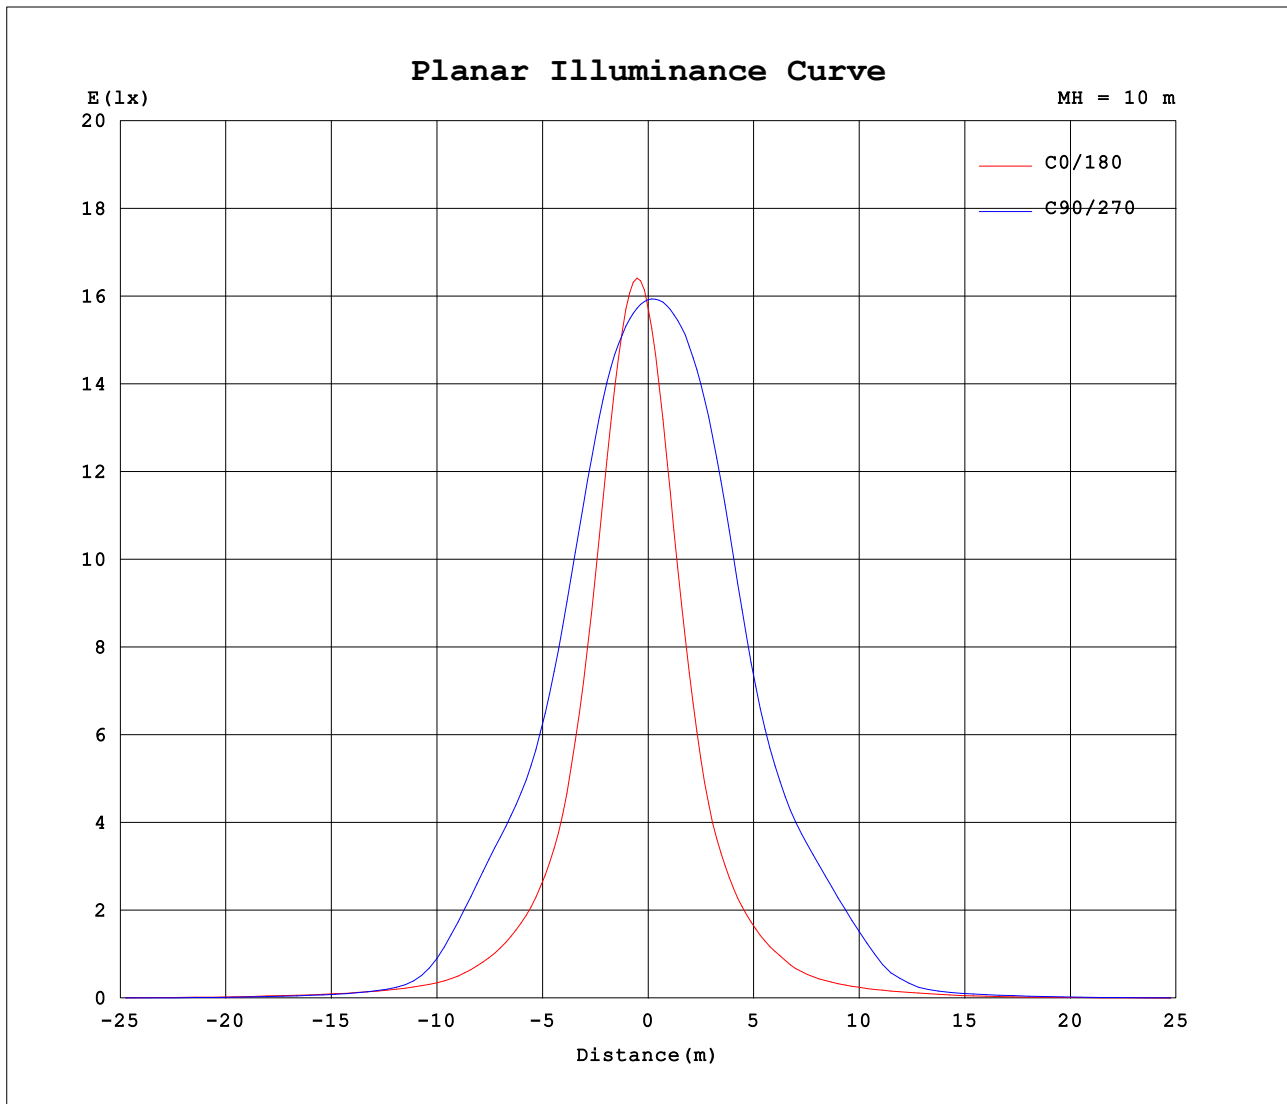

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.7V I:0.0870A P:10.40W PF:0.9970 Freq:60.00Hz Lamp Flux:1122.37x1 lm		
NAME: 1FT 偏光	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1589	1589	1589	1589	1589	1589	1589	1589										
5	1645	1657	1562	1415	1266	1376	1594	1597										
10	1388	1545	1502	1136	867	1083	1579	1440										
15	986	1285	1362	826	551	791	1511	1166										
20	642	949	1154	558	369	547	1353	847										
25	420	637	932	374	259	380	1105	566										
30	294	408	765	254	183	264	876	376										
35	211	263	667	177	125	186	728	253										
40	147	177	515	125	90.7	133	620	174										
45	102	123	256	89.8	71.3	96.4	429	122										
50	79.0	88.1	94.1	65.3	56.1	70.8	173	87.7										
55	62.4	64.2	56.5	47.6	40.9	52.3	71.1	64.3										
60	48.6	46.4	39.1	33.1	26.5	36.9	47.0	46.6										
65	31.8	31.2	23.1	19.9	15.9	22.6	28.4	31.8										
70	20.6	18.4	15.0	11.2	8.46	12.8	18.0	18.8										
75	11.4	10.2	8.64	5.48	3.91	6.31	10.9	10.5										
80	5.60	4.72	3.60	2.06	1.32	2.37	5.39	4.87										
85	2.26	1.60	0.82	0.51	0.22	0.58	1.46	1.69										
90	0.65	0.30	0.00	0.00	0.00	0.00	0.10	0.36										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
115	0.00	0.00	0.06	0.01	0.00	0.00	0.01	0.00										
120	0.01	0.01	0.11	0.04	0.01	0.01	0.04	0.00										
125	0.03	0.04	0.16	0.07	0.04	0.05	0.09	0.02										
130	0.05	0.08	0.24	0.14	0.07	0.11	0.14	0.05										
135	0.08	0.13	0.33	0.22	0.11	0.17	0.20	0.09										
140	0.13	0.21	0.43	0.34	0.18	0.27	0.27	0.14										
145	0.20	0.31	0.52	0.48	0.28	0.39	0.36	0.22										
150	0.31	0.41	0.61	0.63	0.42	0.54	0.44	0.32										
155	0.47	0.54	0.69	0.77	0.59	0.65	0.54	0.43										
160	0.68	0.66	0.75	0.87	0.76	0.76	0.64	0.53										
165	0.85	0.76	0.82	0.93	0.88	0.83	0.71	0.63										
170	0.96	0.84	0.87	0.94	0.93	0.88	0.79	0.73										
175	1.01	0.89	0.89	0.93	0.95	0.91	0.85	0.81										
180	0.98	0.91	0.89	0.87	0.98	0.92	0.89	0.88										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: