


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.8V I:0.0880A P:10.60W PF:0.9970 Freq:60.00Hz Lamp Flux:1066.44x1 lm		
NAME: 1FT 2570	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 100.61 lm/W			
MODEL		I _{max} (cd)	1088	S/MH (C0/180)	1.18
NOMINAL POWER(W)	10W	LOR(%)	100.0	S/MH (C90/270)	1.07
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	1066.4	η UP,DN (C0-180)	0.1,52.4
NOMINAL FLUX(lm)	1066.44	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.1,47.5
LAMPS INSIDE	1	η up (%)	0.1	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	120.0	η down (%)	99.9	CIBSE SHR MAX	0.85

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

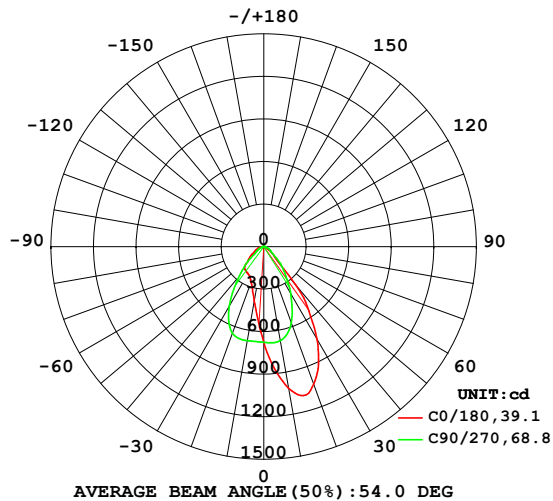

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

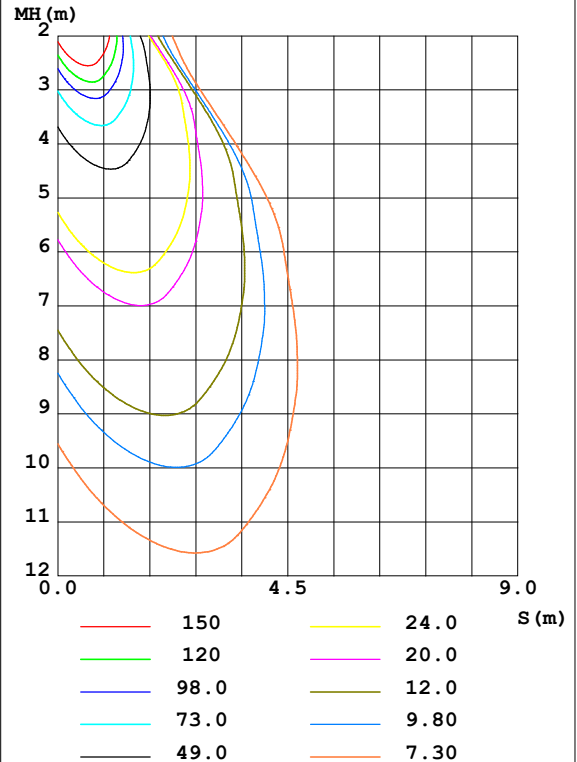

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1013	950.9	673.9	456.3	389.7	453.6	673.3	896.0	0- 10	65.17	65.17	6.11,6.11
20	1031	1078	571.0	308.3	265.3	325.4	651.0	1013	10- 20	192.6	257.8	24.2,24.2
30	751.0	815.0	381.5	223.9	221.5	247.3	487.8	836.0	20- 30	267.8	525.6	49.3,49.3
40	354.1	454.9	221.0	180.2	209.3	196.5	268.2	472.5	30- 40	245.8	771.4	72.3,72.3
50	88.35	193.8	93.20	134.5	139.7	145.6	105.2	137.7	40- 50	155.8	927.2	86.9,86.9
60	33.79	41.79	51.92	77.55	79.71	80.83	51.59	36.81	50- 60	77.08	1004	94.2,94.2
70	8.893	12.66	24.77	40.85	49.71	42.13	23.57	9.802	60- 70	39.69	1044	97.9,97.9
80	1.039	1.765	6.403	15.60	19.15	14.61	5.762	1.145	70- 80	17.42	1061	99.5,99.5
90	0	0	0.0629	2.006	2.442	1.518	0	0	80- 90	3.917	1065	99.9,99.9
100	0	0	0	0	0	0	0	0	90-100	0.1881	1065	99.9,99.9
110	0.0270	0.0352	0.0073	0.0047	0	0	0	0.0184	100-110	0.0037	1065	99.9,99.9
120	0.0785	0.0753	0.0825	0.1014	0.0369	0.0727	0.0341	0.0553	110-120	0.0342	1066	99.9,99.9
130	0.1301	0.1305	0.1894	0.2673	0.1892	0.1980	0.1216	0.0944	120-130	0.1017	1066	99.9,99.9
140	0.1692	0.2008	0.3303	0.4538	0.3979	0.3612	0.2189	0.1565	130-140	0.1724	1066	99.9,99.9
150	0.2356	0.2962	0.4277	0.5827	0.6015	0.5268	0.3355	0.2463	140-150	0.2166	1066	100,100
160	0.3632	0.4242	0.5030	0.6448	0.7438	0.6322	0.4424	0.3430	150-160	0.2112	1066	100,100
170	0.5668	0.5571	0.5735	0.6402	0.7952	0.7000	0.5323	0.4720	160-170	0.1577	1066	100,100
180	0.7339	0.6574	0.5857	0.5757	0.7388	0.6624	0.5857	0.5803	170-180	0.0595	1066	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.8V I:0.0880A P:10.60W PF:0.9970 Freq:60.00Hz Lamp Flux:1066.44x1 lm		
NAME: 1FT 2570	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

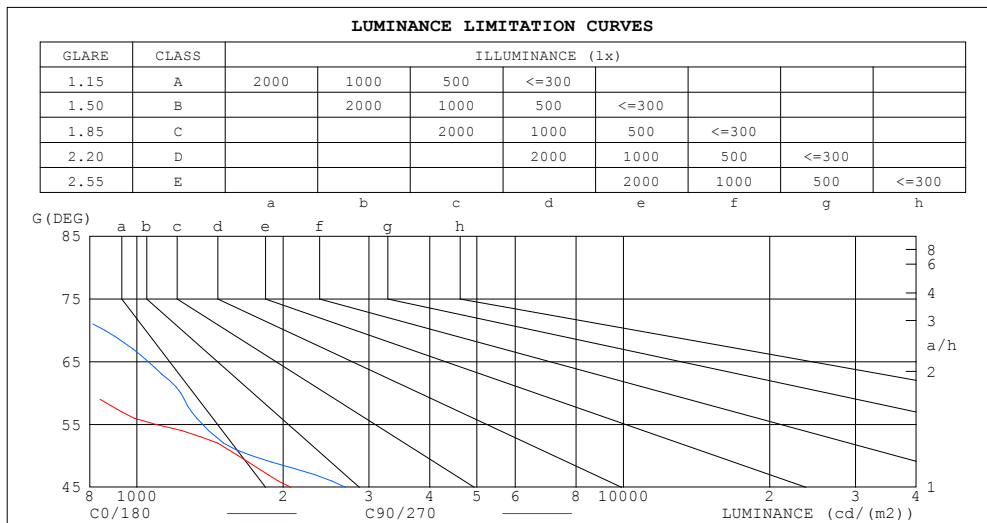

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	245
80	70	437
75	168	636
70	305	859
65	516	1055
60	794	1232
55	1090	1364
50	1615	1720
45	2072	2688


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.8V I:0.0880A P:10.60W PF:0.9970 Freq:60.00Hz Lamp Flux:1066.44x1 lm		
NAME: 1FT 2570	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.08	1.05	1.03	1.06	1.03	1.01	1.02	.00	.98	.98	.96	.95	.95	.93	.92	.90
2.0	.98	.93	.89	.97	.92	.88	.93	.89	.86	.90	.87	.84	.87	.85	.82	.81
3.0	.90	.83	.78	.88	.82	.78	.85	.81	.76	.83	.79	.75	.80	.77	.74	.72
4.0	.82	.75	.70	.81	.74	.69	.78	.73	.69	.76	.71	.68	.74	.70	.67	.65
5.0	.75	.68	.63	.74	.67	.62	.72	.66	.62	.70	.65	.61	.69	.64	.61	.59
6.0	.69	.62	.57	.68	.61	.57	.67	.61	.56	.65	.60	.56	.64	.59	.55	.54
7.0	.64	.57	.52	.63	.56	.52	.62	.56	.51	.61	.55	.51	.59	.54	.51	.49
8.0	.59	.52	.47	.59	.52	.47	.58	.51	.47	.56	.51	.47	.55	.50	.46	.45
9.0	.55	.48	.44	.55	.48	.43	.54	.48	.43	.53	.47	.43	.52	.47	.43	.41
10.0	.52	.45	.40	.51	.45	.40	.50	.44	.40	.49	.44	.40	.49	.43	.40	.38

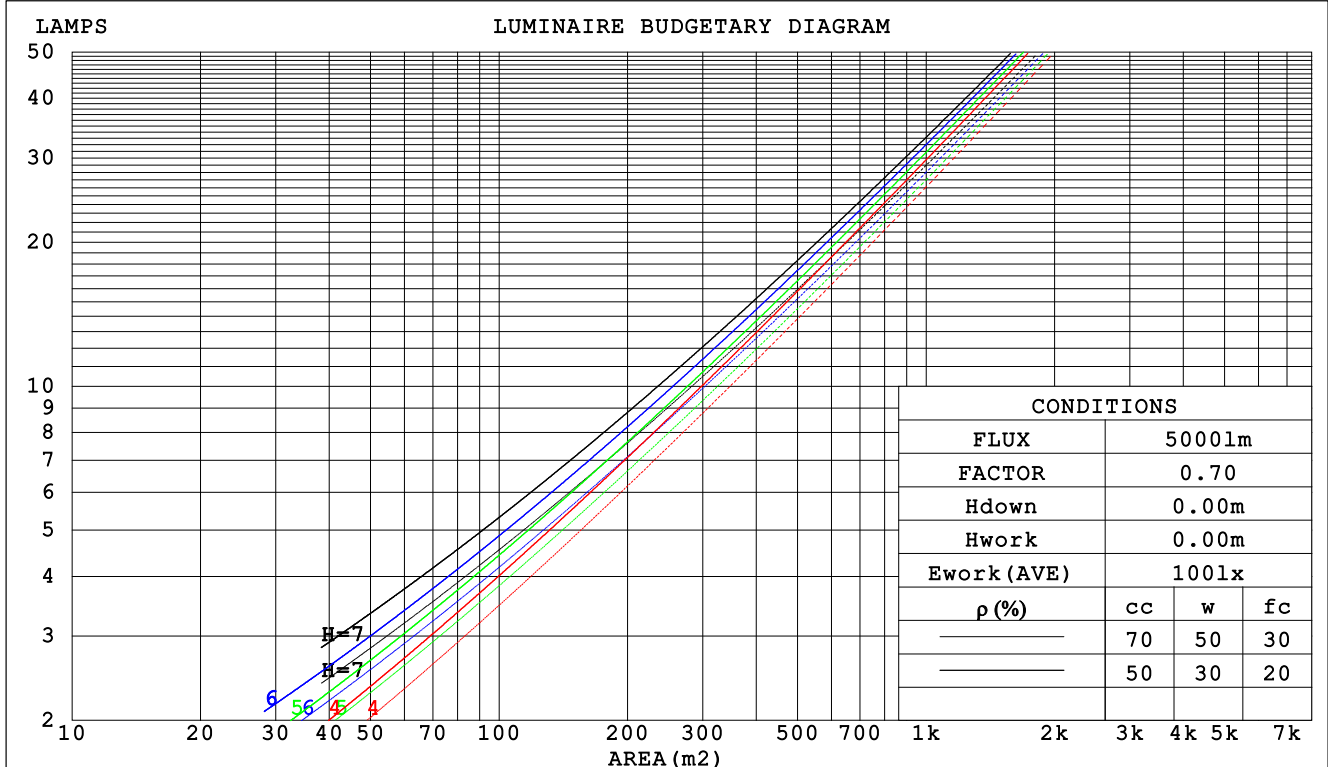

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.8V I:0.0880A P:10.60W PF:0.9970 Freq:60.00Hz Lamp Flux:1066.44x1 lm					
NAME: 1FT 2570			TYPE:3000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.223	.127	.040	.216	.123	.039	.203	.116	.037	.191	.110	.035	.180	.104	.034		
2.0	.215	.118	.036	.209	.115	.035	.198	.110	.034	.188	.105	.033	.178	.101	.032		
3.0	.204	.109	.033	.199	.107	.032	.189	.103	.031	.180	.099	.030	.172	.095	.029		
4.0	.193	.100	.029	.188	.099	.029	.180	.095	.029	.172	.092	.028	.165	.090	.027		
5.0	.182	.093	.027	.178	.092	.027	.171	.089	.026	.164	.087	.026	.158	.084	.025		
6.0	.172	.086	.025	.169	.085	.025	.162	.083	.024	.156	.081	.024	.151	.079	.024		
7.0	.163	.081	.023	.160	.080	.023	.154	.078	.022	.149	.076	.022	.144	.075	.022		
8.0	.155	.076	.021	.152	.075	.021	.147	.073	.021	.142	.072	.021	.137	.071	.021		
9.0	.147	.071	.020	.145	.071	.020	.140	.069	.020	.136	.068	.019	.131	.067	.019		
10.0	.140	.067	.019	.138	.067	.019	.134	.065	.018	.130	.064	.018	.126	.063	.018		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.112	.112	.112	.064	.064	.064	.020	.020	.020	
1.0	.175	.158	.142	.150	.135	.122	.102	.093	.085	.059	.054	.049	.019	.017	.016	
2.0	.163	.133	.108	.139	.115	.093	.096	.079	.065	.055	.046	.038	.018	.015	.012	
3.0	.153	.115	.084	.131	.099	.073	.090	.069	.051	.052	.040	.030	.017	.013	.010	
4.0	.144	.101	.068	.123	.087	.059	.085	.061	.041	.049	.035	.024	.016	.012	.008	
5.0	.136	.090	.055	.117	.077	.048	.081	.054	.034	.047	.032	.020	.015	.010	.007	
6.0	.129	.081	.046	.111	.070	.040	.077	.049	.028	.044	.029	.017	.014	.009	.006	
7.0	.123	.073	.039	.106	.064	.034	.073	.045	.024	.042	.026	.014	.014	.009	.005	
8.0	.117	.068	.033	.101	.059	.029	.070	.041	.021	.041	.024	.012	.013	.008	.004	
9.0	.112	.063	.029	.096	.054	.025	.067	.038	.018	.039	.023	.011	.013	.007	.004	
10.0	.107	.058	.026	.092	.051	.023	.064	.036	.016	.037	.021	.010	.012	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.8V I:0.0880A P:10.60W PF:0.9970 Freq:60.00Hz Lamp Flux:1066.44x1 lm										
NAME: 1FT 2570					TYPE:3000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.4	15.6	14.7	15.8	16.0	14.0	15.2	14.3	15.4	15.6
3H	14.3	15.4	14.6	15.6	15.8	14.1	15.2	14.4	15.5	15.7
4H	14.2	15.2	14.5	15.5	15.7	14.2	15.2	14.5	15.4	15.7
6H	14.1	15.1	14.4	15.3	15.6	14.1	15.1	14.4	15.4	15.6
8H	14.1	15.0	14.4	15.3	15.5	14.1	15.0	14.4	15.3	15.6
12H	14.0	14.9	14.4	15.2	15.5	14.1	15.0	14.4	15.2	15.5
4H 2H	14.3	15.3	14.6	15.5	15.8	13.9	14.9	14.2	15.1	15.4
3H	14.2	15.1	14.5	15.3	15.6	14.1	15.0	14.4	15.2	15.5
4H	14.1	14.9	14.5	15.2	15.5	14.1	14.9	14.5	15.2	15.6
6H	14.0	14.7	14.4	15.1	15.4	14.1	14.8	14.5	15.2	15.5
8H	14.0	14.6	14.4	15.0	15.4	14.1	14.8	14.5	15.1	15.5
12H	13.9	14.5	14.3	14.9	15.3	14.1	14.7	14.5	15.0	15.4
8H 4H	14.0	14.6	14.4	15.0	15.4	14.0	14.7	14.4	15.0	15.4
6H	13.9	14.4	14.3	14.8	15.3	14.0	14.5	14.4	14.9	15.4
8H	13.9	14.3	14.3	14.8	15.2	14.0	14.5	14.4	14.9	15.3
12H	13.8	14.2	14.3	14.7	15.1	14.0	14.4	14.4	14.8	15.3
12H 4H	13.9	14.5	14.4	14.9	15.3	13.9	14.6	14.4	14.9	15.3
6H	13.9	14.3	14.3	14.8	15.2	14.0	14.4	14.4	14.9	15.3
8H	13.8	14.2	14.3	14.7	15.1	13.9	14.4	14.4	14.8	15.3
Variations with the observer position at spacings:										
S = 1.0H	+ 2.4 / - 6.3					+ 2.3 / - 3.2				
1.5H	+ 3.3 / - 4.4					+ 1.8 / - 3.1				
2.0H	+ 3.5 / - 4.0					+ 3.3 / - 3.0				

CIE Pub.117 Corrected 1066 lm Total Lamp Luminous Flux.(8log(F/F0) = 0.2)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.8V I:0.0880A P:10.60W PF:0.9970 Freq:60.00Hz Lamp Flux:1066.44x1 lm		
NAME: 1FT 2570	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	74	65	60	73	65	60	73	65	60	55
0.80	83	75	70	82	75	70	81	74	69	64
1.00	90	82	77	89	82	77	87	82	76	71
1.25	95	88	83	94	88	83	92	86	82	77
1.50	99	93	88	98	92	87	95	90	86	81
2.00	104	98	94	102	97	93	99	95	91	85
2.50	106	101	97	104	100	96	101	97	94	87
3.00	108	104	100	106	102	99	103	99	97	90
4.00	111	107	104	109	106	103	105	102	100	92
5.00	113	109	107	110	108	105	106	104	102	94
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.8V I:0.0880A P:10.60W PF:0.9970 Freq:60.00Hz Lamp Flux:1066.44x1 lm		
NAME: 1FT 2570	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

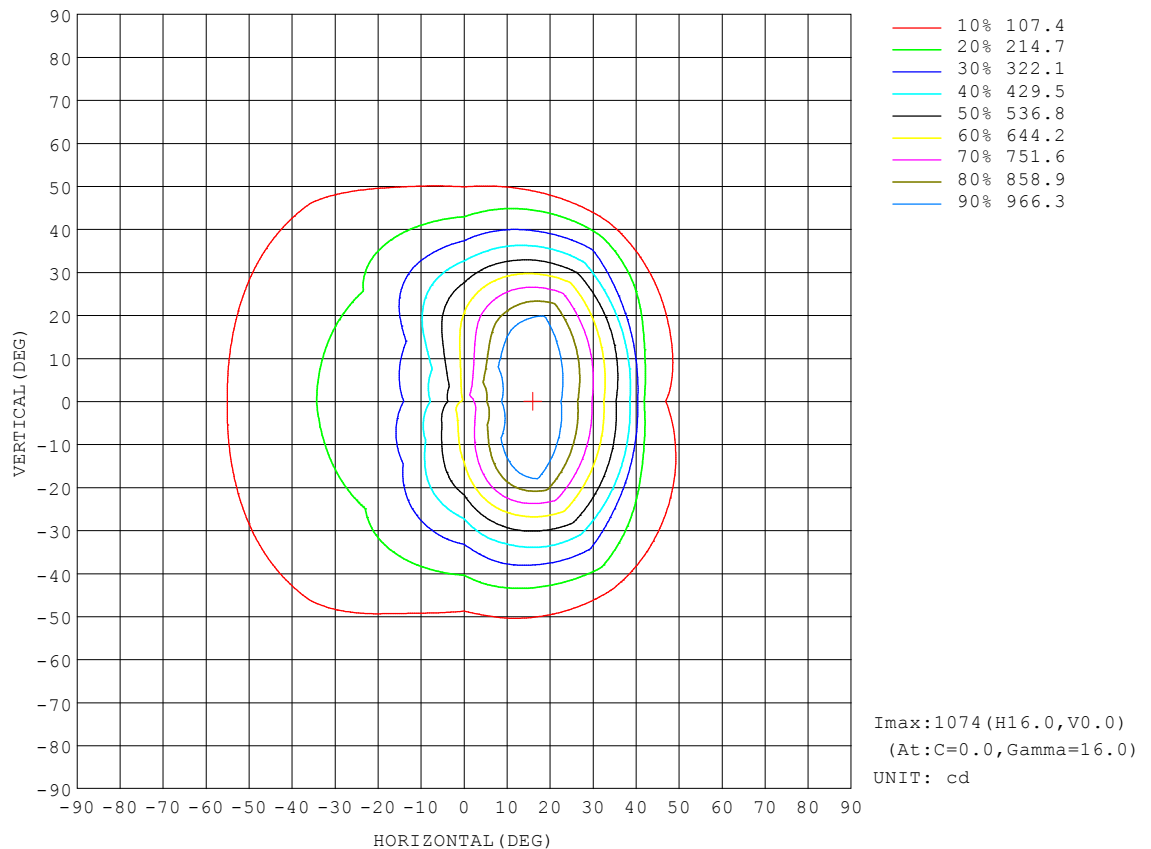


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.8V I:0.0880A P:10.60W PF:0.9970 Freq:60.00Hz Lamp Flux:1066.44x1 lm		
NAME: 1FT 2570	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

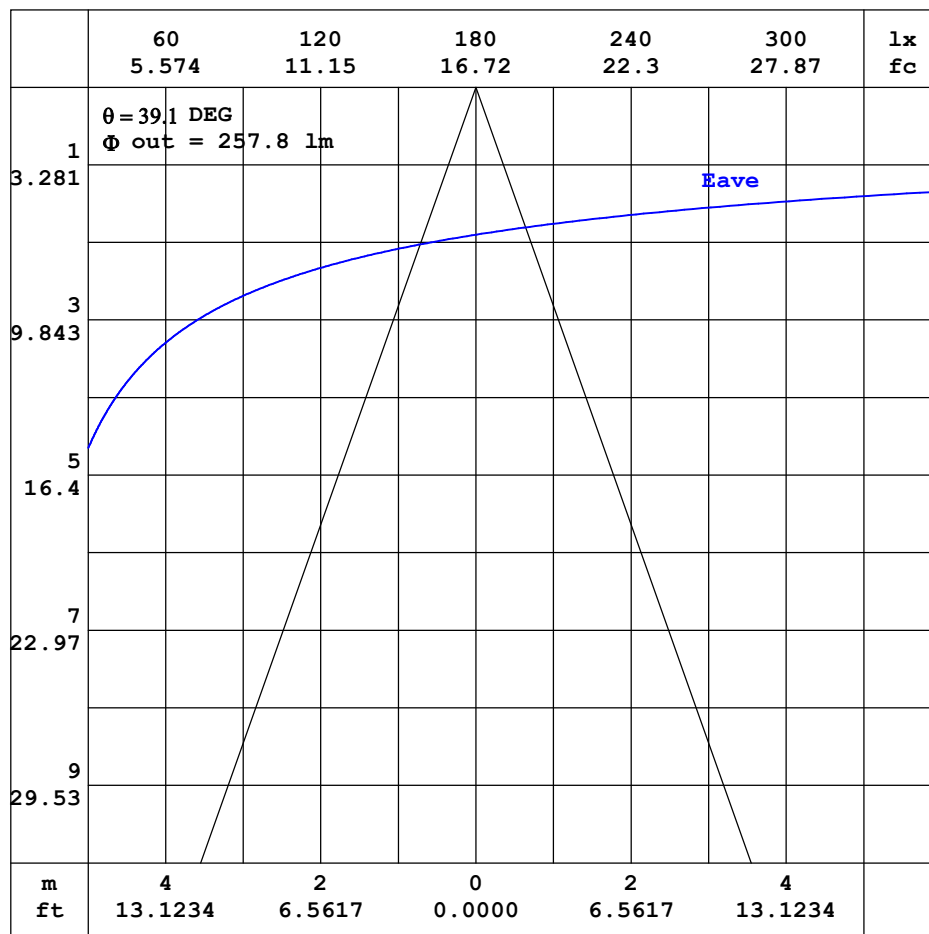


Note: The Curves indicate the illuminated area and the average illuminance when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.8V I:0.0880A P:10.60W PF:0.9970 Freq:60.00Hz Lamp Flux:1066.44x1 lm		
NAME: 1FT 2570	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

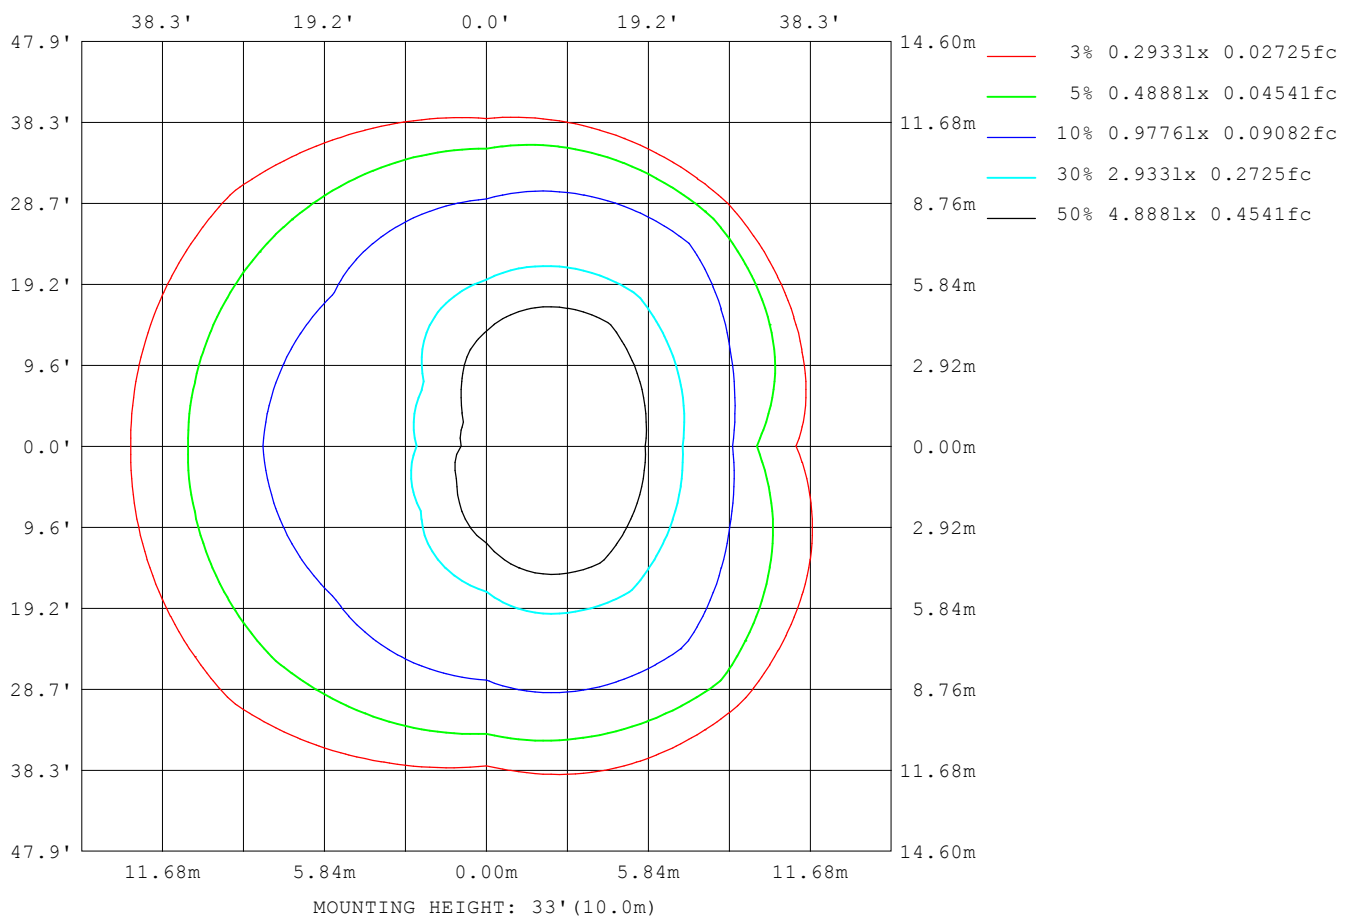

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.8V I:0.0880A P:10.60W PF:0.9970 Freq:60.00Hz Lamp Flux:1066.44x1 lm		
NAME: 1FT 2570	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1154
L_0~180 (75) av	864
L_0~180 (85) av	600
L_90~270 (65) av	1046
L_90~270 (75) av	615
L_90~270 (85) av	222
L_45 (65) av	1122
L_45 (75) av	748
L_45 (85) av	445

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

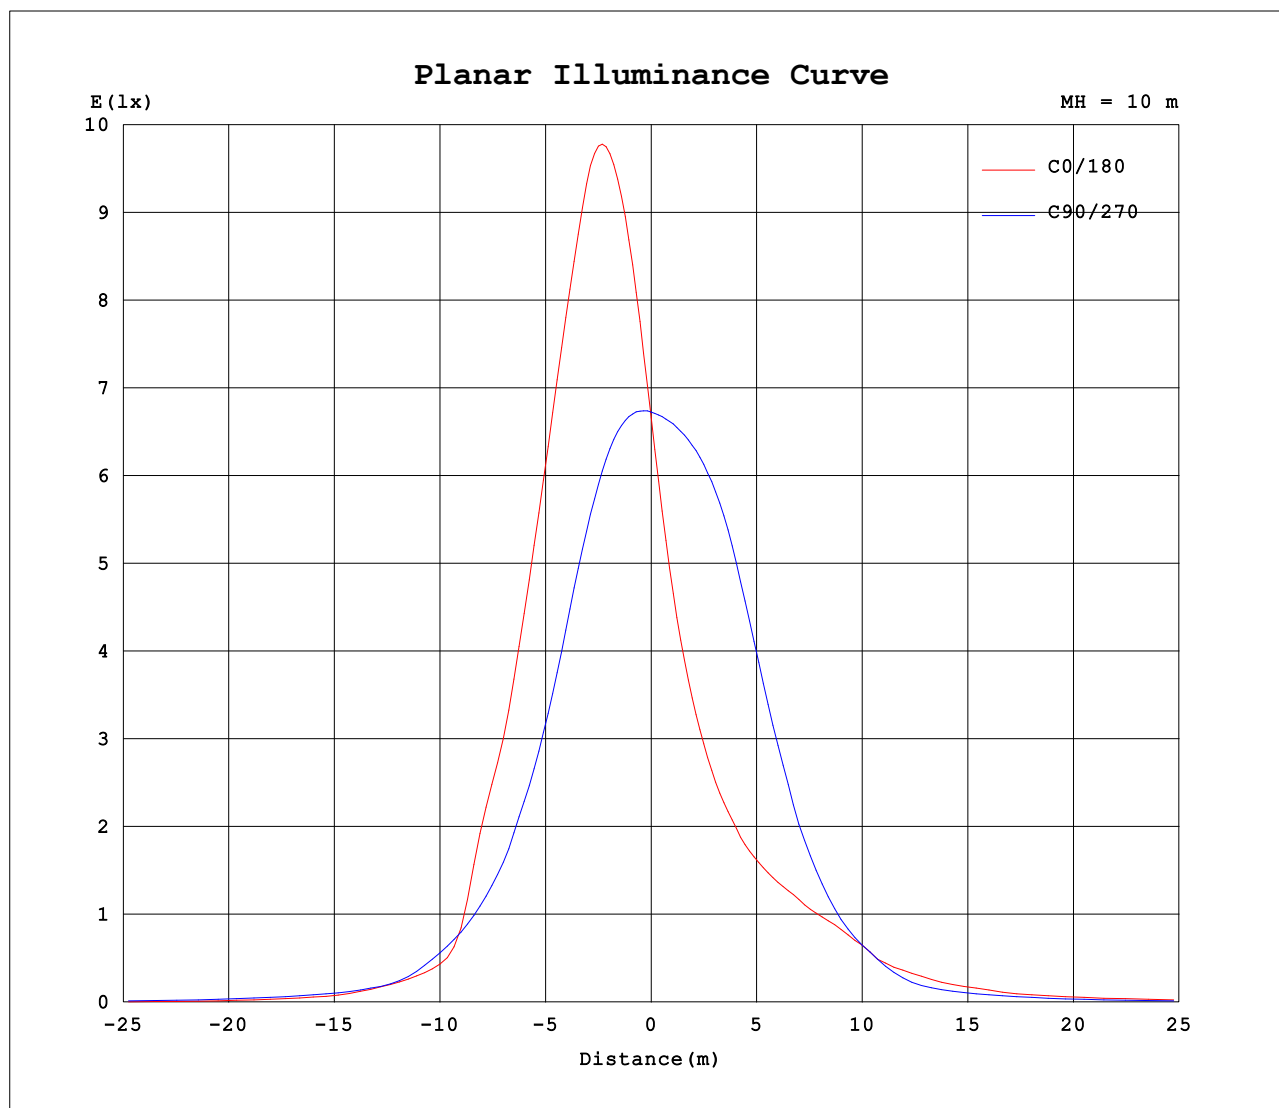

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.8V I:0.0880A P:10.60W PF:0.9970 Freq:60.00Hz Lamp Flux:1066.44x1 lm		
NAME: 1FT 2570	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	675	675	675	675	675	675	675	675										
5	861	815	681	560	508	552	672	790										
10	1013	951	674	456	390	454	673	896										
15	1088	1052	639	372	314	379	672	979										
20	1031	1078	571	308	265	325	651	1013										
25	915	992	475	259	235	282	586	959										
30	751	815	382	224	221	247	488	836										
35	555	633	291	198	216	219	371	664										
40	354	455	221	180	209	196	268	472										
45	125	305	160	164	186	175	185	303										
50	88.4	194	93.2	134	140	146	105	138										
55	53.2	76.0	66.0	109	109	116	66.5	65.9										
60	33.8	41.8	51.9	77.5	79.7	80.8	51.6	36.8										
65	18.5	24.3	37.6	56.5	63.4	58.6	36.7	19.9										
70	8.89	12.7	24.8	40.9	49.7	42.1	23.6	9.80										
75	3.69	5.57	13.9	27.8	33.9	27.6	12.9	4.06										
80	1.04	1.76	6.40	15.6	19.2	14.6	5.76	1.15										
85	0.00	0.14	1.80	6.93	8.79	5.97	1.45	0.00										
90	0.00	0.00	0.06	2.01	2.44	1.52	0.00	0.00										
95	0.00	0.00	0.00	0.08	0.21	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.03	0.04	0.01	0.00	0.00	0.00	0.00	0.02										
115	0.05	0.06	0.03	0.04	0.00	0.02	0.02	0.03										
120	0.08	0.08	0.08	0.10	0.04	0.07	0.03	0.06										
125	0.11	0.11	0.13	0.18	0.11	0.13	0.07	0.08										
130	0.13	0.13	0.19	0.27	0.19	0.20	0.12	0.09										
135	0.15	0.17	0.25	0.36	0.28	0.28	0.17	0.13										
140	0.17	0.20	0.33	0.45	0.40	0.36	0.22	0.16										
145	0.20	0.24	0.38	0.53	0.51	0.44	0.28	0.19										
150	0.24	0.30	0.43	0.58	0.60	0.53	0.34	0.25										
155	0.29	0.36	0.47	0.62	0.67	0.58	0.39	0.29										
160	0.36	0.42	0.50	0.64	0.74	0.63	0.44	0.34										
165	0.46	0.49	0.54	0.65	0.78	0.68	0.49	0.41										
170	0.57	0.56	0.57	0.64	0.80	0.70	0.53	0.47										
175	0.66	0.62	0.59	0.62	0.78	0.70	0.56	0.53										
180	0.73	0.66	0.59	0.58	0.74	0.66	0.59	0.58										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: