


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.8V I:0.0830A P:10.00W PF:0.9970 Freq:60.00Hz Lamp Flux:1153.74x1 lm		
NAME: 1FT 偏光	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 115.37 lm/W			
MODEL		I _{max} (cd)	1663	S/MH(C0/180)	0.60
NOMINAL POWER(W)	10W	LOR(%)	100.0	S/MH(C90/270)	0.96
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	1153.7	η UP,DN(C0-180)	0.0,50.7
NOMINAL FLUX(lm)	1153.74	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.3
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

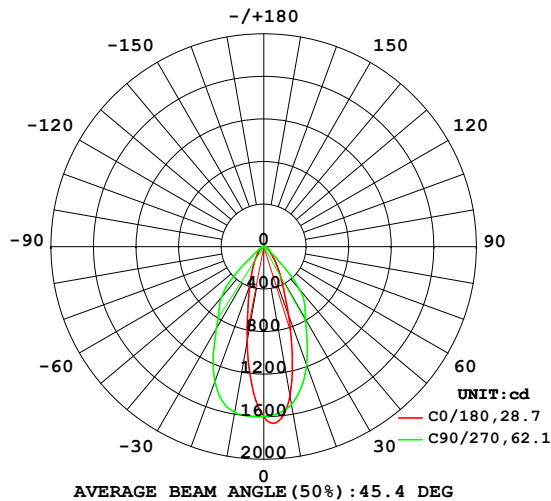

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

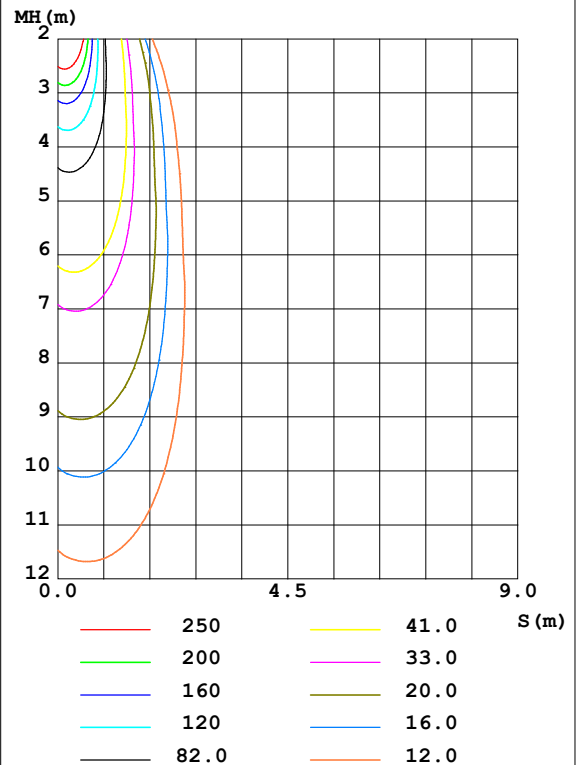

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1422	1552	1506	1181	908.2	1125	1585	1465	0- 10	139.9	139.9	12.1,12.1
20	681.4	985.6	1179	589.1	385.0	572.2	1347	898.1	10- 20	300.8	440.7	38.2,38.2
30	307.4	424.1	786.2	264.6	189.7	273.4	896.4	394.3	20- 30	280.0	720.7	62.5,62.5
40	152.3	183.4	522.3	129.3	93.81	137.0	620.5	180.8	30- 40	210.8	931.5	80.7,80.7
50	81.88	90.93	98.86	67.70	58.02	73.06	178.7	91.22	40- 50	127.9	1059	91.8,91.8
60	50.38	47.88	40.42	34.34	27.34	38.05	48.59	48.49	50- 60	55.09	1114	96.6,96.6
70	21.40	18.97	15.51	11.62	8.718	13.24	18.60	19.59	60- 70	27.12	1142	98.9,98.9
80	5.825	4.865	3.733	2.139	1.354	2.452	5.563	5.088	70- 80	9.587	1151	99.8,99.8
90	0.6784	0.2899	0.0002	0	0	0	0.1003	0.3881	80- 90	1.595	1153	99.9,99.9
100	0	0	0	0	0	0	0	0	90-100	0.0243	1153	99.9,99.9
110	0	0	0.0048	0	0	0	0	0	100-110	0.0000	1153	99.9,99.9
120	0	0.0123	0.0796	0.0309	0.0172	0.0244	0.0411	0.0094	110-120	0.0089	1153	99.9,99.9
130	0.0318	0.0711	0.2027	0.1212	0.0760	0.1053	0.1427	0.0569	120-130	0.0539	1153	99.9,99.9
140	0.1053	0.1912	0.3718	0.2992	0.1889	0.2913	0.2877	0.1541	130-140	0.1247	1153	99.9,99.9
150	0.2816	0.3774	0.5434	0.5626	0.4415	0.5436	0.4591	0.3344	140-150	0.2079	1153	100,100
160	0.5853	0.5881	0.7053	0.7974	0.7699	0.7641	0.6331	0.5527	150-160	0.2565	1153	100,100
170	0.8747	0.7570	0.8189	0.9039	0.9533	0.8769	0.7805	0.7402	160-170	0.2144	1154	100,100
180	0.9582	0.8721	0.8576	0.8779	0.9631	0.8721	0.8673	0.8850	170-180	0.0826	1154	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.8V I:0.0830A P:10.00W PF:0.9970 Freq:60.00Hz Lamp Flux:1153.74x1 lm		
NAME: 1FT 偏光	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

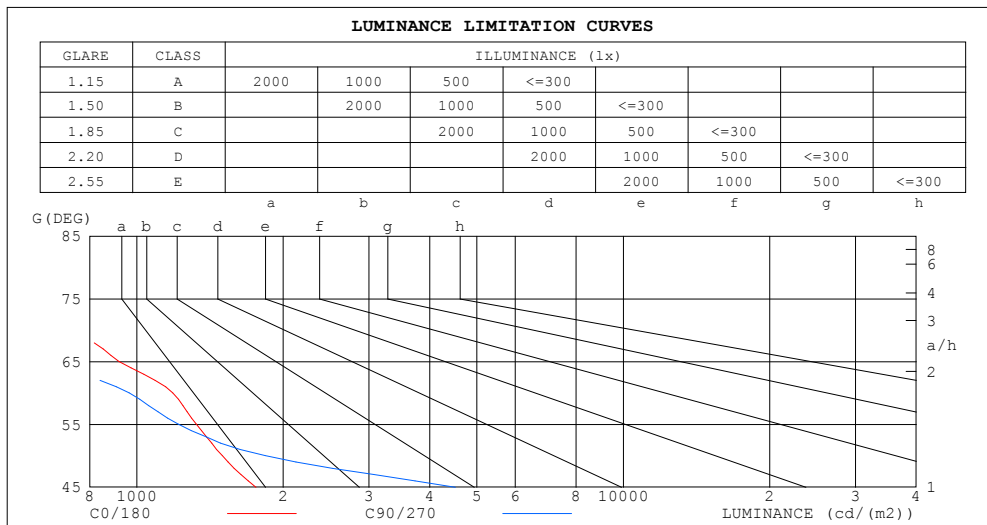

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	319	118
80	395	257
75	537	412
70	736	541
65	919	674
60	1185	965
55	1326	1218
50	1499	1835
45	1756	4520


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.8V I:0.0830A P:10.00W PF:0.9970 Freq:60.00Hz Lamp Flux:1153.74x1 lm		
NAME: 1FT 偏光	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.10	1.07	1.05	1.08	1.05	1.03	1.04	1.02	.00	.00	.98	.97	.96	.95	.94	.92
2.0	1.01	.97	.93	.99	.95	.92	.96	.93	.90	.93	.90	.88	.90	.88	.86	.84
3.0	.94	.88	.84	.92	.87	.83	.89	.85	.82	.87	.83	.80	.85	.82	.79	.77
4.0	.87	.81	.76	.86	.80	.76	.83	.79	.75	.81	.77	.74	.79	.76	.73	.71
5.0	.81	.75	.70	.80	.74	.70	.78	.73	.69	.76	.72	.68	.75	.71	.68	.66
6.0	.76	.69	.65	.75	.69	.64	.73	.68	.64	.72	.67	.63	.70	.66	.63	.61
7.0	.71	.64	.60	.70	.64	.60	.69	.63	.59	.68	.63	.59	.66	.62	.59	.57
8.0	.67	.60	.56	.66	.60	.56	.65	.59	.56	.64	.59	.55	.63	.58	.55	.54
9.0	.63	.57	.52	.62	.56	.52	.61	.56	.52	.60	.55	.52	.60	.55	.52	.50
10.0	.59	.53	.49	.59	.53	.49	.58	.53	.49	.57	.52	.49	.57	.52	.49	.47

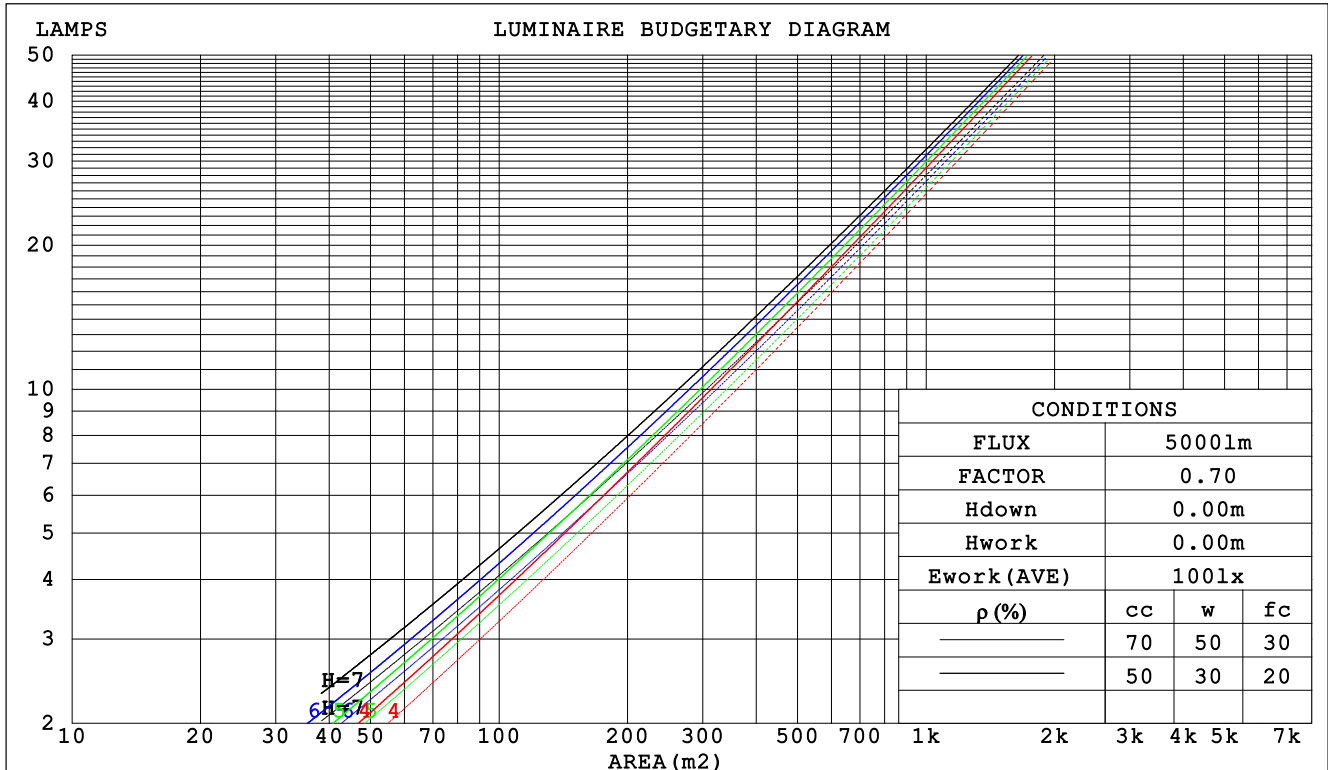

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.8V I:0.0830A P:10.00W PF:0.9970 Freq:60.00Hz Lamp Flux:1153.74x1 lm					
NAME: 1FT 偏光			TYPE:3500K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.196	.111	.035	.189	.108	.034	.176	.101	.032	.165	.095	.030	.154	.089	.029	
2.0	.188	.103	.032	.183	.101	.031	.172	.095	.030	.162	.091	.028	.153	.086	.027	
3.0	.179	.095	.029	.174	.093	.028	.165	.089	.027	.156	.086	.026	.148	.082	.025	
4.0	.169	.088	.026	.165	.086	.026	.157	.083	.025	.150	.080	.024	.143	.078	.024	
5.0	.161	.082	.024	.157	.080	.023	.150	.078	.023	.143	.076	.022	.137	.073	.022	
6.0	.152	.076	.022	.149	.075	.022	.143	.073	.021	.137	.071	.021	.131	.069	.021	
7.0	.145	.071	.020	.142	.071	.020	.136	.069	.020	.131	.067	.020	.126	.065	.019	
8.0	.137	.067	.019	.135	.066	.019	.130	.065	.019	.125	.063	.018	.121	.062	.018	
9.0	.131	.063	.018	.129	.063	.018	.124	.061	.017	.120	.060	.017	.116	.059	.017	
10.0	.125	.060	.017	.123	.059	.017	.119	.058	.016	.115	.057	.016	.112	.056	.016	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.173	.158	.144	.148	.135	.124	.101	.093	.086	.058	.054	.050	.019	.017	.016	
2.0	.159	.133	.111	.136	.115	.096	.093	.079	.067	.054	.046	.039	.017	.015	.013	
3.0	.148	.114	.088	.127	.099	.076	.087	.069	.053	.050	.040	.031	.016	.013	.010	
4.0	.138	.100	.071	.118	.086	.062	.081	.060	.043	.047	.035	.026	.015	.011	.008	
5.0	.129	.088	.058	.111	.077	.051	.077	.053	.036	.044	.031	.021	.014	.010	.007	
6.0	.122	.079	.049	.105	.069	.042	.072	.048	.030	.042	.028	.018	.014	.009	.006	
7.0	.116	.072	.041	.099	.062	.036	.069	.044	.025	.040	.026	.015	.013	.008	.005	
8.0	.110	.066	.036	.094	.057	.031	.065	.040	.022	.038	.024	.013	.012	.008	.004	
9.0	.104	.061	.031	.090	.053	.027	.062	.037	.019	.036	.022	.011	.012	.007	.004	
10.0	.100	.056	.027	.086	.049	.024	.060	.034	.017	.035	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.8V I:0.0830A P:10.00W PF:0.9970 Freq:60.00Hz Lamp Flux:1153.74x1 lm										
NAME: 1FT 偏光					TYPE:3500K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	10.8	11.8	11.0	12.0	12.2	13.6	14.6	13.8	14.8	15.0
	3H	11.3	12.2	11.6	12.5	12.7	13.6	14.6	13.9	14.8
	4H	11.4	12.3	11.7	12.5	12.8	13.6	14.5	13.9	14.7
	6H	11.4	12.3	11.7	12.5	12.8	13.6	14.4	13.9	14.6
	8H	11.4	12.2	11.7	12.5	12.8	13.5	14.3	13.8	14.6
	12H	11.4	12.2	11.7	12.5	12.7	13.5	14.2	13.8	14.5
4H	2H	11.0	11.9	11.3	12.1	12.4	13.5	14.5	13.8	14.7
	3H	11.6	12.4	11.9	12.6	12.9	13.6	14.4	14.0	14.7
	4H	11.8	12.5	12.1	12.8	13.1	13.6	14.4	14.0	14.7
	6H	11.8	12.5	12.2	12.8	13.1	13.6	14.2	14.0	14.6
	8H	11.8	12.4	12.2	12.8	13.1	13.6	14.1	14.0	14.5
	12H	11.8	12.4	12.2	12.7	13.1	13.5	14.1	13.9	14.4
8H	4H	11.7	12.3	12.1	12.7	13.0	13.6	14.1	14.0	14.5
	6H	11.8	12.3	12.3	12.7	13.1	13.6	14.0	14.0	14.4
	8H	11.9	12.3	12.3	12.7	13.1	13.5	13.9	14.0	14.4
	12H	11.9	12.2	12.3	12.7	13.1	13.5	13.8	13.9	14.3
12H	4H	11.7	12.2	12.1	12.6	13.0	13.5	14.1	13.9	14.4
	6H	11.8	12.2	12.3	12.6	13.1	13.5	13.9	14.0	14.3
	8H	11.8	12.2	12.3	12.6	13.1	13.5	13.8	14.0	14.3
Variations with the observer position at spacings:										
S = 1.0H	+ 0.8 / - 1.0					+ 3.3 / - 4.1				
1.5H	+ 0.9 / - 0.7					+ 4.9 / - 3.5				
2.0H	+ 1.0 / - 1.0					+ 5.6 / - 2.5				

CIE Pub.117 Corrected 1154 lm Total Lamp Luminous Flux. (8log(F/F0) = 0.5)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.8V I:0.0830A P:10.00W PF:0.9970 Freq:60.00Hz Lamp Flux:1153.74x1 lm		
NAME: 1FT 偏光	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	79	72	67	79	71	67	78	71	67	62
0.80	88	81	76	87	80	76	86	80	75	71
1.00	94	87	82	93	86	82	91	87	82	77
1.25	99	92	88	98	92	88	95	90	87	82
1.50	102	96	92	101	95	92	98	94	90	85
2.00	106	101	97	104	100	96	101	98	95	89
2.50	108	103	100	106	102	99	103	100	97	90
3.00	110	106	102	108	104	101	104	102	99	92
4.00	112	109	106	110	107	105	106	104	102	95
5.00	114	111	109	111	109	107	107	106	104	96
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.8V I:0.0830A P:10.00W PF:0.9970 Freq:60.00Hz Lamp Flux:1153.74x1 lm		
NAME: 1FT 偏光	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

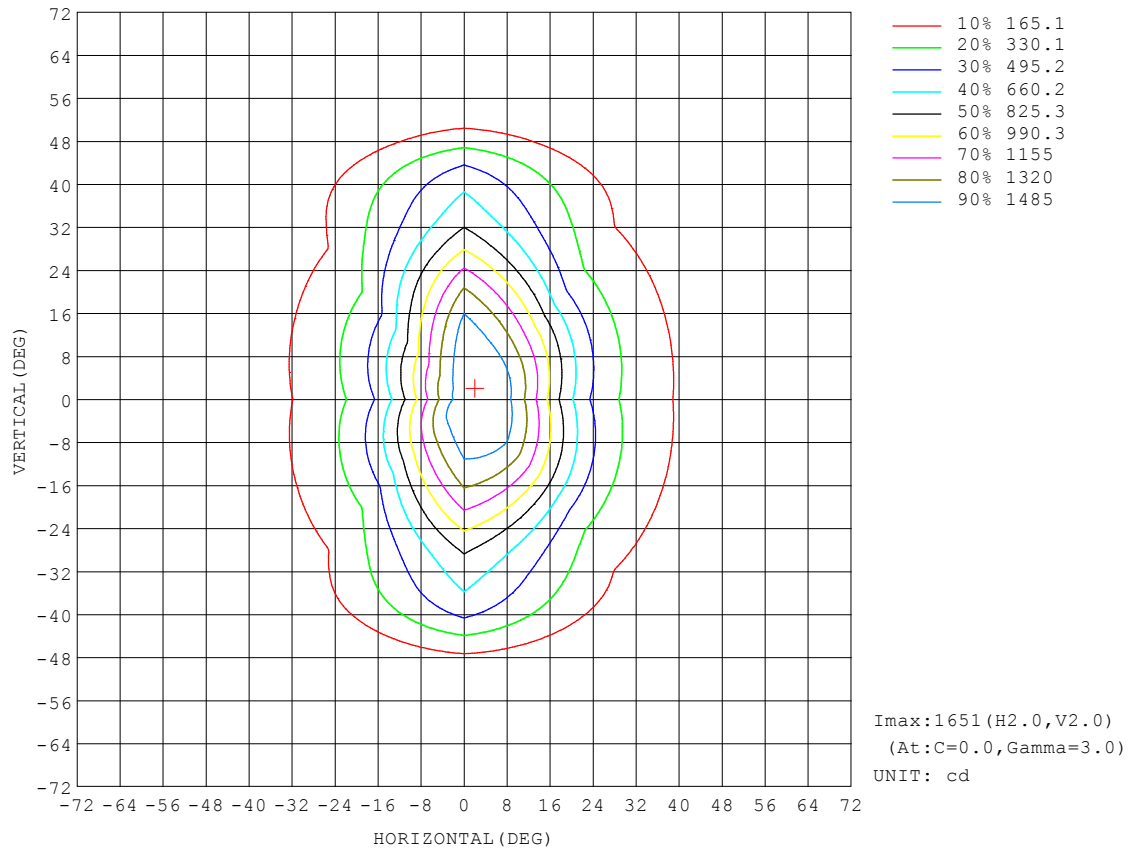


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.8V I:0.0830A P:10.00W PF:0.9970 Freq:60.00Hz Lamp Flux:1153.74x1 lm		
NAME: 1FT 偏光	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

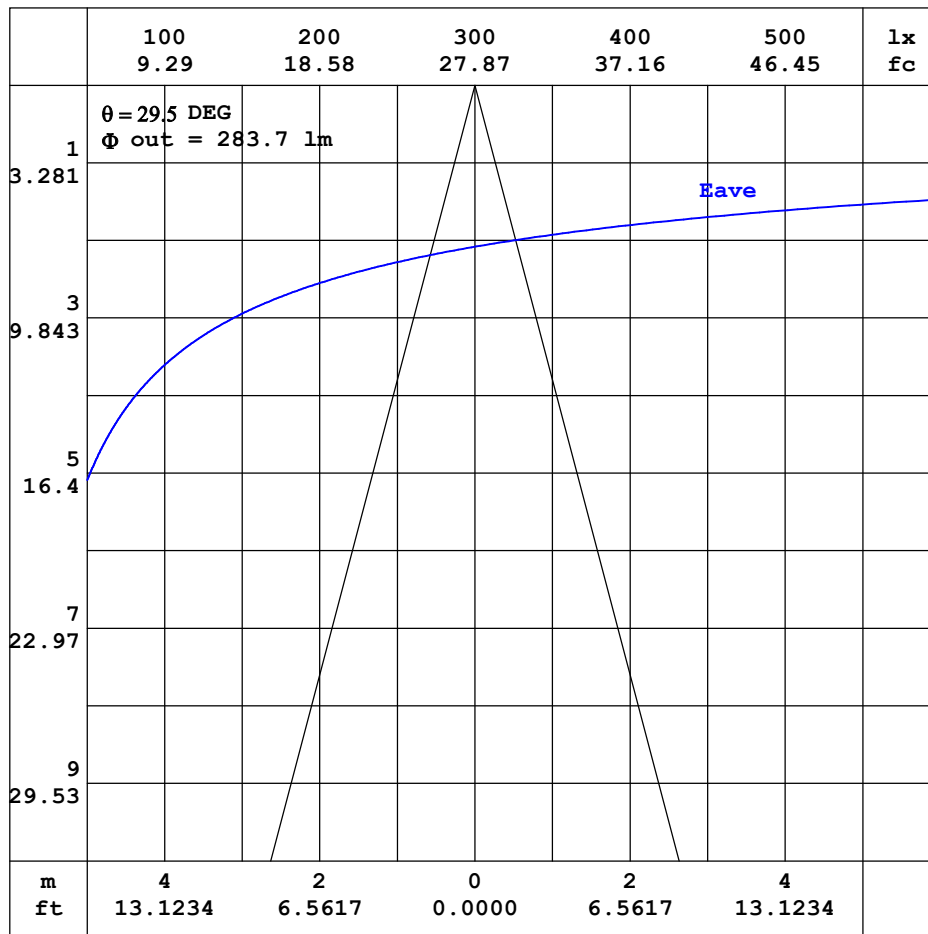


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.8V I:0.0830A P:10.00W PF:0.9970 Freq:60.00Hz Lamp Flux:1153.74x1 lm		
NAME: 1FT 偏光	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

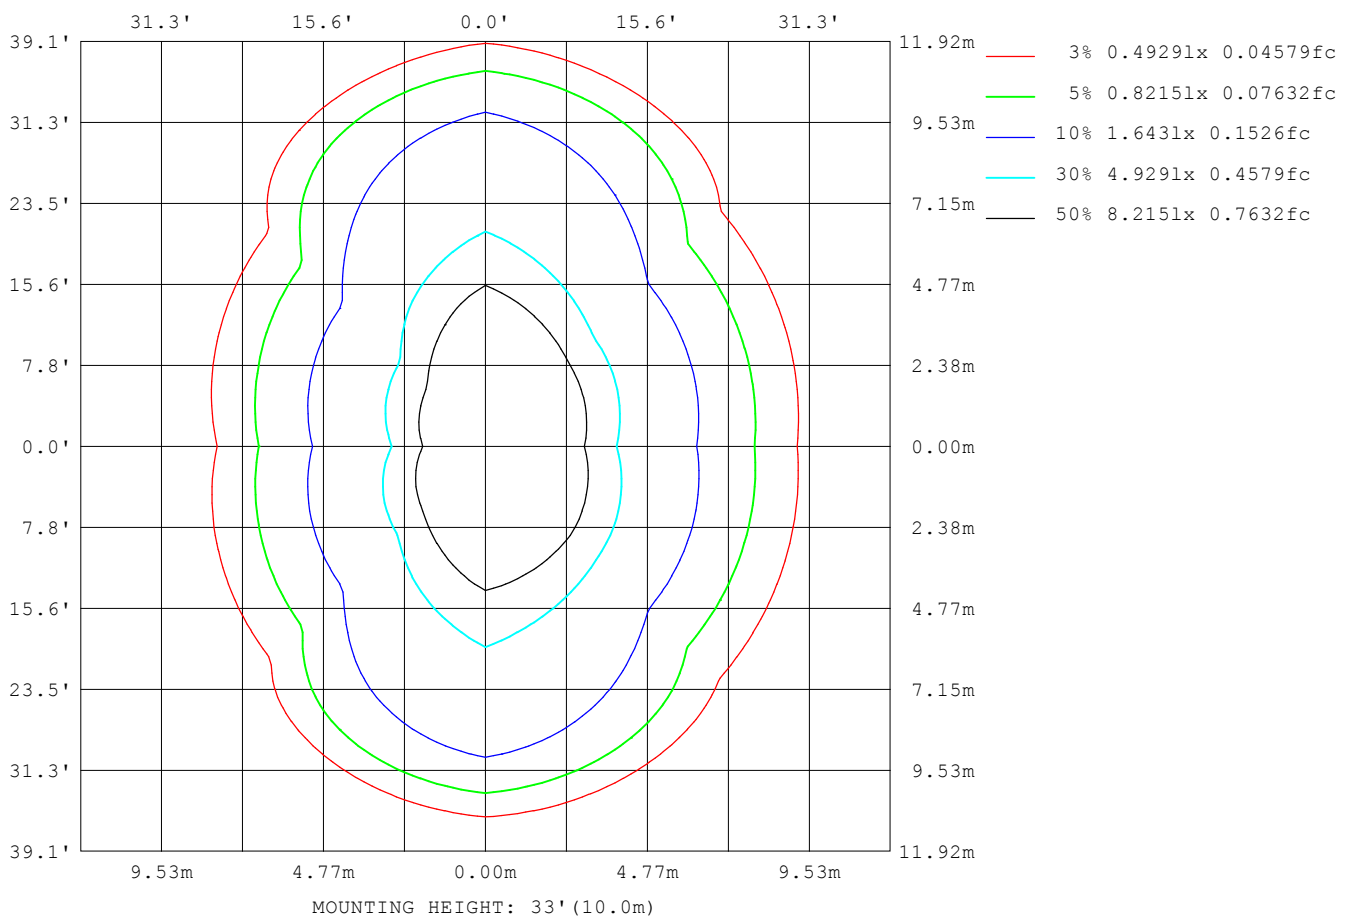

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.8V I:0.0830A P:10.00W PF:0.9970 Freq:60.00Hz Lamp Flux:1153.74x1 lm		
NAME: 1FT 偏光	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	696
L_0~180 (75) av	364
L_0~180 (85) av	177
L_90~270 (65) av	750
L_90~270 (75) av	465
L_90~270 (85) av	161
L_45 (65) av	769
L_45 (75) av	387
L_45 (85) av	156

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

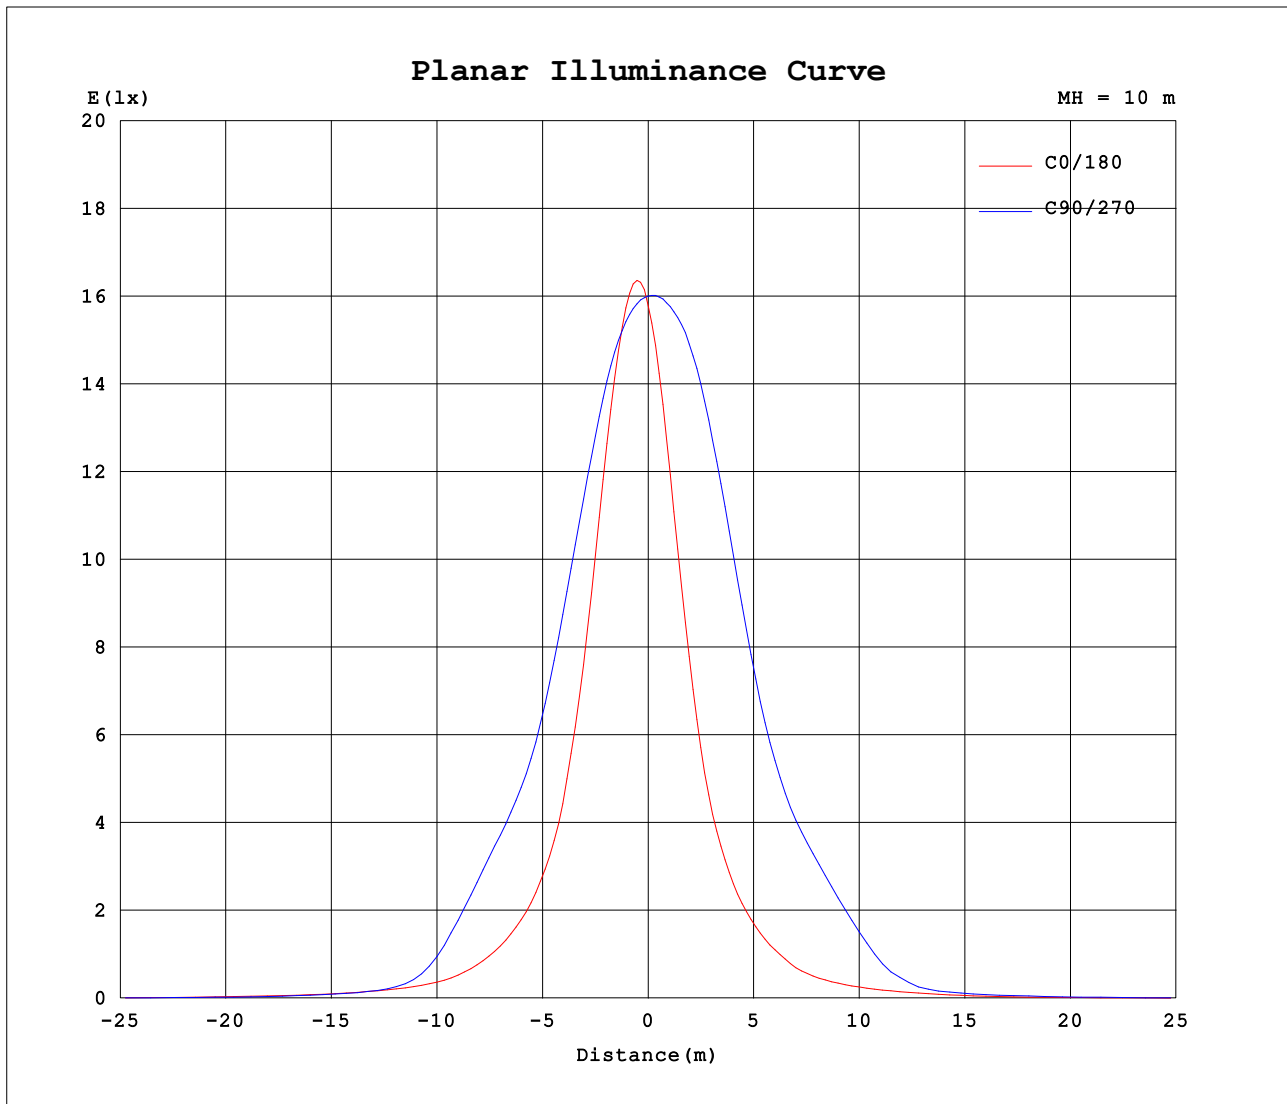

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.8V I:0.0830A P:10.00W PF:0.9970 Freq:60.00Hz Lamp Flux:1153.74x1 lm		
NAME: 1FT 偏光	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1597	1597	1597	1597	1597	1597	1597	1597										
5	1645	1651	1573	1444	1306	1404	1600	1601										
10	1422	1552	1506	1181	908	1125	1585	1465										
15	1038	1311	1368	872	577	830	1506	1210										
20	681	986	1179	589	385	572	1347	898										
25	441	666	965	391	268	395	1125	598										
30	307	424	786	265	190	273	896	394										
35	219	273	675	184	129	193	737	264										
40	152	183	522	129	93.8	137	620	181										
45	106	127	268	93.2	73.7	99.4	428	127										
50	81.9	90.9	98.9	67.7	58.0	73.1	179	91.2										
55	64.7	66.3	58.6	49.4	42.3	54.0	73.5	67.0										
60	50.4	47.9	40.4	34.3	27.3	38.1	48.6	48.5										
65	33.0	32.2	23.9	20.6	16.4	23.3	29.4	33.1										
70	21.4	19.0	15.5	11.6	8.72	13.2	18.6	19.6										
75	11.8	10.6	8.93	5.66	4.01	6.51	11.3	10.9										
80	5.83	4.86	3.73	2.14	1.35	2.45	5.56	5.09										
85	2.36	1.64	0.86	0.53	0.23	0.61	1.50	1.77										
90	0.68	0.29	0.00	0.00	0.00	0.00	0.10	0.39										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
115	0.00	0.00	0.03	0.01	0.00	0.00	0.00	0.00										
120	0.00	0.01	0.08	0.03	0.02	0.02	0.04	0.01										
125	0.01	0.03	0.14	0.07	0.05	0.06	0.09	0.02										
130	0.03	0.07	0.20	0.12	0.08	0.11	0.14	0.06										
135	0.07	0.12	0.28	0.19	0.12	0.19	0.21	0.10										
140	0.11	0.19	0.37	0.30	0.19	0.29	0.29	0.15										
145	0.17	0.27	0.46	0.43	0.29	0.42	0.37	0.24										
150	0.28	0.38	0.54	0.56	0.44	0.54	0.46	0.33										
155	0.42	0.49	0.64	0.69	0.61	0.67	0.55	0.43										
160	0.59	0.59	0.71	0.80	0.77	0.76	0.63	0.55										
165	0.75	0.68	0.76	0.86	0.89	0.84	0.72	0.65										
170	0.87	0.76	0.82	0.90	0.95	0.88	0.78	0.74										
175	0.95	0.83	0.86	0.90	0.97	0.88	0.84	0.81										
180	0.96	0.87	0.86	0.88	0.96	0.87	0.87	0.89										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: