


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.8V I:0.0830A P:10.10W PF:0.9970 Freq:60.00Hz Lamp Flux:1189.51x1 lm		
NAME: 1FT 2570	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 117.77 lm/W			
MODEL		Imax(cd)	1719	S/MH(C0/180)	0.43
NOMINAL POWER(W)	10W	LOR(%)	100.0	S/MH(C90/270)	0.90
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	1189.5	η UP,DN(C0-180)	0.0,50.4
NOMINAL FLUX(lm)	1189.51	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.5
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

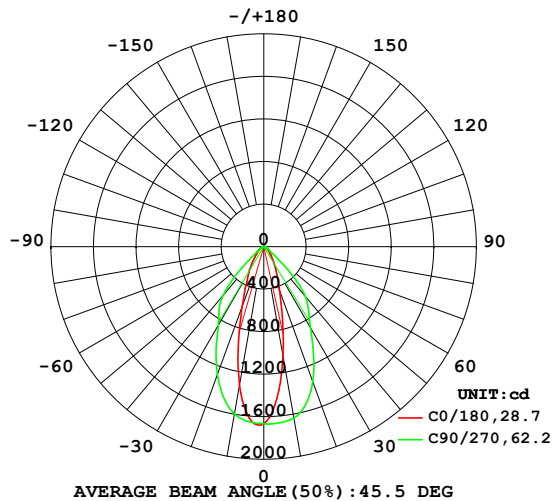

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

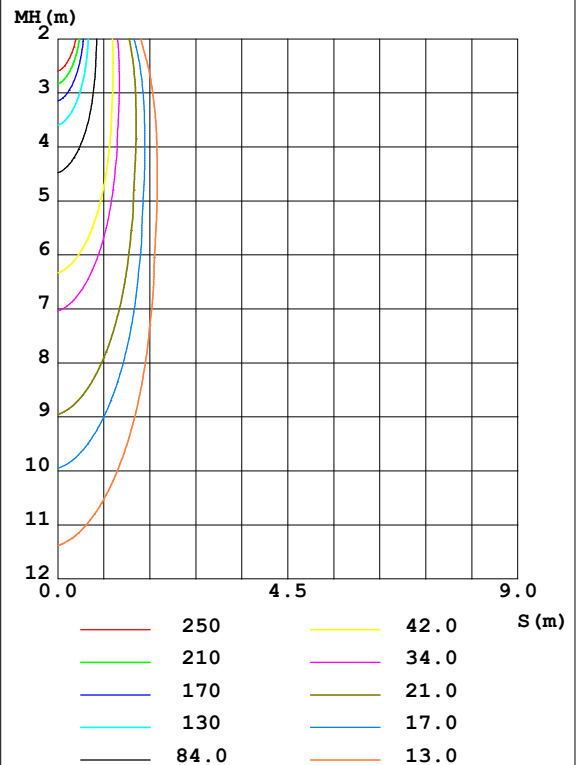

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1044	1292	1636	1608	1319	1488	1597	1171	0- 10	145.5	145.5	12.2,12.2
20	436.5	681.0	1349	1029	591.0	886.7	1278	571.5	10- 20	310.3	455.8	38.3,38.3
30	212.6	300.4	880.8	447.0	280.3	393.6	859.6	267.4	20- 30	287.9	743.7	62.5,62.5
40	103.7	144.7	603.9	199.8	135.6	179.0	594.2	133.8	30- 40	217.5	961.2	80.8,80.8
50	63.50	74.99	141.7	98.84	77.00	91.27	121.2	71.23	40- 50	131.8	1093	91.9,91.9
60	31.51	38.50	46.84	52.16	44.99	48.63	45.00	35.93	50- 60	56.27	1149	96.6,96.6
70	11.20	13.57	17.94	21.42	17.61	19.03	17.35	12.06	60- 70	27.74	1177	98.9,98.9
80	2.197	2.768	5.180	5.828	4.397	4.749	4.528	2.161	70- 80	9.792	1187	99.8,99.8
90	0	0	0.0623	0.5175	0.3067	0.2395	0	0	80- 90	1.624	1188	99.9,99.9
100	0	0	0	0	0	0	0	0	90-100	0.0145	1188	99.9,99.9
110	0	0.0000	0	0	0	0	0	0	100-110	0.0000	1188	99.9,99.9
120	0.0216	0.0481	0.0774	0.0173	0.0145	0.0168	0.0680	0.0371	110-120	0.0148	1188	99.9,99.9
130	0.0790	0.1536	0.1961	0.0768	0.0648	0.0863	0.1963	0.1260	120-130	0.0688	1188	99.9,99.9
140	0.2033	0.3432	0.3728	0.2030	0.1630	0.2420	0.3709	0.3015	130-140	0.1481	1189	99.9,99.9
150	0.4548	0.5998	0.5787	0.4355	0.3885	0.5011	0.5985	0.5636	140-150	0.2409	1189	99.9,99.9
160	0.8092	0.8493	0.7918	0.7249	0.7501	0.7937	0.7922	0.7689	150-160	0.2983	1189	100,100
170	1.023	1.012	0.9396	0.9325	0.9943	0.9737	0.9520	0.9247	160-170	0.2488	1189	100,100
180	1.107	1.158	1.029	0.9892	1.066	1.003	1.010	1.006	170-180	0.0955	1190	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.8V I:0.0830A P:10.10W PF:0.9970 Freq:60.00Hz Lamp Flux:1189.51x1 lm		
NAME: 1FT 2570	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

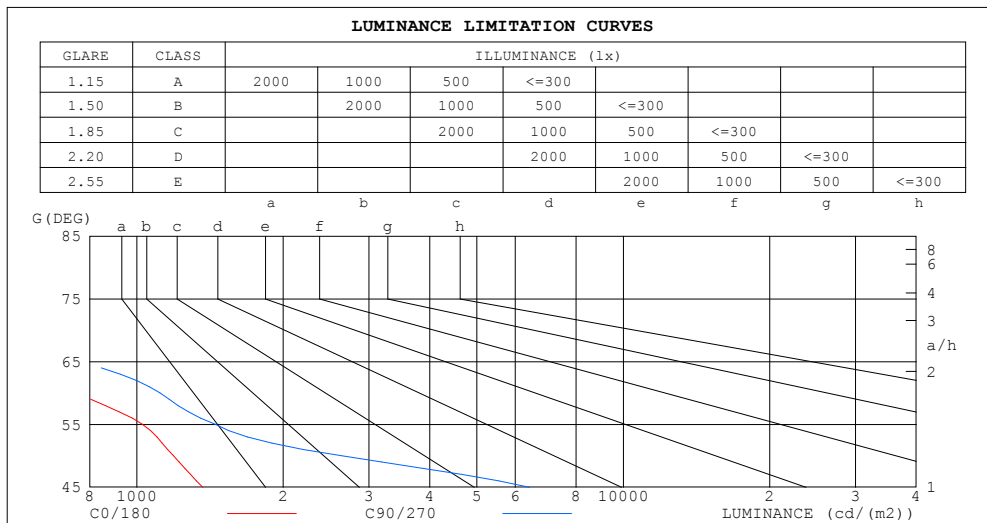


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.8V I:0.0830A P:10.10W PF:0.9970 Freq:60.00Hz Lamp Flux:1189.51x1 lm		
NAME: 1FT 2570	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.10	1.07	1.05	1.08	1.05	1.03	1.04	1.02	.00	.00	.98	.97	.96	.95	.94	.92
2.0	1.01	.97	.93	.99	.95	.92	.96	.93	.90	.93	.90	.88	.90	.88	.86	.84
3.0	.94	.88	.84	.92	.87	.83	.89	.85	.82	.87	.83	.80	.85	.82	.79	.78
4.0	.87	.81	.76	.86	.80	.76	.83	.79	.75	.81	.77	.74	.79	.76	.73	.71
5.0	.81	.75	.70	.80	.74	.70	.78	.73	.69	.76	.72	.68	.75	.71	.68	.66
6.0	.76	.69	.65	.75	.69	.64	.73	.68	.64	.72	.67	.63	.70	.66	.63	.61
7.0	.71	.64	.60	.70	.64	.60	.69	.63	.59	.68	.63	.59	.66	.62	.59	.57
8.0	.67	.60	.56	.66	.60	.56	.65	.59	.56	.64	.59	.55	.63	.58	.55	.54
9.0	.63	.57	.52	.62	.56	.52	.61	.56	.52	.60	.56	.52	.60	.55	.52	.50
10.0	.59	.53	.49	.59	.53	.49	.58	.53	.49	.57	.52	.49	.57	.52	.49	.48

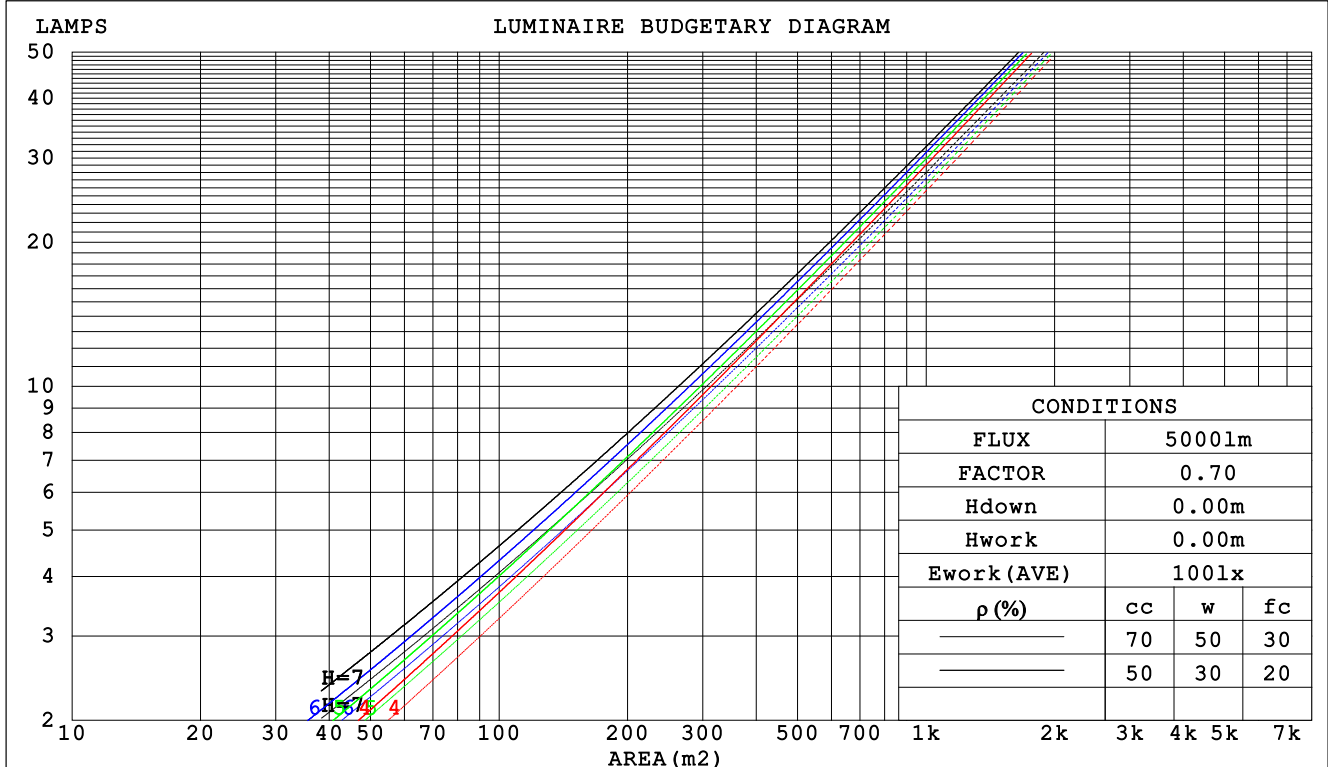

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.8V I:0.0830A P:10.10W PF:0.9970 Freq:60.00Hz Lamp Flux:1189.51x1 lm					
NAME: 1FT 2570			TYPE:3500K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.196	.111	.035	.189	.108	.034	.176	.101	.032	.164	.095	.030	.153	.089	.029	
2.0	.188	.103	.032	.182	.100	.031	.171	.095	.030	.162	.091	.028	.152	.086	.027	
3.0	.179	.095	.028	.174	.093	.028	.164	.089	.027	.156	.085	.026	.148	.082	.025	
4.0	.169	.088	.026	.165	.086	.026	.157	.083	.025	.149	.080	.024	.142	.077	.024	
5.0	.160	.082	.024	.157	.080	.023	.150	.078	.023	.143	.075	.022	.137	.073	.022	
6.0	.152	.076	.022	.149	.075	.022	.143	.073	.021	.137	.071	.021	.131	.069	.021	
7.0	.144	.071	.020	.141	.070	.020	.136	.069	.020	.131	.067	.020	.126	.065	.019	
8.0	.137	.067	.019	.135	.066	.019	.130	.065	.019	.125	.063	.018	.121	.062	.018	
9.0	.131	.063	.018	.128	.063	.018	.124	.061	.017	.120	.060	.017	.116	.059	.017	
10.0	.125	.060	.017	.123	.059	.017	.119	.058	.016	.115	.057	.016	.111	.056	.016	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.112	.112	.112	.064	.064	.064	.020	.020	.020	
1.0	.173	.158	.144	.148	.135	.124	.101	.093	.086	.058	.054	.050	.019	.017	.016	
2.0	.159	.133	.111	.136	.115	.096	.093	.079	.067	.054	.046	.039	.017	.015	.013	
3.0	.148	.114	.088	.127	.099	.076	.087	.069	.053	.050	.040	.032	.016	.013	.010	
4.0	.138	.100	.071	.118	.086	.062	.081	.060	.043	.047	.035	.026	.015	.011	.008	
5.0	.129	.089	.058	.111	.077	.051	.077	.054	.036	.044	.031	.021	.014	.010	.007	
6.0	.122	.079	.049	.105	.069	.042	.072	.048	.030	.042	.028	.018	.014	.009	.006	
7.0	.116	.072	.041	.099	.062	.036	.069	.044	.026	.040	.026	.015	.013	.008	.005	
8.0	.110	.066	.036	.094	.057	.031	.065	.040	.022	.038	.024	.013	.012	.008	.004	
9.0	.104	.061	.031	.090	.053	.027	.062	.037	.019	.036	.022	.011	.012	.007	.004	
10.0	.100	.056	.027	.086	.049	.024	.060	.034	.017	.035	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.8V I:0.0830A P:10.10W PF:0.9970 Freq:60.00Hz Lamp Flux:1189.51x1 lm										
NAME: 1FT 2570					TYPE:3500K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	8.9	9.9	9.1	10.1	10.3	14.2	15.2	14.4	15.4	15.5
3H	9.1	10.1	9.4	10.3	10.5	14.2	15.1	14.4	15.3	15.5
4H	9.1	10.0	9.4	10.3	10.5	14.1	15.0	14.4	15.3	15.5
6H	9.1	9.9	9.4	10.2	10.4	14.1	14.9	14.4	15.2	15.4
8H	9.1	9.9	9.4	10.1	10.4	14.1	14.9	14.4	15.1	15.4
12H	9.0	9.8	9.3	10.1	10.3	14.0	14.8	14.3	15.1	15.3
4H 2H	9.1	10.0	9.4	10.2	10.5	14.0	14.9	14.3	15.1	15.4
3H	9.4	10.2	9.8	10.5	10.8	14.0	14.8	14.4	15.1	15.4
4H	9.5	10.2	9.8	10.5	10.8	14.0	14.7	14.4	15.1	15.4
6H	9.5	10.1	9.8	10.4	10.8	14.0	14.6	14.4	15.0	15.3
8H	9.4	10.0	9.8	10.4	10.7	14.0	14.6	14.4	14.9	15.3
12H	9.4	9.9	9.8	10.3	10.7	13.9	14.5	14.3	14.8	15.2
8H 4H	9.5	10.0	9.9	10.4	10.8	13.9	14.5	14.3	14.9	15.2
6H	9.4	9.9	9.9	10.3	10.7	13.9	14.4	14.3	14.8	15.2
8H	9.4	9.8	9.9	10.3	10.7	13.9	14.3	14.3	14.7	15.2
12H	9.4	9.7	9.9	10.2	10.7	13.8	14.2	14.3	14.6	15.1
12H 4H	9.4	9.9	9.8	10.3	10.7	13.9	14.4	14.3	14.8	15.2
6H	9.4	9.8	9.9	10.2	10.7	13.9	14.3	14.3	14.7	15.1
8H	9.4	9.7	9.9	10.2	10.7	13.8	14.2	14.3	14.6	15.1
Variations with the observer position at spacings:										
S = 1.0H	+ 1.0 / - 1.2					+ 3.6 / - 4.4				
1.5H	+ 0.7 / - 0.8					+ 4.7 / - 4.9				
2.0H	+ 1.3 / - 1.7					+ 7.0 / - 4.1				

CIE Pub.117 Corrected 1190 lm Total Lamp Luminous Flux.(8log(F/F0) = 0.6)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.8V I:0.0830A P:10.10W PF:0.9970 Freq:60.00Hz Lamp Flux:1189.51x1 lm		
NAME: 1FT 2570	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	79	72	67	79	72	67	78	71	67	62
0.80	88	81	76	87	80	76	86	80	75	71
1.00	94	87	82	93	86	82	91	87	82	77
1.25	99	92	88	98	92	88	95	91	87	82
1.50	102	96	92	101	95	92	98	94	91	85
2.00	106	101	97	104	100	96	101	98	95	89
2.50	108	103	100	106	102	99	103	100	97	91
3.00	110	106	103	108	104	101	104	102	99	92
4.00	112	109	106	110	107	105	106	104	102	95
5.00	114	111	109	111	109	107	107	106	104	96
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.8V I:0.0830A P:10.10W PF:0.9970 Freq:60.00Hz Lamp Flux:1189.51x1 lm		
NAME: 1FT 2570	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

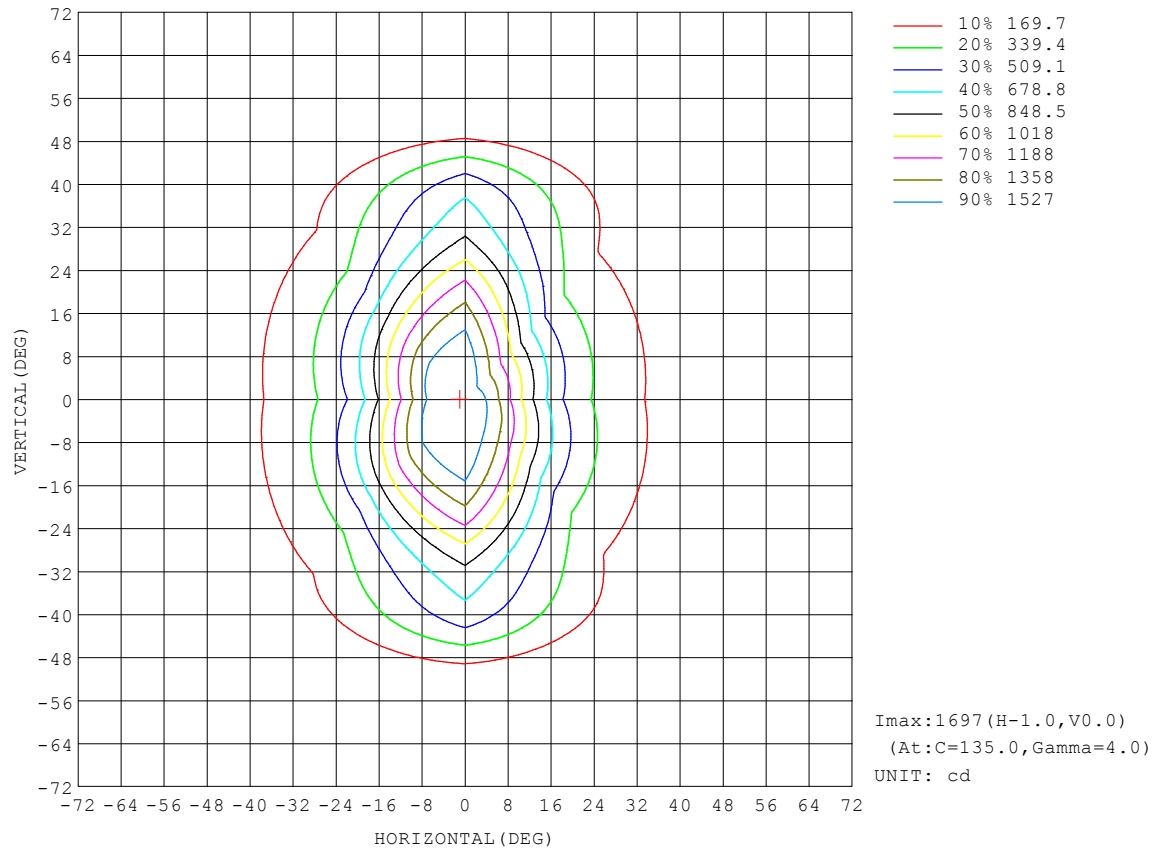

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:


```

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

```

ISOLUX DIAGRAM

Test:U:120.8V I:0.0830A P:10.10W PF:0.9970 Freq:60.00Hz Lamp Flux:1189.51x1 lm		
NAME: 1FT 2570	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

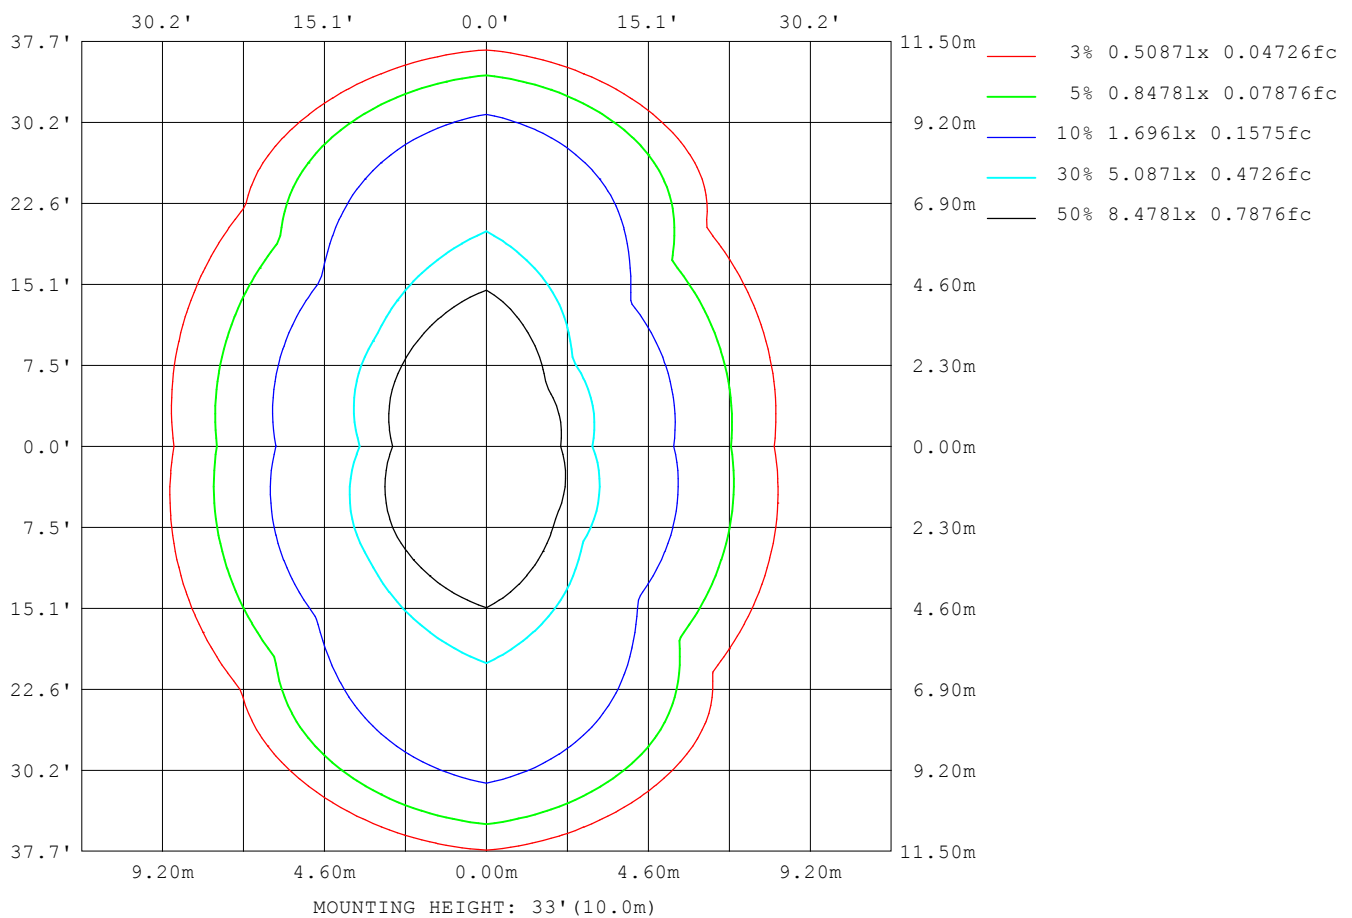

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.8V I:0.0830A P:10.10W PF:0.9970 Freq:60.00Hz Lamp Flux:1189.51x1 lm		
NAME: 1FT 2570	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	696
L_0~180 (75) av	344
L_0~180 (85) av	151
L_90~270 (65) av	759
L_90~270 (75) av	482
L_90~270 (85) av	174
L_45 (65) av	801
L_45 (75) av	406
L_45 (85) av	170

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

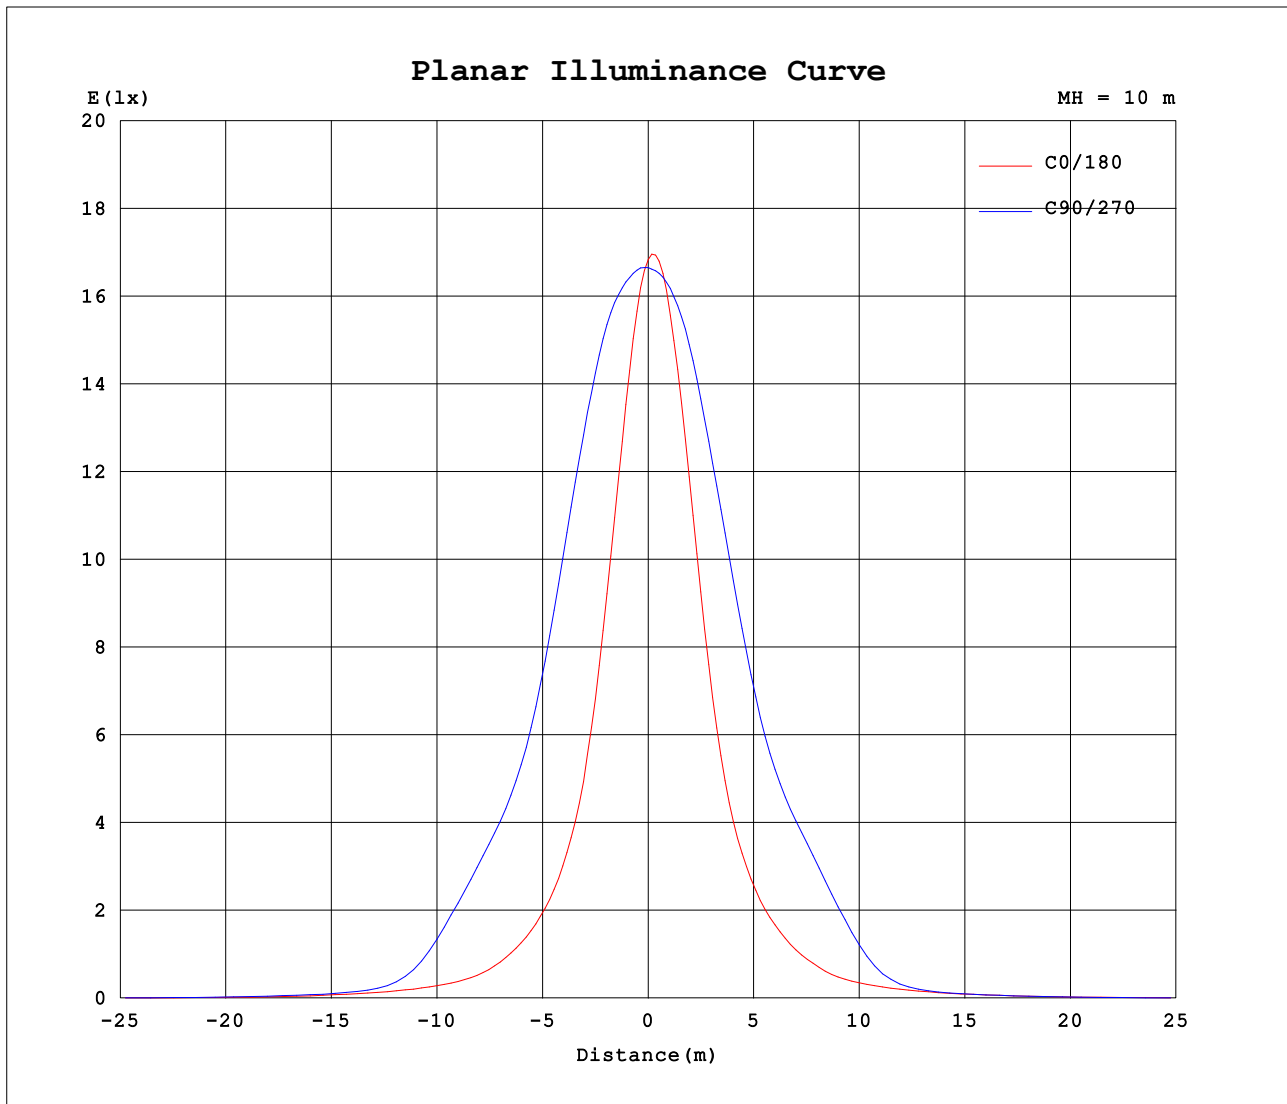

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.8V I:0.0830A P:10.10W PF:0.9970 Freq:60.00Hz Lamp Flux:1189.51x1 lm		
NAME: 1FT 2570	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1666	1666	1666	1666	1666	1666	1666	1666										
5	1432	1533	1662	1716	1614	1647	1651	1467										
10	1044	1292	1636	1608	1319	1488	1597	1171										
15	679	982	1533	1364	924	1210	1465	850										
20	436	681	1349	1029	591	887	1278	571										
25	299	450	1110	695	398	596	1061	389										
30	213	300	881	447	280	394	860	267										
35	149	206	735	294	199	262	736	188										
40	104	145	604	200	136	179	594	134										
45	80.3	104	381	138	98.5	127	345	97.1										
50	63.5	75.0	142	98.8	77.0	91.3	121	71.2										
55	48.9	54.7	69.9	72.1	60.2	67.3	65.6	52.2										
60	31.5	38.5	46.8	52.2	45.0	48.6	45.0	35.9										
65	20.3	23.8	27.4	35.8	29.2	32.7	26.5	21.4										
70	11.2	13.6	17.9	21.4	17.6	19.0	17.4	12.1										
75	5.58	6.93	10.8	12.1	9.40	10.5	10.1	5.80										
80	2.20	2.77	5.18	5.83	4.40	4.75	4.53	2.16										
85	0.67	0.73	1.43	2.15	1.55	1.57	1.12	0.52										
90	0.00	0.00	0.06	0.52	0.31	0.24	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
115	0.01	0.02	0.03	0.00	0.00	0.01	0.03	0.01										
120	0.02	0.05	0.08	0.02	0.01	0.02	0.07	0.04										
125	0.06	0.09	0.14	0.04	0.04	0.05	0.13	0.08										
130	0.08	0.15	0.20	0.08	0.06	0.09	0.20	0.13										
135	0.13	0.23	0.29	0.13	0.11	0.15	0.28	0.21										
140	0.20	0.34	0.37	0.20	0.16	0.24	0.37	0.30										
145	0.30	0.47	0.47	0.31	0.25	0.36	0.48	0.43										
150	0.45	0.60	0.58	0.44	0.39	0.50	0.60	0.56										
155	0.63	0.73	0.69	0.58	0.56	0.66	0.70	0.67										
160	0.81	0.85	0.79	0.72	0.75	0.79	0.79	0.77										
165	0.94	0.94	0.87	0.85	0.91	0.90	0.88	0.85										
170	1.02	1.01	0.94	0.93	0.99	0.97	0.95	0.92										
175	1.04	1.09	0.99	0.98	1.04	1.01	1.00	0.97										
180	1.11	1.16	1.03	0.99	1.07	1.00	1.01	1.01										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: