


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.8V I:0.0850A P:10.30W PF:0.9970 Freq:60.00Hz Lamp Flux:1108.82x1 lm		
NAME: 1FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 107.65 lm/W			
MODEL		I _{max} (cd)	1557	S/MH(C0/180)	0.44
NOMINAL POWER(W)	10W	LOR(%)	100.0	S/MH(C90/270)	0.92
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	1108.8	η UP,DN(C0-180)	0.1,50.3
NOMINAL FLUX(lm)	1108.82	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.6
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

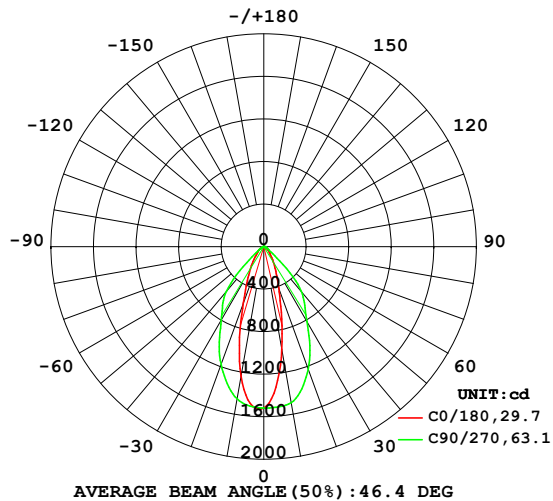

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

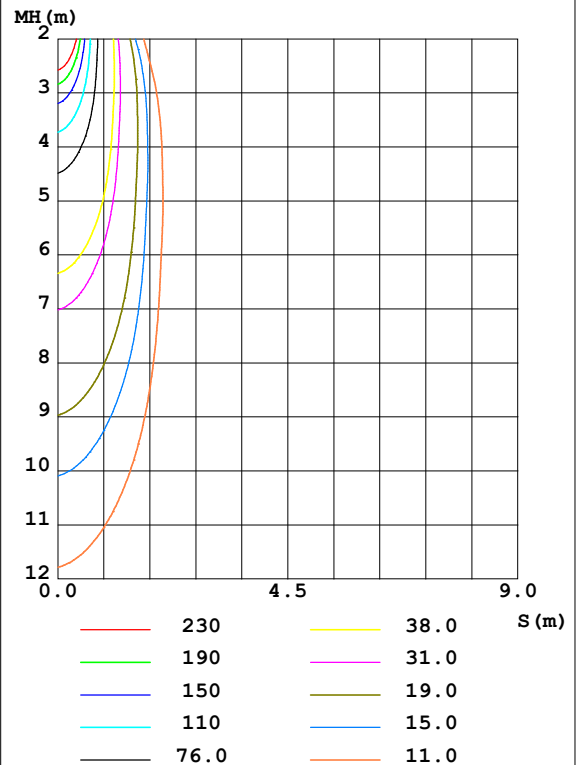

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	984.4	1209	1490	1474	1236	1372	1453	1097	0- 10	133.7	133.7	12.1,12.1
20	414.5	649.1	1223	974.1	564.5	840.7	1177	541.2	10- 20	288.9	422.7	38.1,38.1
30	200.6	282.8	814.3	422.1	265.1	372.0	800.6	251.2	20- 30	270.3	693.0	62.5,62.5
40	97.63	134.9	549.4	187.3	127.8	168.2	545.1	125.3	30- 40	202.3	895.3	80.7,80.7
50	59.75	70.40	133.6	92.59	72.14	85.83	115.5	66.72	40- 50	122.8	1018	91.8,91.8
60	29.66	36.16	43.85	48.82	42.25	45.61	42.19	33.65	50- 60	52.85	1071	96.6,96.6
70	10.56	12.77	16.79	20.08	16.52	17.83	16.22	11.28	60- 70	26.01	1097	98.9,98.9
80	2.081	2.599	4.851	5.440	4.109	4.440	4.247	2.025	70- 80	9.177	1106	99.8,99.8
90	0	0	0.0597	0.4782	0.2770	0.2181	0	0	80- 90	1.518	1108	99.9,99.9
100	0	0	0	0	0	0	0	0	90-100	0.0131	1108	99.9,99.9
110	0	0.0000	0.0120	0	0	0	0.0001	0	100-110	0.0001	1108	99.9,99.9
120	0.0312	0.0433	0.0942	0.0099	0.0097	0.0167	0.0799	0.0393	110-120	0.0160	1108	99.9,99.9
130	0.0794	0.1418	0.2369	0.0739	0.0530	0.0816	0.2034	0.1205	120-130	0.0685	1108	99.9,99.9
140	0.1994	0.3101	0.4304	0.2045	0.1397	0.2496	0.3921	0.2928	130-140	0.1485	1108	99.9,99.9
150	0.4591	0.5454	0.6457	0.4335	0.3276	0.5089	0.6098	0.5290	140-150	0.2396	1108	99.9,99.9
160	0.8009	0.7663	0.8441	0.7042	0.6693	0.7972	0.8081	0.7408	150-160	0.2928	1108	100,100
170	1.015	0.9080	0.9796	0.9060	0.9288	0.9774	0.9508	0.8910	160-170	0.2424	1109	100,100
180	0.9960	1.011	1.038	1.004	0.9840	1.006	1.011	1.014	170-180	0.0933	1109	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.8V I:0.0850A P:10.30W PF:0.9970 Freq:60.00Hz Lamp Flux:1108.82x1 lm		
NAME: 1FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

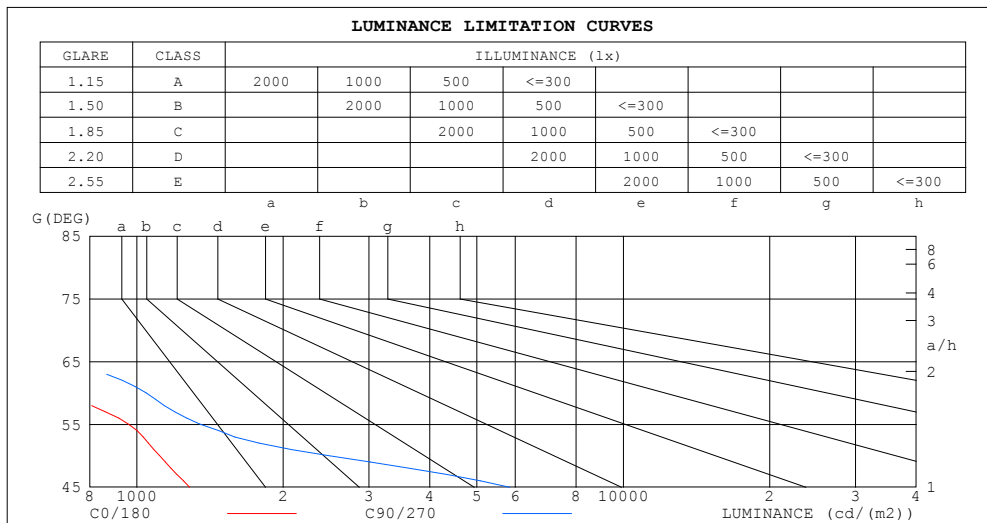


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.8V I:0.0850A P:10.30W PF:0.9970 Freq:60.00Hz Lamp Flux:1108.82x1 lm		
NAME: 1FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.10	1.07	1.05	1.08	1.05	1.03	1.04	1.02	.00	.00	.98	.97	.96	.95	.94	.92
2.0	1.01	.97	.93	.99	.95	.92	.96	.93	.90	.93	.90	.88	.90	.88	.86	.84
3.0	.94	.88	.84	.92	.87	.83	.89	.85	.82	.87	.83	.80	.85	.82	.79	.77
4.0	.87	.81	.76	.86	.80	.76	.83	.79	.75	.81	.77	.74	.79	.76	.73	.71
5.0	.81	.74	.70	.80	.74	.70	.78	.73	.69	.76	.72	.68	.75	.71	.68	.66
6.0	.76	.69	.64	.75	.69	.64	.73	.68	.64	.72	.67	.63	.70	.66	.63	.61
7.0	.71	.64	.60	.70	.64	.60	.69	.63	.59	.68	.63	.59	.66	.62	.59	.57
8.0	.67	.60	.56	.66	.60	.56	.65	.59	.55	.64	.59	.55	.63	.58	.55	.54
9.0	.63	.57	.52	.62	.56	.52	.61	.56	.52	.60	.55	.52	.59	.55	.52	.50
10.0	.59	.53	.49	.59	.53	.49	.58	.53	.49	.57	.52	.49	.57	.52	.49	.47

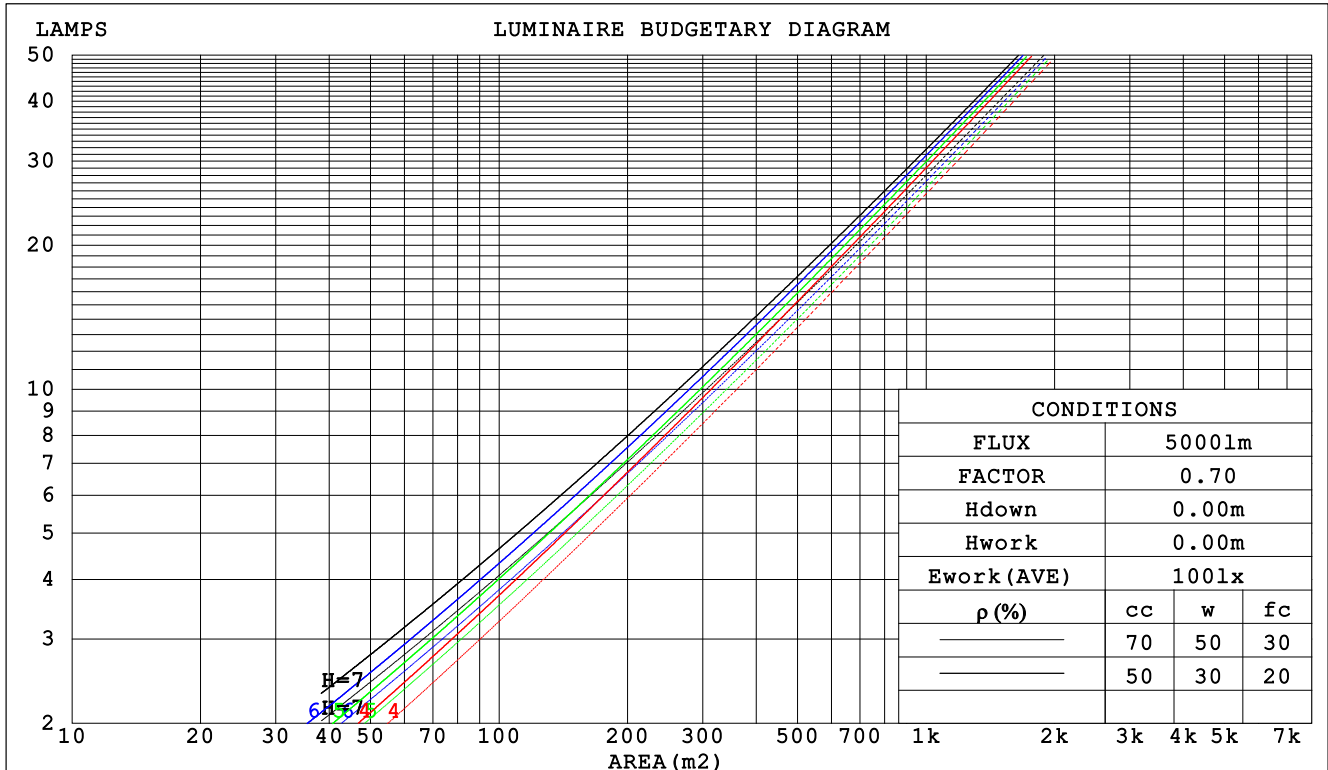

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.8V I:0.0850A P:10.30W PF:0.9970 Freq:60.00Hz Lamp Flux:1108.82x1 lm					
NAME: 1FT 2570			TYPE:4000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.196	.111	.035	.189	.108	.034	.176	.101	.032	.165	.095	.030	.154	.089	.029		
2.0	.188	.103	.032	.183	.101	.031	.172	.096	.030	.162	.091	.028	.153	.086	.027		
3.0	.179	.095	.029	.174	.093	.028	.165	.089	.027	.156	.086	.026	.148	.082	.025		
4.0	.170	.088	.026	.165	.086	.026	.157	.083	.025	.150	.080	.024	.143	.078	.024		
5.0	.161	.082	.024	.157	.081	.023	.150	.078	.023	.143	.076	.022	.137	.073	.022		
6.0	.152	.076	.022	.149	.075	.022	.143	.073	.021	.137	.071	.021	.131	.069	.021		
7.0	.145	.071	.020	.142	.071	.020	.136	.069	.020	.131	.067	.020	.126	.065	.019		
8.0	.138	.067	.019	.135	.066	.019	.130	.065	.019	.125	.063	.018	.121	.062	.018		
9.0	.131	.063	.018	.129	.063	.018	.124	.061	.017	.120	.060	.017	.116	.059	.017		
10.0	.125	.060	.017	.123	.059	.017	.119	.058	.016	.115	.057	.016	.112	.056	.016		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.112	.112	.112	.064	.064	.064	.020	.020	.020	
1.0	.173	.158	.144	.148	.136	.124	.101	.093	.086	.058	.054	.050	.019	.017	.016	
2.0	.159	.133	.111	.136	.115	.096	.093	.079	.067	.054	.046	.039	.017	.015	.013	
3.0	.148	.114	.088	.127	.099	.076	.087	.069	.053	.050	.040	.032	.016	.013	.010	
4.0	.138	.100	.071	.118	.086	.062	.081	.060	.043	.047	.035	.026	.015	.011	.008	
5.0	.130	.089	.058	.111	.077	.051	.077	.054	.036	.044	.031	.021	.014	.010	.007	
6.0	.122	.079	.049	.105	.069	.042	.072	.048	.030	.042	.028	.018	.014	.009	.006	
7.0	.116	.072	.041	.100	.062	.036	.069	.044	.026	.040	.026	.015	.013	.008	.005	
8.0	.110	.066	.036	.095	.057	.031	.065	.040	.022	.038	.024	.013	.012	.008	.004	
9.0	.105	.061	.031	.090	.053	.027	.062	.037	.019	.036	.022	.011	.012	.007	.004	
10.0	.100	.056	.027	.086	.049	.024	.060	.034	.017	.035	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.8V I:0.0850A P:10.30W PF:0.9970 Freq:60.00Hz Lamp Flux:1108.82x1 lm										
NAME: 1FT 2570					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	8.7	9.7	8.9	9.9	10.1	13.9	14.9	14.1	15.1	15.2
3H	8.9	9.9	9.2	10.1	10.3	13.9	14.8	14.1	15.0	15.2
4H	8.9	9.8	9.2	10.1	10.3	13.8	14.7	14.1	15.0	15.2
6H	8.9	9.7	9.2	10.0	10.2	13.8	14.6	14.1	14.9	15.1
8H	8.8	9.7	9.2	9.9	10.2	13.8	14.6	14.1	14.8	15.1
12H	8.8	9.6	9.1	9.9	10.1	13.7	14.5	14.0	14.8	15.1
4H 2H	8.9	9.8	9.2	10.0	10.3	13.7	14.6	14.0	14.8	15.1
3H	9.2	10.0	9.6	10.3	10.6	13.8	14.5	14.1	14.8	15.1
4H	9.3	10.0	9.6	10.3	10.6	13.8	14.5	14.1	14.8	15.1
6H	9.3	9.9	9.6	10.2	10.6	13.7	14.3	14.1	14.7	15.0
8H	9.2	9.8	9.6	10.2	10.5	13.7	14.3	14.1	14.6	15.0
12H	9.2	9.7	9.6	10.1	10.5	13.6	14.2	14.1	14.6	14.9
8H 4H	9.3	9.8	9.7	10.2	10.6	13.6	14.2	14.0	14.6	14.9
6H	9.2	9.7	9.7	10.1	10.5	13.6	14.1	14.0	14.5	14.9
8H	9.2	9.6	9.7	10.1	10.5	13.6	14.0	14.0	14.4	14.9
12H	9.2	9.5	9.6	10.0	10.5	13.5	13.9	14.0	14.3	14.8
12H 4H	9.2	9.7	9.6	10.1	10.5	13.6	14.1	14.0	14.5	14.9
6H	9.2	9.6	9.7	10.0	10.5	13.6	14.0	14.0	14.4	14.8
8H	9.2	9.5	9.7	10.0	10.5	13.5	13.9	14.0	14.3	14.8
Variations with the observer position at spacings:										
S = 1.0H	+ 1.0 / - 1.2					+ 3.6 / - 4.3				
1.5H	+ 0.7 / - 0.8					+ 4.7 / - 4.8				
2.0H	+ 1.3 / - 1.7					+ 6.9 / - 4.0				

CIE Pub.117 Corrected 1109 lm Total Lamp Luminous Flux.(8log(F/F0) = 0.4)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.8V I:0.0850A P:10.30W PF:0.9970 Freq:60.00Hz Lamp Flux:1108.82x1 lm		
NAME: 1FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	79	72	67	79	71	67	78	71	67	62
0.80	88	81	76	87	80	76	86	80	75	71
1.00	94	87	82	93	86	82	91	87	82	77
1.25	99	92	88	98	92	88	95	90	87	82
1.50	102	96	92	101	95	92	98	94	90	85
2.00	106	101	97	104	100	96	101	98	95	89
2.50	108	103	100	106	102	99	103	100	97	90
3.00	110	106	102	108	104	101	104	102	99	92
4.00	112	109	106	110	107	105	106	104	102	95
5.00	114	111	109	111	109	107	107	106	104	96
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.8V I:0.0850A P:10.30W PF:0.9970 Freq:60.00Hz Lamp Flux:1108.82x1 lm		
NAME: 1FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

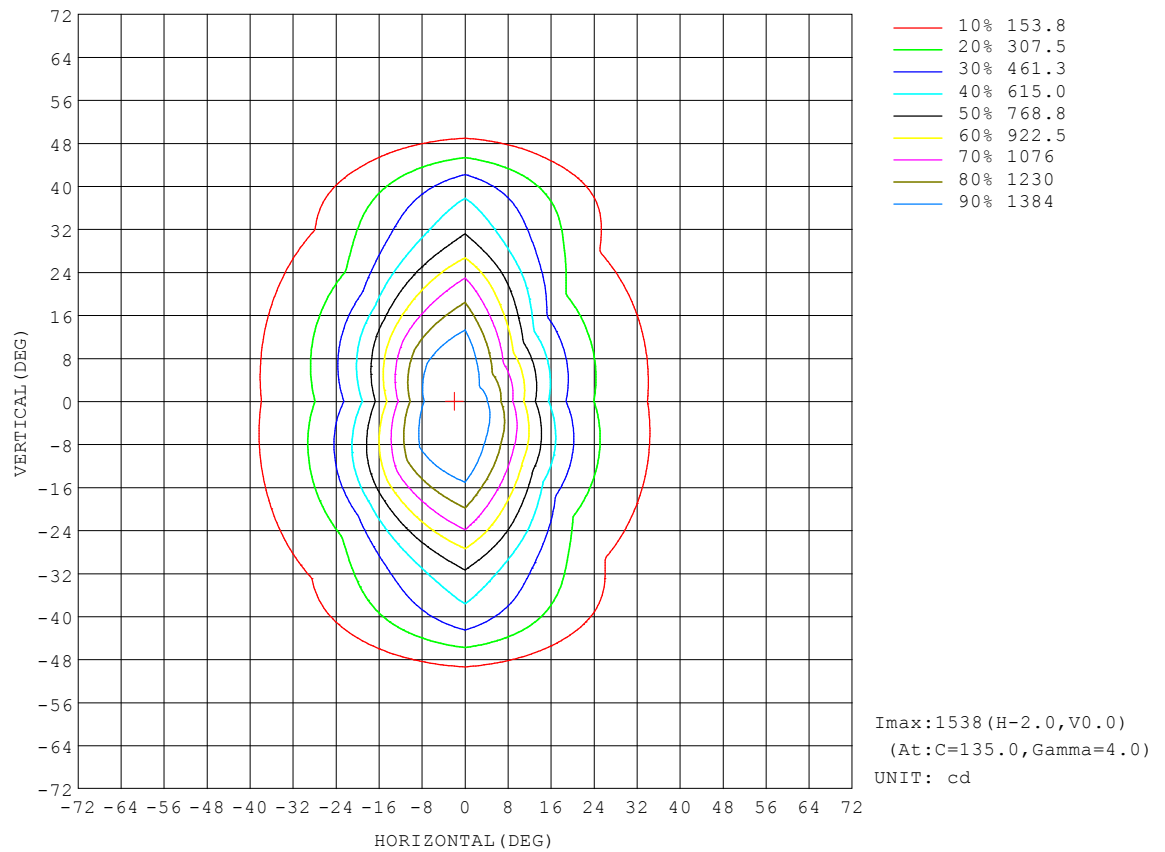


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.8V I:0.0850A P:10.30W PF:0.9970 Freq:60.00Hz Lamp Flux:1108.82x1 lm		
NAME: 1FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

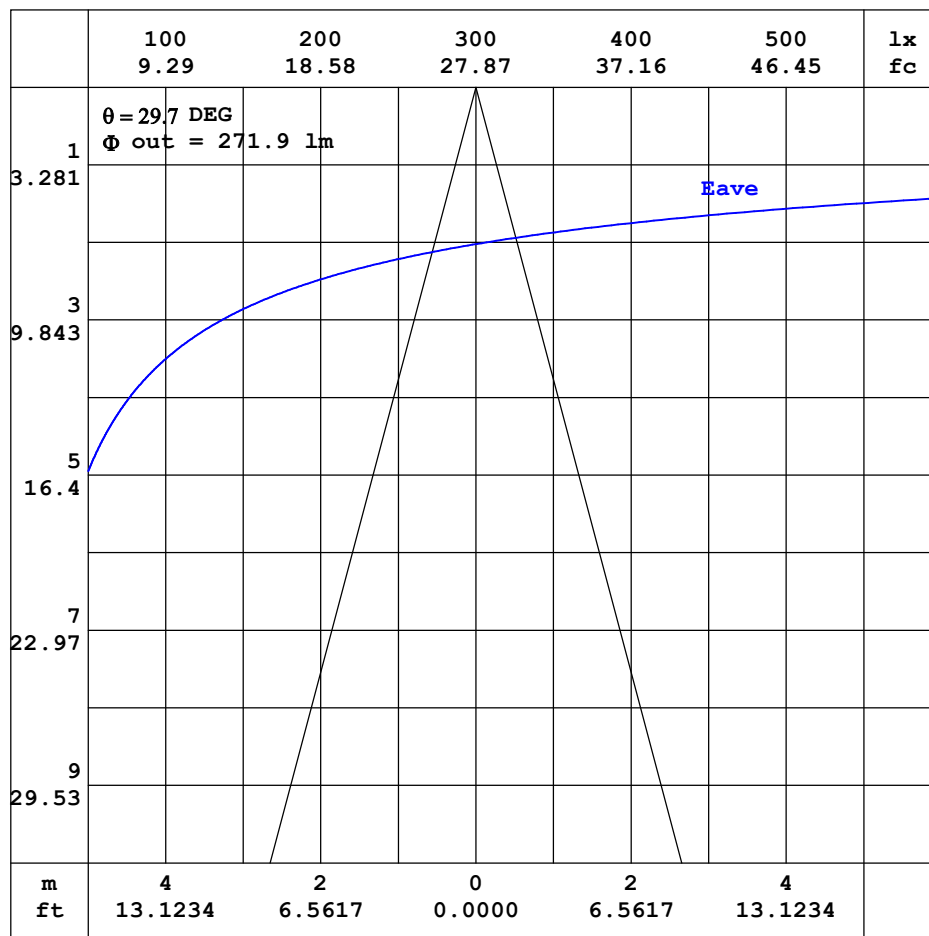


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.8V I:0.0850A P:10.30W PF:0.9970 Freq:60.00Hz Lamp Flux:1108.82x1 lm		
NAME: 1FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

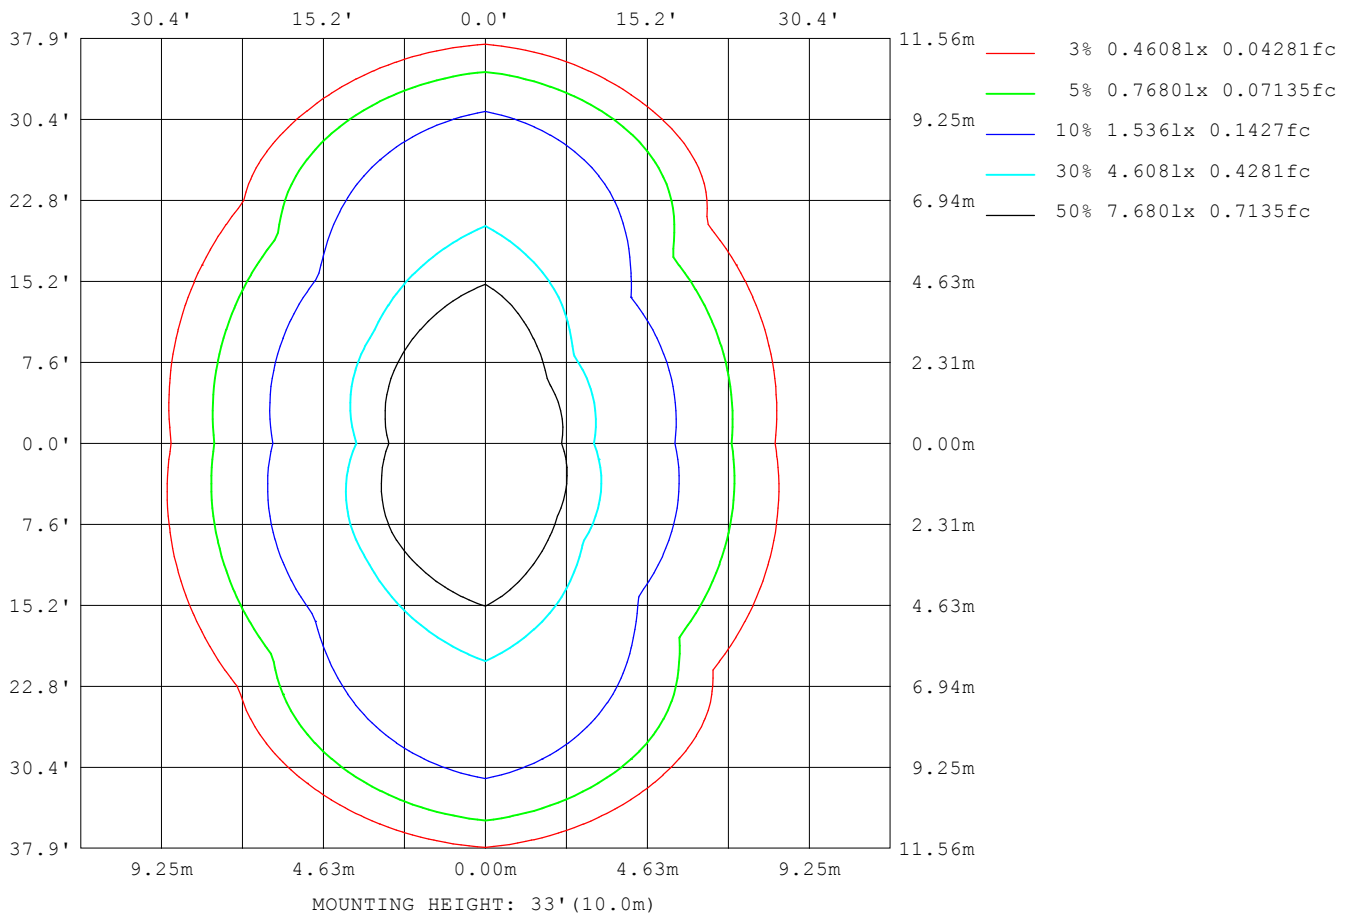

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.8V I:0.0850A P:10.30W PF:0.9970 Freq:60.00Hz Lamp Flux:1108.82x1 lm		
NAME: 1FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	654
L_0~180 (75) av	323
L_0~180 (85) av	141
L_90~270 (65) av	710
L_90~270 (75) av	451
L_90~270 (85) av	163
L_45 (65) av	750
L_45 (75) av	380
L_45 (85) av	158

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

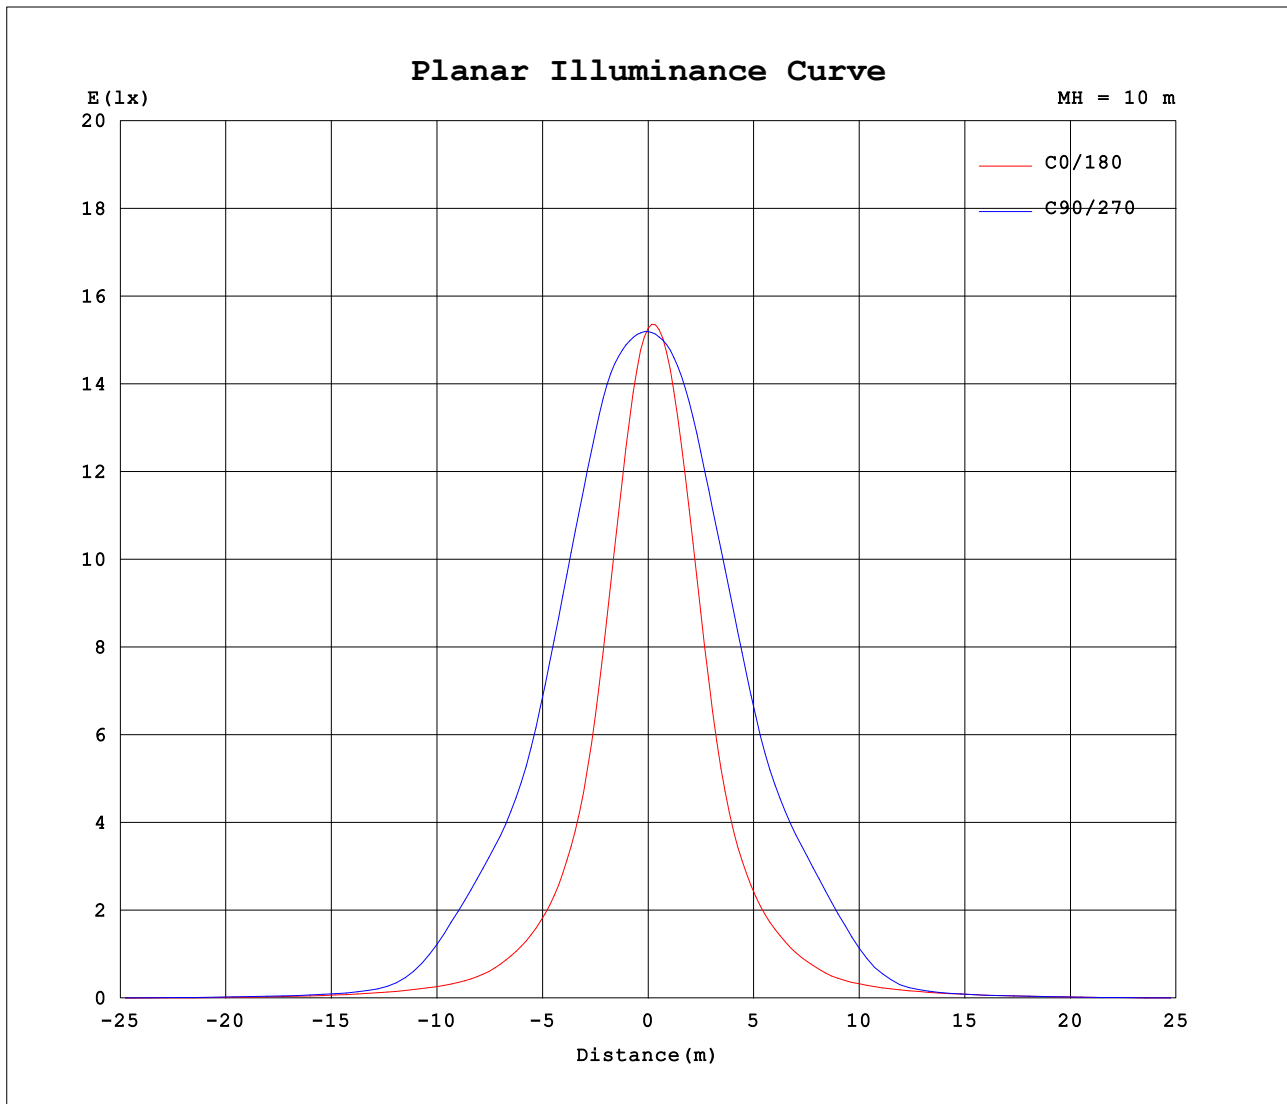

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.8V I:0.0850A P:10.30W PF:0.9970 Freq:60.00Hz Lamp Flux:1108.82x1 lm		
NAME: 1FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1518	1518	1518	1518	1518	1518	1518	1518										
5	1328	1418	1513	1555	1480	1502	1505	1355										
10	984	1209	1490	1474	1236	1372	1453	1097										
15	641	935	1384	1270	884	1132	1333	804										
20	415	649	1223	974	565	841	1177	541										
25	283	426	1027	661	380	566	992	366										
30	201	283	814	422	265	372	801	251										
35	141	193	673	276	188	246	677	176										
40	97.6	135	549	187	128	168	545	125										
45	75.8	97.2	347	129	92.5	119	323	90.8										
50	59.7	70.4	134	92.6	72.1	85.8	116	66.7										
55	46.0	51.4	65.0	67.5	56.5	63.1	61.7	48.8										
60	29.7	36.2	43.8	48.8	42.3	45.6	42.2	33.7										
65	19.1	22.4	25.6	33.5	27.4	30.6	24.8	20.0										
70	10.6	12.8	16.8	20.1	16.5	17.8	16.2	11.3										
75	5.25	6.49	10.1	11.3	8.81	9.79	9.47	5.42										
80	2.08	2.60	4.85	5.44	4.11	4.44	4.25	2.03										
85	0.62	0.68	1.32	2.00	1.45	1.47	1.06	0.47										
90	0.00	0.00	0.06	0.48	0.28	0.22	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00										
115	0.00	0.02	0.05	0.00	0.00	0.00	0.03	0.00										
120	0.03	0.04	0.09	0.01	0.01	0.02	0.08	0.04										
125	0.04	0.08	0.16	0.03	0.02	0.04	0.14	0.07										
130	0.08	0.14	0.24	0.07	0.05	0.08	0.20	0.12										
135	0.13	0.22	0.33	0.12	0.08	0.15	0.29	0.19										
140	0.20	0.31	0.43	0.20	0.14	0.25	0.39	0.29										
145	0.31	0.43	0.54	0.30	0.21	0.36	0.50	0.41										
150	0.46	0.55	0.65	0.43	0.33	0.51	0.61	0.53										
155	0.63	0.67	0.76	0.57	0.50	0.66	0.71	0.64										
160	0.80	0.77	0.84	0.70	0.67	0.80	0.81	0.74										
165	0.94	0.85	0.92	0.81	0.82	0.91	0.89	0.82										
170	1.02	0.91	0.98	0.91	0.93	0.98	0.95	0.89										
175	1.05	0.97	1.01	0.97	0.98	1.00	0.98	0.96										
180	1.00	1.01	1.04	1.00	0.98	1.01	1.01	1.01										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: