


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 10W 偏光透镜款	DIM.: 280X45MM	SERIAL No.:
MFR.: EVERFINE	SUR.:280*0.045	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 91.11 lm/W
MODEL	1FT-偏光透镜	Imax(cd)	953.4	S/MH(C0/180)	1.46	
NOMINAL POWER(W)	10W	LOR(%)	100.0	S/MH(C90/270)	1.14	
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	965.73	η UP,DN(C0-180)	0.0,55.3	
NOMINAL FLUX(lm)	965.734	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,44.6	
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.75	
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.75	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

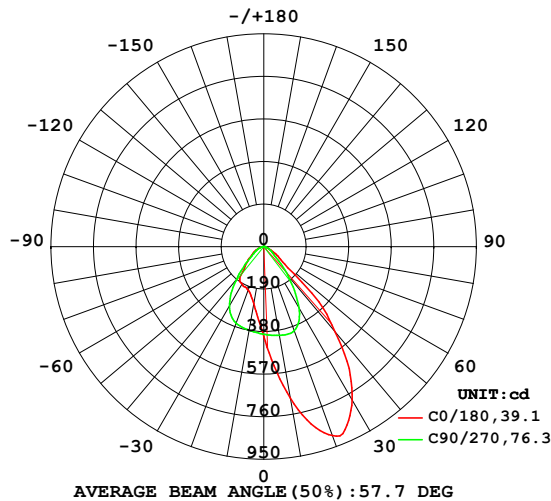

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

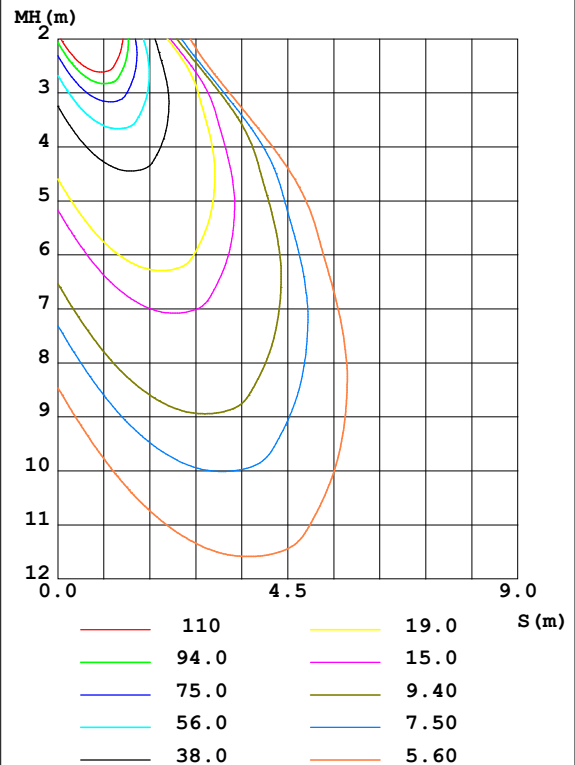

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	687.5	589.5	402.7	292.9	259.7	277.0	379.4	584.4	0- 10	39.76	39.76	4.12,4.12
20	898.1	832.9	399.8	230.3	206.8	219.8	364.0	795.5	10- 20	132.8	172.5	17.9,17.9
30	789.8	940.5	315.0	190.8	193.2	194.5	307.2	932.6	20- 30	230.3	402.9	41.7,41.7
40	495.3	654.5	167.5	150.0	148.4	166.8	188.8	712.0	30- 40	261.0	663.9	68.7,68.7
50	121.9	254.6	64.63	91.97	89.54	98.98	81.34	302.8	40- 50	180.9	844.8	87.5,87.5
60	49.89	46.10	36.96	44.59	51.49	51.53	44.13	51.74	50- 60	76.06	920.8	95.4,95.4
70	17.66	14.76	15.76	20.06	24.83	24.13	21.50	16.89	60- 70	31.57	952.4	98.6,98.6
80	3.615	2.688	2.907	3.945	4.903	5.243	5.348	3.455	70- 80	11.13	963.5	99.8,99.8
90	0.0011	0.0917	0	0.1426	0	0.0375	0	0.0783	80- 90	1.424	965.0	99.9,99.9
100	0	0	0	0.0315	0	0	0	0.0121	90-100	0.0160	965.0	99.9,99.9
110	0	0	0	0.0146	0	0.0024	0	0.0049	100-110	0.0036	965.0	99.9,99.9
120	0.0193	0.0242	0.0290	0.1163	0.0801	0.0943	0.0098	0.0242	110-120	0.0213	965.0	99.9,99.9
130	0.0629	0.0678	0.1017	0.2642	0.2594	0.2300	0.0800	0.0653	120-130	0.0842	965.1	99.9,99.9
140	0.1064	0.1164	0.1888	0.3755	0.4556	0.3608	0.1721	0.1138	130-140	0.1465	965.2	99.9,99.9
150	0.1453	0.1817	0.2639	0.4602	0.5887	0.4479	0.2568	0.1840	140-150	0.1733	965.4	100,100
160	0.2227	0.2689	0.3389	0.5304	0.6467	0.5158	0.3319	0.2736	150-160	0.1635	965.6	100,100
170	0.3341	0.3609	0.3899	0.5206	0.6199	0.5280	0.3996	0.3704	160-170	0.1182	965.7	100,100
180	0.4892	0.4359	0.4020	0.4456	0.4844	0.4238	0.4044	0.4432	170-180	0.0423	965.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 10W 偏光透镜款	DIM.: 280X45MM	SERIAL No.:
MFR.: EVERFINE	SUR.:280*0.045	Shielding Angle:

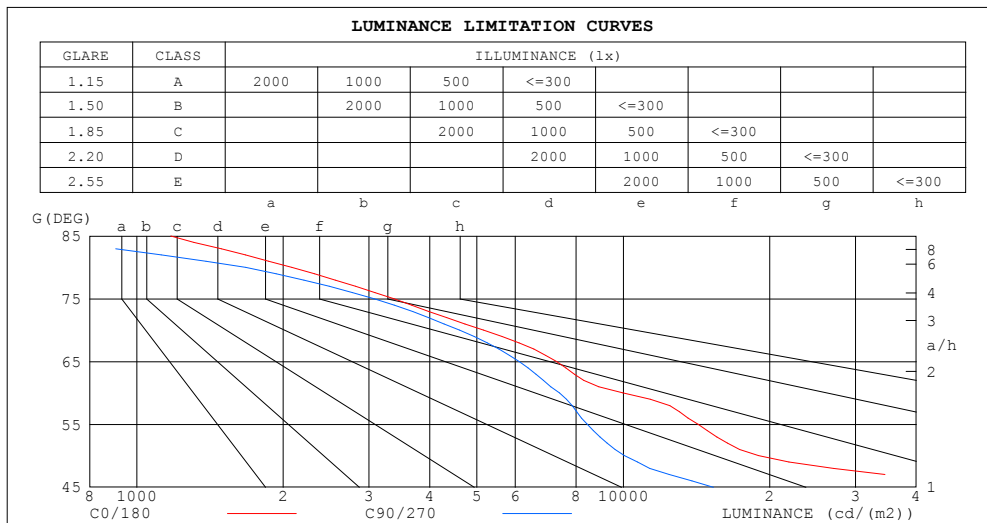

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1175	529
80	2082	1674
75	3380	3073
70	5163	4609
65	7286	6106
60	9978	7392
55	14233	8428
50	18962	10054
45	49288	15310


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 10W 偏光透镜款	DIM.: 280X45MM	SERIAL No.:
MFR.: EVERFINE	SUR.:280*0.045	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.08	1.05	1.02	1.06	1.03	1.01	1.02	.00	.98	.98	.96	.95	.95	.93	.92	.90
2.0	.98	.93	.88	.96	.91	.87	.93	.89	.85	.90	.86	.83	.87	.84	.82	.80
3.0	.89	.82	.77	.87	.81	.76	.84	.79	.75	.82	.78	.74	.79	.76	.73	.71
4.0	.80	.73	.68	.79	.73	.67	.77	.71	.67	.75	.70	.66	.73	.68	.65	.63
5.0	.73	.66	.60	.72	.65	.60	.70	.64	.59	.68	.63	.59	.67	.62	.58	.56
6.0	.67	.59	.54	.66	.59	.54	.64	.58	.53	.63	.57	.53	.61	.56	.52	.51
7.0	.61	.54	.49	.61	.53	.48	.59	.53	.48	.58	.52	.48	.57	.51	.47	.46
8.0	.56	.49	.44	.56	.49	.44	.55	.48	.44	.53	.48	.43	.52	.47	.43	.41
9.0	.52	.45	.40	.52	.45	.40	.51	.44	.40	.50	.44	.39	.49	.43	.39	.38
10.0	.48	.41	.36	.48	.41	.36	.47	.41	.36	.46	.40	.36	.45	.40	.36	.34

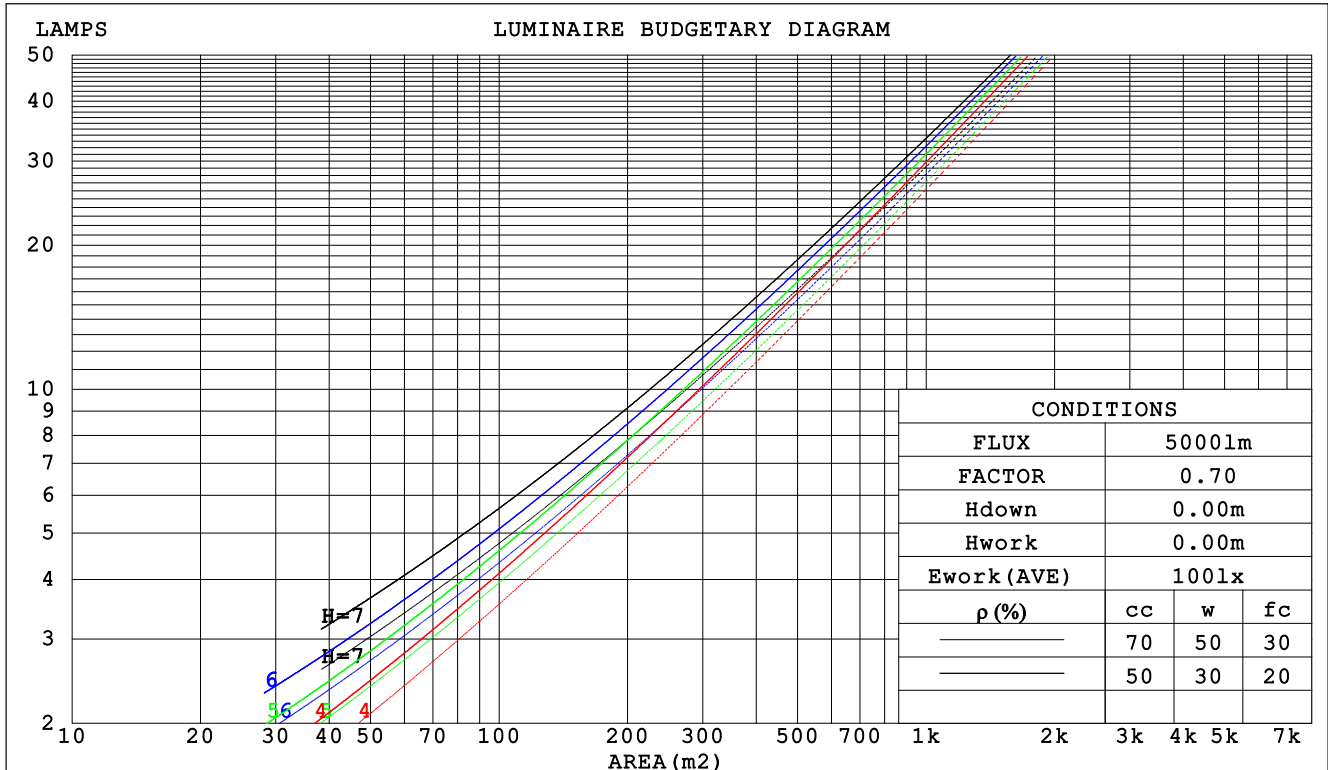

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 10W 偏光透镜款	DIM.: 280X45MM	SERIAL No.:
MFR.: EVERFINE	SUR.:280*0.045	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.225	.128	.041	.219	.125	.040	.206	.118	.038	.194	.112	.036	.183	.106	.034		
2.0	.220	.121	.037	.214	.118	.036	.203	.113	.035	.193	.108	.034	.183	.104	.033		
3.0	.210	.112	.034	.205	.110	.033	.196	.106	.032	.187	.102	.031	.178	.099	.031		
4.0	.200	.104	.031	.196	.102	.030	.187	.099	.030	.179	.096	.029	.172	.093	.028		
5.0	.190	.097	.028	.186	.095	.028	.178	.093	.027	.171	.090	.027	.165	.088	.026		
6.0	.180	.090	.026	.176	.089	.026	.170	.087	.025	.163	.085	.025	.157	.083	.025		
7.0	.171	.084	.024	.167	.083	.024	.161	.082	.024	.156	.080	.023	.151	.078	.023		
8.0	.162	.079	.022	.159	.078	.022	.154	.077	.022	.149	.075	.022	.144	.074	.022		
9.0	.154	.074	.021	.151	.074	.021	.147	.072	.021	.142	.071	.020	.138	.070	.020		
10.0	.146	.070	.019	.144	.070	.019	.140	.068	.019	.136	.067	.019	.132	.066	.019		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.175	.157	.142	.150	.135	.122	.102	.093	.084	.059	.054	.049	.019	.017	.016	
2.0	.163	.133	.107	.140	.114	.093	.096	.079	.065	.055	.046	.038	.018	.015	.012	
3.0	.154	.115	.083	.132	.099	.072	.090	.069	.051	.052	.040	.030	.017	.013	.010	
4.0	.145	.101	.066	.125	.087	.058	.086	.061	.041	.050	.035	.024	.016	.012	.008	
5.0	.138	.090	.054	.119	.078	.047	.082	.054	.033	.047	.032	.020	.015	.010	.006	
6.0	.131	.081	.045	.113	.070	.039	.078	.049	.027	.045	.029	.016	.015	.009	.005	
7.0	.125	.074	.038	.108	.064	.033	.075	.045	.023	.043	.026	.014	.014	.009	.005	
8.0	.120	.068	.032	.103	.059	.028	.071	.041	.020	.042	.024	.012	.013	.008	.004	
9.0	.115	.063	.028	.099	.055	.025	.068	.038	.017	.040	.023	.010	.013	.007	.003	
10.0	.110	.059	.025	.095	.051	.022	.066	.036	.015	.038	.021	.009	.012	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: COVELIGHT					TYPE:4000K			WEIGHT:			
SPEC.:1FT 10W 偏光透镜款					DIM.: 280X45MM			SERIAL No.:			
MFR.: EVERFINE					SUR.:280*0.045			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	24.8	26.0	25.0	26.2	26.4	22.9	24.2	23.2	24.4	24.6
	3H	24.7	25.8	25.0	26.0	26.3	22.9	24.0	23.2	24.2	24.5
	4H	24.6	25.7	24.9	25.9	26.2	22.8	23.9	23.1	24.1	24.4
	6H	24.5	25.5	24.8	25.8	26.1	22.7	23.7	23.0	24.0	24.3
	8H	24.5	25.5	24.8	25.7	26.0	22.7	23.7	23.0	23.9	24.2
	12H	24.4	25.4	24.8	25.6	25.9	22.6	23.6	23.0	23.8	24.1
4H	2H	24.6	25.7	24.9	25.9	26.1	22.8	23.9	23.1	24.1	24.4
	3H	24.5	25.4	24.9	25.7	26.0	22.8	23.7	23.1	24.0	24.3
	4H	24.5	25.3	24.8	25.6	25.9	22.7	23.6	23.1	23.9	24.2
	6H	24.4	25.1	24.8	25.5	25.8	22.7	23.4	23.1	23.8	24.1
	8H	24.3	25.0	24.7	25.4	25.8	22.6	23.3	23.0	23.7	24.1
	12H	24.3	24.9	24.7	25.3	25.7	22.6	23.2	23.0	23.6	24.0
8H	4H	24.3	25.0	24.7	25.4	25.8	22.6	23.3	23.0	23.7	24.0
	6H	24.3	24.8	24.7	25.2	25.6	22.6	23.1	23.0	23.5	23.9
	8H	24.2	24.7	24.7	25.1	25.6	22.5	23.0	23.0	23.4	23.9
	12H	24.2	24.6	24.7	25.0	25.5	22.5	22.9	23.0	23.4	23.8
12H	4H	24.3	24.9	24.7	25.3	25.7	22.6	23.2	23.0	23.6	24.0
	6H	24.2	24.7	24.7	25.1	25.6	22.5	23.0	23.0	23.4	23.9
	8H	24.2	24.6	24.7	25.0	25.5	22.5	22.9	23.0	23.4	23.8
Variations with the observer position at spacings:											
S = 1.0H		+ 2.5 / - 5.9					+ 3.3 / - 5.5				
1.5H		+ 2.4 / - 5.2					+ 2.8 / - 6.0				
2.0H		+ 5.0 / - 5.6					+ 3.9 / - 4.2				

CIE Pub.117 Corrected 965.7 lm Total Lamp Luminous Flux.(8log(F/F0) = -0.1)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 10W 偏光透镜款	DIM.: 280X45MM	SERIAL No.:
MFR.: EVERFINE	SUR.:280*0.045	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) k(RI) x RCR = 5									
k = 0.60	72	63	57	71	62	57	70	62	57	52
0.80	81	73	67	80	72	67	79	72	67	61
1.00	89	81	75	88	80	75	86	81	75	69
1.25	95	87	82	93	87	82	91	85	81	75
1.50	99	92	87	97	91	86	95	89	85	80
2.00	103	98	93	102	96	92	99	94	91	85
2.50	106	101	96	104	99	95	101	97	94	87
3.00	108	103	100	106	102	99	103	99	96	89
4.00	111	107	104	109	105	102	105	102	100	92
5.00	112	109	106	110	107	105	106	104	102	93
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNOM = 1.25										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2023-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 10W 偏光透镜款	DIM.: 280X45MM	SERIAL No.:
MFR.: EVERFINE	SUR.:280*0.045	Shielding Angle:

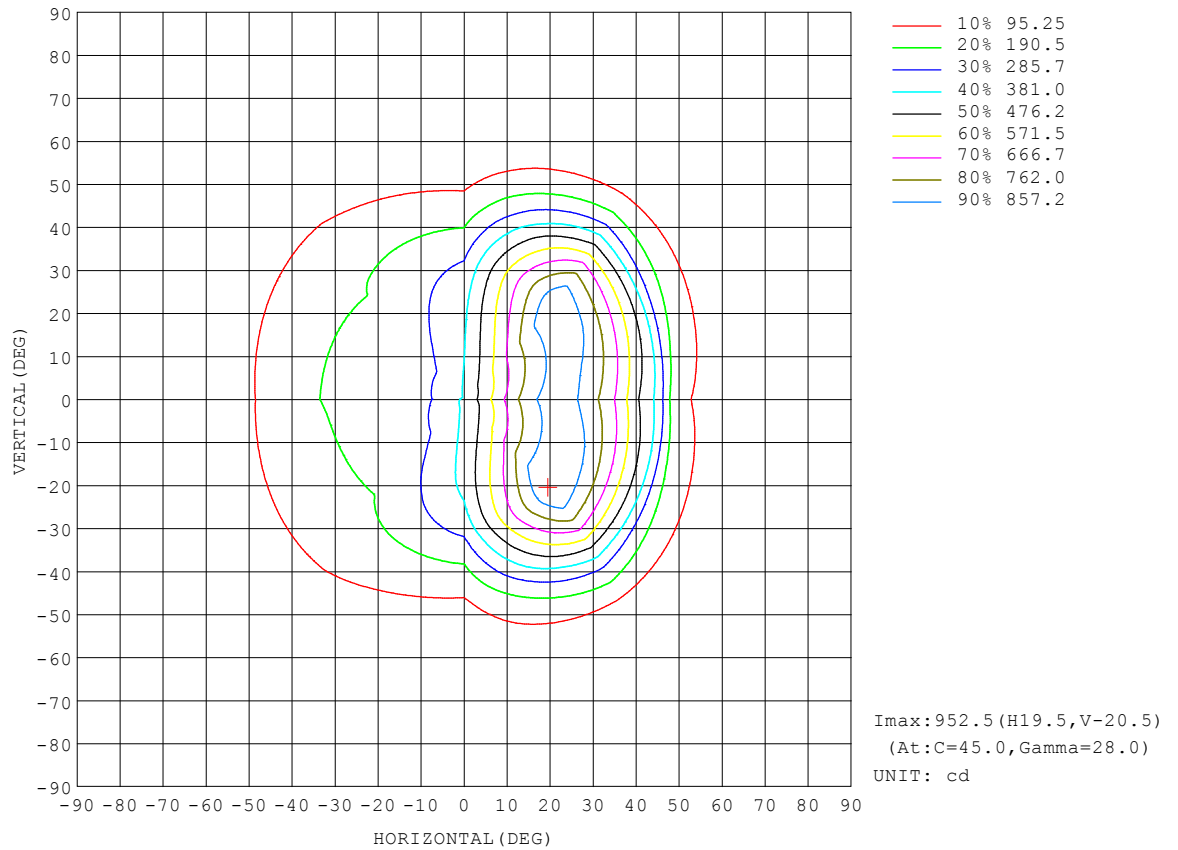


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

AAI CURVES

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 10W 偏光透镜款	DIM.: 280X45MM	SERIAL No.:
MFR.: EVERFINE	SUR.:280*0.045	Shielding Angle:

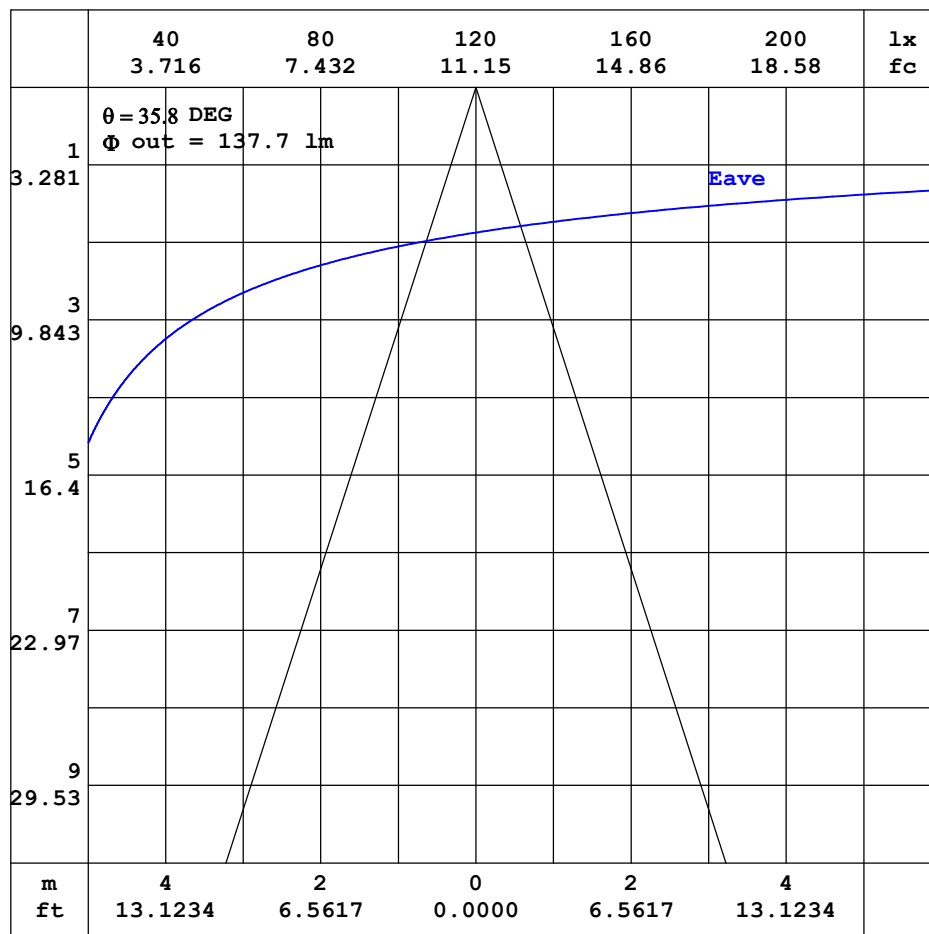


Note: The Curves indicate the illuminated area and the average illuminance when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 10W 偏光透镜款	DIM.: 280X45MM	SERIAL No.:
MFR.: EVERFINE	SUR.:280*0.045	Shielding Angle:

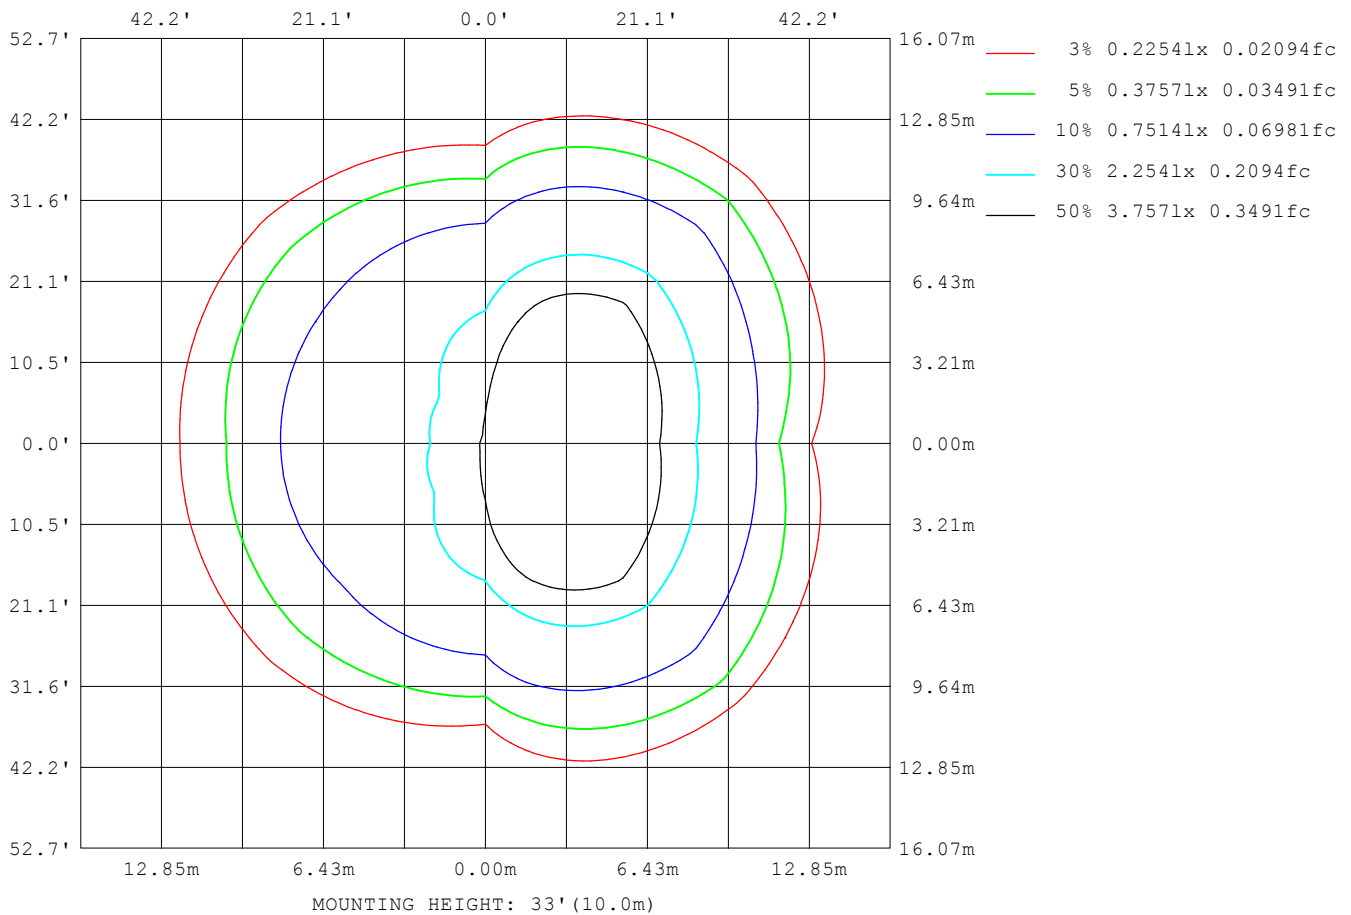

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 10W 偏光透镜款	DIM.: 280X45MM	SERIAL No.:
MFR.: EVERFINE	SUR.:280*0.045	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	8243
L_0~180 (75) av	4174
L_0~180 (85) av	1142
L_90~270 (65) av	6866
L_90~270 (75) av	3829
L_90~270 (85) av	1014
L_45 (65) av	7369
L_45 (75) av	3712
L_45 (85) av	1074

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

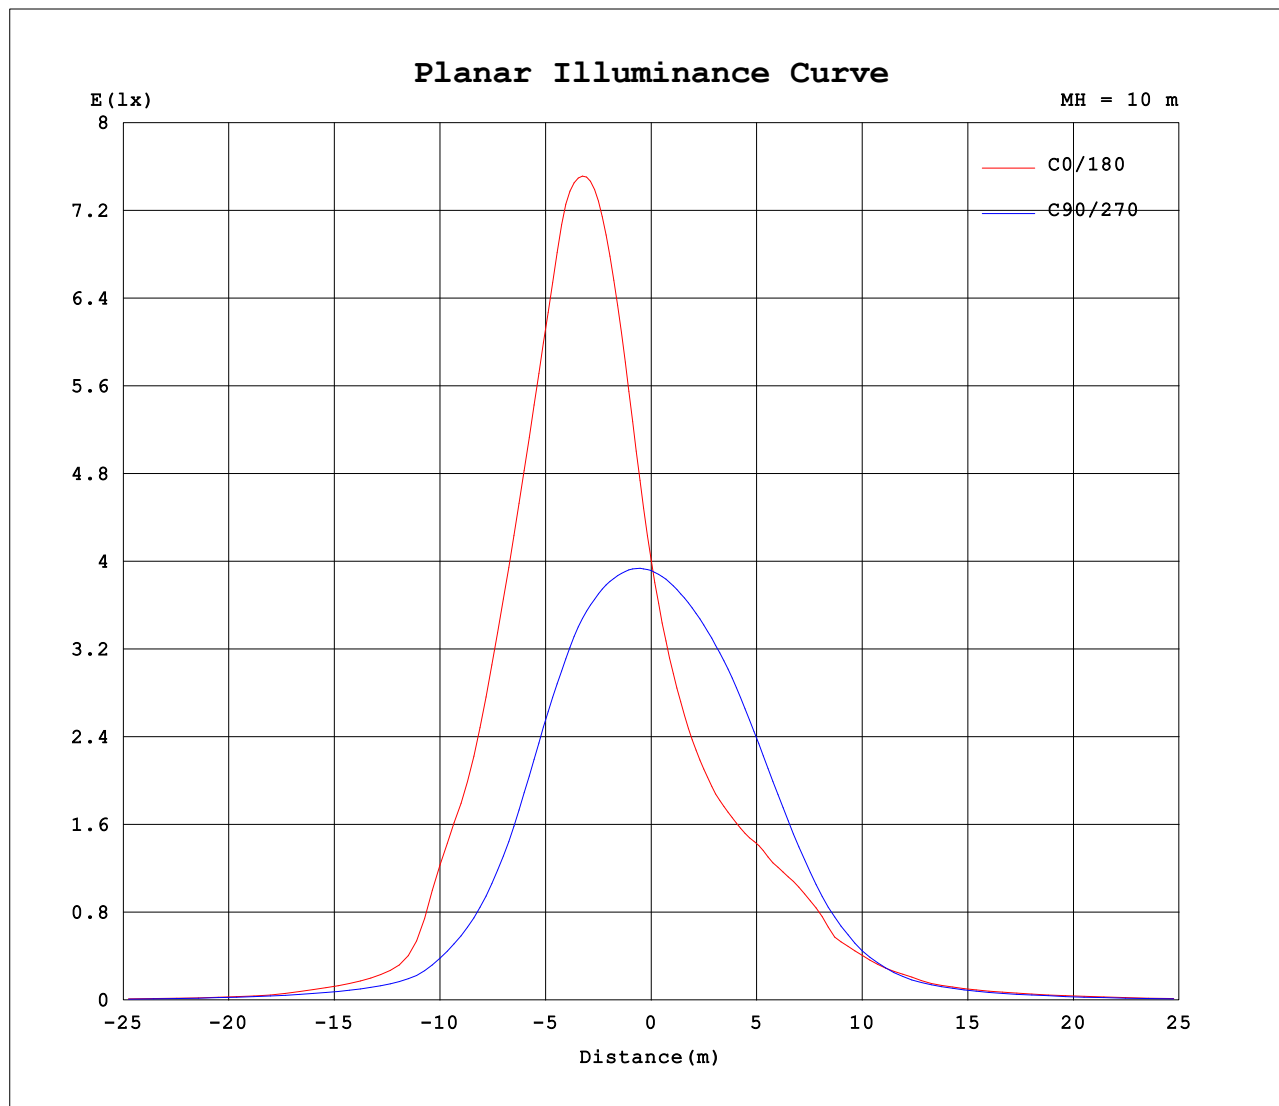

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 10W 偏光透镜款	DIM.: 280X45MM	SERIAL No.:
MFR.: EVERFINE	SUR.:280*0.045	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	401	388	392	404	401	388	392	404										
5	534	478	398	340	316	322	385	486										
10	688	590	403	293	260	277	379	584										
15	820	712	406	257	226	244	373	690										
20	898	833	400	230	207	220	364	795										
25	879	927	371	207	199	205	343	886										
30	790	941	315	191	193	194	307	933										
35	666	827	239	173	188	185	255	858										
40	495	655	167	150	148	167	189	712										
45	349	441	108	123	116	143	127	505										
50	122	255	64.6	92.0	89.5	99.0	81.3	303										
55	81.6	125	48.3	62.9	64.1	72.4	57.4	152										
60	49.9	46.1	37.0	44.6	51.5	51.5	44.1	51.7										
65	30.8	26.3	25.8	31.5	38.9	36.8	32.2	30.1										
70	17.7	14.8	15.8	20.1	24.8	24.1	21.5	16.9										
75	8.75	7.02	7.95	10.2	12.9	12.9	11.9	8.35										
80	3.61	2.69	2.91	3.95	4.90	5.24	5.35	3.45										
85	1.02	0.66	0.46	0.85	0.97	1.32	1.31	0.91										
90	0.00	0.09	0.00	0.14	0.00	0.04	0.00	0.08										
95	0.00	0.00	0.00	0.05	0.00	0.00	0.00	0.03										
100	0.00	0.00	0.00	0.03	0.00	0.00	0.00	0.01										
105	0.00	0.00	0.00	0.02	0.00	0.00	0.00	0.01										
110	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00										
115	0.00	0.02	0.00	0.06	0.03	0.04	0.00	0.01										
120	0.02	0.02	0.03	0.12	0.08	0.09	0.01	0.02										
125	0.04	0.05	0.06	0.19	0.16	0.16	0.04	0.05										
130	0.06	0.07	0.10	0.26	0.26	0.23	0.08	0.07										
135	0.08	0.09	0.15	0.33	0.36	0.31	0.13	0.08										
140	0.11	0.12	0.19	0.38	0.46	0.36	0.17	0.11										
145	0.12	0.15	0.23	0.42	0.54	0.41	0.22	0.15										
150	0.15	0.18	0.26	0.46	0.59	0.45	0.26	0.18										
155	0.18	0.22	0.30	0.50	0.63	0.49	0.29	0.23										
160	0.22	0.27	0.34	0.53	0.65	0.52	0.33	0.27										
165	0.28	0.31	0.36	0.53	0.65	0.54	0.37	0.33										
170	0.33	0.36	0.39	0.52	0.62	0.53	0.40	0.37										
175	0.41	0.39	0.41	0.50	0.57	0.48	0.41	0.41										
180	0.49	0.44	0.40	0.45	0.48	0.42	0.40	0.44										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: