


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.3V I:0.0840A P:10.10W PF:0.9970 Freq:60.00Hz Lamp Flux:1215.49x1 lm		
NAME: 1FT PC罩	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.305*0.056	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 120.35 lm/W			
MODEL		I _{max} (cd)	444.8	S/MH(C0/180)	1.22
NOMINAL POWER(W)	10W	LOR(%)	100.0	S/MH(C90/270)	1.28
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	1215.5	η UP,DN(C0-180)	0.4,48.3
NOMINAL FLUX(lm)	1215.49	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.4,50.8
LAMPS INSIDE	1	η up(%)	0.8	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	99.2	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

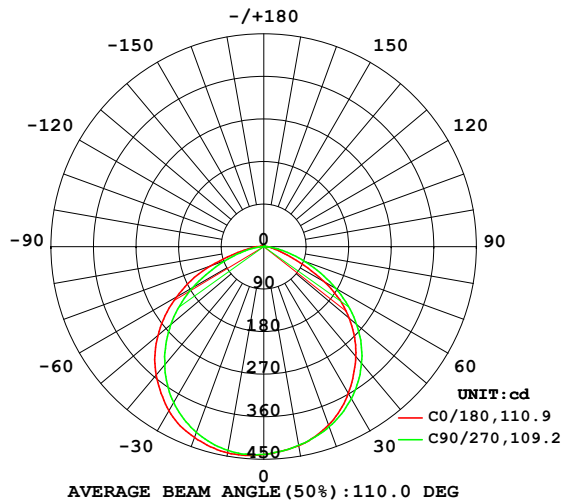

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

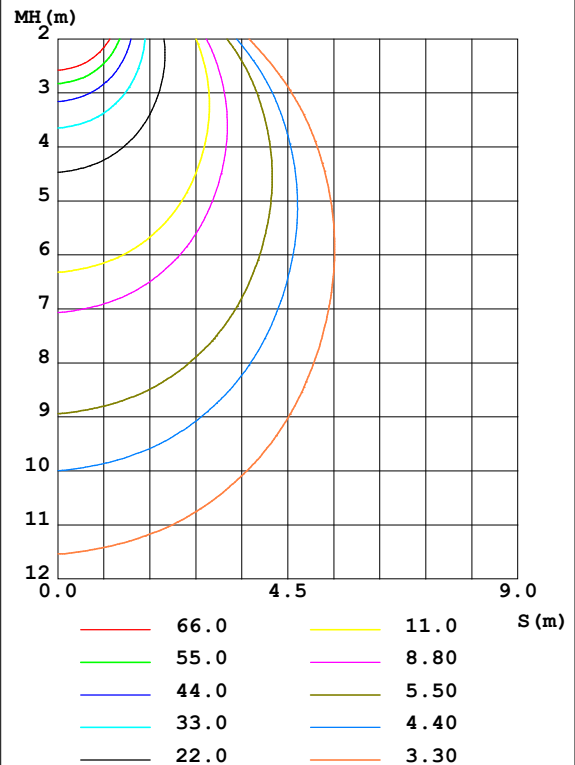

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	427.4	423.5	426.5	435.9	443.1	444.2	437.5	431.1	0- 10	41.68	41.68	3.43,3.43
20	401.3	398.1	405.2	419.8	429.2	431.5	417.9	407.3	10- 20	120.2	161.9	13.3,13.3
30	357.9	359.7	371.1	391.8	401.2	402.0	381.3	365.1	20- 30	183.5	345.4	28.4,28.4
40	303.1	304.2	321.9	349.4	354.4	354.2	326.3	304.6	30- 40	221.9	567.3	46.7,46.7
50	236.1	235.0	257.0	286.2	292.1	284.0	257.4	231.4	40- 50	227.5	794.9	65.4,65.4
60	146.4	157.8	175.3	209.8	213.2	200.6	173.9	148.3	50- 60	196.9	991.8	81.6,81.6
70	53.12	76.47	92.14	124.2	119.6	114.2	87.30	66.15	60- 70	132.4	1124	92.5,92.5
80	17.71	25.13	31.15	52.93	39.87	46.06	25.70	20.82	70- 80	62.01	1186	97.6,97.6
90	5.813	5.094	0.5232	15.74	13.53	12.50	0.0194	4.154	80- 90	18.98	1205	99.2,99.2
100	2.254	1.720	0.1015	3.266	4.486	2.593	0.0484	1.843	90-100	4.228	1209	99.5,99.5
110	1.766	1.408	0.1764	2.117	2.347	2.008	0.1283	1.475	100-110	1.745	1211	99.6,99.6
120	1.450	1.183	0.2828	1.729	1.886	1.611	0.2131	1.201	110-120	1.302	1213	99.8,99.8
130	1.217	0.9481	0.4714	1.392	1.188	1.258	0.4042	0.8974	120-130	0.9581	1213	99.8,99.8
140	1.001	0.8659	0.6745	1.137	1.038	1.086	0.5491	0.8124	130-140	0.7237	1214	99.9,99.9
150	0.9480	0.8660	0.7546	0.9771	1.016	0.9362	0.6386	0.8244	140-150	0.5496	1215	99.9,99.9
160	0.9794	0.9047	0.7595	1.077	1.062	1.108	0.6845	0.9335	150-160	0.4138	1215	100,100
170	0.8785	0.6481	0.7256	1.137	1.193	1.033	0.6724	0.6114	160-170	0.2600	1215	100,100
180	0.5116	0.6555	0.7764	0.8172	0.5140	0.6604	0.7812	0.8148	170-180	0.0746	1215	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.3V I:0.0840A P:10.10W PF:0.9970 Freq:60.00Hz Lamp Flux:1215.49x1 lm		
NAME: 1FT PC罩	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.305*0.056	Shielding Angle:

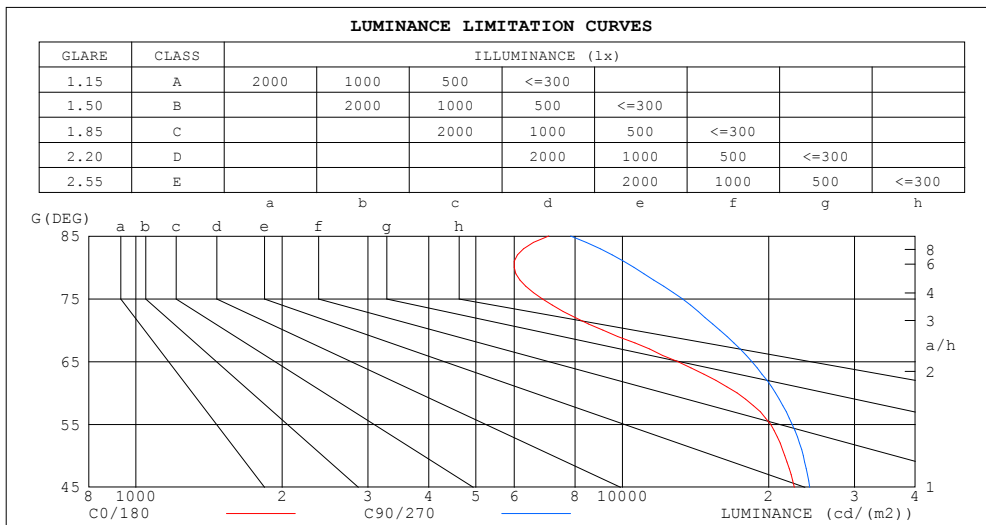

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	7061	7834
80	5993	10564
75	6843	13286
70	9125	15867
65	12981	18453
60	17204	20652
55	20171	22340
50	21584	23551
45	22592	24285


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.3V I:0.0840A P:10.10W PF:0.9970 Freq:60.00Hz Lamp Flux:1215.49x1 lm		
NAME: 1FT PC罩	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.305*0.056	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.05	1.00	.97	1.02	.98	.95	.98	.95	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.92	.85	.80	.90	.84	.78	.86	.81	.77	.83	.78	.75	.79	.76	.73	.71
3.0	.81	.73	.66	.79	.72	.66	.76	.70	.65	.73	.68	.63	.71	.66	.62	.60
4.0	.72	.63	.57	.70	.62	.56	.68	.61	.55	.65	.59	.54	.63	.58	.54	.51
5.0	.64	.55	.49	.63	.55	.48	.61	.53	.48	.59	.52	.47	.57	.51	.47	.45
6.0	.58	.49	.43	.57	.48	.42	.55	.47	.42	.53	.47	.42	.51	.46	.41	.39
7.0	.52	.44	.38	.52	.43	.38	.50	.43	.37	.48	.42	.37	.47	.41	.37	.35
8.0	.48	.39	.34	.47	.39	.33	.46	.38	.33	.44	.38	.33	.43	.37	.33	.31
9.0	.44	.36	.30	.43	.35	.30	.42	.35	.30	.41	.34	.30	.40	.34	.30	.28
10.0	.40	.33	.27	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.27	.25

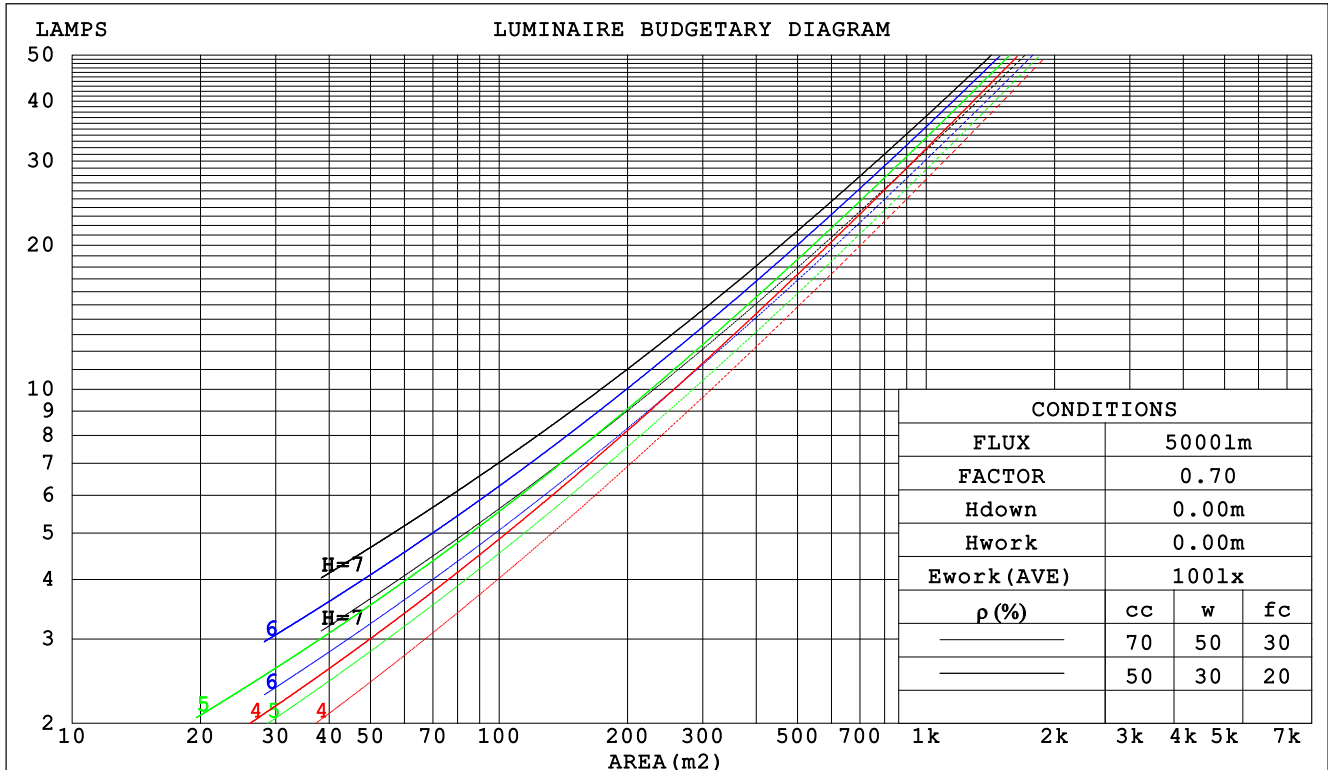

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.3V I:0.0840A P:10.10W PF:0.9970 Freq:60.00Hz Lamp Flux:1215.49x1 lm		
NAME: 1FT PC罩	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.305*0.056	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.294	.167	.053	.286	.163	.052	.273	.156	.050	.260	.150	.048	.248	.144	.046		
2.0	.279	.153	.047	.272	.150	.046	.260	.145	.045	.249	.140	.044	.239	.135	.043		
3.0	.260	.138	.041	.254	.136	.041	.244	.132	.040	.234	.128	.039	.225	.124	.038		
4.0	.241	.125	.037	.236	.124	.037	.227	.120	.036	.218	.117	.035	.210	.114	.035		
5.0	.224	.114	.033	.220	.113	.033	.211	.110	.032	.204	.107	.032	.196	.105	.032		
6.0	.209	.105	.030	.205	.103	.030	.197	.101	.029	.190	.099	.029	.184	.097	.029		
7.0	.195	.096	.027	.191	.095	.027	.185	.093	.027	.178	.091	.027	.172	.090	.026		
8.0	.183	.089	.025	.179	.088	.025	.173	.087	.025	.168	.085	.024	.162	.083	.024		
9.0	.171	.083	.023	.169	.082	.023	.163	.081	.023	.158	.079	.023	.153	.078	.022		
10.0	.161	.077	.021	.159	.077	.021	.154	.075	.021	.149	.074	.021	.145	.073	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.197	.197	.197	.168	.168	.168	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.186	.163	.142	.159	.140	.122	.109	.096	.085	.063	.056	.049	.020	.018	.016	
2.0	.177	.138	.106	.152	.119	.092	.104	.082	.064	.060	.048	.038	.019	.016	.012	
3.0	.169	.121	.082	.145	.104	.071	.100	.072	.050	.057	.042	.029	.018	.014	.010	
4.0	.162	.107	.066	.139	.093	.057	.095	.065	.040	.055	.038	.024	.018	.012	.008	
5.0	.154	.097	.055	.132	.084	.048	.091	.059	.034	.053	.034	.020	.017	.011	.007	
6.0	.147	.089	.046	.127	.077	.040	.087	.054	.029	.051	.032	.017	.016	.010	.006	
7.0	.141	.082	.040	.121	.071	.035	.084	.050	.025	.049	.029	.015	.016	.010	.005	
8.0	.134	.076	.036	.116	.066	.031	.080	.046	.022	.047	.027	.013	.015	.009	.004	
9.0	.128	.071	.032	.111	.062	.028	.077	.043	.020	.045	.026	.012	.014	.008	.004	
10.0	.123	.067	.029	.106	.058	.026	.073	.041	.018	.043	.024	.011	.014	.008	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.3V I:0.0840A P:10.10W PF:0.9970 Freq:60.00Hz Lamp Flux:1215.49x1 lm										
NAME: 1FT PC罩					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:0.305*0.056			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.7	24.1	23.0	24.4	24.6	23.2	24.7	23.5	24.9	25.2
3H	23.3	24.7	23.6	24.9	25.2	24.4	25.7	24.7	26.0	26.2
4H	23.4	24.7	23.7	25.0	25.2	24.7	26.0	25.0	26.3	26.5
6H	23.5	24.7	23.8	25.0	25.3	24.9	26.1	25.3	26.4	26.7
8H	23.5	24.7	23.8	24.9	25.3	25.0	26.1	25.3	26.4	26.7
12H	23.5	24.6	23.9	24.9	25.2	25.0	26.1	25.3	26.4	26.7
4H 2H	23.1	24.4	23.5	24.7	25.0	23.6	24.9	23.9	25.2	25.4
3H	23.9	25.0	24.3	25.4	25.7	24.9	26.0	25.2	26.3	26.6
4H	24.1	25.2	24.5	25.5	25.8	25.3	26.3	25.7	26.7	27.0
6H	24.3	25.2	24.7	25.5	25.9	25.6	26.5	26.0	26.9	27.3
8H	24.3	25.2	24.7	25.5	25.9	25.7	26.5	26.1	26.9	27.3
12H	24.4	25.1	24.8	25.5	25.9	25.7	26.5	26.2	26.9	27.3
8H 4H	24.3	25.1	24.7	25.5	25.9	25.4	26.2	25.8	26.6	27.0
6H	24.5	25.2	25.0	25.6	26.1	25.8	26.5	26.2	26.9	27.3
8H	24.6	25.2	25.1	25.7	26.1	25.9	26.5	26.4	27.0	27.4
12H	24.7	25.2	25.2	25.7	26.2	26.0	26.5	26.5	27.0	27.5
12H 4H	24.3	25.0	24.7	25.4	25.9	25.3	26.1	25.8	26.5	26.9
6H	24.5	25.1	25.0	25.6	26.1	25.8	26.4	26.2	26.8	27.3
8H	24.7	25.2	25.2	25.7	26.2	25.9	26.5	26.4	26.9	27.4
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.4					+ 0.2 / - 0.3				
1.5H	+ 0.3 / - 0.6					+ 0.2 / - 0.3				
2.0H	+ 0.6 / - 0.6					+ 0.5 / - 0.5				

CIE Pub.117 Corrected 1215 lm Total Lamp Luminous Flux.(8log(F/F0) = 0.7)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.3V I:0.0840A P:10.10W PF:0.9970 Freq:60.00Hz Lamp Flux:1215.49x1 lm		
NAME: 1FT PC罩	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.305*0.056	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	47	40	58	47	40	56	46	40	34
0.80	69	57	50	68	57	50	66	56	50	43
1.00	77	66	59	76	66	59	74	67	59	52
1.25	84	74	67	83	73	67	80	72	66	59
1.50	89	80	73	88	79	72	85	77	71	64
2.00	96	88	82	94	87	81	91	84	79	72
2.50	100	92	86	98	91	85	94	88	84	75
3.00	103	96	91	101	95	90	97	92	88	79
4.00	107	101	97	104	99	95	100	96	93	84
5.00	109	104	100	106	102	99	102	99	96	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.3V I:0.0840A P:10.10W PF:0.9970 Freq:60.00Hz Lamp Flux:1215.49x1 lm		
NAME: 1FT PC罩	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.305*0.056	Shielding Angle:

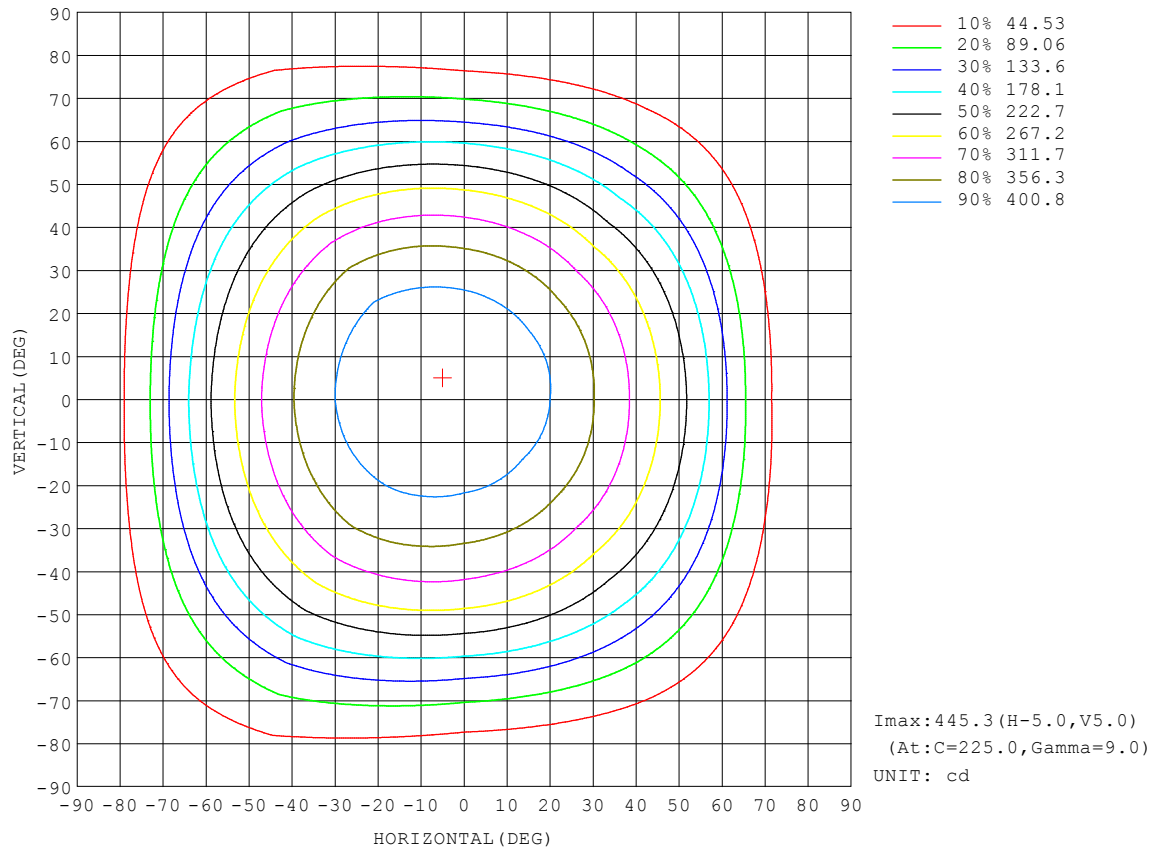


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.3V I:0.0840A P:10.10W PF:0.9970 Freq:60.00Hz Lamp Flux:1215.49x1 lm		
NAME: 1FT PC罩	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.305*0.056	Shielding Angle:

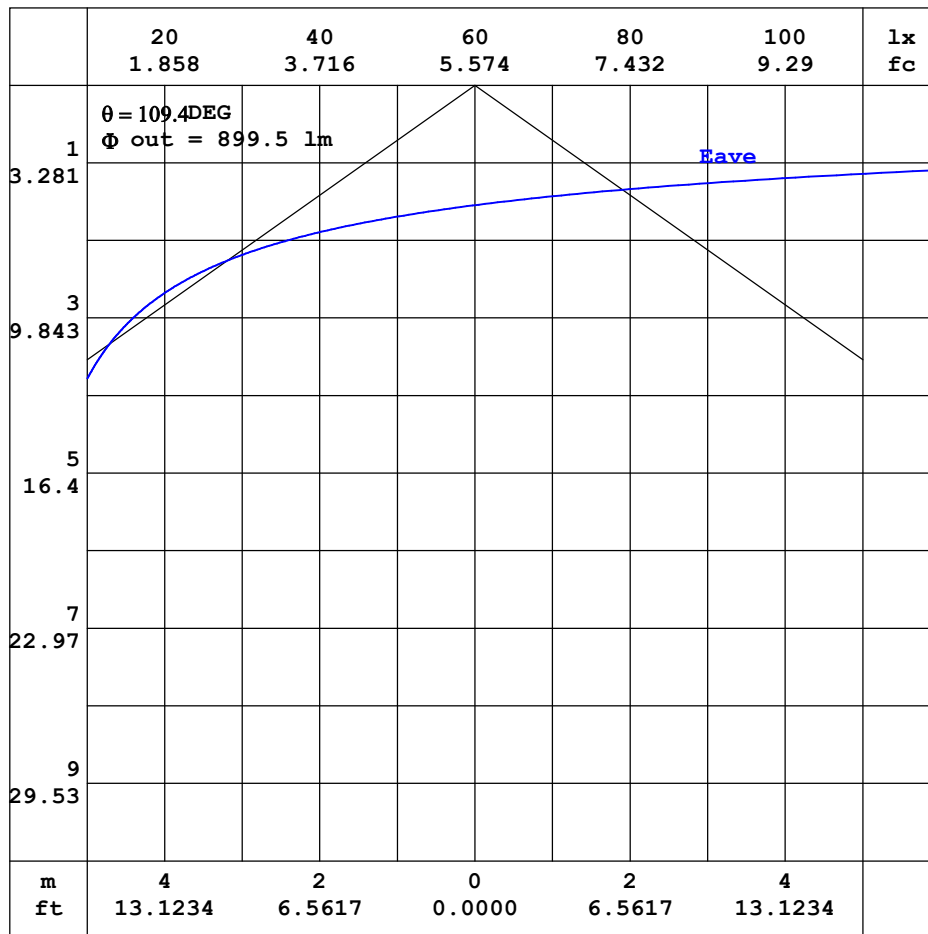


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-01-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.3V I:0.0840A P:10.10W PF:0.9970 Freq:60.00Hz Lamp Flux:1215.49x1 lm		
NAME: 1FT PC罩	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.305*0.056	Shielding Angle:

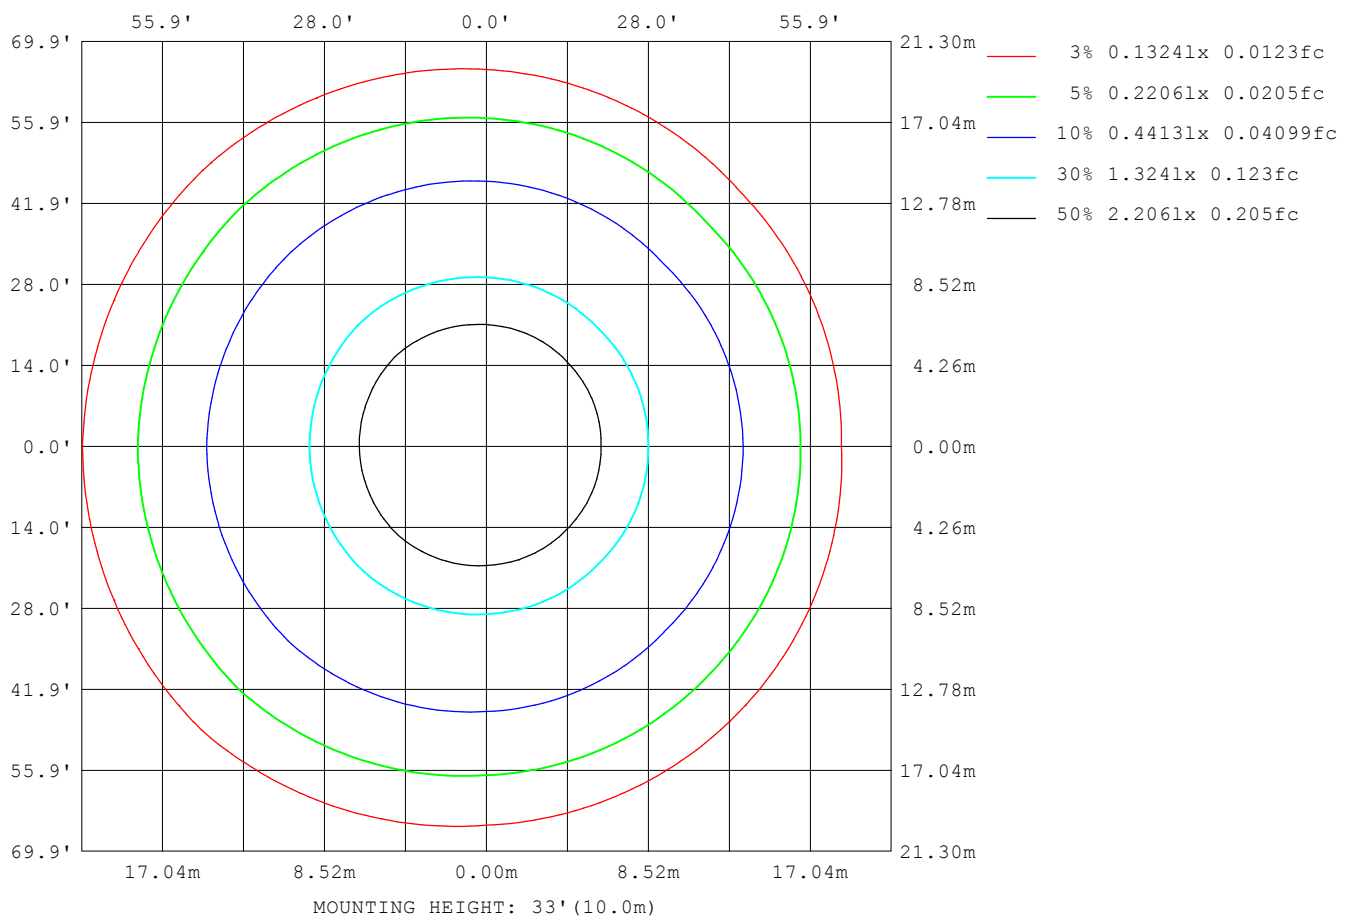

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.3V I:0.0840A P:10.10W PF:0.9970 Freq:60.00Hz Lamp Flux:1215.49x1 lm		
NAME: 1FT PC罩	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.305*0.056	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	18318
L_0~180 (75) av	11533
L_0~180 (85) av	11260
L_90~270 (65) av	18148
L_90~270 (75) av	12605
L_90~270 (85) av	6285
L_45 (65) av	18951
L_45 (75) av	13957
L_45 (85) av	13128

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

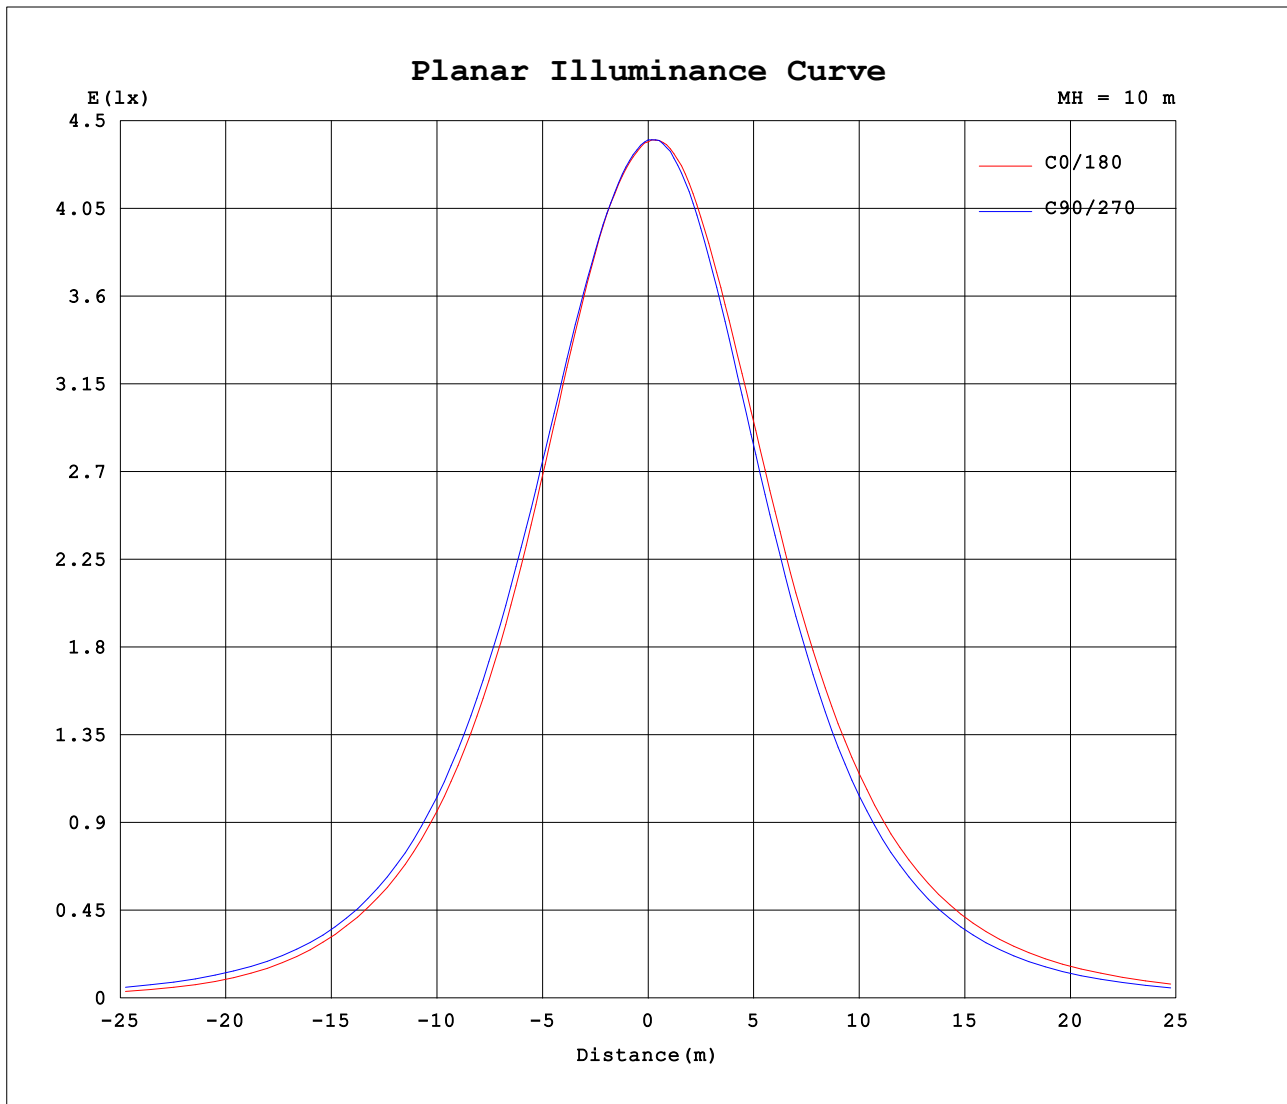

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.3V I:0.0840A P:10.10W PF:0.9970 Freq:60.00Hz Lamp Flux:1215.49x1 lm		
NAME: 1FT PC罩	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.305*0.056	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	440	440	440	440	440	440	440	440										
5	434	433	434	439	443	444	441	437										
10	427	423	426	436	443	444	438	431										
15	417	413	417	430	438	440	430	422										
20	401	398	405	420	429	432	418	407										
25	382	381	390	407	418	418	402	389										
30	358	360	371	392	401	402	381	365										
35	331	334	348	373	379	381	356	337										
40	303	304	322	349	354	354	326	305										
45	272	270	292	319	326	321	293	269										
50	236	235	257	286	292	284	257	231										
55	197	197	218	250	255	244	217	191										
60	146	158	175	210	213	201	174	148										
65	93.4	116	132	167	170	157	128	104										
70	53.1	76.5	92.1	124	120	114	87.3	66.2										
75	30.1	45.5	58.4	85.8	71.3	76.3	52.5	38.0										
80	17.7	25.1	31.1	52.9	39.9	46.1	25.7	20.8										
85	10.5	12.5	11.6	29.9	22.9	25.2	7.03	10.1										
90	5.81	5.09	0.52	15.7	13.5	12.5	0.02	4.15										
95	3.27	2.14	0.07	7.31	7.86	5.13	0.03	2.11										
100	2.25	1.72	0.10	3.27	4.49	2.59	0.05	1.84										
105	1.98	1.56	0.14	2.34	2.92	2.22	0.09	1.64										
110	1.77	1.41	0.18	2.12	2.35	2.01	0.13	1.47										
115	1.58	1.29	0.22	1.91	2.15	1.80	0.16	1.34										
120	1.45	1.18	0.28	1.73	1.89	1.61	0.21	1.20										
125	1.33	1.06	0.38	1.54	1.43	1.44	0.31	1.02										
130	1.22	0.95	0.47	1.39	1.19	1.26	0.40	0.90										
135	1.11	0.89	0.58	1.29	1.11	1.18	0.50	0.84										
140	1.00	0.87	0.67	1.14	1.04	1.09	0.55	0.81										
145	0.97	0.85	0.73	1.03	1.03	1.00	0.59	0.79										
150	0.95	0.87	0.75	0.98	1.02	0.94	0.64	0.82										
155	0.95	0.87	0.76	0.99	1.01	1.01	0.67	0.88										
160	0.98	0.90	0.76	1.08	1.06	1.11	0.68	0.93										
165	1.03	0.74	0.75	1.14	1.18	1.16	0.69	0.73										
170	0.88	0.65	0.73	1.14	1.19	1.03	0.67	0.61										
175	0.61	0.55	0.70	0.99	0.73	0.86	0.69	0.51										
180	0.51	0.66	0.78	0.82	0.51	0.66	0.78	0.81										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: