


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 偏光透镜款	DIM.: 280X45MM	SERIAL No.:
MFR.: EVERFINE	SUR.:0.28*0.045	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 90.88 lm/W			
MODEL	1FT-偏光透镜	I _{max} (cd)	796.7	S/MH(C0/180)	1.47
NOMINAL POWER(W)	7.5W	LOR(%)	100.0	S/MH(C90/270)	1.13
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	794.30	η UP,DN(C0-180)	0.2,56.4
NOMINAL FLUX(lm)	794.298	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,43.3
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	120.0	η down(%)	99.8	CIBSE SHR MAX	0.80

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

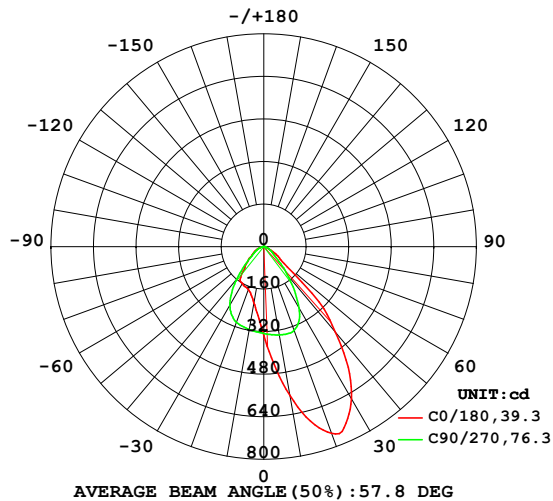

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

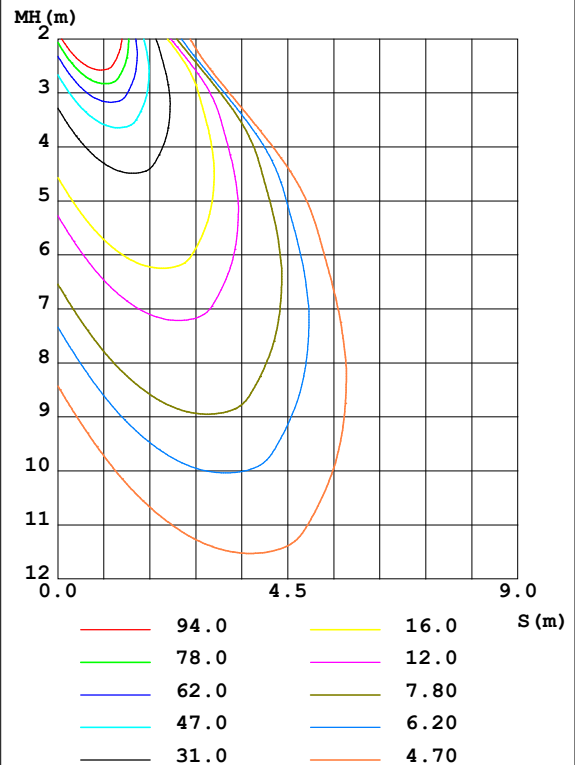

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	568.5	492.6	337.3	245.9	215.1	230.8	316.5	488.1	0- 10	33.15	33.15	4.17,4.17
20	747.5	695.6	335.3	193.5	172.0	183.1	303.1	633.0	10- 20	110.5	143.6	18.1,18.1
30	659.3	785.7	265.9	160.5	160.8	162.3	255.5	673.1	20- 30	187.3	330.9	41.7,41.7
40	418.6	549.1	140.3	125.8	120.5	139.4	157.0	557.3	30- 40	211.5	542.4	68.3,68.3
50	100.7	214.1	54.00	78.12	74.33	82.70	67.83	243.8	40- 50	148.8	691.2	87,87
60	42.37	38.75	30.88	38.63	42.70	43.00	36.89	43.34	50- 60	63.42	754.6	95,95
70	15.10	12.36	13.21	18.32	20.43	20.14	17.97	15.36	60- 70	26.63	781.2	98.4,98.4
80	3.163	2.248	2.429	5.167	3.949	4.372	4.456	3.568	70- 80	9.666	790.9	99.6,99.6
90	0.0008	0.0627	0	2.303	0	0.0203	0	0.5578	80- 90	1.536	792.4	99.8,99.8
100	0	0	0	2.509	0	0	0	0.4747	90-100	0.3953	792.8	99.8,99.8
110	0	0	0	2.635	0	0	0	0.4740	100-110	0.4065	793.2	99.9,99.9
120	0.0072	0.0097	0.0121	1.297	0.0631	0.0726	0.0024	0.4989	110-120	0.3242	793.6	99.9,99.9
130	0.0435	0.0460	0.0798	0.3147	0.2061	0.1864	0.0606	0.3537	120-130	0.1703	793.7	99.9,99.9
140	0.0750	0.0944	0.1476	0.2932	0.3683	0.2929	0.1357	0.1720	130-140	0.1365	793.9	99.9,99.9
150	0.1138	0.1406	0.2106	0.3657	0.4845	0.3632	0.2035	0.2228	140-150	0.1442	794.0	100,100
160	0.1719	0.2132	0.2712	0.4205	0.5372	0.4287	0.2665	0.3341	150-160	0.1358	794.2	100,100
170	0.2735	0.2907	0.3148	0.4238	0.5157	0.4335	0.3197	0.4528	160-170	0.1004	794.3	100,100
180	0.3996	0.3584	0.3269	0.7459	0.3996	0.3512	0.3294	0.8186	170-180	0.0385	794.3	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 偏光透镜款	DIM.: 280X45MM	SERIAL No.:
MFR.: EVERFINE	SUR.:0.28*0.045	Shielding Angle:

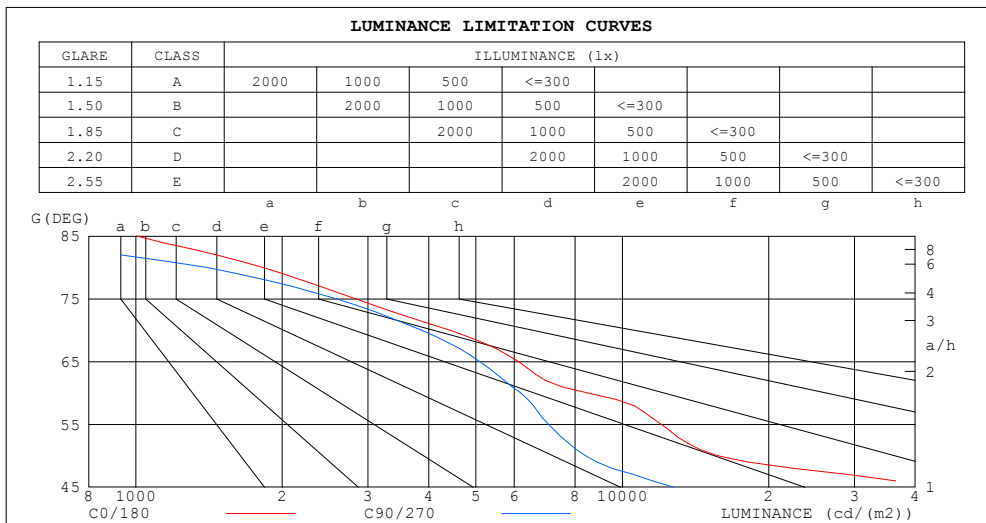

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1005	431
80	1821	1399
75	2828	2581
70	4416	3863
65	6112	5095
60	8475	6177
55	12023	7048
50	15667	8400
45	41784	12770


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 偏光透镜款	DIM.: 280X45MM	SERIAL No.:
MFR.: EVERFINE	SUR.:0.28*0.045	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.08	1.05	1.02	1.06	1.03	1.01	1.02	.99	.97	.98	.96	.94	.94	.93	.92	.90
2.0	.98	.93	.88	.96	.91	.87	.93	.89	.85	.89	.86	.83	.87	.84	.81	.80
3.0	.89	.82	.77	.87	.81	.76	.84	.79	.75	.82	.77	.74	.79	.76	.73	.71
4.0	.80	.73	.68	.79	.72	.67	.77	.71	.66	.75	.70	.66	.72	.68	.65	.63
5.0	.73	.66	.60	.72	.65	.60	.70	.64	.59	.68	.63	.59	.67	.62	.58	.56
6.0	.67	.59	.54	.66	.59	.54	.64	.58	.53	.63	.57	.53	.61	.56	.52	.51
7.0	.61	.54	.48	.61	.53	.48	.59	.53	.48	.58	.52	.48	.56	.51	.47	.46
8.0	.56	.49	.44	.56	.49	.44	.55	.48	.43	.53	.47	.43	.52	.47	.43	.41
9.0	.52	.45	.40	.52	.45	.40	.50	.44	.40	.49	.44	.39	.48	.43	.39	.38
10.0	.48	.41	.36	.48	.41	.36	.47	.41	.36	.46	.40	.36	.45	.40	.36	.34

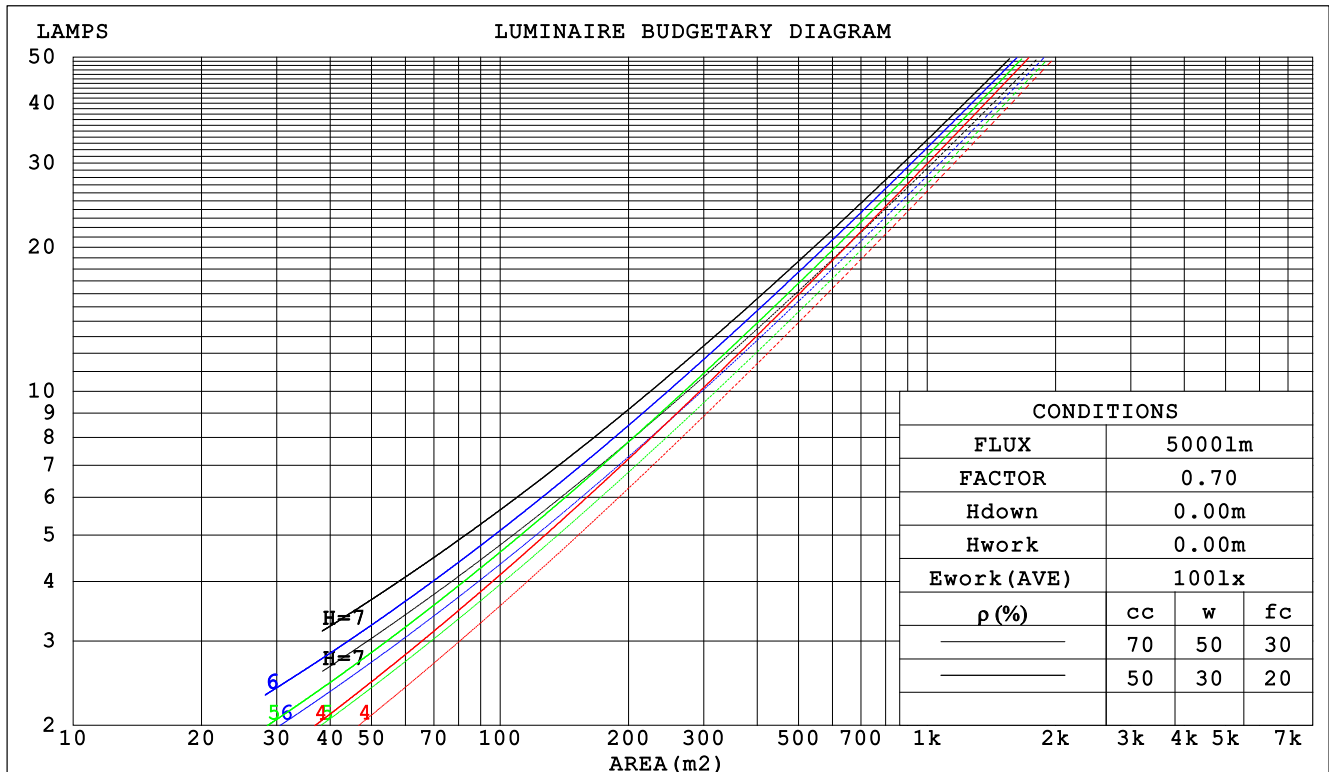

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 偏光透镜款	DIM.: 280X45MM	SERIAL No.:
MFR.: EVERFINE	SUR.:0.28*0.045	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.226	.129	.041	.220	.125	.040	.207	.119	.038	.195	.112	.036	.184	.106	.034		
2.0	.221	.121	.037	.215	.118	.036	.204	.113	.035	.193	.108	.034	.184	.104	.033		
3.0	.211	.112	.034	.206	.110	.033	.196	.106	.032	.187	.102	.031	.179	.099	.031		
4.0	.200	.104	.031	.196	.103	.030	.187	.099	.030	.179	.096	.029	.172	.093	.028		
5.0	.190	.097	.028	.186	.095	.028	.178	.093	.027	.171	.090	.027	.165	.088	.026		
6.0	.180	.090	.026	.176	.089	.026	.170	.087	.025	.163	.085	.025	.157	.083	.025		
7.0	.171	.084	.024	.168	.083	.024	.161	.082	.024	.156	.080	.023	.150	.078	.023		
8.0	.162	.079	.022	.159	.078	.022	.154	.077	.022	.149	.075	.022	.144	.074	.021		
9.0	.154	.074	.021	.151	.074	.021	.146	.072	.021	.142	.071	.020	.137	.070	.020		
10.0	.146	.070	.019	.144	.070	.019	.140	.068	.019	.136	.067	.019	.132	.066	.019		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021		
1.0	.176	.159	.143	.151	.136	.123	.103	.094	.085	.059	.054	.049	.019	.017	.016		
2.0	.165	.134	.108	.141	.115	.094	.097	.080	.065	.056	.046	.038	.018	.015	.012		
3.0	.155	.116	.084	.133	.100	.073	.091	.069	.051	.053	.040	.030	.017	.013	.010		
4.0	.147	.102	.067	.126	.088	.059	.087	.061	.041	.050	.036	.024	.016	.012	.008		
5.0	.139	.091	.055	.120	.079	.048	.082	.055	.034	.048	.032	.020	.015	.011	.007		
6.0	.133	.082	.046	.114	.071	.040	.079	.050	.028	.046	.029	.017	.015	.010	.006		
7.0	.127	.075	.039	.109	.065	.034	.075	.046	.024	.044	.027	.014	.014	.009	.005		
8.0	.121	.069	.034	.104	.060	.029	.072	.042	.021	.042	.025	.012	.014	.008	.004		
9.0	.116	.064	.029	.100	.056	.026	.069	.039	.018	.040	.023	.011	.013	.008	.004		
10.0	.111	.060	.026	.096	.052	.023	.066	.037	.016	.039	.022	.010	.013	.007	.003		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: COVELIGHT					TYPE:4000K					WEIGHT:				
SPEC.:1FT 偏光透镜款					DIM.: 280X45MM					SERIAL No.:				
MFR.: EVERFINE					SUR.:0.28*0.045					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions					Viewed crosswise					Viewed endwise				
x = 2H y = 2H					24.2	25.5	24.5	25.7	25.9	22.4	23.6	22.6	23.8	24.0
3H					24.1	25.3	24.4	25.5	25.7	22.3	23.5	22.6	23.7	23.9
4H					24.1	25.2	24.4	25.4	25.6	22.3	23.3	22.6	23.6	23.8
6H					24.0	25.0	24.3	25.3	25.5	22.2	23.2	22.5	23.4	23.7
8H					23.9	24.9	24.3	25.2	25.5	22.1	23.1	22.5	23.4	23.7
12H					23.9	24.8	24.2	25.1	25.4	22.1	23.0	22.4	23.3	23.6
4H 2H					24.0	25.1	24.3	25.4	25.6	22.3	23.3	22.6	23.6	23.8
3H					24.0	24.9	24.3	25.2	25.5	22.2	23.2	22.6	23.5	23.7
4H					23.9	24.8	24.3	25.1	25.4	22.2	23.0	22.6	23.3	23.7
6H					23.8	24.6	24.2	24.9	25.3	22.1	22.9	22.5	23.2	23.6
8H					23.8	24.5	24.2	24.8	25.2	22.1	22.8	22.5	23.1	23.5
12H					23.8	24.4	24.2	24.8	25.2	22.0	22.7	22.5	23.0	23.4
8H 4H					23.8	24.5	24.2	24.8	25.2	22.1	22.8	22.5	23.1	23.5
6H					23.7	24.3	24.2	24.7	25.1	22.0	22.6	22.5	23.0	23.4
8H					23.7	24.2	24.1	24.6	25.0	22.0	22.5	22.4	22.9	23.3
12H					23.6	24.1	24.1	24.5	25.0	21.9	22.4	22.4	22.8	23.3
12H 4H					23.7	24.4	24.2	24.7	25.1	22.0	22.7	22.5	23.0	23.4
6H					23.7	24.2	24.1	24.6	25.0	22.0	22.5	22.4	22.9	23.3
8H					23.6	24.1	24.1	24.5	25.0	21.9	22.4	22.4	22.8	23.3
Variations with the observer position at spacings:														
S = 1.0H					+ 2.5 / - 5.8					+ 3.3 / - 5.5				
1.5H					+ 2.4 / - 5.3					+ 2.8 / - 6.0				
2.0H					+ 5.0 / - 5.6					+ 3.9 / - 4.2				

CIE Pub.117 Corrected 794.3 lm Total Lamp Luminous Flux.(8log(F/F0) = -0.8)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 偏光透镜款	DIM.: 280X45MM	SERIAL No.:
MFR.: EVERFINE	SUR.:0.28*0.045	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) k(RI) x RCR = 5									
k = 0.60	71	62	57	71	62	57	70	62	56	51
0.80	81	72	67	80	72	67	79	71	66	61
1.00	88	80	75	87	80	75	86	80	74	69
1.25	94	87	82	93	86	81	91	85	81	75
1.50	98	91	87	97	91	86	94	89	85	79
2.00	103	97	93	102	96	92	99	94	91	84
2.50	106	100	96	104	99	95	100	96	93	86
3.00	108	103	99	106	102	98	102	99	96	89
4.00	111	107	104	108	105	102	105	102	99	92
5.00	112	109	106	110	107	105	106	103	101	93
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNOM = 1.25										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2023-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 偏光透镜款	DIM.: 280X45MM	SERIAL No.:
MFR.: EVERFINE	SUR.:0.28*0.045	Shielding Angle:

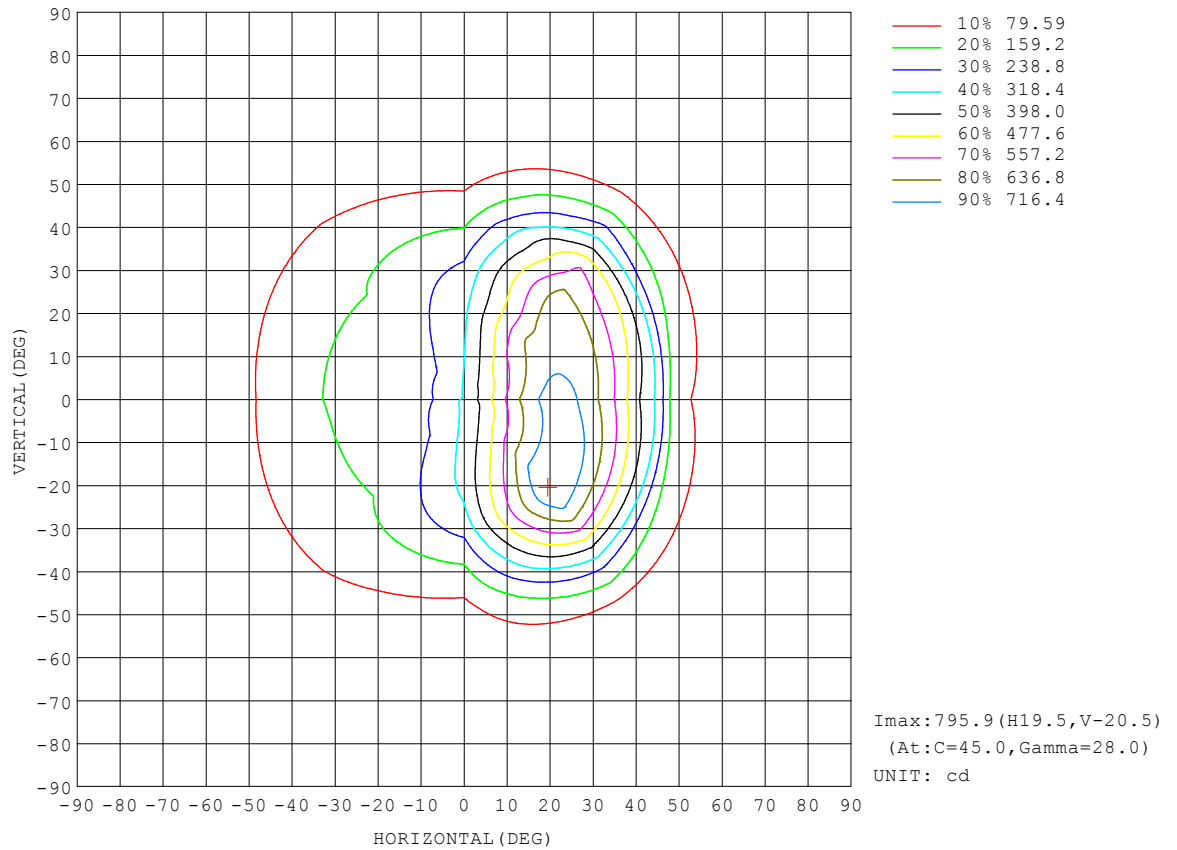


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

AAI CURVES

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 偏光透镜款	DIM.: 280X45MM	SERIAL No.:
MFR.: EVERFINE	SUR.:0.28*0.045	Shielding Angle:

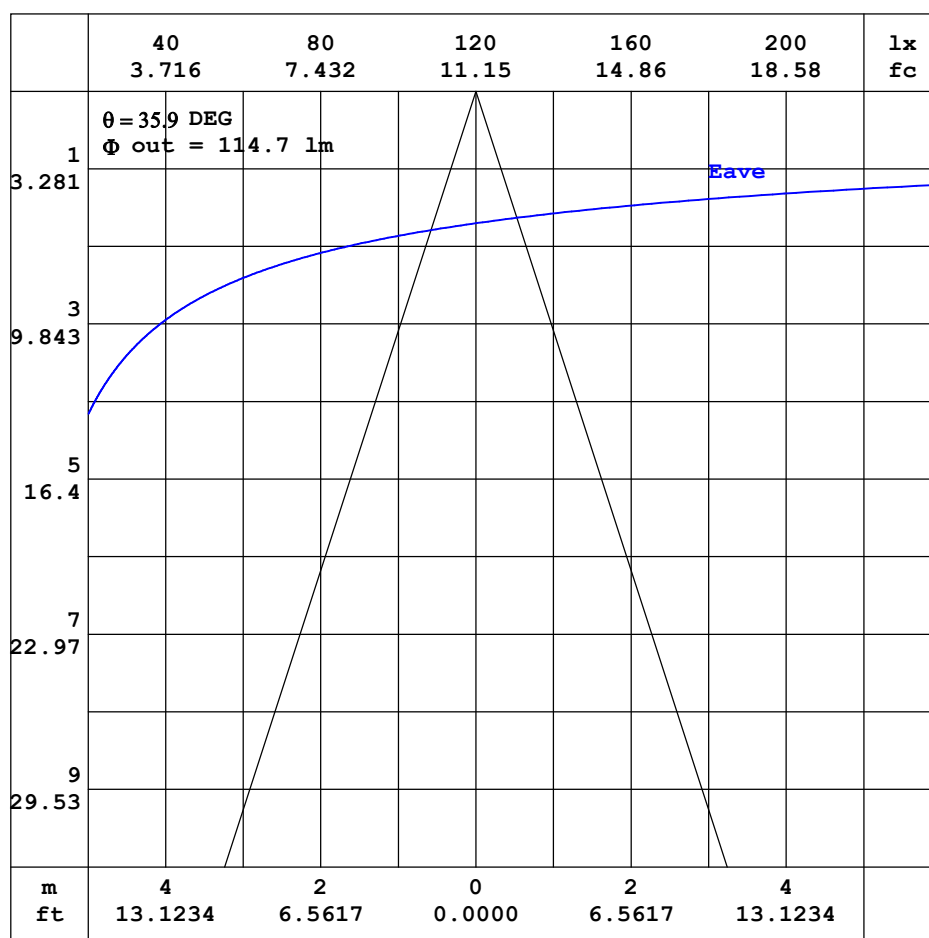


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2023-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 偏光透镜款	DIM.: 280X45MM	SERIAL No.:
MFR.: EVERFINE	SUR.:0.28*0.045	Shielding Angle:

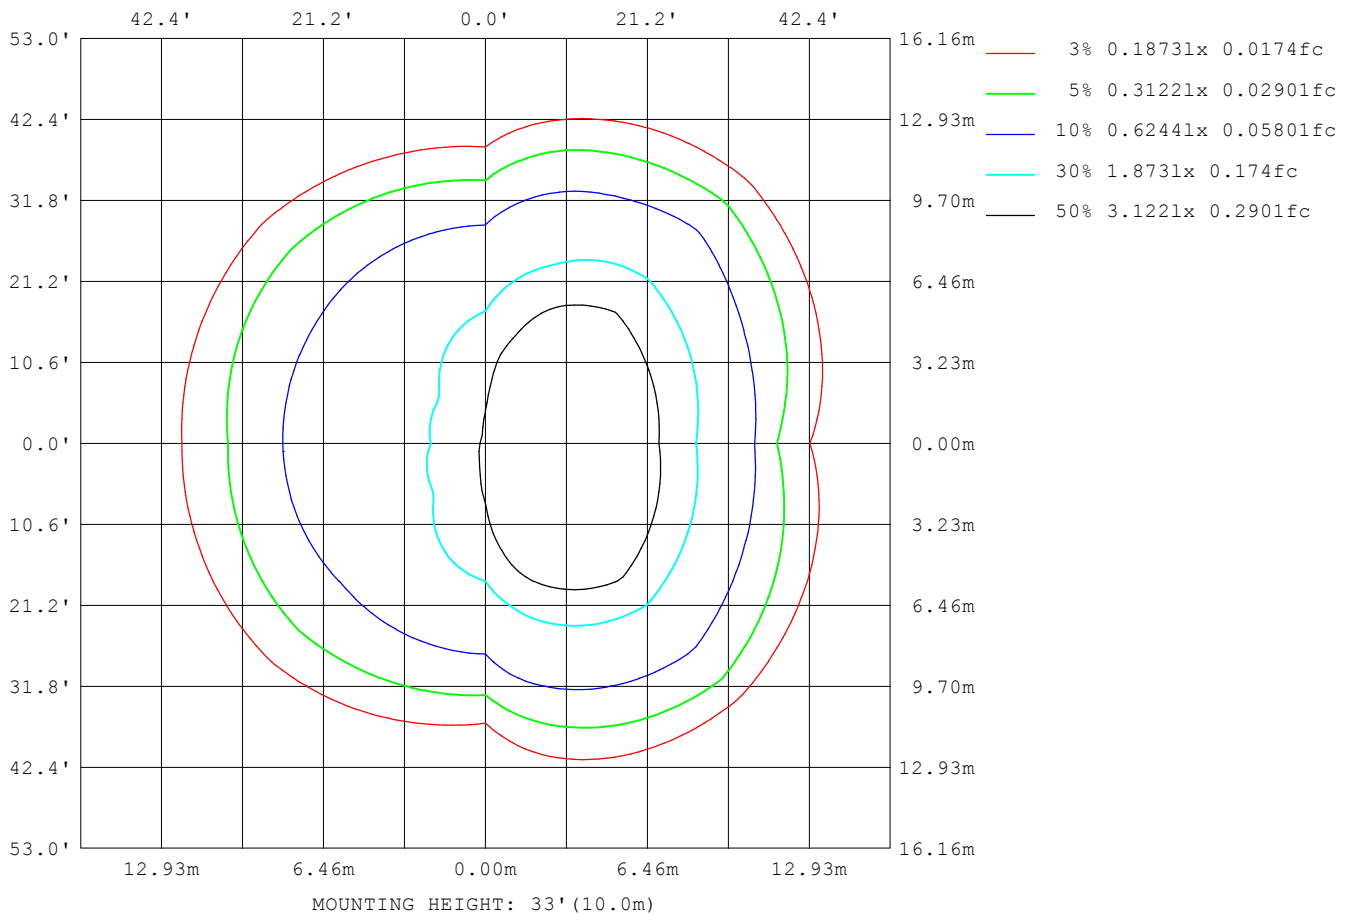

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 偏光透镜款	DIM.: 280X45MM	SERIAL No.:
MFR.: EVERFINE	SUR.:0.28*0.045	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	6859
L_0~180 (75) av	3450
L_0~180 (85) av	941
L_90~270 (65) av	5736
L_90~270 (75) av	3207
L_90~270 (85) av	835
L_45 (65) av	6267
L_45 (75) av	3374
L_45 (85) av	1632

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

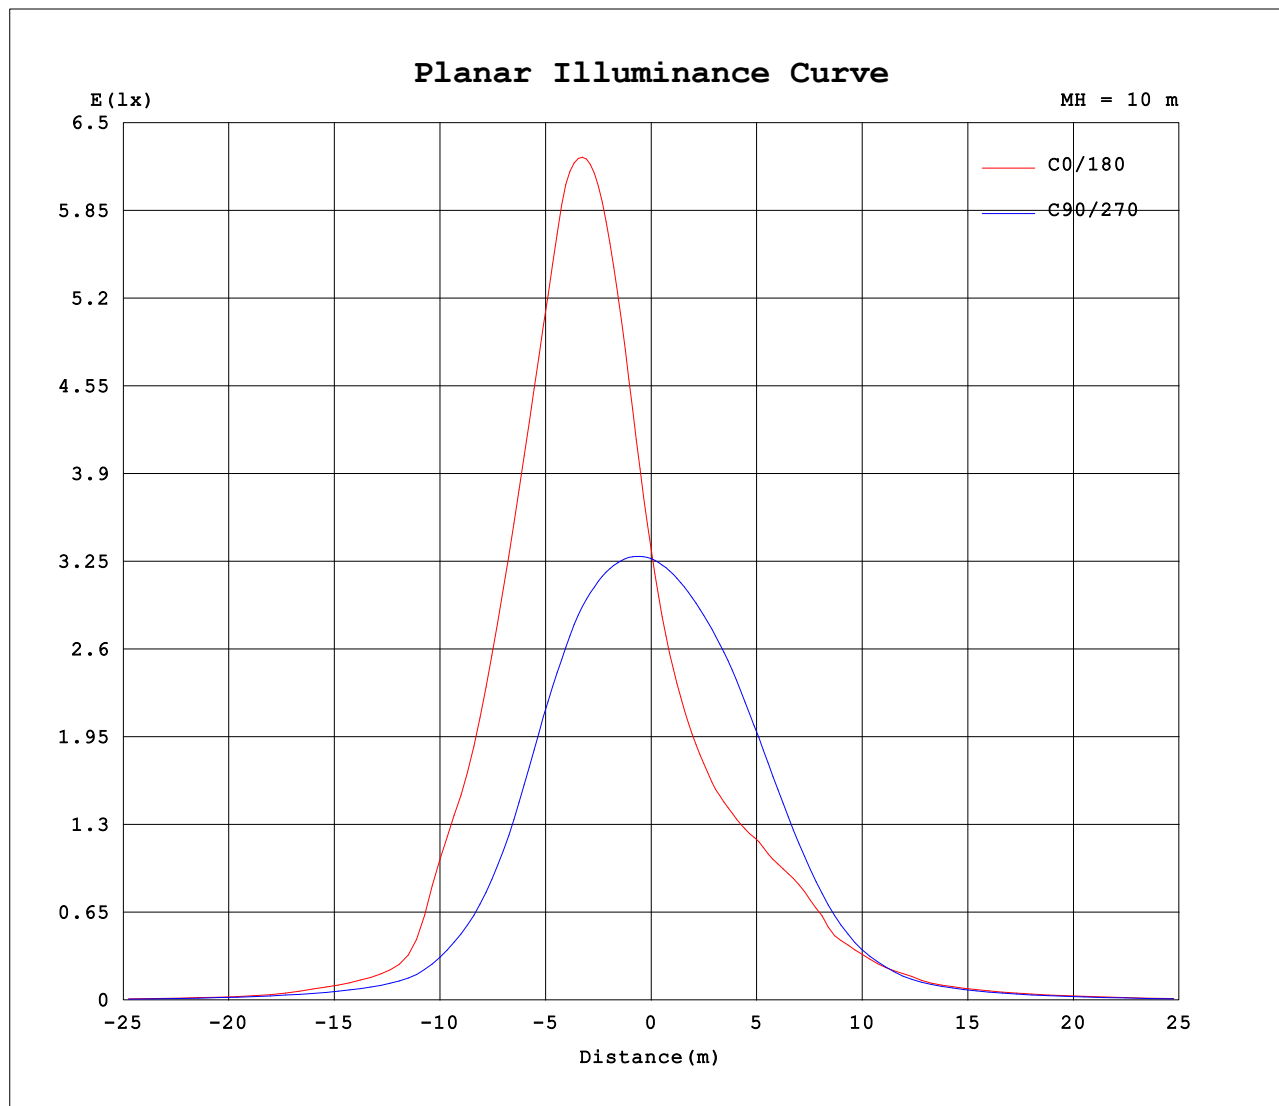

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-12-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 偏光透镜款	DIM.: 280X45MM	SERIAL No.:
MFR.: EVERFINE	SUR.:0.28*0.045	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	334	324	327	338	334	324	327	338										
5	443	399	332	285	260	269	322	407										
10	568	493	337	246	215	231	316	488										
15	679	595	340	216	187	203	311	574										
20	747	696	335	194	172	183	303	633										
25	733	774	312	174	166	171	285	645										
30	659	786	266	160	161	162	255	673										
35	555	692	202	145	156	155	212	624										
40	419	549	140	126	121	139	157	557										
45	295	370	90.3	103	96.0	120	106	391										
50	101	214	54.0	78.1	74.3	82.7	67.8	244										
55	69.0	104	40.4	53.9	53.2	60.7	48.0	125										
60	42.4	38.7	30.9	38.6	42.7	43.0	36.9	43.3										
65	25.8	22.0	21.5	27.7	32.1	30.7	26.9	25.5										
70	15.1	12.4	13.2	18.3	20.4	20.1	18.0	15.4										
75	7.32	5.88	6.68	10.2	10.5	10.7	9.92	8.09										
80	3.16	2.25	2.43	5.17	3.95	4.37	4.46	3.57										
85	0.88	0.54	0.38	2.75	0.76	1.10	1.08	1.30										
90	0.00	0.06	0.00	2.30	0.00	0.02	0.00	0.56										
95	0.00	0.00	0.00	2.37	0.00	0.00	0.00	0.50										
100	0.00	0.00	0.00	2.51	0.00	0.00	0.00	0.47										
105	0.00	0.00	0.00	2.61	0.00	0.00	0.00	0.47										
110	0.00	0.00	0.00	2.63	0.00	0.00	0.00	0.47										
115	0.00	0.00	0.00	2.13	0.01	0.02	0.00	0.48										
120	0.01	0.01	0.01	1.30	0.06	0.07	0.00	0.50										
125	0.03	0.03	0.04	0.65	0.13	0.12	0.03	0.42										
130	0.04	0.05	0.08	0.31	0.21	0.19	0.06	0.35										
135	0.06	0.07	0.11	0.28	0.30	0.24	0.10	0.26										
140	0.08	0.09	0.15	0.29	0.37	0.29	0.14	0.17										
145	0.09	0.11	0.18	0.33	0.43	0.33	0.17	0.19										
150	0.11	0.14	0.21	0.37	0.48	0.36	0.20	0.22										
155	0.14	0.17	0.24	0.40	0.52	0.40	0.24	0.20										
160	0.17	0.21	0.27	0.42	0.54	0.43	0.27	0.33										
165	0.22	0.26	0.30	0.42	0.53	0.45	0.30	0.39										
170	0.27	0.29	0.31	0.42	0.52	0.43	0.32	0.45										
175	0.33	0.32	0.32	0.39	0.46	0.40	0.33	0.69										
180	0.40	0.36	0.33	0.75	0.40	0.35	0.33	0.82										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: