


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 透明PC罩	DIM.: 280x45mm	SERIAL No.:
MFR.: EVERFINE	SUR.:0.28*0.045	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 110.44 lm/W			
MODEL	1FT	I _{max} (cd)	346.9	S/MH(C0/180)	1.26
NOMINAL POWER(W)	7.5W	LOR(%)	100.0	S/MH(C90/270)	1.31
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	929.87	η UP,DN(C0-180)	0.3,48.0
NOMINAL FLUX(lm)	929.873	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.2,51.5
LAMPS INSIDE	1	η up(%)	0.5	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	99.5	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

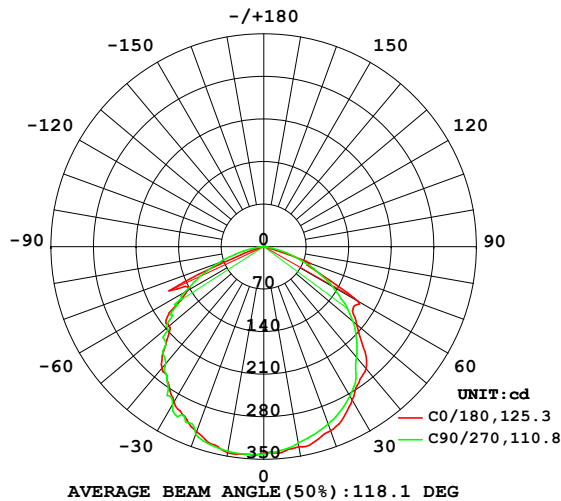

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

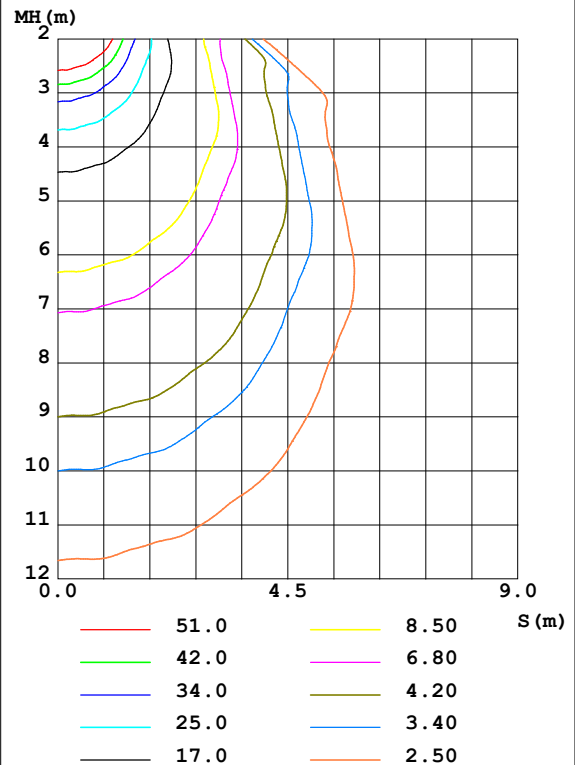

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-12-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	334.4	329.8	327.9	334.7	344.3	346.4	341.9	336.4	0- 10	32.28	32.28	3.47,3.47
20	322.2	315.1	310.4	307.5	324.1	335.5	327.9	320.2	10- 20	93.16	125.4	13.5,13.5
30	291.5	288.2	283.5	278.0	295.2	309.4	300.2	297.2	20- 30	142.1	267.5	28.8,28.8
40	261.9	245.9	237.5	248.2	260.5	271.1	251.3	256.9	30- 40	171.5	439.1	47.2,47.2
50	199.5	194.5	192.2	198.4	203.5	217.4	207.2	216.5	40- 50	176.3	615.3	66.2,66.2
60	178.6	126.8	130.3	142.3	145.5	150.6	150.8	136.3	50- 60	155.9	771.2	82.9,82.9
70	82.21	62.93	64.95	94.55	39.48	83.90	78.84	75.32	60- 70	111.9	883.1	95,95
80	5.968	5.669	10.34	5.562	4.816	7.555	21.34	7.468	70- 80	38.18	921.3	99.1,99.1
90	1.654	1.597	0.4165	2.089	1.186	1.745	0.0651	2.288	80- 90	4.025	925.3	99.5,99.5
100	0.8265	0.7894	0.2862	1.494	0.7335	0.6663	0.0800	1.749	90-100	1.130	926.4	99.6,99.6
110	0.5910	0.6611	0.2175	1.480	0.5133	0.5256	0.1212	1.727	100-110	0.8082	927.2	99.7,99.7
120	0.4989	0.5788	0.3316	1.310	0.3948	0.4238	0.1745	1.238	110-120	0.6546	927.9	99.8,99.8
130	0.4626	0.5788	0.4723	1.266	0.3778	0.4141	0.3150	1.315	120-130	0.5745	928.5	99.8,99.8
140	0.4989	0.6103	0.5377	1.029	0.3753	0.3996	0.4190	1.308	130-140	0.5073	929.0	99.9,99.9
150	0.5619	0.5739	0.4189	0.6760	0.4166	0.4334	0.4844	1.163	140-150	0.3834	929.4	99.9,99.9
160	0.5716	0.4262	0.3608	1.218	0.5060	0.4191	0.4796	1.008	150-160	0.2840	929.6	100,100
170	0.4287	0.3972	0.3802	1.119	0.4237	0.4190	0.5353	0.8961	160-170	0.1701	929.8	100,100
180	0.3851	0.4141	0.6733	1.262	0.3851	0.4311	0.5546	1.271	170-180	0.0562	929.9	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-12-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 透明PC罩	DIM.: 280x45mm	SERIAL No.:
MFR.: EVERFINE	SUR.:0.28*0.045	Shielding Angle:

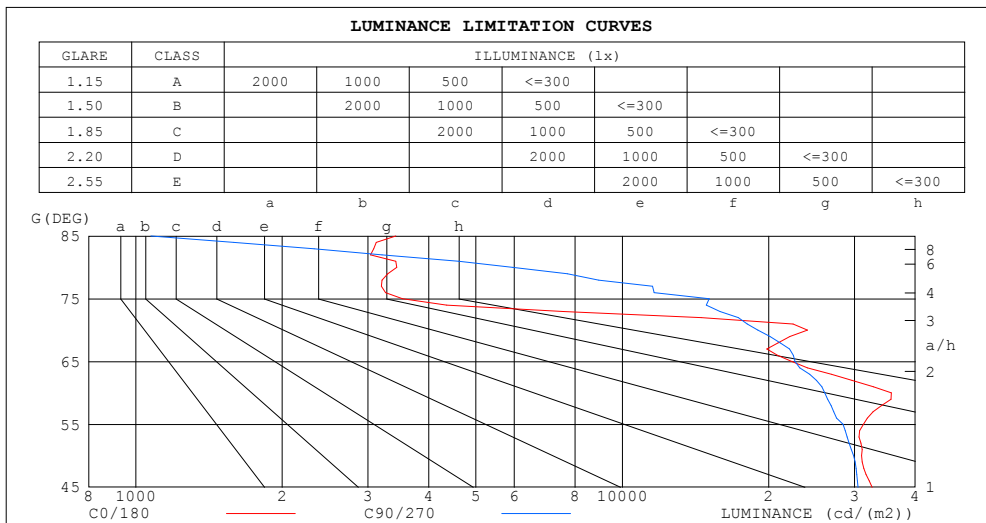

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	3424	1074
80	3437	5954
75	3532	15081
70	24036	18989
65	22306	22657
60	35714	26057
55	31340	28427
50	31037	29897
45	32605	30530


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 透明PC罩	DIM.: 280x45mm	SERIAL No.:
MFR.: EVERFINE	SUR.:0.28*0.045	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.87	.85
2.0	.92	.86	.81	.91	.85	.80	.87	.82	.78	.84	.79	.76	.81	.77	.74	.72
3.0	.81	.74	.67	.80	.73	.67	.77	.71	.66	.74	.69	.64	.71	.67	.63	.61
4.0	.72	.64	.57	.71	.63	.57	.68	.61	.56	.66	.60	.55	.64	.59	.54	.52
5.0	.65	.56	.49	.63	.55	.49	.61	.54	.49	.59	.53	.48	.57	.52	.47	.45
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.54	.47	.42	.52	.46	.42	.40
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.38	.49	.42	.37	.47	.42	.37	.35
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.34	.45	.38	.33	.44	.38	.33	.31
9.0	.44	.36	.31	.44	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.28	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

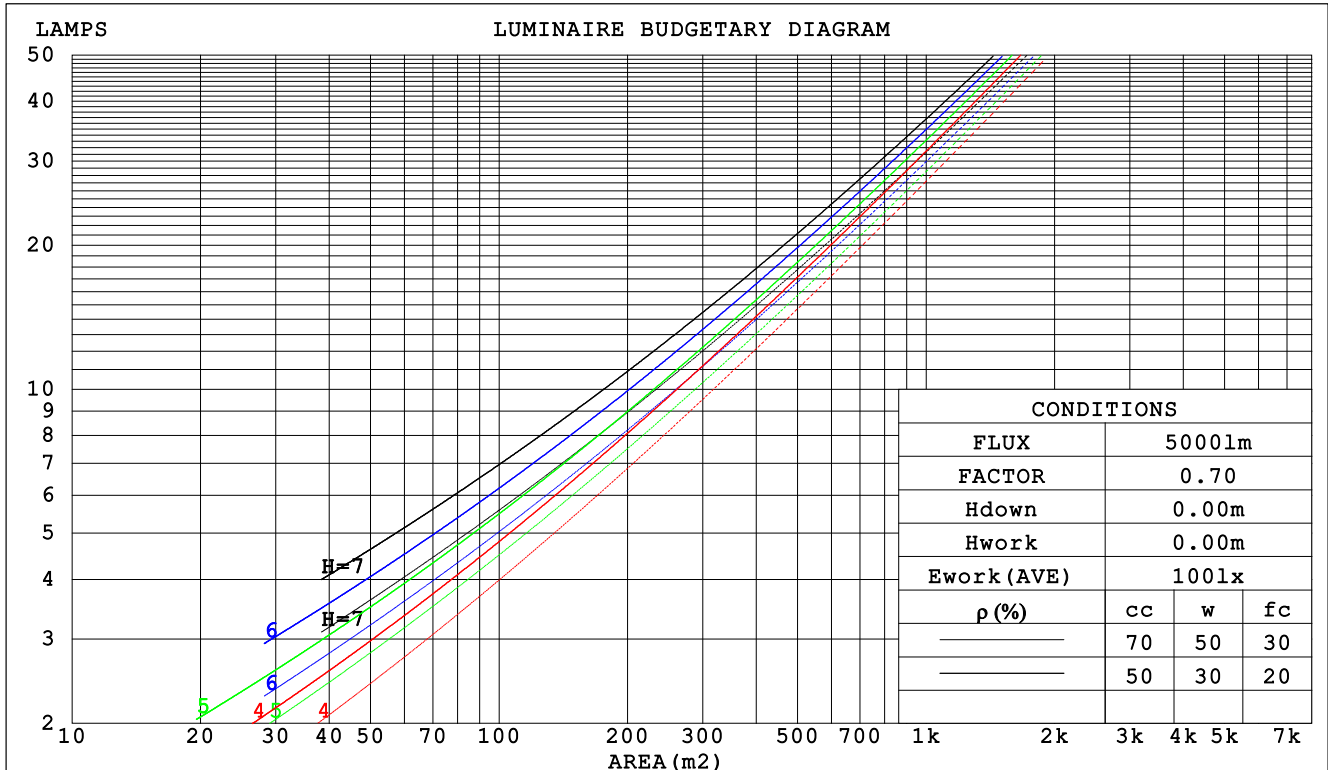

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 透明PC罩	DIM.: 280x45mm	SERIAL No.:
MFR.: EVERFINE	SUR.:0.28*0.045	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.280	.159	.050	.273	.156	.049	.259	.149	.047	.247	.142	.046	.236	.137	.044		
2.0	.272	.149	.046	.265	.146	.045	.254	.141	.044	.243	.136	.043	.233	.132	.042		
3.0	.256	.136	.041	.250	.134	.040	.240	.130	.040	.230	.126	.039	.221	.123	.038		
4.0	.239	.124	.037	.234	.123	.036	.225	.119	.036	.216	.116	.035	.208	.113	.034		
5.0	.223	.114	.033	.218	.112	.033	.210	.109	.032	.203	.107	.032	.195	.104	.031		
6.0	.208	.104	.030	.204	.103	.030	.197	.101	.029	.190	.099	.029	.183	.096	.029		
7.0	.194	.096	.027	.191	.095	.027	.184	.093	.027	.178	.091	.027	.172	.089	.026		
8.0	.182	.089	.025	.179	.088	.025	.173	.086	.025	.167	.085	.024	.162	.083	.024		
9.0	.171	.083	.023	.168	.082	.023	.163	.081	.023	.158	.079	.023	.153	.078	.022		
10.0	.161	.077	.021	.159	.077	.021	.154	.075	.021	.149	.074	.021	.145	.073	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.182	.160	.141	.156	.137	.121	.107	.095	.084	.061	.055	.049	.020	.018	.016	
2.0	.173	.136	.104	.148	.117	.090	.102	.081	.063	.059	.047	.037	.019	.015	.012	
3.0	.166	.118	.080	.142	.102	.069	.097	.071	.049	.056	.041	.029	.018	.013	.009	
4.0	.158	.105	.064	.136	.090	.055	.093	.063	.039	.054	.037	.023	.017	.012	.008	
5.0	.151	.094	.052	.130	.081	.045	.089	.057	.032	.052	.033	.019	.017	.011	.006	
6.0	.144	.086	.044	.124	.074	.038	.085	.052	.027	.050	.031	.016	.016	.010	.005	
7.0	.138	.079	.038	.118	.068	.033	.082	.048	.023	.047	.028	.014	.015	.009	.005	
8.0	.131	.073	.033	.113	.063	.029	.078	.044	.020	.046	.026	.012	.015	.009	.004	
9.0	.125	.068	.029	.108	.059	.026	.075	.042	.018	.044	.025	.011	.014	.008	.004	
10.0	.120	.064	.027	.103	.055	.023	.072	.039	.016	.042	.023	.010	.014	.008	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-12-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

NAME: COVELIGHT					TYPE:4000K			WEIGHT:			
SPEC.:1FT 透明PC罩					DIM.: 280x45mm			SERIAL No.:			
MFR.: EVERFINE					SUR.:0.28*0.045			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	24.9	26.3	25.1	26.5	26.8	24.2	25.7	24.5	25.9	26.1
	3H	25.9	27.2	26.2	27.5	27.7	25.3	26.7	25.7	26.9	27.2
	4H	25.9	27.1	26.2	27.4	27.7	25.6	26.9	25.9	27.1	27.4
	6H	25.8	27.0	26.1	27.2	27.5	25.6	26.8	25.9	27.1	27.4
	8H	25.7	26.9	26.1	27.2	27.5	25.5	26.7	25.9	27.0	27.3
	12H	25.7	26.8	26.0	27.1	27.4	25.5	26.6	25.9	26.9	27.2
4H	2H	25.3	26.6	25.6	26.8	27.1	24.8	26.1	25.1	26.4	26.6
	3H	26.4	27.5	26.8	27.8	28.1	26.0	27.1	26.4	27.4	27.7
	4H	26.4	27.4	26.8	27.8	28.1	26.3	27.3	26.7	27.6	28.0
	6H	26.4	27.2	26.8	27.6	28.0	26.3	27.2	26.7	27.6	28.0
	8H	26.3	27.1	26.7	27.5	27.9	26.3	27.1	26.7	27.5	27.9
	12H	26.3	27.0	26.7	27.4	27.8	26.3	27.0	26.7	27.4	27.8
8H	4H	26.4	27.3	26.9	27.6	28.0	26.3	27.1	26.7	27.5	27.9
	6H	26.4	27.1	26.8	27.5	27.9	26.4	27.1	26.8	27.5	27.9
	8H	26.4	27.0	26.8	27.4	27.9	26.4	27.0	26.8	27.4	27.8
	12H	26.3	26.9	26.8	27.3	27.8	26.3	26.8	26.8	27.3	27.8
12H	4H	26.4	27.2	26.8	27.5	28.0	26.3	27.0	26.7	27.4	27.8
	6H	26.4	27.0	26.8	27.4	27.8	26.3	26.9	26.8	27.4	27.8
	8H	26.3	26.8	26.8	27.3	27.8	26.3	26.8	26.8	27.3	27.8
Variations with the observer position at spacings:											
S = 1.0H		+ 0.4 / - 0.6					+ 0.4 / - 0.3				
1.5H		+ 0.6 / - 1.0					+ 0.2 / - 0.4				
2.0H		+ 0.9 / - 1.2					+ 0.5 / - 0.6				

CIE Pub.117 Corrected 929.9 lm Total Lamp Luminous Flux.(8log(F/F0) = -0.3)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 透明PC罩	DIM.: 280x45mm	SERIAL No.:
MFR.: EVERFINE	SUR.:0.28*0.045	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) k(RI) x RCR = 5									
k = 0.60	59	47	40	58	47	40	57	47	40	34
0.80	69	58	51	68	57	50	66	57	50	43
1.00	78	67	60	77	66	60	74	68	59	52
1.25	85	75	68	83	74	68	81	73	67	60
1.50	90	81	74	88	80	73	85	78	72	65
2.00	97	89	83	95	87	82	91	85	80	73
2.50	100	93	88	98	92	87	95	89	85	77
3.00	104	97	92	101	96	91	97	93	89	81
4.00	107	102	98	105	100	97	101	97	94	85
5.00	110	105	102	107	103	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended				SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2023-12-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 透明PC罩	DIM.: 280x45mm	SERIAL No.:
MFR.: EVERFINE	SUR.:0.28*0.045	Shielding Angle:

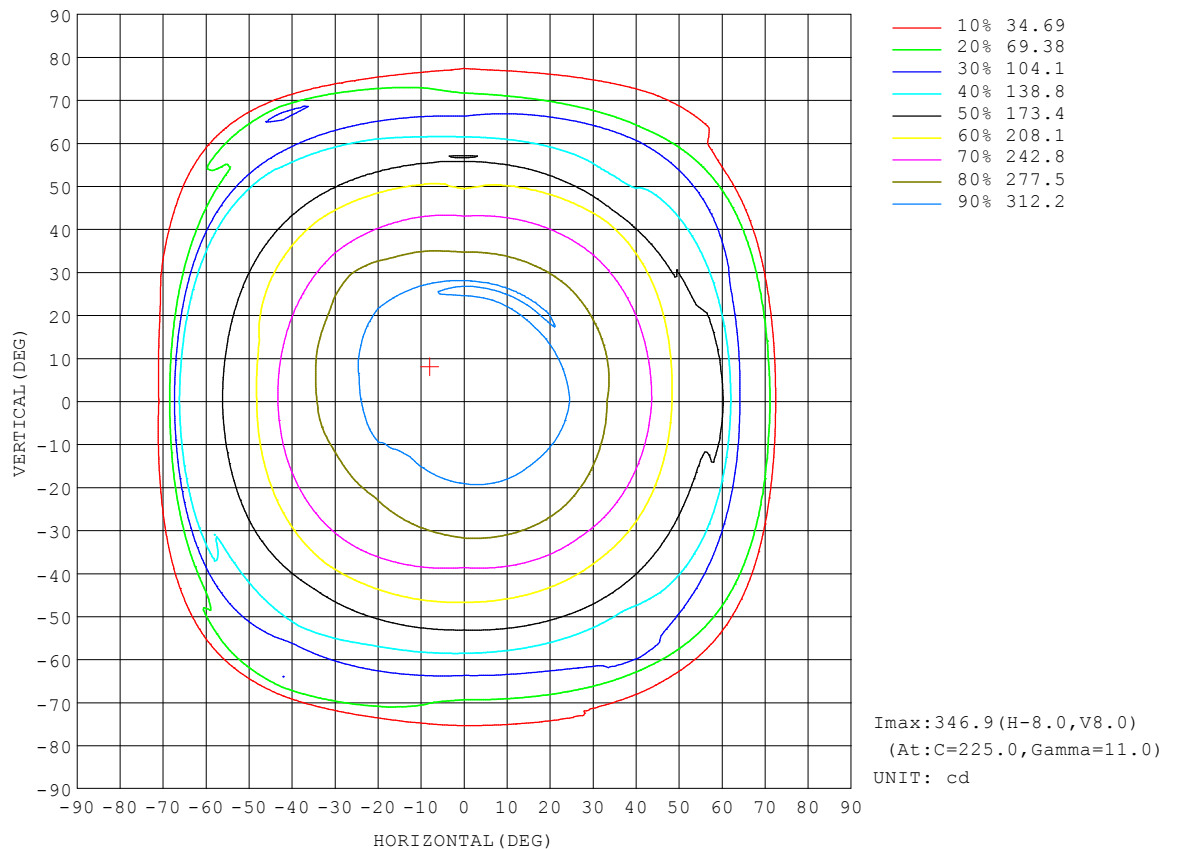


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 透明PC罩	DIM.: 280x45mm	SERIAL No.:
MFR.: EVERFINE	SUR.:0.28*0.045	Shielding Angle:

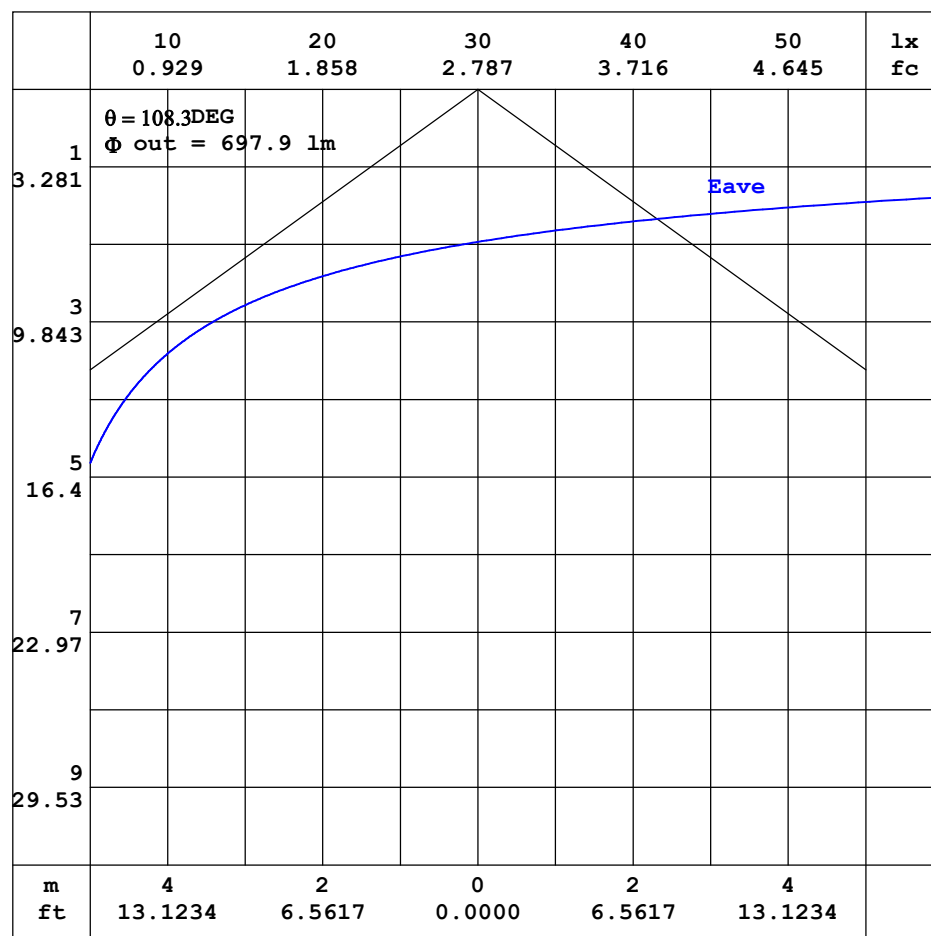


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2023-12-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: COVELIGHT	TYPE: 4000K	WEIGHT:
SPEC.: 1FT 透明PC罩	DIM.: 280x45mm	SERIAL No.:
MFR.: EVERFINE	SUR.: 0.28*0.045	Shielding Angle:

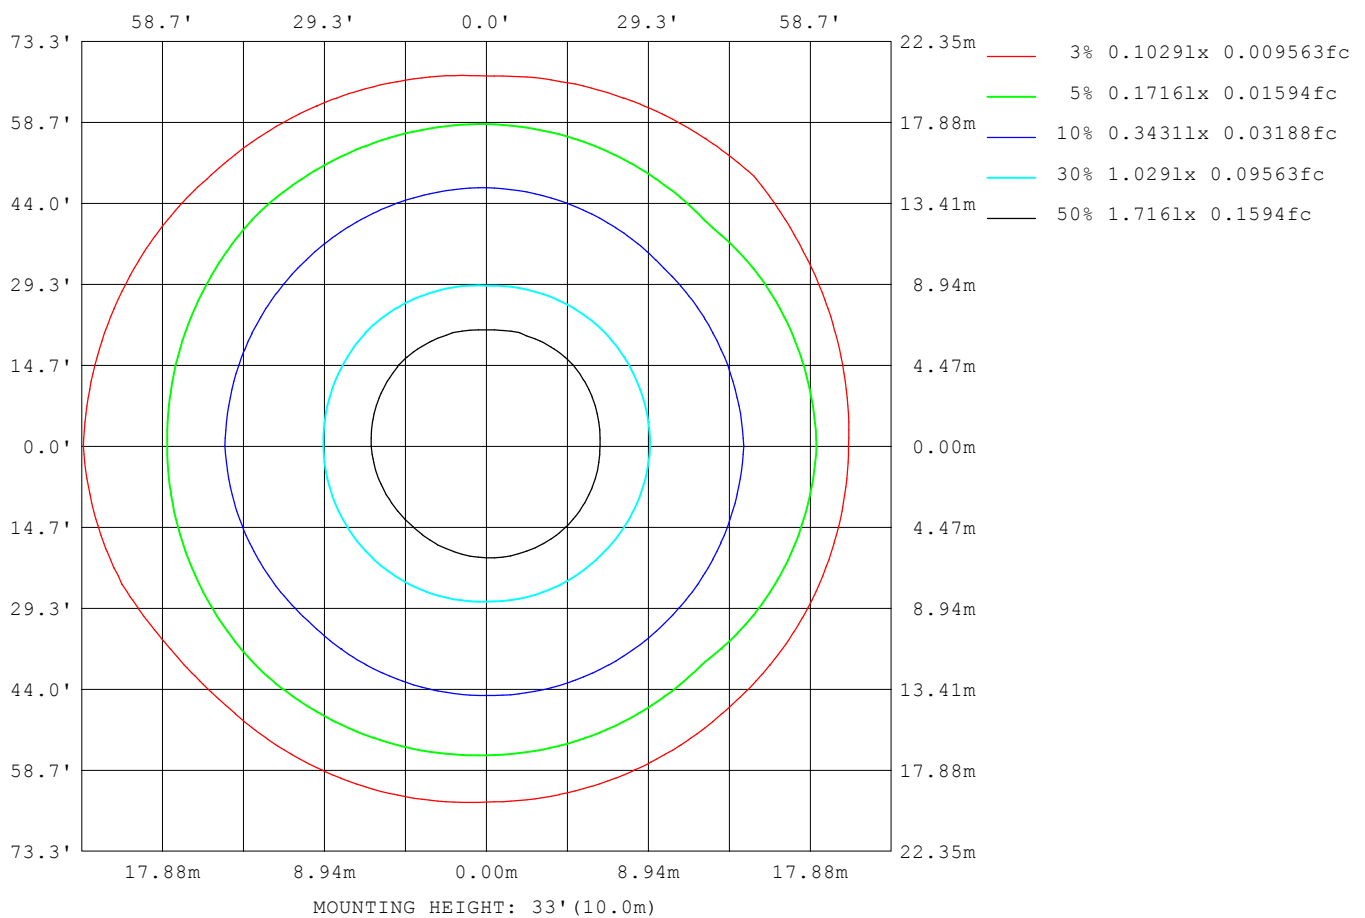

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-12-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 透明PC罩	DIM.: 280x45mm	SERIAL No.:
MFR.: EVERFINE	SUR.:0.28*0.045	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	31520
L_0~180 (75) av	3271
L_0~180 (85) av	3019
L_90~270 (65) av	25126
L_90~270 (75) av	16864
L_90~270 (85) av	3109
L_45 (65) av	27937
L_45 (75) av	15291
L_45 (85) av	3820

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

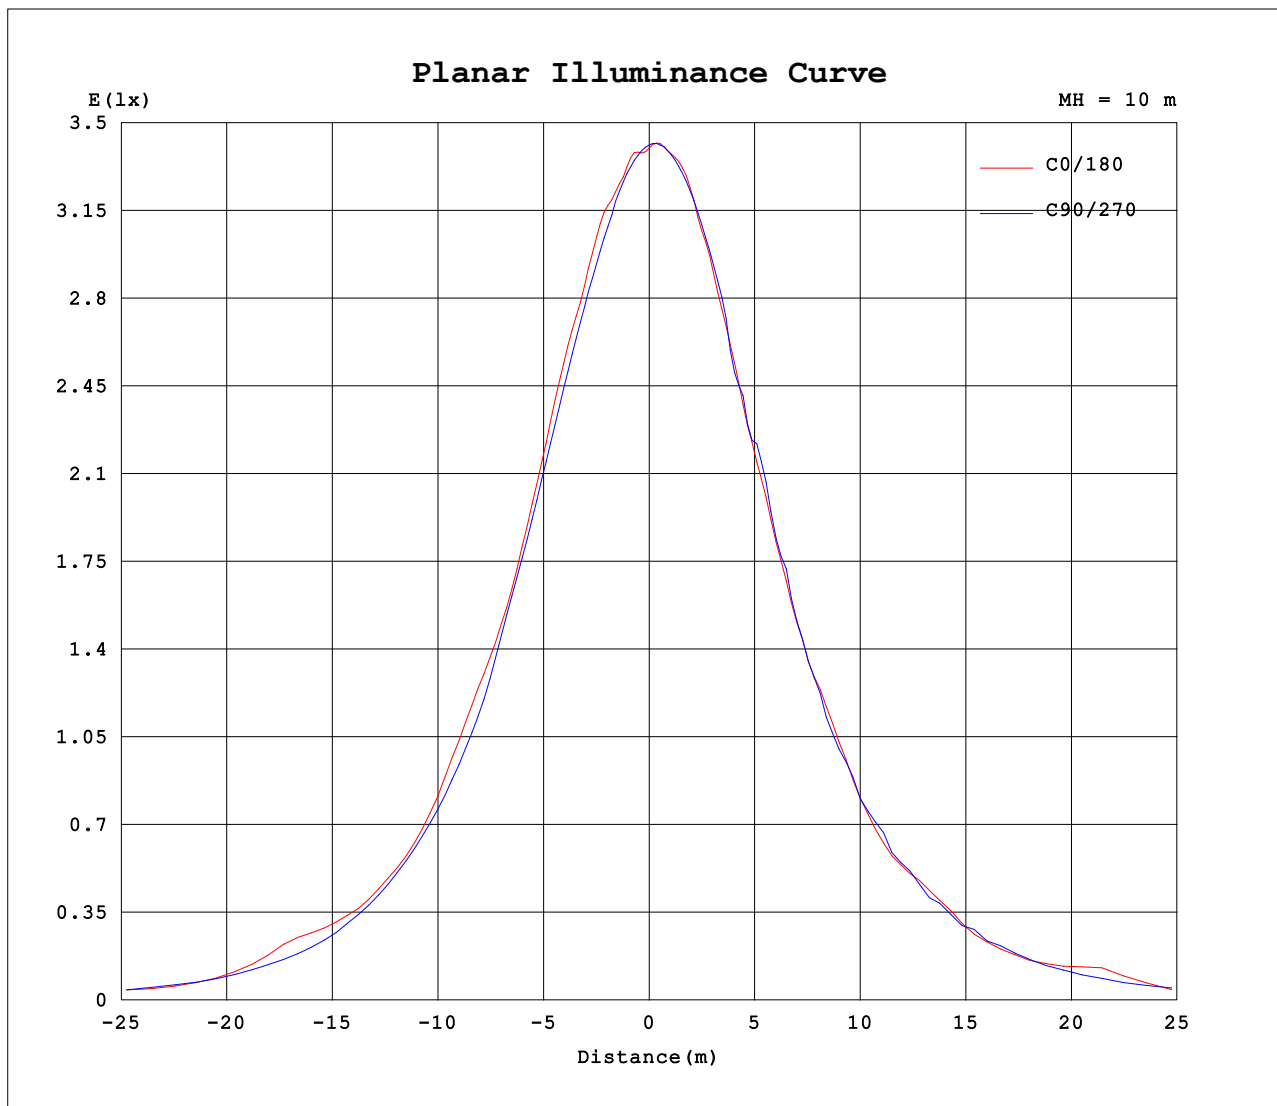

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-12-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: COVELIGHT	TYPE:4000K	WEIGHT:
SPEC.:1FT 透明PC罩	DIM.: 280x45mm	SERIAL No.:
MFR.: EVERFINE	SUR.:0.28*0.045	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	340	341	341	335	340	341	341	335										
5	340	337	336	328	343	346	343	339										
10	334	330	328	335	344	346	342	336										
15	331	321	320	318	336	344	338	336										
20	322	315	310	307	324	336	328	320										
25	311	301	299	286	308	324	309	308										
30	292	288	283	278	295	309	300	297										
35	273	269	265	269	274	291	275	280										
40	262	246	237	248	261	271	251	257										
45	231	219	216	226	228	239	228	233										
50	199	195	192	198	203	217	207	216										
55	180	164	163	161	190	183	181	167										
60	179	127	130	142	145	151	151	136										
65	94.3	109	95.8	101	172	134	117	129										
70	82.2	62.9	64.9	94.6	39.5	83.9	78.8	75.3										
75	9.14	32.4	39.0	23.5	7.79	54.7	48.3	47.7										
80	5.97	5.67	10.3	5.56	4.82	7.56	21.3	7.47										
85	2.98	2.76	0.94	3.47	2.28	3.57	4.48	3.52										
90	1.65	1.60	0.42	2.09	1.19	1.75	0.07	2.29										
95	1.16	1.00	0.40	1.66	0.90	1.00	0.05	1.87										
100	0.83	0.79	0.29	1.49	0.73	0.67	0.08	1.75										
105	0.65	0.72	0.14	1.51	0.61	0.58	0.11	1.74										
110	0.59	0.66	0.22	1.48	0.51	0.53	0.12	1.73										
115	0.53	0.61	0.28	1.29	0.39	0.49	0.15	1.36										
120	0.50	0.58	0.33	1.31	0.39	0.42	0.17	1.24										
125	0.49	0.58	0.46	1.36	0.36	0.40	0.24	1.27										
130	0.46	0.58	0.47	1.27	0.38	0.41	0.32	1.31										
135	0.49	0.60	0.52	1.15	0.37	0.42	0.36	1.37										
140	0.50	0.61	0.54	1.03	0.38	0.40	0.42	1.31										
145	0.54	0.60	0.46	0.83	0.39	0.40	0.44	1.23										
150	0.56	0.57	0.42	0.68	0.42	0.43	0.48	1.16										
155	0.57	0.56	0.36	0.94	0.45	0.47	0.51	1.11										
160	0.57	0.43	0.36	1.22	0.51	0.42	0.48	1.01										
165	0.49	0.39	0.37	1.18	0.46	0.41	0.51	0.92										
170	0.43	0.40	0.38	1.12	0.42	0.42	0.54	0.90										
175	0.39	0.41	0.68	1.00	0.39	0.43	0.55	1.01										
180	0.39	0.41	0.67	1.26	0.39	0.43	0.55	1.27										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-12-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: