


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.9V I:0.1650A P:19.80W PF:0.9920 Freq:60.00Hz Lamp Flux:2502.83x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 126.41 lm/W			
MODEL		I _{max} (cd)	3398	S/MH(C0/180)	0.55
NOMINAL POWER(W)	20W	LOR(%)	100.0	S/MH(C90/270)	0.90
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	2502.8	η UP,DN(C0-180)	0.1,53.1
NOMINAL FLUX(lm)	2502.83	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,46.7
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

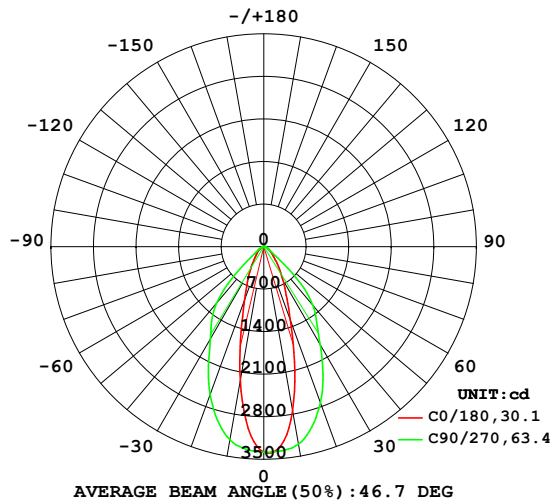

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

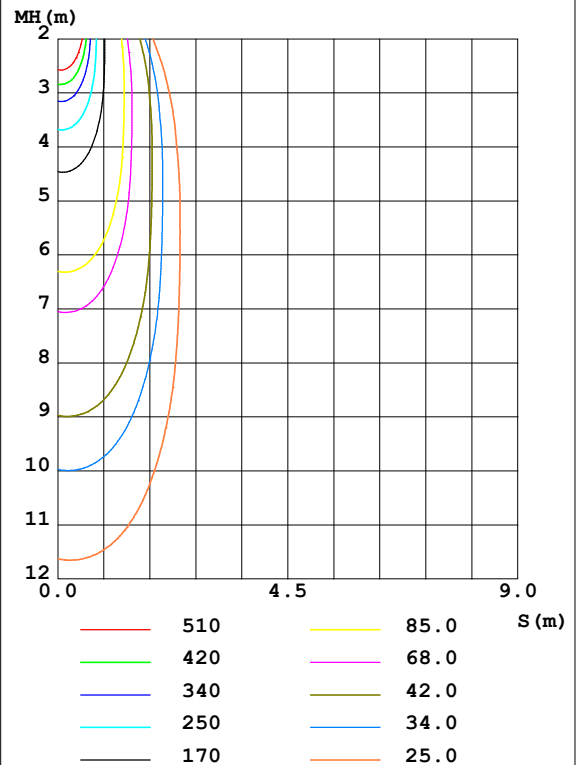

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2740	3100	3300	2901	2241	2683	3226	2818	0- 10	298.5	298.5	11.9,11.9
20	1289	1956	2728	1639	930.6	1431	2589	1592	10- 20	642.5	941.0	37.6,37.6
30	627.3	891.2	1857	708.1	449.0	636.8	1760	729.6	20- 30	601.1	1542	61.6,61.6
40	320.6	409.7	1260	335.8	215.2	307.1	1206	355.8	30- 40	457.3	1999	79.9,79.9
50	174.5	207.6	361.9	171.6	130.0	159.8	300.7	185.5	40- 50	287.9	2287	91.4,91.4
60	107.8	108.8	102.9	89.44	63.53	81.53	98.73	99.04	50- 60	124.4	2412	96.4,96.4
70	45.97	45.27	40.06	32.70	22.02	28.68	38.43	38.77	60- 70	61.51	2473	98.8,98.8
80	12.61	12.17	12.14	7.371	4.091	5.637	10.42	9.375	70- 80	22.17	2495	99.7,99.7
90	1.696	1.158	0.2886	0.0048	0	0	0	0.3841	80- 90	3.889	2499	99.9,99.9
100	0.0193	0.0219	0.0482	0.0363	0.0170	0.0121	0.0122	0.0048	90-100	0.0669	2499	99.9,99.9
110	0.0677	0.0777	0.1787	0.1042	0.0654	0.0630	0.1090	0.0411	100-110	0.0529	2499	99.9,99.9
120	0.1525	0.1821	0.4880	0.2349	0.1334	0.1769	0.2904	0.1209	110-120	0.1456	2500	99.9,99.9
130	0.2953	0.3981	0.8941	0.4991	0.2595	0.4218	0.5710	0.2733	120-130	0.2897	2500	99.9,99.9
140	0.6099	0.8085	1.392	1.056	0.5165	0.8632	0.9314	0.5612	130-140	0.4846	2500	99.9,99.9
150	1.375	1.488	1.943	1.848	1.084	1.484	1.463	1.024	140-150	0.7035	2501	99.9,99.9
160	2.458	2.206	2.251	2.494	1.905	2.054	2.048	1.527	150-160	0.8247	2502	100,100
170	2.960	2.635	2.647	2.723	2.423	2.530	2.498	2.028	160-170	0.6618	2503	100,100
180	2.767	2.783	2.730	2.493	2.619	2.727	2.706	2.496	170-180	0.2497	2503	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.9V I:0.1650A P:19.80W PF:0.9920 Freq:60.00Hz Lamp Flux:2502.83x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

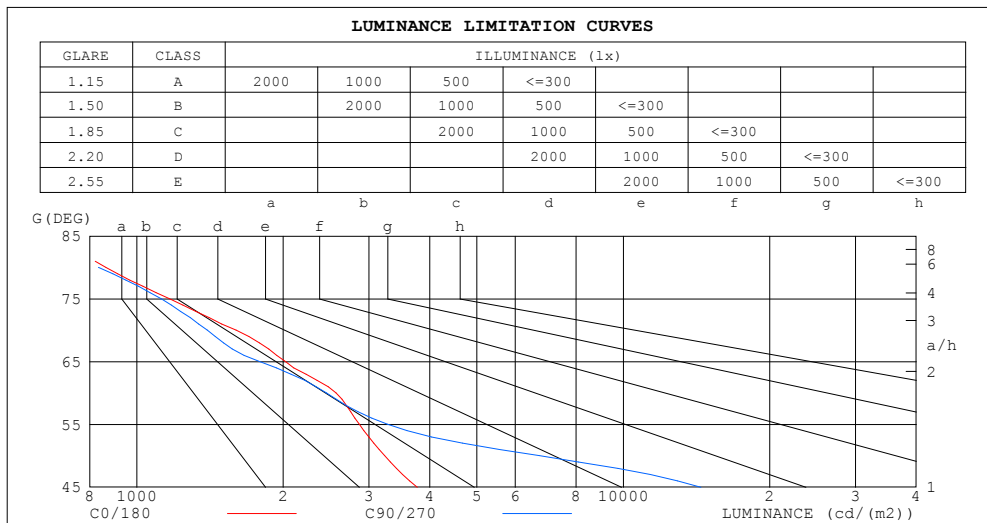

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	717	474
80	864	834
75	1168	1122
70	1600	1397
65	2022	1788
60	2565	2453
55	2867	3275
50	3231	6714
45	3772	14446


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.9V I:0.1650A P:19.80W PF:0.9920 Freq:60.00Hz Lamp Flux:2502.83x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.10	1.07	1.04	1.08	1.05	1.03	1.03	1.01	.00	.00	.98	.97	.96	.95	.94	.92
2.0	1.01	.97	.93	.99	.95	.92	.96	.93	.90	.93	.90	.88	.90	.88	.86	.84
3.0	.93	.88	.83	.92	.87	.83	.89	.85	.81	.87	.83	.80	.84	.81	.79	.77
4.0	.86	.80	.76	.85	.80	.75	.83	.78	.74	.81	.77	.73	.79	.76	.73	.71
5.0	.80	.74	.69	.79	.74	.69	.78	.72	.68	.76	.71	.68	.74	.70	.67	.66
6.0	.75	.69	.64	.74	.68	.64	.73	.67	.63	.71	.67	.63	.70	.66	.62	.61
7.0	.70	.64	.59	.70	.64	.59	.68	.63	.59	.67	.62	.59	.66	.62	.58	.57
8.0	.66	.60	.55	.66	.59	.55	.64	.59	.55	.63	.58	.55	.62	.58	.55	.53
9.0	.62	.56	.52	.62	.56	.52	.61	.55	.52	.60	.55	.51	.59	.55	.51	.50
10.0	.59	.53	.49	.59	.53	.49	.58	.52	.49	.57	.52	.48	.56	.52	.48	.47

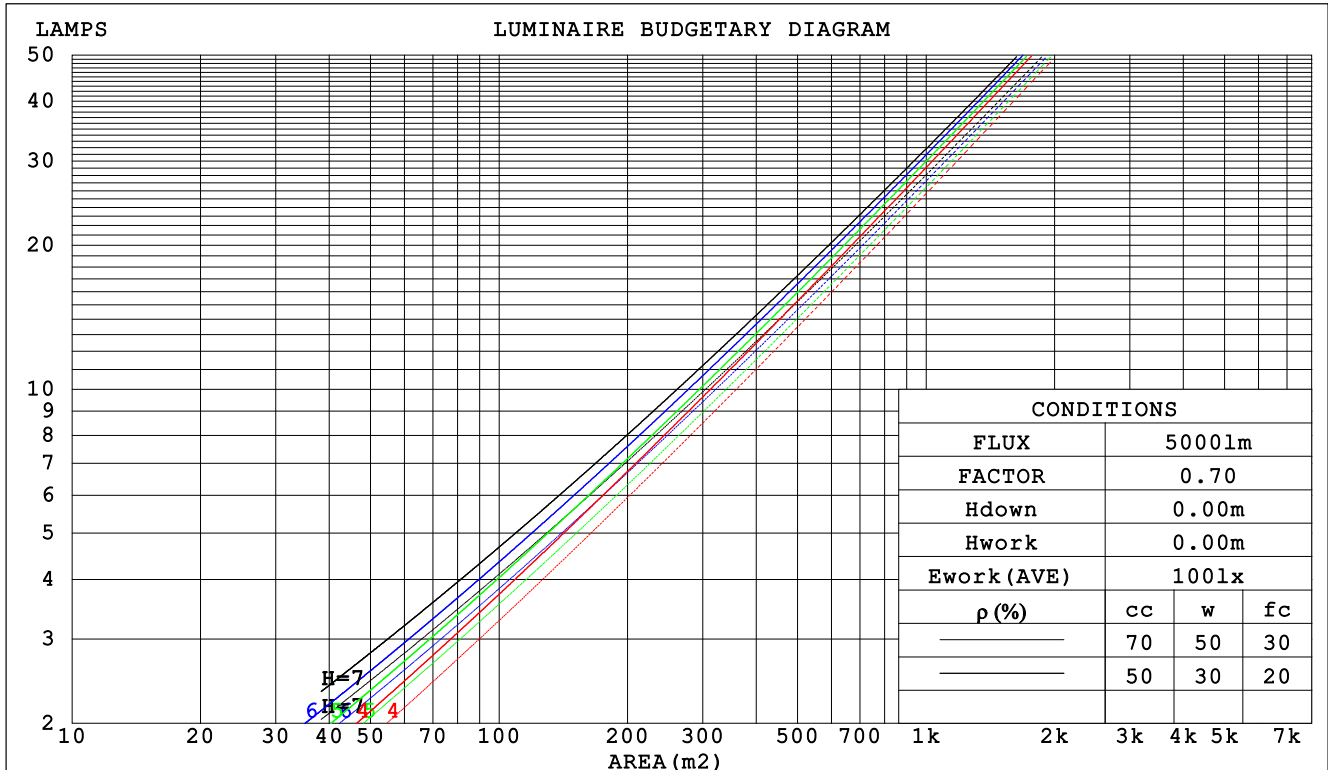

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.9V I:0.1650A P:19.80W PF:0.9920 Freq:60.00Hz Lamp Flux:2502.83x1 lm								
NAME: 4FT 2570			TYPE:4000K			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: EVERFINE			SUR.:			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.198	.112	.036	.191	.109	.035	.178	.102	.033	.166	.096	.031	.155	.090	.029		
2.0	.190	.104	.032	.184	.101	.031	.173	.096	.030	.163	.092	.029	.154	.087	.027		
3.0	.180	.096	.029	.176	.094	.028	.166	.090	.027	.158	.086	.026	.150	.083	.026		
4.0	.171	.089	.026	.167	.087	.026	.159	.084	.025	.151	.081	.024	.144	.078	.024		
5.0	.162	.082	.024	.158	.081	.024	.151	.079	.023	.144	.076	.023	.138	.074	.022		
6.0	.153	.077	.022	.150	.076	.022	.144	.074	.021	.138	.072	.021	.133	.070	.021		
7.0	.146	.072	.020	.143	.071	.020	.137	.069	.020	.132	.068	.020	.127	.066	.019		
8.0	.138	.068	.019	.136	.067	.019	.131	.065	.019	.126	.064	.018	.122	.063	.018		
9.0	.132	.064	.018	.130	.063	.018	.125	.062	.018	.121	.061	.017	.117	.059	.017		
10.0	.126	.060	.017	.124	.060	.017	.120	.059	.017	.116	.058	.016	.112	.056	.016		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.174	.158	.144	.149	.136	.124	.102	.093	.086	.058	.054	.050	.019	.017	.016	
2.0	.160	.133	.111	.137	.115	.096	.094	.079	.067	.054	.046	.039	.017	.015	.013	
3.0	.148	.115	.088	.127	.099	.076	.087	.069	.054	.050	.040	.032	.016	.013	.010	
4.0	.139	.100	.071	.119	.087	.062	.082	.060	.043	.047	.035	.026	.015	.012	.008	
5.0	.130	.089	.058	.112	.077	.051	.077	.054	.036	.045	.032	.021	.014	.010	.007	
6.0	.123	.080	.049	.106	.069	.043	.073	.048	.030	.042	.028	.018	.014	.009	.006	
7.0	.116	.072	.042	.100	.063	.036	.069	.044	.026	.040	.026	.015	.013	.008	.005	
8.0	.111	.066	.036	.095	.057	.031	.066	.040	.022	.038	.024	.013	.012	.008	.004	
9.0	.105	.061	.031	.091	.053	.027	.063	.037	.019	.037	.022	.012	.012	.007	.004	
10.0	.100	.057	.028	.087	.049	.024	.060	.035	.017	.035	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.9V I:0.1650A P:19.80W PF:0.9920 Freq:60.00Hz Lamp Flux:2502.83x1 lm										
NAME: 4FT 2570					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.6	14.7	13.9	14.9	15.0	17.4	18.4	17.6	18.6	18.8
3H	14.1	15.1	14.4	15.3	15.5	17.4	18.4	17.7	18.6	18.8
4H	14.2	15.2	14.5	15.4	15.6	17.4	18.3	17.7	18.5	18.7
6H	14.3	15.1	14.6	15.4	15.6	17.3	18.2	17.6	18.4	18.7
8H	14.3	15.1	14.6	15.3	15.6	17.3	18.1	17.6	18.4	18.6
12H	14.2	15.0	14.6	15.3	15.6	17.3	18.0	17.6	18.3	18.6
4H 2H	13.9	14.8	14.2	15.0	15.2	17.3	18.2	17.6	18.4	18.7
3H	14.5	15.3	14.8	15.5	15.8	17.4	18.2	17.7	18.4	18.7
4H	14.7	15.4	15.0	15.7	16.0	17.4	18.1	17.7	18.4	18.7
6H	14.7	15.4	15.1	15.7	16.0	17.4	18.0	17.7	18.3	18.7
8H	14.7	15.3	15.1	15.7	16.0	17.3	17.9	17.7	18.3	18.6
12H	14.7	15.3	15.1	15.6	16.0	17.3	17.8	17.7	18.2	18.6
8H 4H	14.6	15.2	15.0	15.6	16.0	17.3	17.9	17.7	18.2	18.6
6H	14.8	15.2	15.2	15.6	16.1	17.3	17.8	17.7	18.2	18.6
8H	14.8	15.2	15.2	15.6	16.1	17.3	17.7	17.7	18.1	18.6
12H	14.8	15.2	15.3	15.6	16.1	17.2	17.6	17.7	18.1	18.5
12H 4H	14.6	15.1	15.0	15.5	15.9	17.3	17.8	17.7	18.2	18.6
6H	14.7	15.2	15.2	15.6	16.0	17.3	17.7	17.7	18.1	18.5
8H	14.8	15.1	15.2	15.6	16.1	17.2	17.6	17.7	18.0	18.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.8 / - 1.0					+ 3.1 / - 3.7				
1.5H	+ 0.9 / - 0.8					+ 4.0 / - 3.8				
2.0H	+ 1.0 / - 0.9					+ 6.4 / - 3.3				

CIE Pub.117 Corrected 2503 lm Total Lamp Luminous Flux.(8log(F/F0) = 3.2)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.9V I:0.1650A P:19.80W PF:0.9920 Freq:60.00Hz Lamp Flux:2502.83x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	79	71	66	78	71	66	77	70	66	62
0.80	87	80	75	87	80	75	85	79	75	70
1.00	93	86	82	92	86	82	91	86	81	76
1.25	98	92	88	97	91	87	95	90	86	81
1.50	102	96	92	100	95	91	98	93	90	85
2.00	106	100	97	104	99	96	101	97	94	88
2.50	108	103	99	106	102	99	103	99	97	90
3.00	110	106	102	108	104	101	104	101	99	92
4.00	112	109	106	110	107	105	106	104	102	94
5.00	114	111	108	111	109	107	107	105	104	96
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.9V I:0.1650A P:19.80W PF:0.9920 Freq:60.00Hz Lamp Flux:2502.83x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

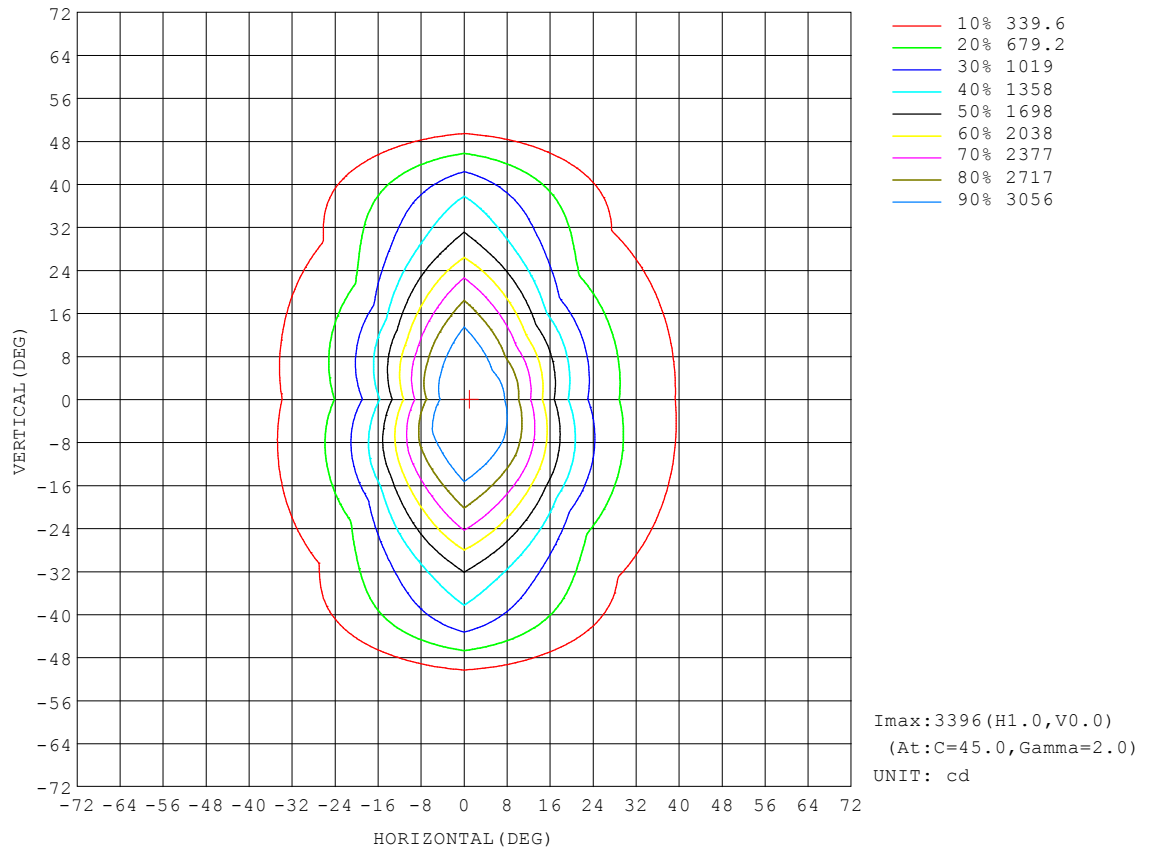


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.9V I:0.1650A P:19.80W PF:0.9920 Freq:60.00Hz Lamp Flux:2502.83x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

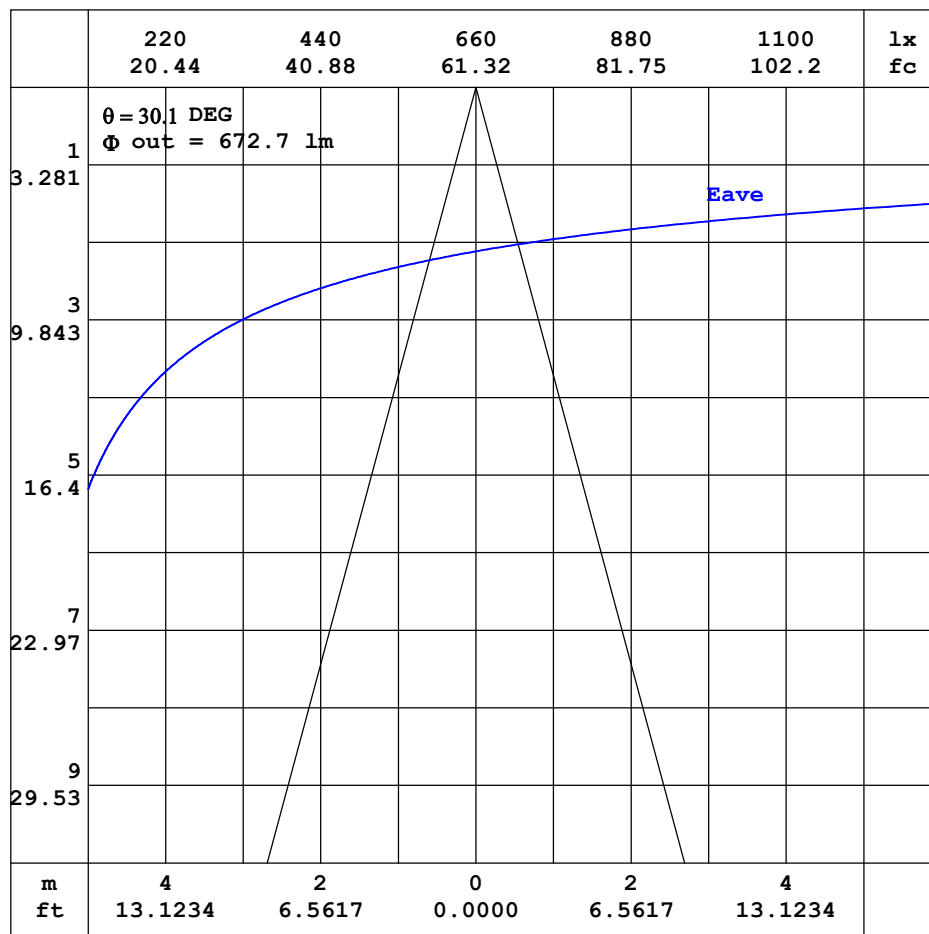


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.9V I:0.1650A P:19.80W PF:0.9920 Freq:60.00Hz Lamp Flux:2502.83x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

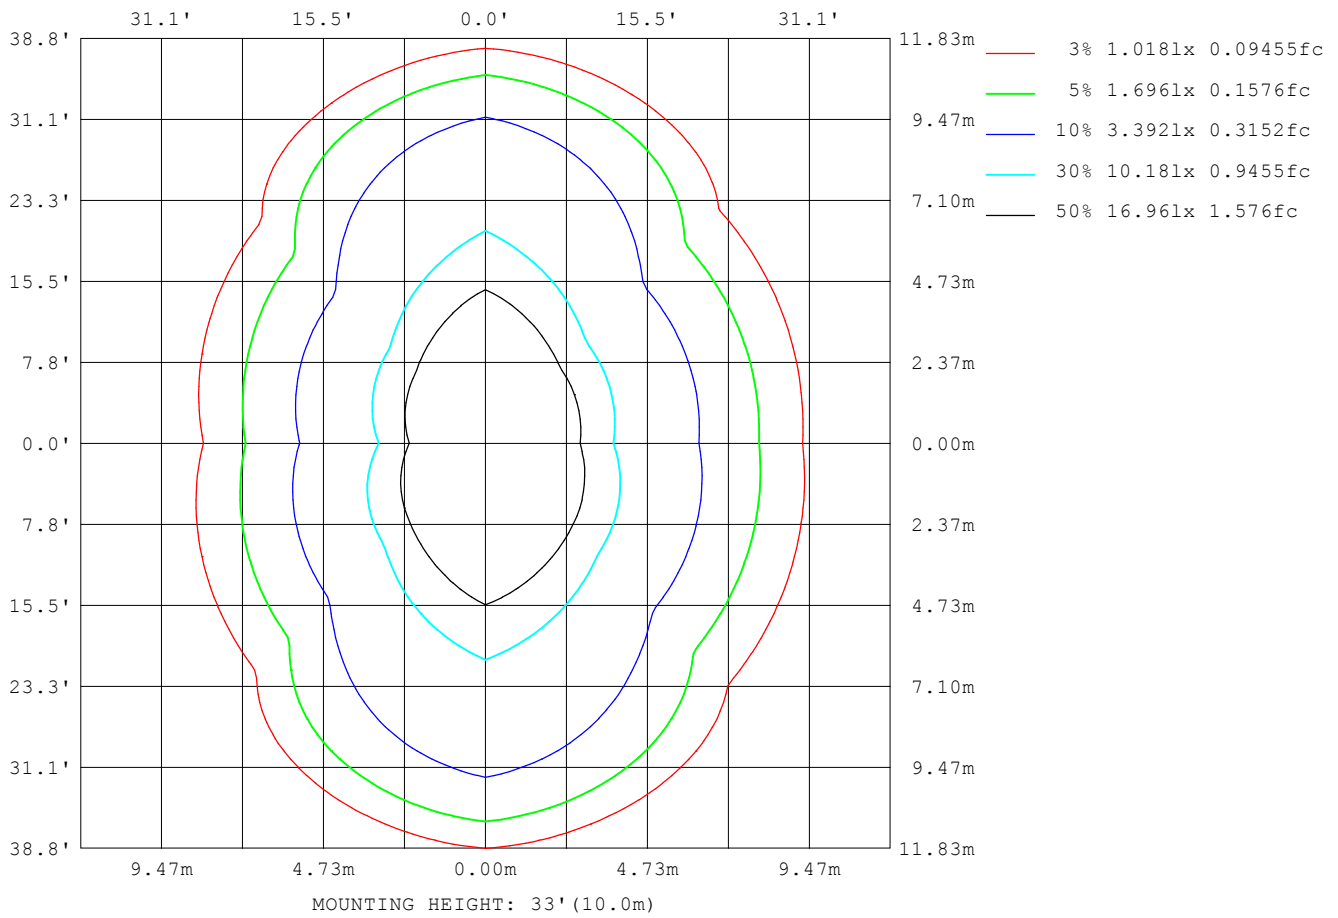

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.9V I:0.1650A P:19.80W PF:0.9920 Freq:60.00Hz Lamp Flux:2502.83x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1574
L_0~180 (75) av	832
L_0~180 (85) av	419
L_90~270 (65) av	1731
L_90~270 (75) av	1082
L_90~270 (85) av	411
L_45 (65) av	1757
L_45 (75) av	900
L_45 (85) av	385

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

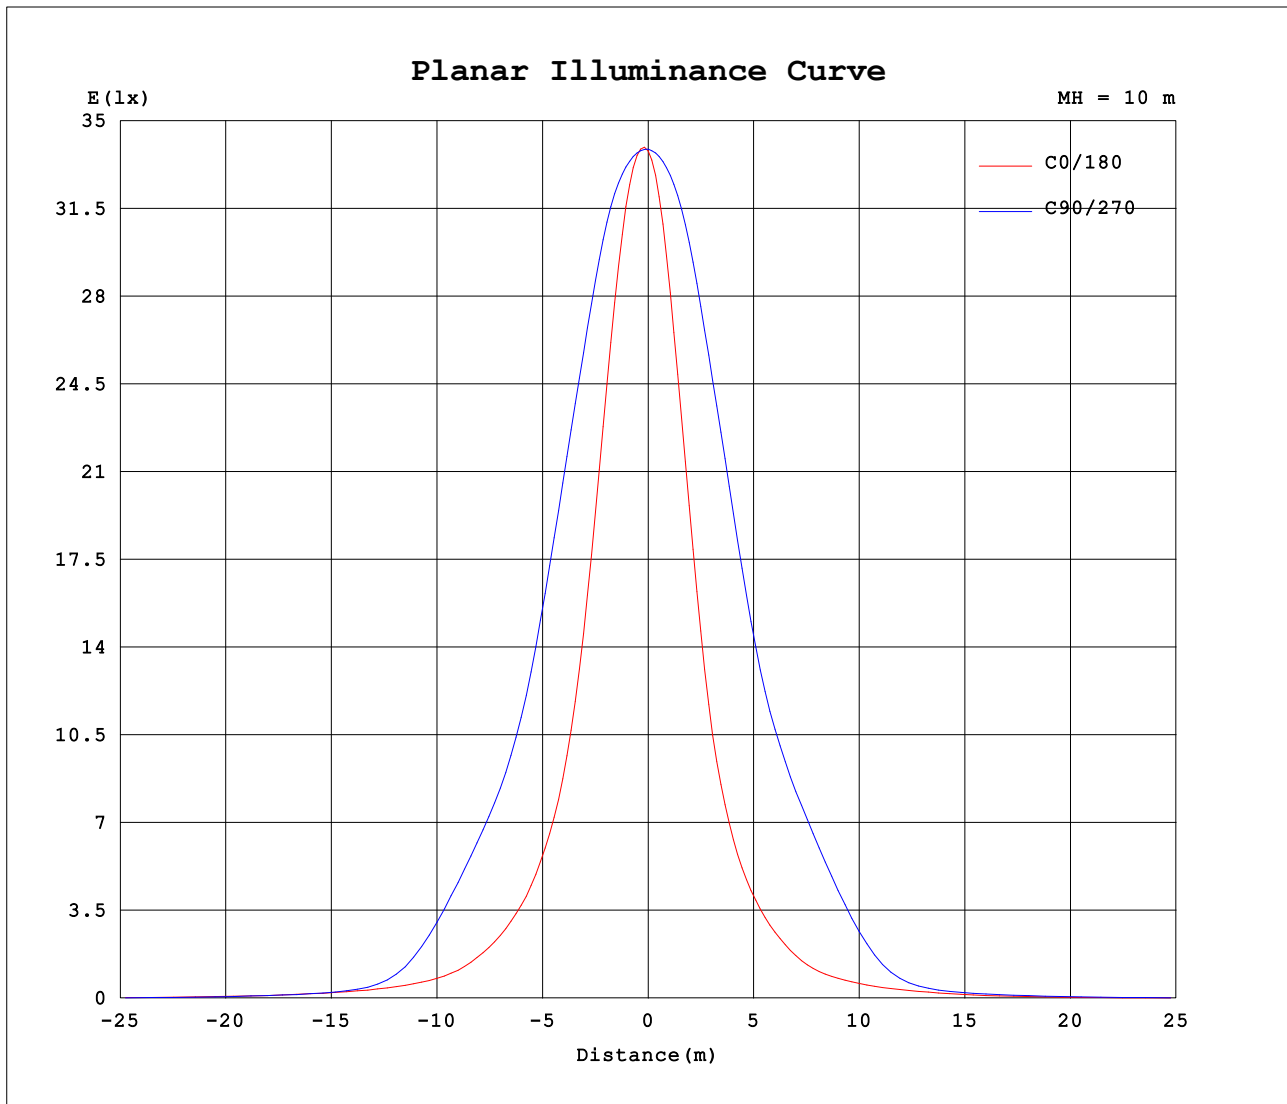

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.9V I:0.1650A P:19.80W PF:0.9920 Freq:60.00Hz Lamp Flux:2502.83x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	3381	3381	3381	3381	3381	3381	3381	3381										
5	3284	3358	3371	3285	2996	3158	3346	3228										
10	2740	3100	3300	2901	2241	2683	3226	2818										
15	1965	2594	3070	2304	1456	2060	2952	2226										
20	1289	1956	2728	1639	931	1431	2589	1592										
25	883	1345	2315	1069	636	946	2155	1068										
30	627	891	1857	708	449	637	1760	730										
35	456	596	1522	484	310	437	1497	504										
40	321	410	1260	336	215	307	1206	356										
45	224	289	857	238	167	221	753	255										
50	174	208	362	172	130	160	301	185										
55	138	152	158	125	98.6	117	148	137										
60	108	109	103	89.4	63.5	81.5	98.7	99.0										
65	71.8	74.7	63.4	57.4	40.0	50.5	59.5	66.9										
70	46.0	45.3	40.1	32.7	22.0	28.7	38.4	38.8										
75	25.4	25.5	24.3	17.3	10.8	14.4	22.7	21.1										
80	12.6	12.2	12.1	7.37	4.09	5.64	10.4	9.38										
85	5.25	4.46	3.47	2.24	0.88	1.52	2.55	3.06										
90	1.70	1.16	0.29	0.00	0.00	0.00	0.00	0.38										
95	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00										
100	0.02	0.02	0.05	0.04	0.02	0.01	0.01	0.00										
105	0.05	0.05	0.09	0.06	0.03	0.04	0.05	0.02										
110	0.07	0.08	0.18	0.10	0.07	0.06	0.11	0.04										
115	0.10	0.12	0.31	0.16	0.09	0.10	0.19	0.07										
120	0.15	0.18	0.49	0.23	0.13	0.18	0.29	0.12										
125	0.21	0.27	0.68	0.34	0.18	0.27	0.42	0.18										
130	0.30	0.40	0.89	0.50	0.26	0.42	0.57	0.27										
135	0.43	0.56	1.14	0.73	0.36	0.62	0.74	0.40										
140	0.61	0.81	1.39	1.06	0.52	0.86	0.93	0.56										
145	0.91	1.12	1.67	1.45	0.75	1.15	1.15	0.77										
150	1.38	1.49	1.94	1.85	1.08	1.48	1.46	1.02										
155	1.93	1.87	2.09	2.22	1.48	1.78	1.76	1.28										
160	2.46	2.21	2.25	2.49	1.91	2.05	2.05	1.53										
165	2.81	2.47	2.39	2.67	2.23	2.31	2.29	1.77										
170	2.96	2.63	2.65	2.72	2.42	2.53	2.50	2.03										
175	2.90	2.73	2.74	2.64	2.52	2.69	2.65	2.29										
180	2.77	2.78	2.73	2.49	2.62	2.73	2.71	2.50										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: