


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.8V I:0.2400A P:28.90W PF:0.9950 Freq:60.00Hz Lamp Flux:3521.68x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 121.86 lm/W			
MODEL		Imax(cd)	4779	S/MH(C0/180)	0.55
NOMINAL POWER(W)	30W	LOR(%)	100.0	S/MH(C90/270)	0.90
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	3521.7	η UP,DN(C0-180)	0.1,53.0
NOMINAL FLUX(lm)	3521.68	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,46.8
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

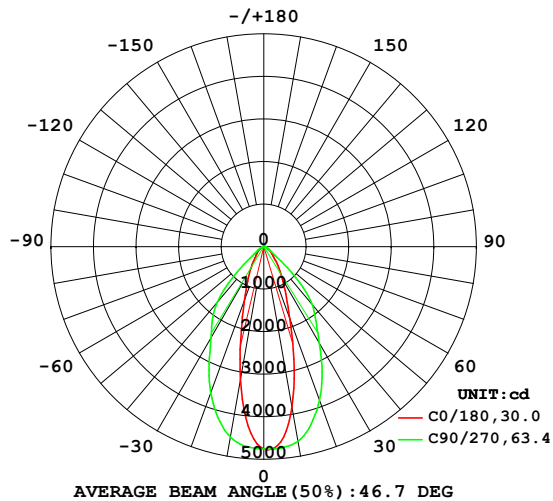

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

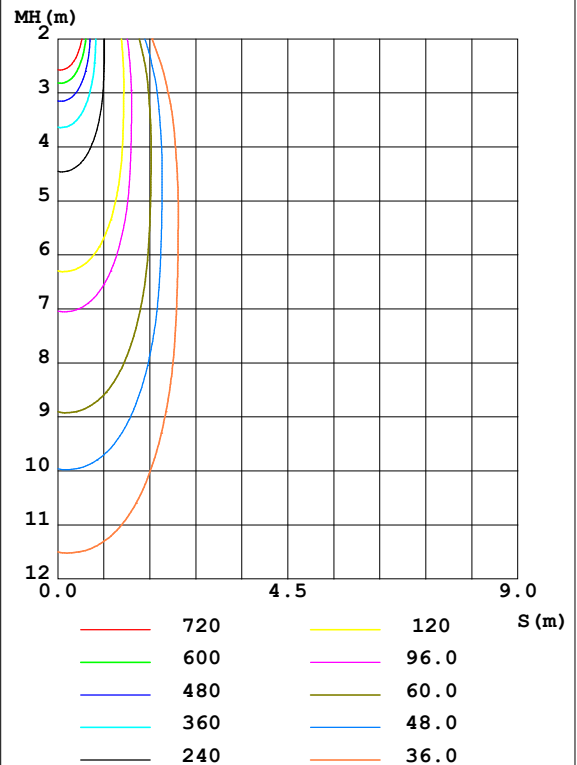

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3830	4362	4645	4083	3169	3781	4544	3964	0- 10	420.1	420.1	11.9,11.9
20	1796	2746	3839	2297	1321	2021	3652	2239	10- 20	904.0	1324	37.6,37.6
30	879.5	1252	2609	997.4	636.8	892.6	2483	1026	20- 30	845.9	2170	61.6,61.6
40	446.9	576.2	1771	473.2	304.1	432.9	1702	500.6	30- 40	643.9	2814	79.9,79.9
50	243.7	291.8	526.4	241.4	184.7	225.4	427.2	260.9	40- 50	405.3	3219	91.4,91.4
60	150.4	154.2	144.0	125.9	89.95	115.0	140.2	139.4	50- 60	175.3	3394	96.4,96.4
70	63.72	63.42	56.12	46.07	31.40	40.56	54.29	54.54	60- 70	86.37	3481	98.8,98.8
80	17.43	17.03	16.93	10.44	5.915	7.996	14.84	13.11	70- 80	31.16	3512	99.7,99.7
90	2.296	1.616	0.3750	0.0217	0.0073	0.0121	0.0048	0.5554	80- 90	5.458	3517	99.9,99.9
100	0.0314	0.0291	0.0507	0.0412	0.0412	0.0364	0.0339	0.0315	90-100	0.0999	3518	99.9,99.9
110	0.0727	0.0898	0.1812	0.1115	0.0969	0.1066	0.1696	0.0944	100-110	0.0750	3518	99.9,99.9
120	0.1693	0.2038	0.4714	0.2398	0.2035	0.2448	0.4431	0.2056	110-120	0.1843	3518	99.9,99.9
130	0.3242	0.4320	0.9090	0.5017	0.3732	0.5550	0.8425	0.4356	120-130	0.3540	3518	99.9,99.9
140	0.6508	0.8566	1.444	1.047	0.7417	1.142	1.353	0.8639	130-140	0.5847	3519	99.9,99.9
150	1.389	1.531	2.080	1.870	1.507	1.923	1.975	1.525	140-150	0.8377	3520	99.9,99.9
160	2.539	2.256	2.564	2.654	2.592	2.597	2.611	2.201	150-160	0.9722	3521	100,100
170	3.298	2.843	3.099	3.080	3.214	3.034	3.082	2.743	160-170	0.7857	3521	100,100
180	3.264	3.291	3.222	3.036	3.288	3.174	3.278	3.102	170-180	0.3004	3522	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.8V I:0.2400A P:28.90W PF:0.9950 Freq:60.00Hz Lamp Flux:3521.68x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

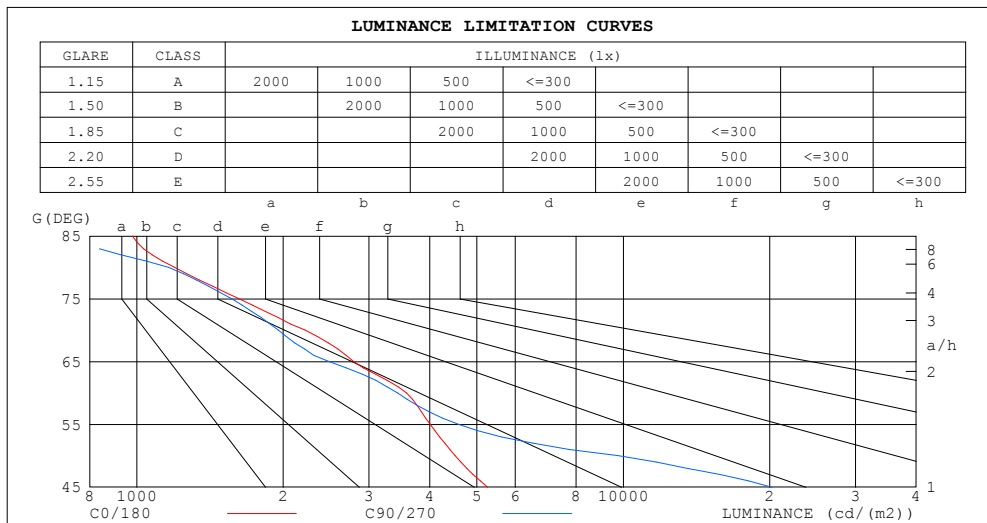

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	979	655
80	1195	1162
75	1622	1567
70	2218	1956
65	2789	2483
60	3580	3432
55	4009	4579
50	4514	9759
45	5263	20217


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.8V I:0.2400A P:28.90W PF:0.9950 Freq:60.00Hz Lamp Flux:3521.68x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.10	1.07	1.04	1.08	1.05	1.03	1.03	1.01	.00	.00	.98	.97	.96	.95	.94	.92
2.0	1.01	.97	.93	.99	.95	.92	.96	.93	.90	.93	.90	.88	.90	.88	.86	.84
3.0	.93	.88	.83	.92	.87	.83	.89	.85	.81	.87	.83	.80	.84	.81	.79	.77
4.0	.86	.80	.76	.85	.80	.75	.83	.78	.74	.81	.77	.73	.79	.76	.73	.71
5.0	.80	.74	.69	.79	.74	.69	.78	.72	.68	.76	.71	.68	.74	.70	.67	.66
6.0	.75	.69	.64	.74	.68	.64	.73	.67	.63	.71	.67	.63	.70	.66	.62	.61
7.0	.70	.64	.59	.70	.64	.59	.68	.63	.59	.67	.62	.59	.66	.62	.58	.57
8.0	.66	.60	.55	.66	.60	.55	.64	.59	.55	.63	.58	.55	.62	.58	.55	.53
9.0	.62	.56	.52	.62	.56	.52	.61	.55	.52	.60	.55	.51	.59	.55	.51	.50
10.0	.59	.53	.49	.59	.53	.49	.58	.52	.49	.57	.52	.48	.56	.52	.48	.47

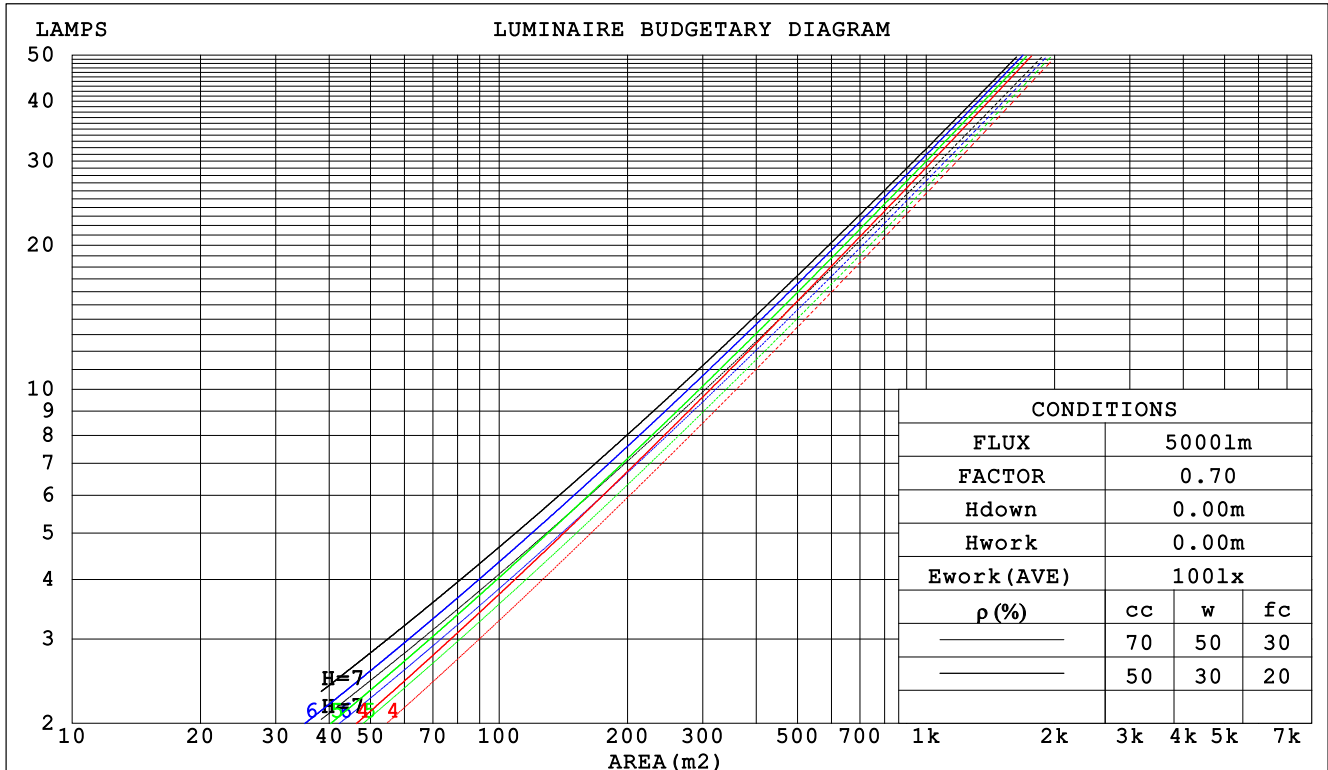

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.8V I:0.2400A P:28.90W PF:0.9950 Freq:60.00Hz Lamp Flux:3521.68x1 lm								
NAME: 4FT 2570				TYPE:4000K			WEIGHT:	
SPEC.:				DIM.:			SERIAL No.:	
MFR.: EVERFINE				SUR.:			Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.197	.112	.036	.191	.109	.035	.178	.102	.033	.166	.096	.031	.155	.090	.029		
2.0	.190	.104	.032	.184	.101	.031	.173	.096	.030	.163	.092	.029	.154	.087	.027		
3.0	.180	.096	.029	.176	.094	.028	.166	.090	.027	.158	.086	.026	.150	.083	.026		
4.0	.171	.089	.026	.167	.087	.026	.159	.084	.025	.151	.081	.024	.144	.078	.024		
5.0	.162	.082	.024	.158	.081	.024	.151	.079	.023	.144	.076	.023	.138	.074	.022		
6.0	.153	.077	.022	.150	.076	.022	.144	.074	.021	.138	.072	.021	.133	.070	.021		
7.0	.146	.072	.020	.143	.071	.020	.137	.069	.020	.132	.068	.020	.127	.066	.019		
8.0	.138	.068	.019	.136	.067	.019	.131	.065	.019	.126	.064	.018	.122	.063	.018		
9.0	.132	.064	.018	.130	.063	.018	.125	.062	.018	.121	.061	.017	.117	.059	.017		
10.0	.126	.060	.017	.124	.060	.017	.120	.059	.017	.116	.058	.016	.112	.056	.016		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.173	.158	.144	.148	.136	.124	.102	.093	.086	.058	.054	.050	.019	.017	.016	
2.0	.160	.133	.111	.137	.115	.096	.094	.079	.067	.054	.046	.039	.017	.015	.013	
3.0	.148	.115	.088	.127	.099	.076	.087	.069	.053	.050	.040	.032	.016	.013	.010	
4.0	.138	.100	.071	.119	.087	.062	.082	.060	.043	.047	.035	.026	.015	.012	.008	
5.0	.130	.089	.058	.112	.077	.051	.077	.054	.036	.045	.032	.021	.014	.010	.007	
6.0	.123	.080	.049	.106	.069	.042	.073	.048	.030	.042	.028	.018	.014	.009	.006	
7.0	.116	.072	.041	.100	.063	.036	.069	.044	.026	.040	.026	.015	.013	.008	.005	
8.0	.110	.066	.036	.095	.057	.031	.066	.040	.022	.038	.024	.013	.012	.008	.004	
9.0	.105	.061	.031	.091	.053	.027	.063	.037	.019	.037	.022	.011	.012	.007	.004	
10.0	.100	.057	.027	.086	.049	.024	.060	.035	.017	.035	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.8V I:0.2400A P:28.90W PF:0.9950 Freq:60.00Hz Lamp Flux:3521.68x1 lm										
NAME: 4FT 2570					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.8	15.8	15.0	16.0	16.2	18.6	19.6	18.8	19.8	20.0
3H	15.3	16.2	15.5	16.4	16.7	18.6	19.6	18.9	19.8	20.0
4H	15.4	16.3	15.7	16.5	16.8	18.6	19.5	18.9	19.7	19.9
6H	15.4	16.3	15.7	16.5	16.8	18.5	19.4	18.8	19.6	19.9
8H	15.4	16.2	15.7	16.5	16.8	18.5	19.3	18.8	19.6	19.8
12H	15.4	16.2	15.7	16.4	16.7	18.4	19.2	18.8	19.5	19.8
4H 2H	15.0	15.9	15.3	16.2	16.4	18.5	19.4	18.8	19.6	19.8
3H	15.6	16.4	16.0	16.7	17.0	18.6	19.3	18.9	19.6	19.9
4H	15.8	16.5	16.2	16.8	17.1	18.6	19.3	18.9	19.6	19.9
6H	15.9	16.5	16.3	16.8	17.2	18.5	19.2	18.9	19.5	19.9
8H	15.9	16.5	16.3	16.8	17.2	18.5	19.1	18.9	19.5	19.8
12H	15.9	16.4	16.3	16.8	17.2	18.5	19.0	18.9	19.4	19.8
8H 4H	15.8	16.4	16.2	16.7	17.1	18.5	19.1	18.9	19.4	19.8
6H	15.9	16.4	16.3	16.8	17.2	18.5	19.0	18.9	19.4	19.8
8H	15.9	16.4	16.4	16.8	17.2	18.5	18.9	18.9	19.3	19.8
12H	15.9	16.3	16.4	16.8	17.2	18.4	18.8	18.9	19.2	19.7
12H 4H	15.8	16.3	16.2	16.7	17.1	18.4	19.0	18.9	19.4	19.7
6H	15.9	16.3	16.3	16.7	17.2	18.4	18.9	18.9	19.3	19.7
8H	15.9	16.3	16.4	16.7	17.2	18.4	18.8	18.9	19.2	19.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.8 / - 1.0					+ 3.1 / - 3.7				
1.5H	+ 0.9 / - 0.8					+ 4.0 / - 3.9				
2.0H	+ 1.0 / - 0.9					+ 6.4 / - 3.3				

CIE Pub.117 Corrected 3522 lm Total Lamp Luminous Flux. (8log(F/F0) = 4.4)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.8V I:0.2400A P:28.90W PF:0.9950 Freq:60.00Hz Lamp Flux:3521.68x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	79	71	66	78	71	66	77	70	66	62
0.80	87	80	75	87	80	75	85	79	75	70
1.00	93	86	82	92	86	82	91	86	81	76
1.25	98	92	88	97	91	87	95	90	86	81
1.50	102	96	92	100	95	91	98	93	90	85
2.00	106	100	97	104	99	96	101	97	94	88
2.50	108	103	99	106	102	99	103	99	97	90
3.00	110	106	102	108	104	101	104	101	99	92
4.00	112	109	106	110	107	105	106	104	102	94
5.00	114	111	108	111	109	107	107	105	104	96
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.8V I:0.2400A P:28.90W PF:0.9950 Freq:60.00Hz Lamp Flux:3521.68x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

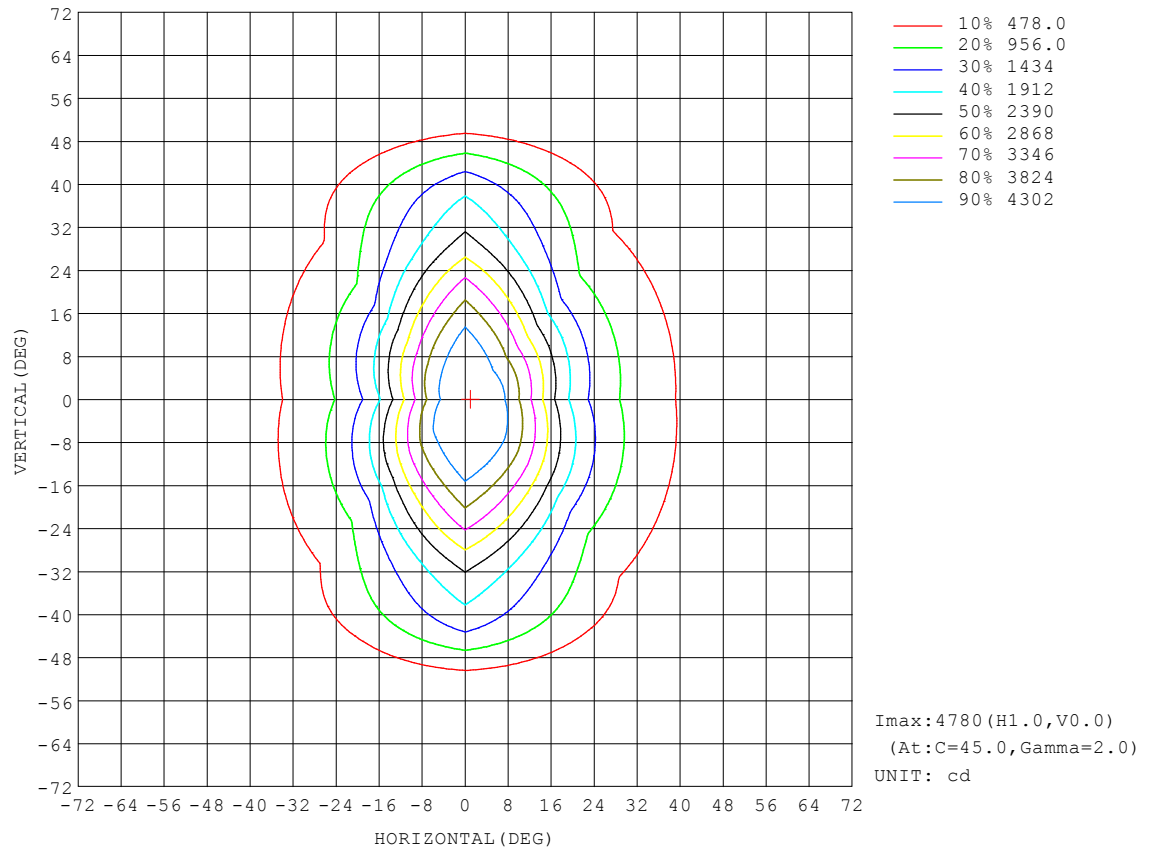


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.8V I:0.2400A P:28.90W PF:0.9950 Freq:60.00Hz Lamp Flux:3521.68x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

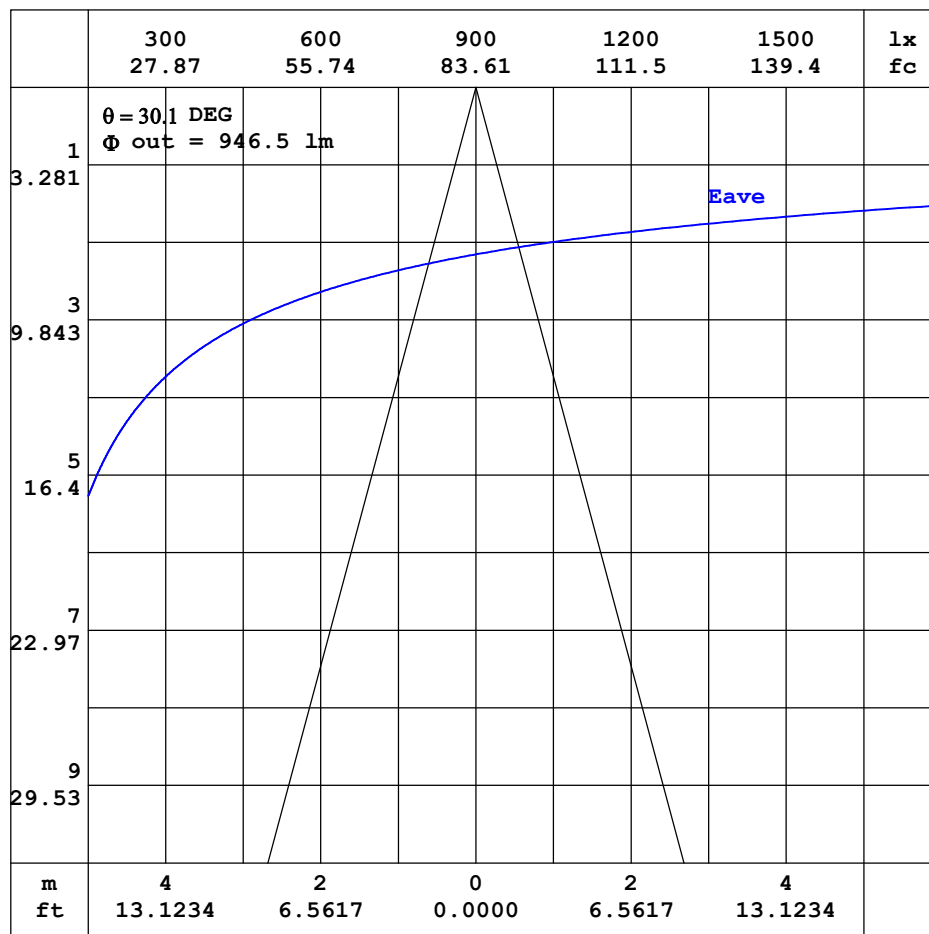


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.8V I:0.2400A P:28.90W PF:0.9950 Freq:60.00Hz Lamp Flux:3521.68x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

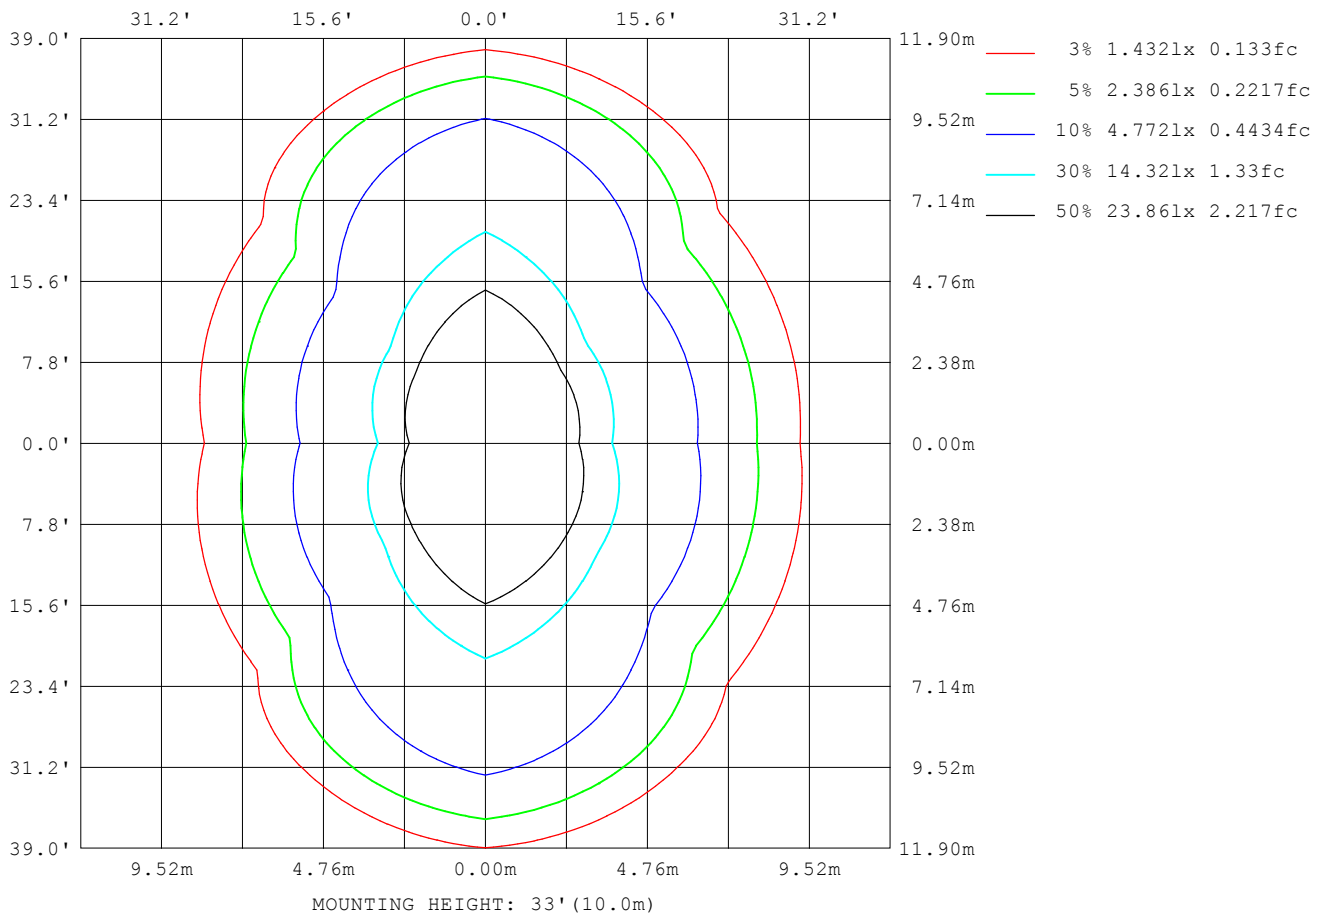

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.8V I:0.2400A P:28.90W PF:0.9950 Freq:60.00Hz Lamp Flux:3521.68x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2195
L_0~180 (75) av	1165
L_0~180 (85) av	581
L_90~270 (65) av	2425
L_90~270 (75) av	1521
L_90~270 (85) av	577
L_45 (65) av	2467
L_45 (75) av	1266
L_45 (85) av	541

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

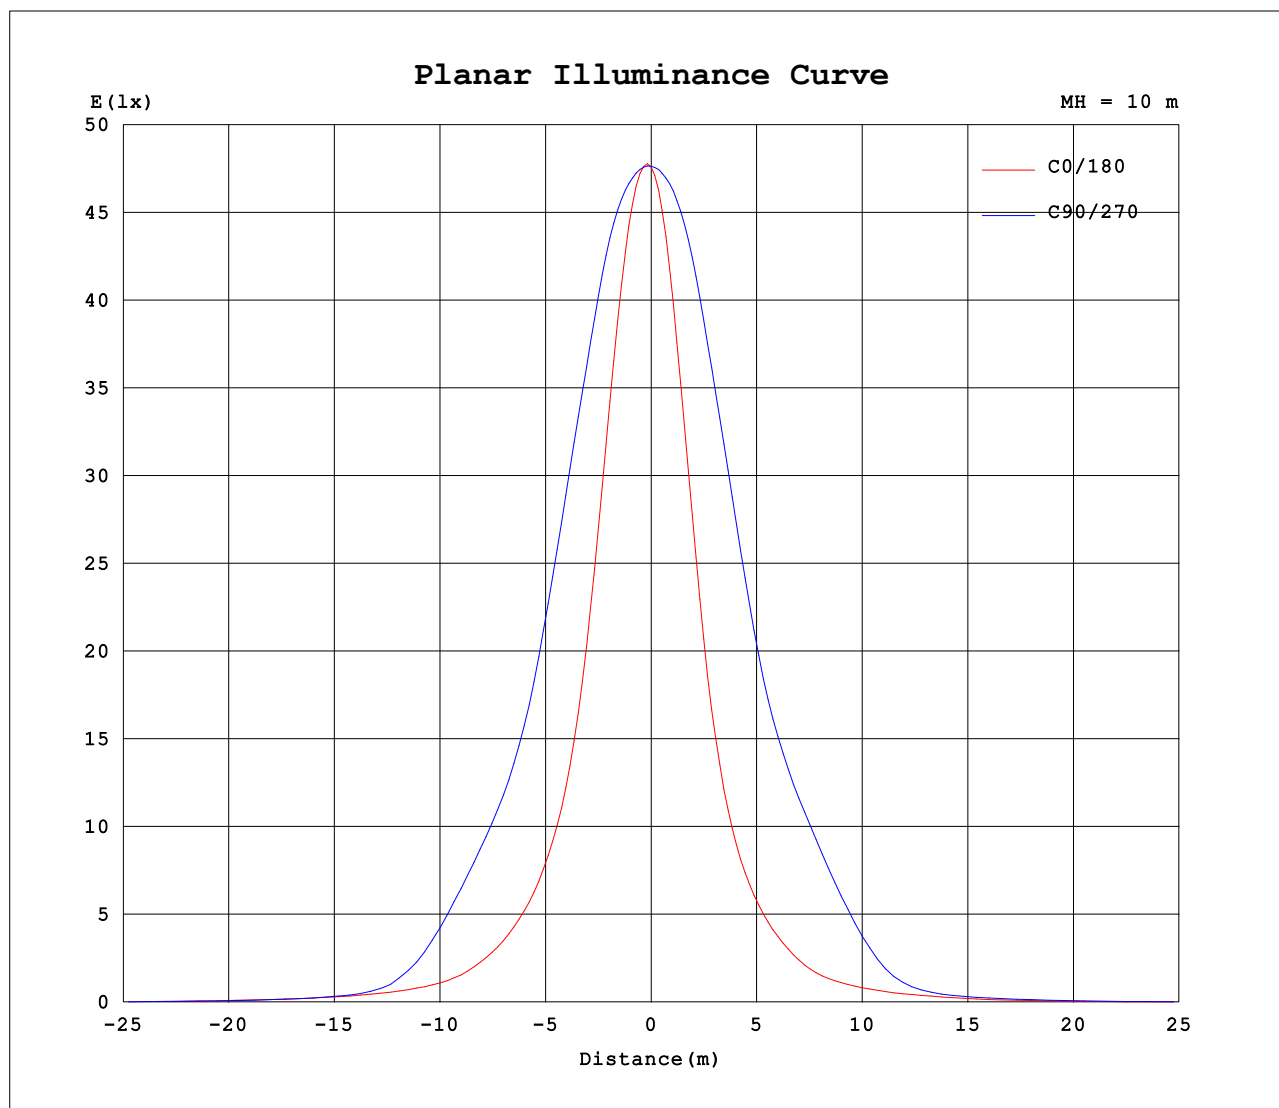

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.8V I:0.2400A P:28.90W PF:0.9950 Freq:60.00Hz Lamp Flux:3521.68x1 lm								
NAME: 4FT 2570					TYPE:4000K			WEIGHT:
SPEC.:					DIM.:			SERIAL No.:
MFR.: EVERFINE					SUR.:			Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	4758	4758	4758	4758	4758	4758	4758	4758										
5	4605	4723	4748	4622	4234	4449	4713	4539										
10	3830	4362	4645	4083	3169	3781	4544	3964										
15	2740	3644	4318	3243	2060	2905	4158	3130										
20	1796	2746	3839	2297	1321	2021	3652	2239										
25	1234	1884	3254	1520	902	1338	3043	1504										
30	880	1252	2609	997	637	893	2483	1026										
35	640	838	2144	683	439	615	2113	713										
40	447	576	1771	473	304	433	1702	501										
45	313	407	1200	335	236	311	1067	359										
50	244	292	526	241	185	225	427	261										
55	193	213	220	178	139	165	208	192										
60	150	154	144	126	89.9	115	140	139										
65	99.0	105	88.0	80.7	56.9	71.1	84.1	93.6										
70	63.7	63.4	56.1	46.1	31.4	40.6	54.3	54.5										
75	35.3	35.7	34.0	24.4	15.4	20.3	32.1	29.7										
80	17.4	17.0	16.9	10.4	5.92	8.00	14.8	13.1										
85	7.17	6.20	4.79	3.18	1.34	2.16	3.66	4.30										
90	2.30	1.62	0.37	0.02	0.01	0.01	0.00	0.56										
95	0.02	0.01	0.02	0.02	0.02	0.02	0.01	0.02										
100	0.03	0.03	0.05	0.04	0.04	0.04	0.03	0.03										
105	0.05	0.06	0.10	0.08	0.07	0.06	0.09	0.06										
110	0.07	0.09	0.18	0.11	0.10	0.11	0.17	0.09										
115	0.11	0.13	0.30	0.17	0.14	0.16	0.30	0.14										
120	0.17	0.20	0.47	0.24	0.20	0.24	0.44	0.21										
125	0.23	0.30	0.68	0.35	0.27	0.38	0.63	0.30										
130	0.32	0.43	0.91	0.50	0.37	0.56	0.84	0.44										
135	0.46	0.61	1.17	0.74	0.53	0.82	1.08	0.62										
140	0.65	0.86	1.44	1.05	0.74	1.14	1.35	0.86										
145	0.95	1.16	1.75	1.43	1.06	1.52	1.65	1.18										
150	1.39	1.53	2.08	1.87	1.51	1.92	1.97	1.52										
155	1.95	1.90	2.34	2.28	2.05	2.32	2.32	1.89										
160	2.54	2.26	2.56	2.65	2.59	2.60	2.61	2.20										
165	3.01	2.56	2.85	2.90	2.99	2.83	2.88	2.48										
170	3.30	2.84	3.10	3.08	3.21	3.03	3.08	2.74										
175	3.39	3.09	3.24	3.13	3.28	3.18	3.23	3.02										
180	3.26	3.29	3.22	3.04	3.29	3.17	3.28	3.10										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: