


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.6V I:0.3290A P:39.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4326x1 lm		
NAME: 4FT 偏光	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 109.24 lm/W			
MODEL		I _{max} (cd)	4102	S/MH(C0/180)	0.57
NOMINAL POWER(W)	40W	LOR(%)	100.0	S/MH(C90/270)	1.10
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	4326.0	η UP,DN(C0-180)	0.1,43.0
NOMINAL FLUX(lm)	4326	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,56.8
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	120.0	η down(%)	99.8	CIBSE SHR MAX	0.85

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

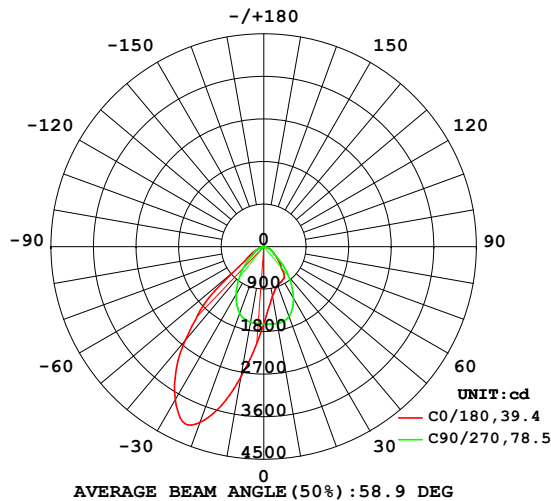

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

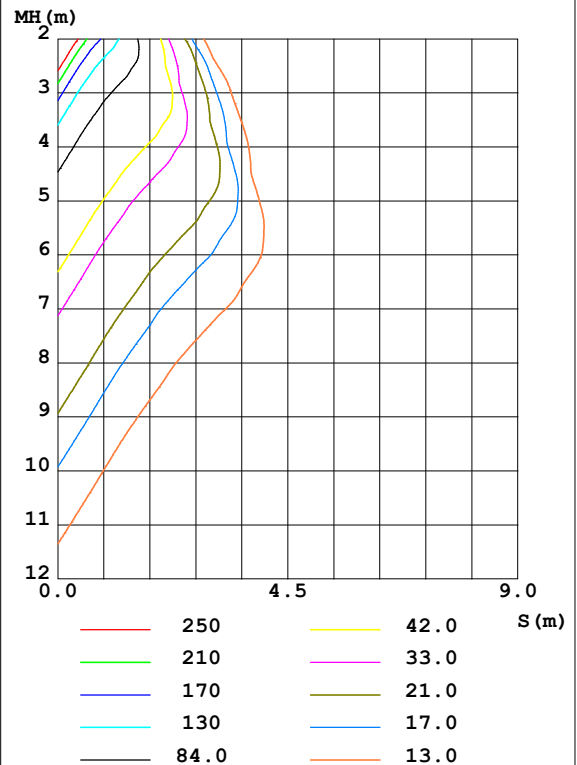

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1071	1190	1651	2398	2790	2397	1624	1203	0- 10	163.7	163.7	3.78,3.78
20	870.4	942.3	1569	3476	3960	3374	1499	973.5	10- 20	555.6	719.4	16.6,16.6
30	807.9	793.0	1259	3994	3747	3676	1178	850.2	20- 30	973.6	1693	39.1,39.1
40	576.2	645.0	817.8	3002	2584	2609	773.4	697.1	30- 40	1114	2807	64.9,64.9
50	366.4	407.9	404.4	1583	886.0	1338	396.0	406.5	40- 50	846.2	3653	84.4,84.4
60	216.6	213.0	211.9	536.0	301.8	400.8	212.0	214.7	50- 60	419.2	4072	94.1,94.1
70	98.14	98.70	103.6	127.5	108.5	104.0	100.1	93.72	60- 70	174.0	4246	98.2,98.2
80	20.24	22.16	28.03	34.71	27.28	26.32	24.77	17.73	70- 80	62.23	4309	99.6,99.6
90	0.0781	0.0705	0.4823	3.608	2.321	1.820	0.0387	0.0639	80- 90	10.55	4319	99.8,99.8
100	0.1843	0.2280	0.1502	0.1433	0.0923	0.0892	0.0753	0.1406	90-100	0.2343	4319	99.8,99.8
110	0.5268	0.7779	0.3586	0.2867	0.1563	0.1596	0.1943	0.4447	100-110	0.2457	4320	99.9,99.9
120	1.560	1.623	0.7343	0.5117	0.2865	0.2863	0.4612	1.023	110-120	0.5727	4320	99.9,99.9
130	2.694	2.556	1.253	0.7522	0.4711	0.4718	0.8640	1.731	120-130	0.9629	4321	99.9,99.9
140	3.549	3.227	1.847	1.036	0.6462	0.7019	1.364	2.442	130-140	1.243	4322	99.9,99.9
150	3.630	3.480	2.413	1.430	0.9304	1.110	2.007	3.519	140-150	1.299	4324	99.9,99.9
160	3.301	3.499	2.801	2.006	1.338	1.580	2.601	4.243	150-160	1.147	4325	100,100
170	2.956	3.259	3.024	2.804	1.785	2.144	3.027	4.351	160-170	0.7889	4326	100,100
180	2.307	2.724	3.141	3.673	2.321	2.705	3.129	3.678	170-180	0.2804	4326	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.6V I:0.3290A P:39.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4326x1 lm		
NAME: 4FT 偏光	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

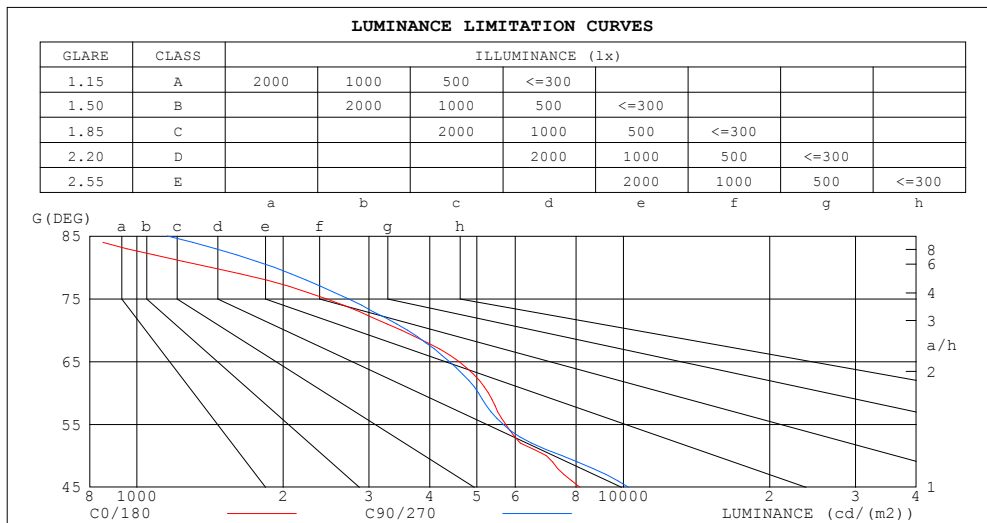

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	769	1155
80	1420	1919
75	2450	2721
70	3496	3600
65	4594	4386
60	5279	5038
55	5733	5659
50	6944	7478
45	8145	10254


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.6V I:0.3290A P:39.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4326x1 lm		
NAME: 4FT 偏光	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.08	1.05	1.02	1.06	1.03	1.00	1.01	.99	.97	.98	.96	.94	.94	.93	.91	.89
2.0	.97	.92	.87	.95	.90	.86	.92	.88	.84	.89	.85	.82	.86	.83	.81	.79
3.0	.88	.81	.76	.86	.80	.75	.83	.78	.74	.81	.76	.72	.78	.74	.71	.69
4.0	.79	.72	.66	.78	.71	.66	.76	.70	.65	.73	.68	.64	.71	.67	.63	.61
5.0	.72	.64	.59	.71	.64	.58	.69	.62	.58	.67	.61	.57	.65	.60	.56	.55
6.0	.65	.58	.52	.65	.57	.52	.63	.56	.51	.61	.55	.51	.60	.55	.51	.49
7.0	.60	.52	.47	.59	.52	.47	.58	.51	.46	.56	.50	.46	.55	.50	.46	.44
8.0	.55	.47	.42	.54	.47	.42	.53	.46	.42	.52	.46	.42	.51	.45	.41	.40
9.0	.51	.43	.38	.50	.43	.38	.49	.42	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.46	.39	.35	.45	.39	.35	.45	.39	.34	.44	.38	.34	.33

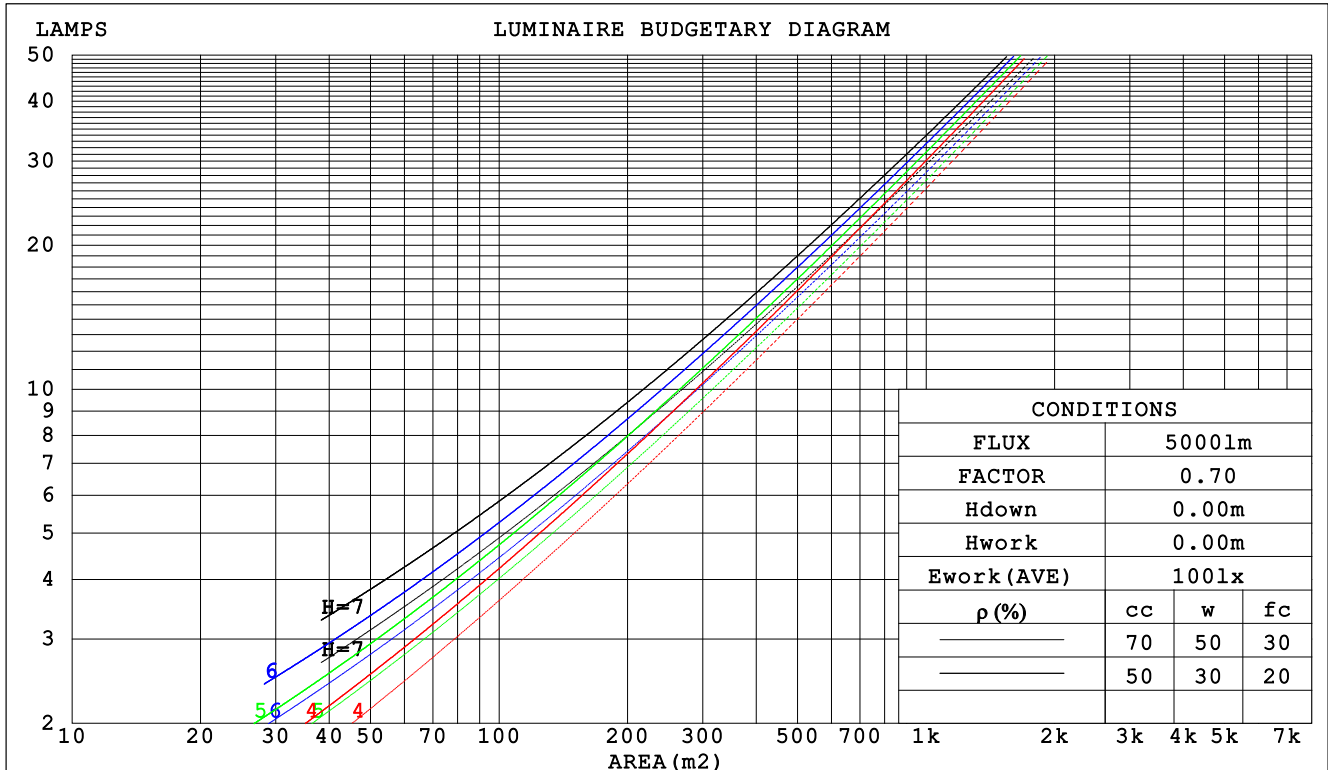

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.6V I:0.3290A P:39.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4326x1 lm					
NAME: 4FT 偏光			TYPE:3000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.233	.133	.042	.227	.129	.041	.214	.123	.039	.202	.116	.037	.191	.111	.036		
2.0	.228	.125	.038	.222	.122	.038	.210	.117	.036	.200	.112	.035	.191	.108	.034		
3.0	.217	.116	.035	.212	.114	.034	.202	.110	.033	.193	.106	.032	.185	.102	.032		
4.0	.206	.107	.032	.202	.106	.031	.193	.102	.031	.185	.099	.030	.178	.096	.029		
5.0	.195	.099	.029	.191	.098	.029	.183	.095	.028	.176	.093	.028	.170	.091	.027		
6.0	.185	.093	.026	.181	.091	.026	.174	.089	.026	.168	.087	.026	.162	.085	.025		
7.0	.175	.086	.024	.171	.085	.024	.165	.084	.024	.160	.082	.024	.154	.080	.024		
8.0	.166	.081	.023	.163	.080	.023	.157	.079	.022	.152	.077	.022	.147	.076	.022		
9.0	.157	.076	.021	.155	.075	.021	.150	.074	.021	.145	.073	.021	.141	.071	.021		
10.0	.149	.072	.020	.147	.071	.020	.142	.070	.020	.138	.069	.020	.134	.068	.019		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.176	.158	.142	.151	.136	.122	.103	.093	.084	.059	.054	.049	.019	.017	.016	
2.0	.165	.133	.107	.141	.115	.092	.097	.079	.065	.056	.046	.038	.018	.015	.012	
3.0	.156	.115	.083	.133	.099	.072	.092	.069	.050	.053	.040	.030	.017	.013	.010	
4.0	.147	.101	.066	.127	.087	.057	.087	.061	.040	.050	.036	.024	.016	.012	.008	
5.0	.140	.090	.054	.120	.078	.047	.083	.055	.033	.048	.032	.020	.015	.010	.006	
6.0	.134	.082	.045	.115	.071	.039	.079	.050	.027	.046	.029	.016	.015	.010	.005	
7.0	.128	.075	.038	.110	.065	.033	.076	.045	.023	.044	.027	.014	.014	.009	.005	
8.0	.122	.069	.032	.105	.060	.028	.073	.042	.020	.042	.025	.012	.014	.008	.004	
9.0	.117	.064	.028	.100	.056	.025	.070	.039	.018	.041	.023	.011	.013	.008	.003	
10.0	.112	.060	.025	.096	.052	.022	.067	.037	.016	.039	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.6V I:0.3290A P:39.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4326x1 lm										
NAME: 4FT 偏光					TYPE:3000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.3	17.5	16.5	17.7	17.9	16.6	17.9	16.9	18.1	18.3
3H	16.9	18.1	17.2	18.3	18.5	17.2	18.4	17.5	18.6	18.8
4H	17.1	18.2	17.4	18.4	18.7	17.3	18.5	17.6	18.7	18.9
6H	17.1	18.1	17.4	18.4	18.6	17.4	18.4	17.7	18.7	19.0
8H	17.0	18.0	17.4	18.3	18.6	17.4	18.4	17.7	18.6	18.9
12H	17.0	18.0	17.3	18.2	18.5	17.3	18.3	17.7	18.6	18.9
4H 2H	16.5	17.7	16.8	17.9	18.1	16.8	18.0	17.1	18.2	18.4
3H	17.4	18.3	17.7	18.6	18.9	17.6	18.5	17.9	18.8	19.1
4H	17.6	18.4	17.9	18.7	19.1	17.8	18.7	18.2	19.0	19.3
6H	17.6	18.4	18.0	18.7	19.1	17.9	18.6	18.3	19.0	19.4
8H	17.6	18.3	18.0	18.7	19.0	17.9	18.6	18.3	19.0	19.3
12H	17.6	18.2	18.0	18.6	19.0	17.9	18.5	18.3	18.9	19.3
8H 4H	17.6	18.3	18.0	18.6	19.0	17.8	18.5	18.2	18.9	19.2
6H	17.7	18.2	18.1	18.6	19.1	17.9	18.5	18.4	18.9	19.3
8H	17.7	18.2	18.1	18.6	19.0	18.0	18.5	18.4	18.9	19.3
12H	17.6	18.1	18.1	18.5	19.0	18.0	18.4	18.4	18.8	19.3
12H 4H	17.5	18.2	18.0	18.6	19.0	17.8	18.4	18.2	18.8	19.2
6H	17.6	18.1	18.1	18.6	19.0	17.9	18.4	18.4	18.8	19.3
8H	17.6	18.1	18.1	18.5	19.0	18.0	18.4	18.4	18.8	19.3
Variations with the observer position at spacings:										
S = 1.0H	+ 0.7 / - 0.8					+ 0.7 / - 1.0				
1.5H	+ 0.3 / - 0.8					+ 0.8 / - 0.8				
2.0H	+ 1.1 / - 0.8					+ 1.7 / - 1.0				

CIE Pub.117 Corrected 4326 lm Total Lamp Luminous Flux. (8log(F/F0) = 5.1)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.6V I:0.3290A P:39.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4326x1 lm		
NAME: 4FT 偏光	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	69	60	54	69	59	54	68	59	54	48
0.80	79	70	64	78	70	64	77	69	64	58
1.00	87	78	73	86	78	73	84	79	72	66
1.25	93	85	80	92	85	80	89	83	79	73
1.50	97	90	85	96	89	84	93	87	83	77
2.00	102	96	92	101	95	91	98	93	89	83
2.50	105	99	95	103	98	94	100	96	92	85
3.00	107	103	99	105	101	97	102	98	95	88
4.00	110	106	103	108	104	101	104	101	99	91
5.00	112	108	105	110	106	104	105	103	101	92
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.6V I:0.3290A P:39.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4326x1 lm		
NAME: 4FT 偏光	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

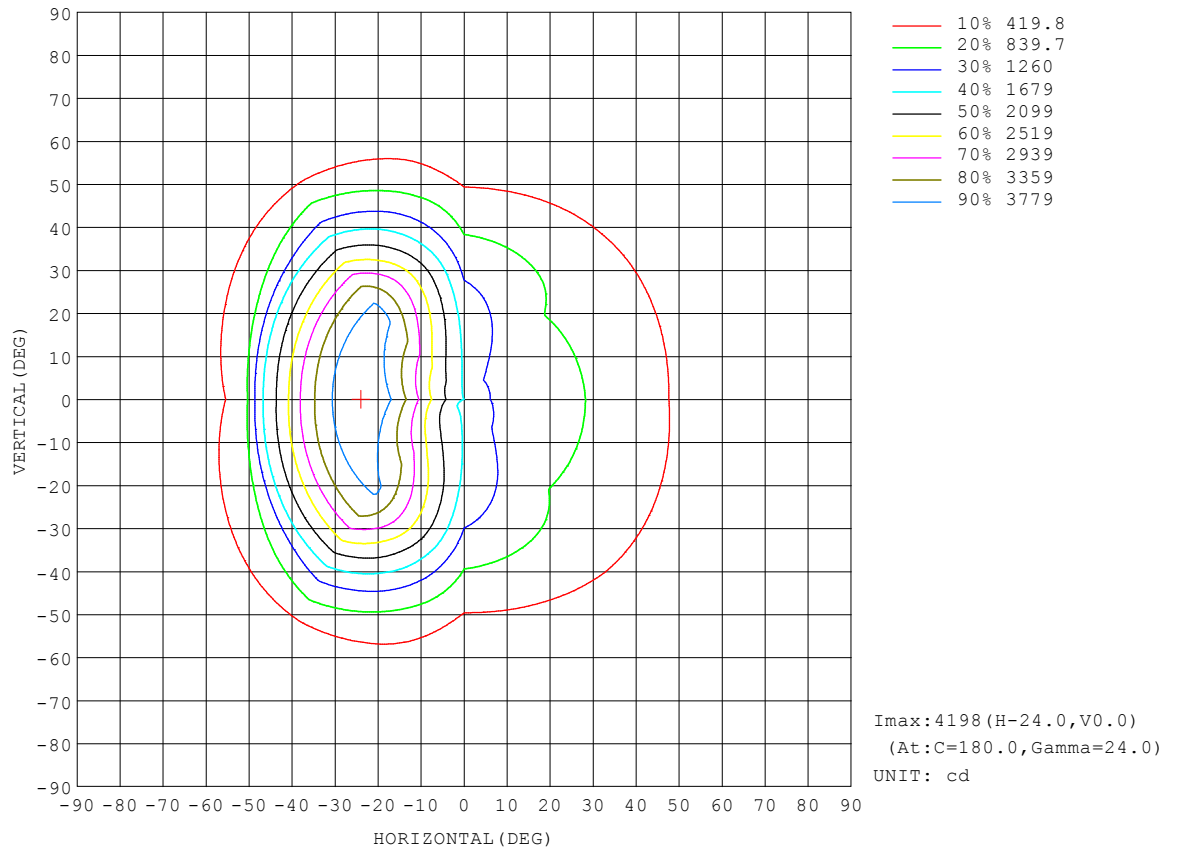


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.6V I:0.3290A P:39.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4326x1 lm		
NAME: 4FT 偏光	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

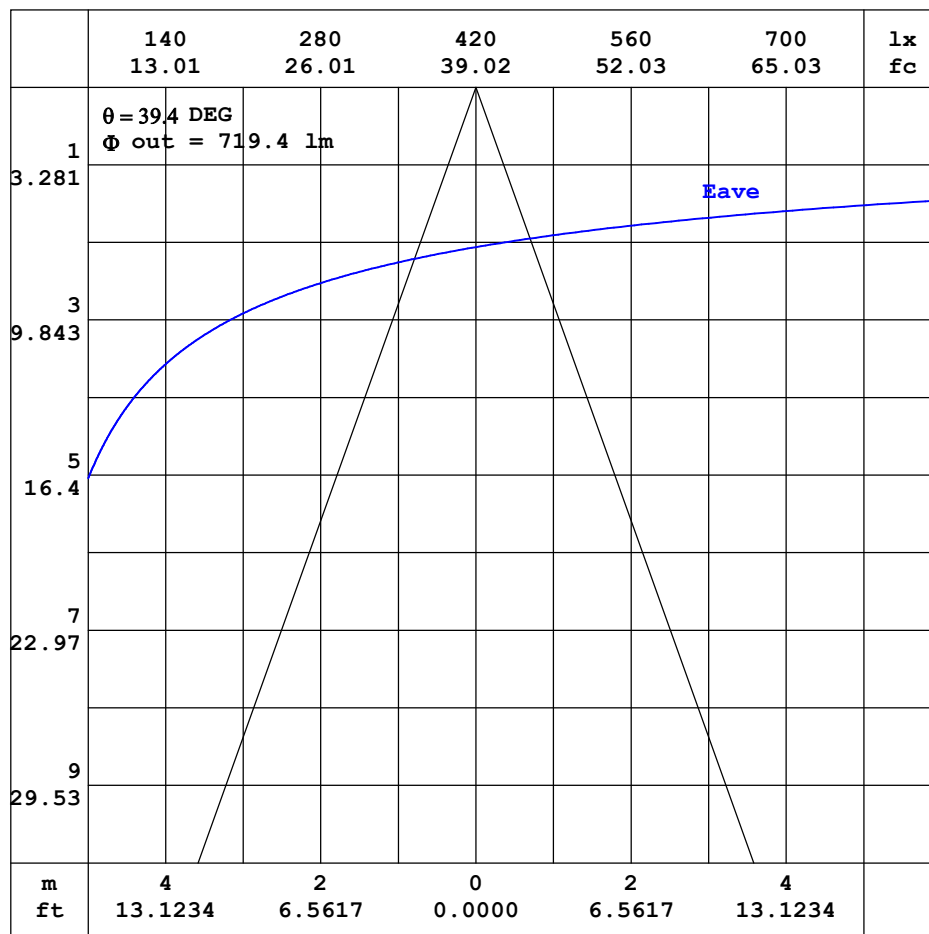


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.6V I:0.3290A P:39.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4326x1 lm		
NAME: 4FT 偏光	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

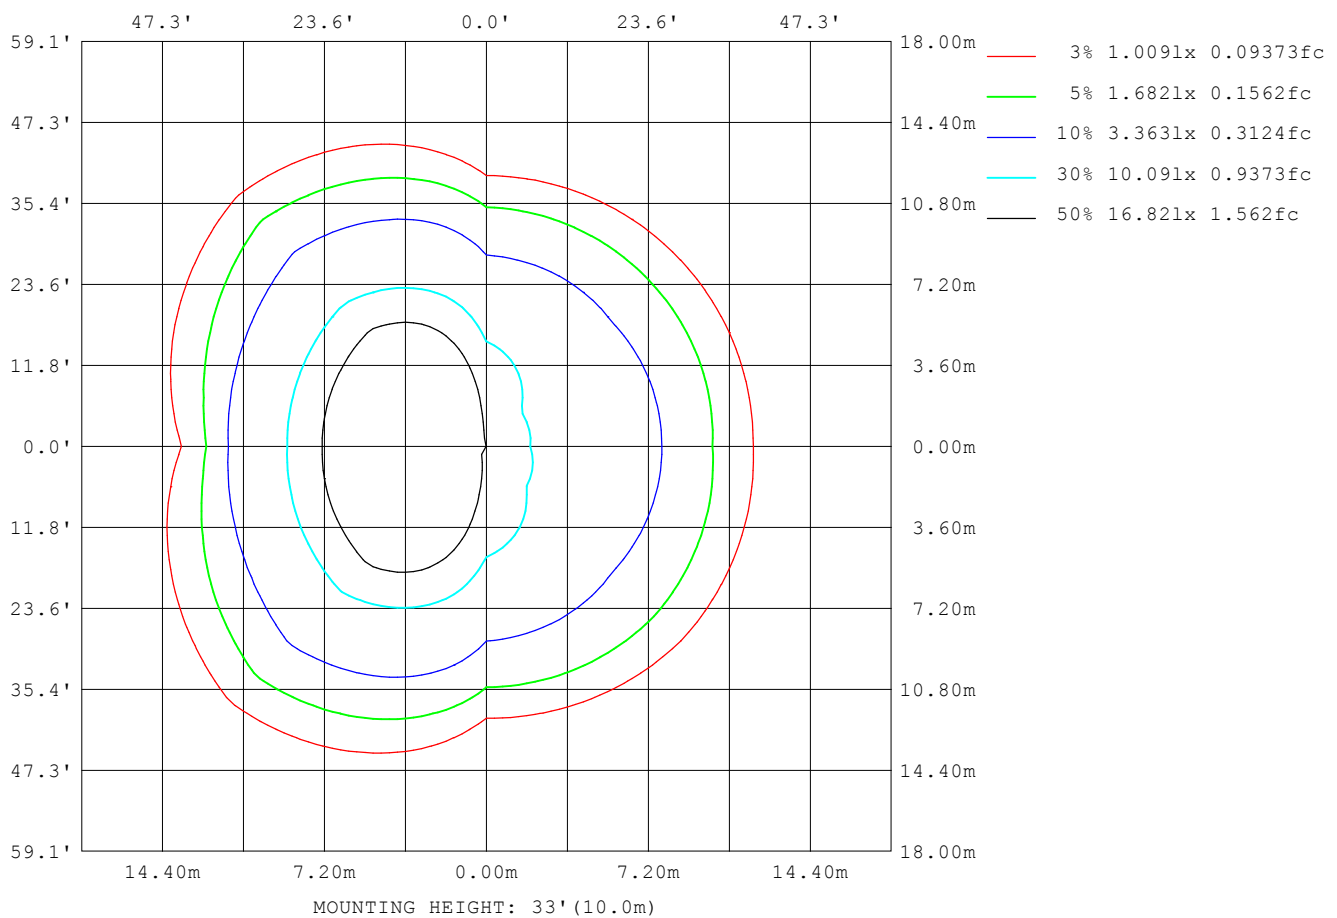

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.6V I:0.3290A P:39.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4326x1 lm		
NAME: 4FT 偏光	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	4626
L_0~180 (75) av	2490
L_0~180 (85) av	1088
L_90~270 (65) av	4368
L_90~270 (75) av	2626
L_90~270 (85) av	1021
L_45 (65) av	5005
L_45 (75) av	2630
L_45 (85) av	1153

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

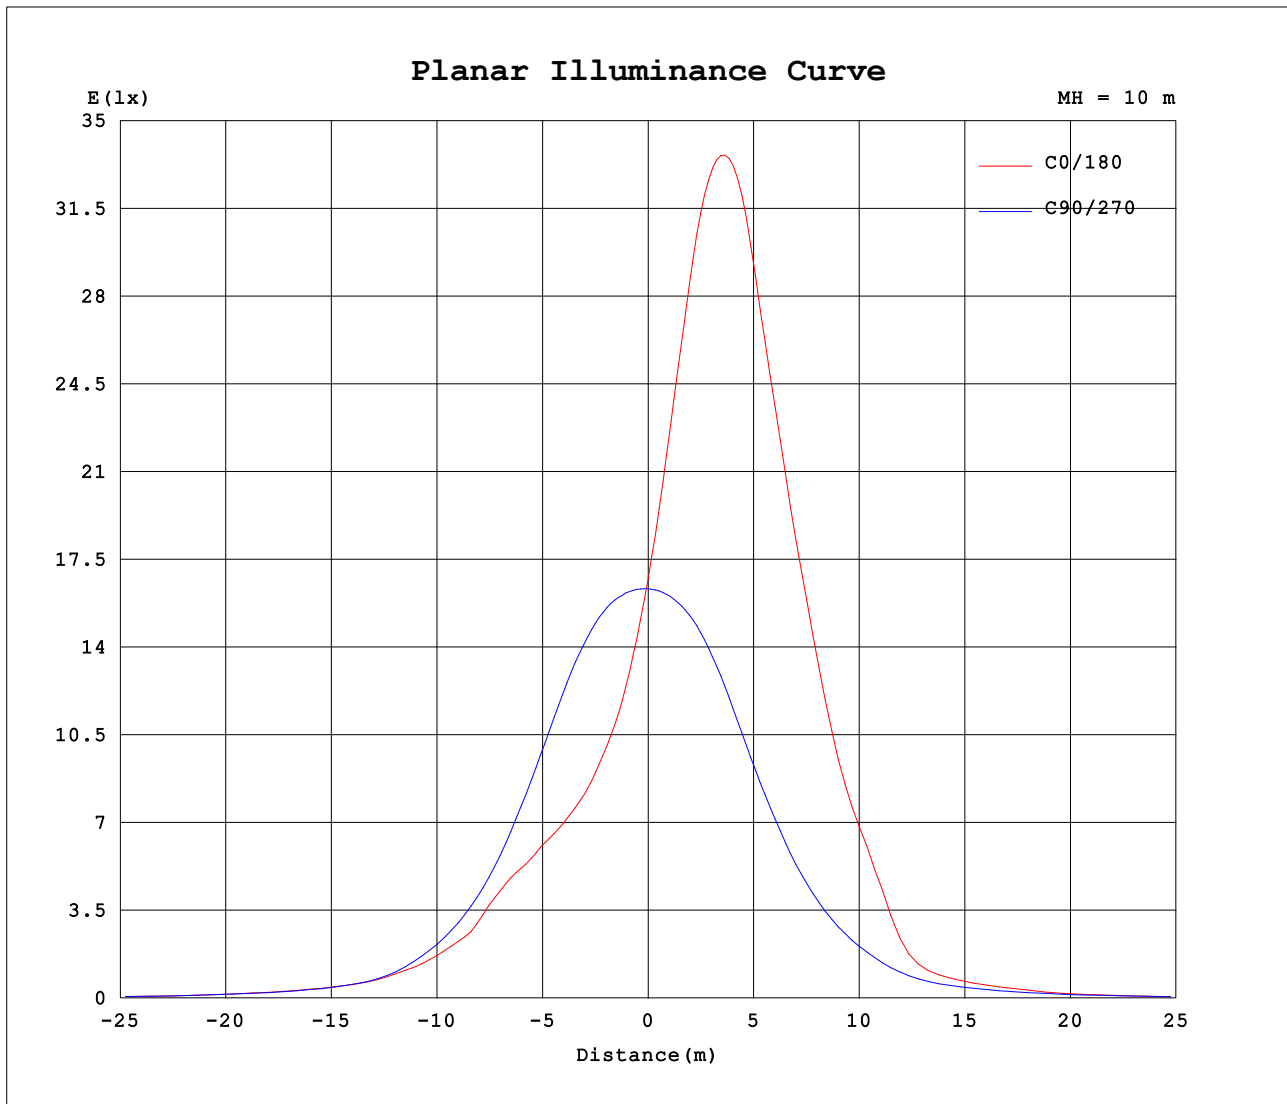

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.6V I:0.3290A P:39.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4326x1 lm		
NAME: 4FT 偏光	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1636	1636	1636	1636	1636	1636	1636	1636										
5	1290	1383	1643	1961	2142	1968	1632	1388										
10	1071	1190	1651	2398	2790	2397	1624	1203										
15	939	1050	1634	2915	3475	2892	1589	1076										
20	870	942	1569	3476	3960	3374	1499	974										
25	839	857	1440	3883	4082	3680	1355	908										
30	808	793	1259	3994	3747	3676	1178	850										
35	763	729	1041	3663	3251	3249	974	782										
40	576	645	818	3002	2584	2609	773	697										
45	473	547	610	2272	1895	1956	589	562										
50	366	408	404	1583	886	1338	396	407										
55	270	297	273	998	422	836	273	298										
60	217	213	212	536	302	401	212	215										
65	159	153	156	222	169	182	154	154										
70	98.1	98.7	104	127	109	104	100	93.7										
75	52.0	52.6	59.2	72.1	56.2	57.0	54.9	47.0										
80	20.2	22.2	28.0	34.7	27.3	26.3	24.8	17.7										
85	5.50	6.09	8.47	13.8	10.4	9.43	6.48	4.42										
90	0.08	0.07	0.48	3.61	2.32	1.82	0.04	0.06										
95	0.11	0.13	0.10	0.11	0.07	0.08	0.03	0.08										
100	0.18	0.23	0.15	0.14	0.09	0.09	0.08	0.14										
105	0.28	0.45	0.24	0.21	0.11	0.12	0.12	0.26										
110	0.53	0.78	0.36	0.29	0.16	0.16	0.19	0.44										
115	1.06	1.16	0.53	0.39	0.22	0.21	0.31	0.71										
120	1.56	1.62	0.73	0.51	0.29	0.29	0.46	1.02										
125	2.14	2.09	0.98	0.63	0.37	0.38	0.65	1.37										
130	2.69	2.56	1.25	0.75	0.47	0.47	0.86	1.73										
135	3.21	2.94	1.54	0.89	0.56	0.58	1.11	2.06										
140	3.55	3.23	1.85	1.04	0.65	0.70	1.36	2.44										
145	3.67	3.41	2.14	1.21	0.74	0.86	1.65	2.86										
150	3.63	3.48	2.41	1.43	0.93	1.11	2.01	3.52										
155	3.47	3.51	2.60	1.69	1.10	1.33	2.30	3.91										
160	3.30	3.50	2.80	2.01	1.34	1.58	2.60	4.24										
165	3.12	3.42	2.91	2.38	1.56	1.85	2.85	4.41										
170	2.96	3.26	3.02	2.80	1.78	2.14	3.03	4.35										
175	2.68	3.04	3.13	3.25	2.03	2.41	3.10	4.10										
180	2.31	2.72	3.14	3.67	2.32	2.71	3.13	3.68										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: