


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.7V I:0.3120A P:37.50W PF:0.9960 Freq:60.00Hz Lamp Flux:4408.74x1 lm		
NAME: 4FT 偏光	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 117.57 lm/W			
MODEL		I _{max} (cd)	4129	S/MH(C0/180)	0.56
NOMINAL POWER(W)	40W	LOR(%)	100.0	S/MH(C90/270)	1.11
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	4408.7	η UP,DN(C0-180)	0.1,43.0
NOMINAL FLUX(lm)	4408.74	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,56.8
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.90

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

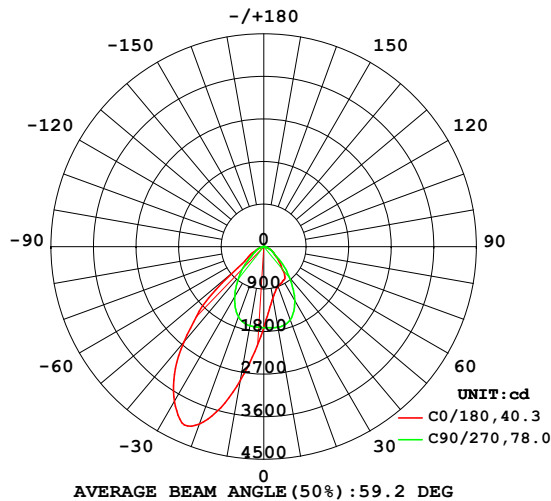

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

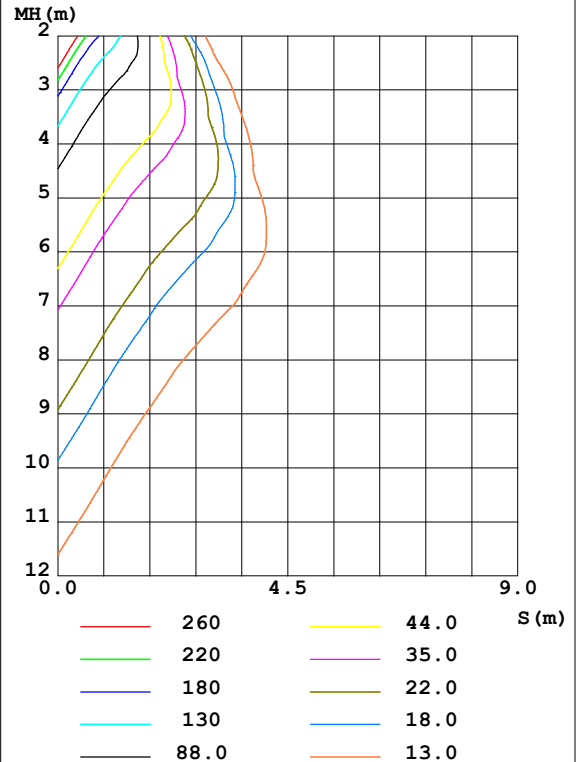

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1113	1242	1732	2494	2867	2485	1702	1254	0- 10	170.8	170.8	3.87,3.87
20	896.2	976.6	1647	3521	3990	3402	1577	1007	10- 20	572.1	742.9	16.8,16.8
30	830.1	817.3	1315	3929	3786	3641	1236	876.0	20- 30	985.5	1728	39.2,39.2
40	592.9	663.0	846.4	2997	2630	2651	804.0	716.2	30- 40	1127	2855	64.8,64.8
50	376.2	419.1	416.4	1621	909.6	1377	406.5	418.2	40- 50	864.6	3720	84.4,84.4
60	223.0	218.6	217.3	545.6	308.1	412.7	217.0	220.6	50- 60	429.8	4149	94.1,94.1
70	100.7	101.2	106.4	130.8	111.1	106.9	102.5	96.33	60- 70	178.5	4328	98.2,98.2
80	20.72	22.70	28.86	35.58	27.89	27.03	25.26	18.25	70- 80	63.79	4392	99.6,99.6
90	0.0617	0.0682	0.5114	3.721	2.353	1.866	0.0291	0.0766	80- 90	10.81	4402	99.9,99.9
100	0.1610	0.2023	0.1331	0.1353	0.0877	0.0940	0.0704	0.1556	90-100	0.2312	4403	99.9,99.9
110	0.4592	0.6397	0.3076	0.2604	0.1543	0.1692	0.2014	0.4514	100-110	0.2255	4403	99.9,99.9
120	1.315	1.368	0.6636	0.4494	0.2894	0.2960	0.4681	1.028	110-120	0.5160	4403	99.9,99.9
130	2.317	2.215	1.141	0.6691	0.4721	0.4792	0.8755	1.725	120-130	0.8776	4404	99.9,99.9
140	3.134	2.889	1.706	0.9498	0.6569	0.7165	1.375	2.414	130-140	1.149	4405	99.9,99.9
150	3.367	3.246	2.251	1.325	0.9108	1.078	1.949	3.261	140-150	1.221	4407	100,100
160	3.173	3.347	2.654	1.864	1.314	1.541	2.504	3.836	150-160	1.083	4408	100,100
170	2.886	3.187	2.894	2.566	1.767	2.110	2.880	3.877	160-170	0.7487	4408	100,100
180	2.297	2.681	2.996	3.303	2.286	2.677	2.996	3.308	170-180	0.2667	4409	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.7V I:0.3120A P:37.50W PF:0.9960 Freq:60.00Hz Lamp Flux:4408.74x1 lm		
NAME: 4FT 偏光	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

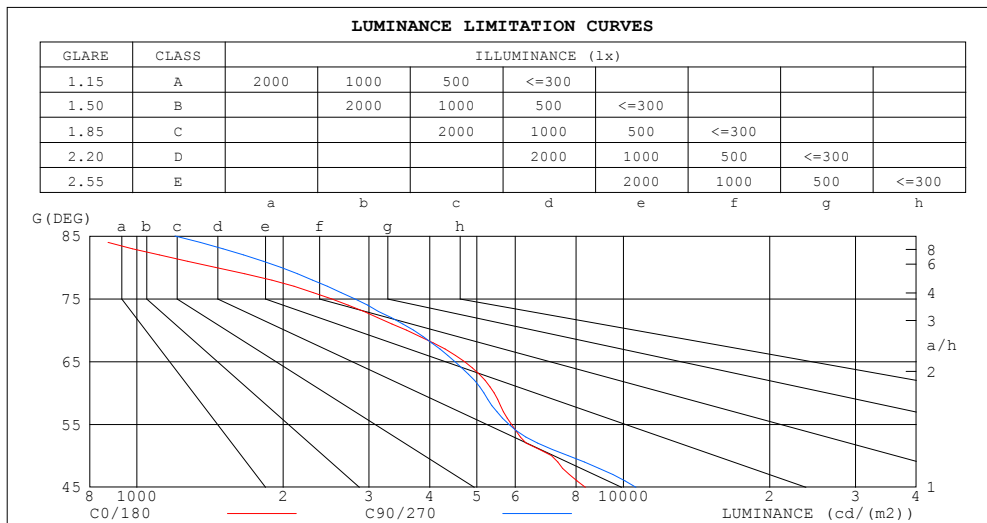

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	789	1197
80	1451	1977
75	2511	2804
70	3581	3702
65	4716	4503
60	5424	5170
55	5889	5814
50	7116	7705
45	8356	10614


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.7V I:0.3120A P:37.50W PF:0.9960 Freq:60.00Hz Lamp Flux:4408.74x1 lm		
NAME: 4FT 偏光	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.08	1.05	1.02	1.06	1.03	1.00	1.01	.99	.97	.98	.96	.94	.94	.93	.91	.89
2.0	.97	.92	.87	.95	.90	.86	.92	.88	.84	.89	.85	.82	.86	.83	.81	.79
3.0	.88	.81	.76	.86	.80	.75	.83	.78	.74	.81	.76	.72	.78	.74	.71	.69
4.0	.79	.72	.66	.78	.71	.66	.76	.70	.65	.73	.68	.64	.71	.67	.63	.61
5.0	.72	.64	.59	.71	.64	.58	.69	.62	.58	.67	.61	.57	.65	.60	.56	.55
6.0	.65	.58	.52	.65	.57	.52	.63	.56	.51	.61	.55	.51	.60	.55	.51	.49
7.0	.60	.52	.47	.59	.52	.47	.58	.51	.46	.56	.50	.46	.55	.50	.46	.44
8.0	.55	.47	.42	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.45	.41	.40
9.0	.51	.43	.38	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.46	.39	.35	.45	.39	.35	.45	.39	.35	.44	.38	.34	.33

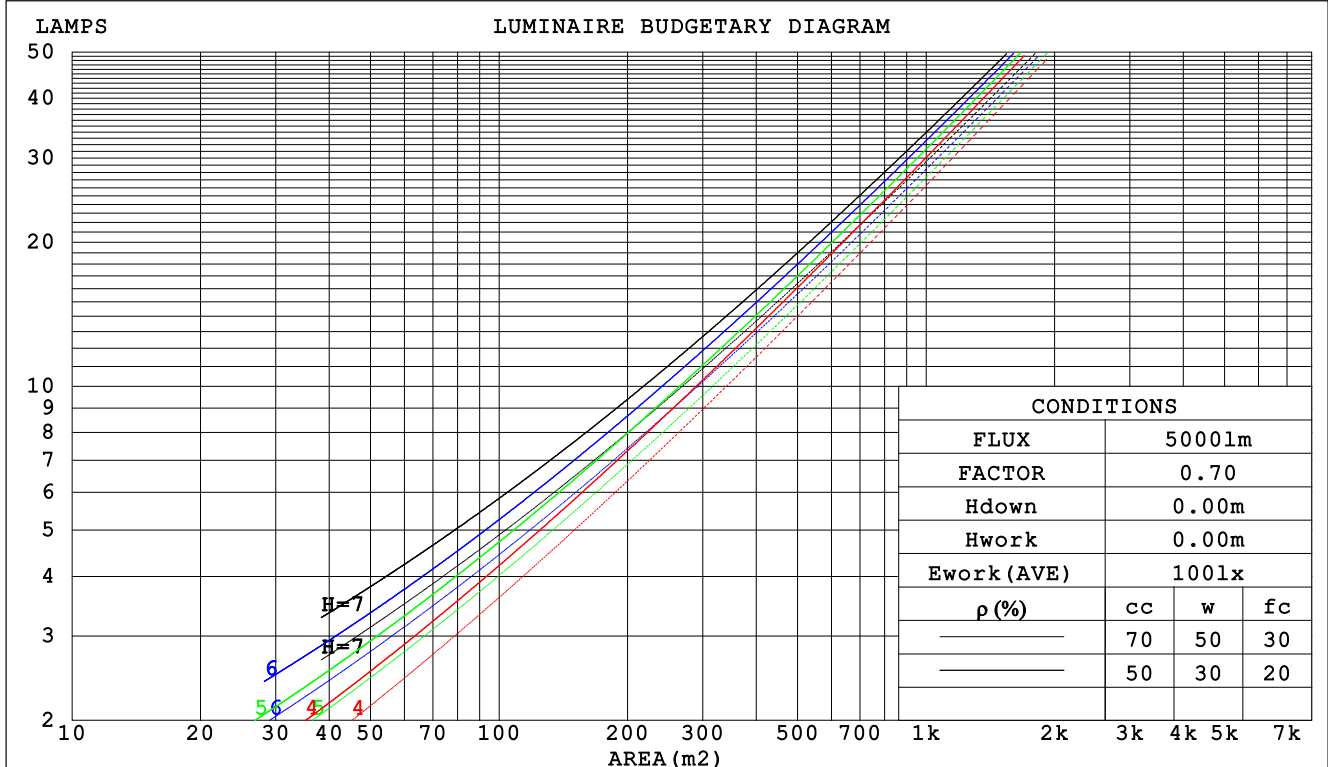

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.7V I:0.3120A P:37.50W PF:0.9960 Freq:60.00Hz Lamp Flux:4408.74x1 lm					
NAME: 4FT 偏光			TYPE:3500K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.233	.133	.042	.227	.129	.041	.214	.123	.039	.202	.116	.037	.191	.111	.036		
2.0	.228	.125	.038	.222	.122	.038	.211	.117	.036	.200	.112	.035	.191	.108	.034		
3.0	.217	.116	.035	.212	.114	.034	.202	.110	.033	.193	.106	.032	.185	.102	.032		
4.0	.206	.107	.031	.202	.105	.031	.193	.102	.031	.185	.099	.030	.178	.096	.029		
5.0	.195	.099	.029	.191	.098	.029	.183	.095	.028	.176	.093	.028	.170	.091	.027		
6.0	.185	.092	.026	.181	.091	.026	.174	.089	.026	.168	.087	.026	.162	.085	.025		
7.0	.175	.086	.024	.171	.085	.024	.165	.084	.024	.160	.082	.024	.154	.080	.024		
8.0	.165	.081	.023	.163	.080	.023	.157	.078	.022	.152	.077	.022	.147	.076	.022		
9.0	.157	.076	.021	.154	.075	.021	.149	.074	.021	.145	.073	.021	.140	.071	.021		
10.0	.149	.072	.020	.147	.071	.020	.142	.070	.020	.138	.069	.020	.134	.067	.019		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.176	.158	.142	.151	.136	.122	.103	.093	.084	.059	.054	.049	.019	.017	.016	
2.0	.165	.133	.107	.141	.115	.092	.097	.079	.064	.056	.046	.038	.018	.015	.012	
3.0	.155	.115	.083	.133	.099	.072	.092	.069	.050	.053	.040	.030	.017	.013	.010	
4.0	.147	.101	.066	.126	.087	.057	.087	.061	.040	.050	.036	.024	.016	.012	.008	
5.0	.140	.090	.054	.120	.078	.047	.083	.055	.033	.048	.032	.020	.015	.010	.006	
6.0	.134	.082	.044	.115	.071	.039	.079	.050	.027	.046	.029	.016	.015	.010	.005	
7.0	.127	.075	.038	.110	.065	.033	.076	.045	.023	.044	.027	.014	.014	.009	.005	
8.0	.122	.069	.032	.105	.060	.028	.073	.042	.020	.042	.025	.012	.014	.008	.004	
9.0	.116	.064	.028	.100	.055	.025	.070	.039	.018	.040	.023	.010	.013	.008	.003	
10.0	.112	.060	.025	.096	.052	.022	.067	.036	.016	.039	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.7V I:0.3120A P:37.50W PF:0.9960 Freq:60.00Hz Lamp Flux:4408.74x1 lm										
NAME: 4FT 偏光					TYPE:3500K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.4	17.7	16.6	17.8	18.0	16.7	18.0	17.0	18.2	18.4
3H	17.0	18.2	17.3	18.4	18.7	17.3	18.5	17.6	18.7	18.9
4H	17.2	18.3	17.5	18.5	18.8	17.5	18.6	17.8	18.8	19.1
6H	17.2	18.2	17.5	18.5	18.7	17.5	18.6	17.8	18.8	19.1
8H	17.2	18.2	17.5	18.4	18.7	17.5	18.5	17.8	18.8	19.1
12H	17.1	18.1	17.5	18.4	18.6	17.5	18.4	17.8	18.7	19.0
4H 2H	16.7	17.8	17.0	18.0	18.3	17.0	18.1	17.3	18.3	18.6
3H	17.5	18.4	17.8	18.7	19.0	17.7	18.7	18.0	18.9	19.2
4H	17.7	18.5	18.0	18.8	19.2	17.9	18.8	18.3	19.1	19.4
6H	17.7	18.5	18.1	18.8	19.2	18.0	18.8	18.4	19.1	19.5
8H	17.7	18.4	18.1	18.8	19.1	18.0	18.7	18.4	19.1	19.5
12H	17.7	18.3	18.1	18.7	19.1	18.0	18.6	18.4	19.0	19.4
8H 4H	17.7	18.4	18.1	18.7	19.1	17.9	18.6	18.3	19.0	19.4
6H	17.8	18.3	18.2	18.8	19.2	18.1	18.6	18.5	19.0	19.5
8H	17.8	18.3	18.2	18.7	19.1	18.1	18.6	18.6	19.0	19.5
12H	17.8	18.2	18.2	18.6	19.1	18.1	18.5	18.6	19.0	19.4
12H 4H	17.7	18.3	18.1	18.7	19.1	17.9	18.5	18.3	18.9	19.3
6H	17.8	18.3	18.2	18.7	19.1	18.0	18.6	18.5	19.0	19.4
8H	17.8	18.2	18.2	18.6	19.1	18.1	18.5	18.6	19.0	19.4
Variations with the observer position at spacings:										
S = 1.0H	+ 0.7 / - 0.8					+ 0.7 / - 1.0				
1.5H	+ 0.3 / - 0.8					+ 0.8 / - 0.8				
2.0H	+ 1.1 / - 0.8					+ 1.8 / - 1.0				

CIE Pub.117 Corrected 4409 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.2)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.7V I:0.3120A P:37.50W PF:0.9960 Freq:60.00Hz Lamp Flux:4408.74x1 lm		
NAME: 4FT 偏光	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	69	60	54	68	59	54	67	59	54	48
0.80	79	70	64	78	69	64	77	69	63	58
1.00	87	78	73	86	78	72	84	78	72	66
1.25	93	85	80	92	85	79	89	83	79	73
1.50	97	90	85	96	89	84	93	87	83	77
2.00	102	96	91	101	95	91	98	93	89	83
2.50	105	99	95	103	98	94	100	96	92	85
3.00	107	102	98	105	101	97	102	98	95	88
4.00	110	106	103	108	104	101	104	101	99	91
5.00	112	108	105	110	106	104	105	103	101	92
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.7V I:0.3120A P:37.50W PF:0.9960 Freq:60.00Hz Lamp Flux:4408.74x1 lm		
NAME: 4FT 偏光	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

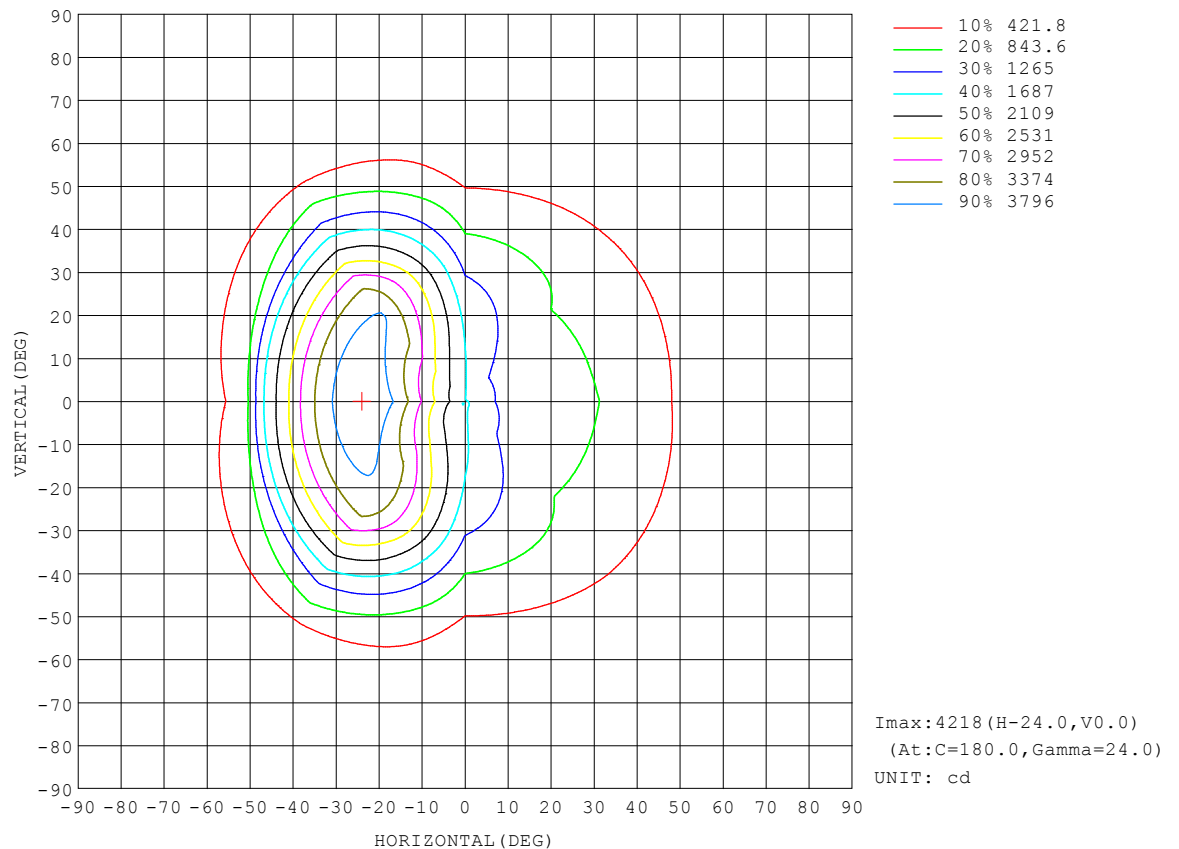


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.7V I:0.3120A P:37.50W PF:0.9960 Freq:60.00Hz Lamp Flux:4408.74x1 lm		
NAME: 4FT 偏光	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

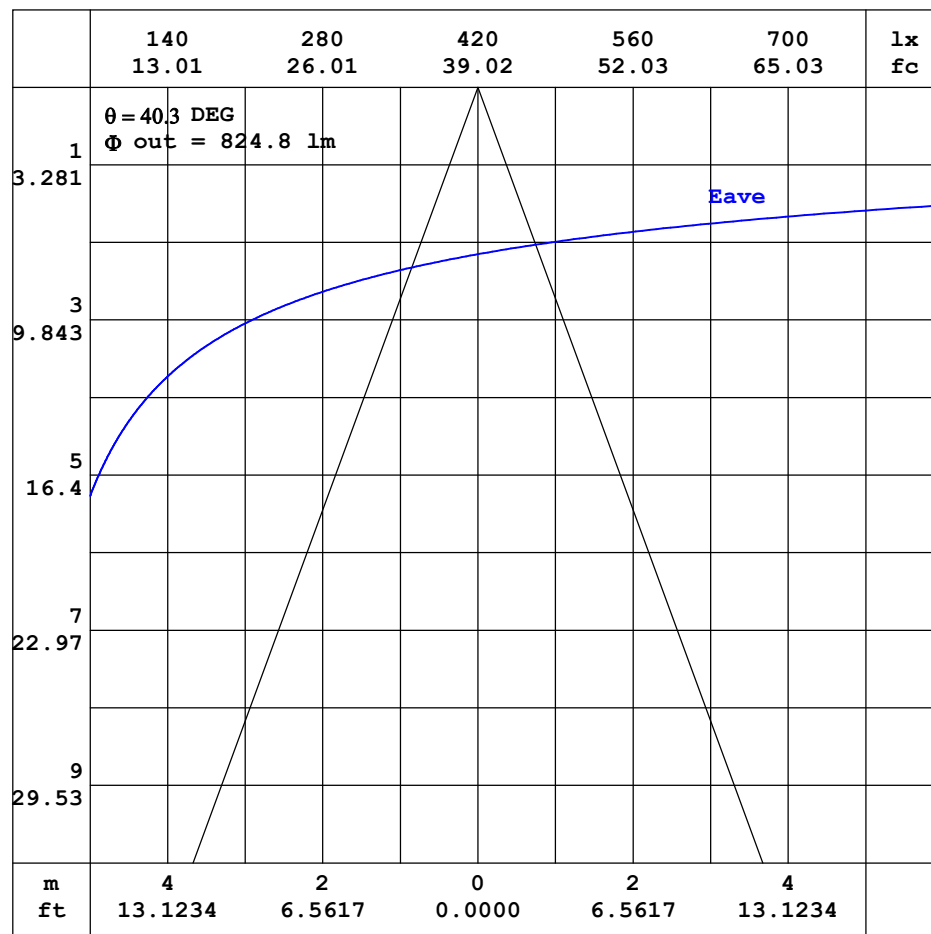


Note: The Curves indicate the illuminated area and the average illuminance when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.7V I:0.3120A P:37.50W PF:0.9960 Freq:60.00Hz Lamp Flux:4408.74x1 lm		
NAME: 4FT 偏光	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

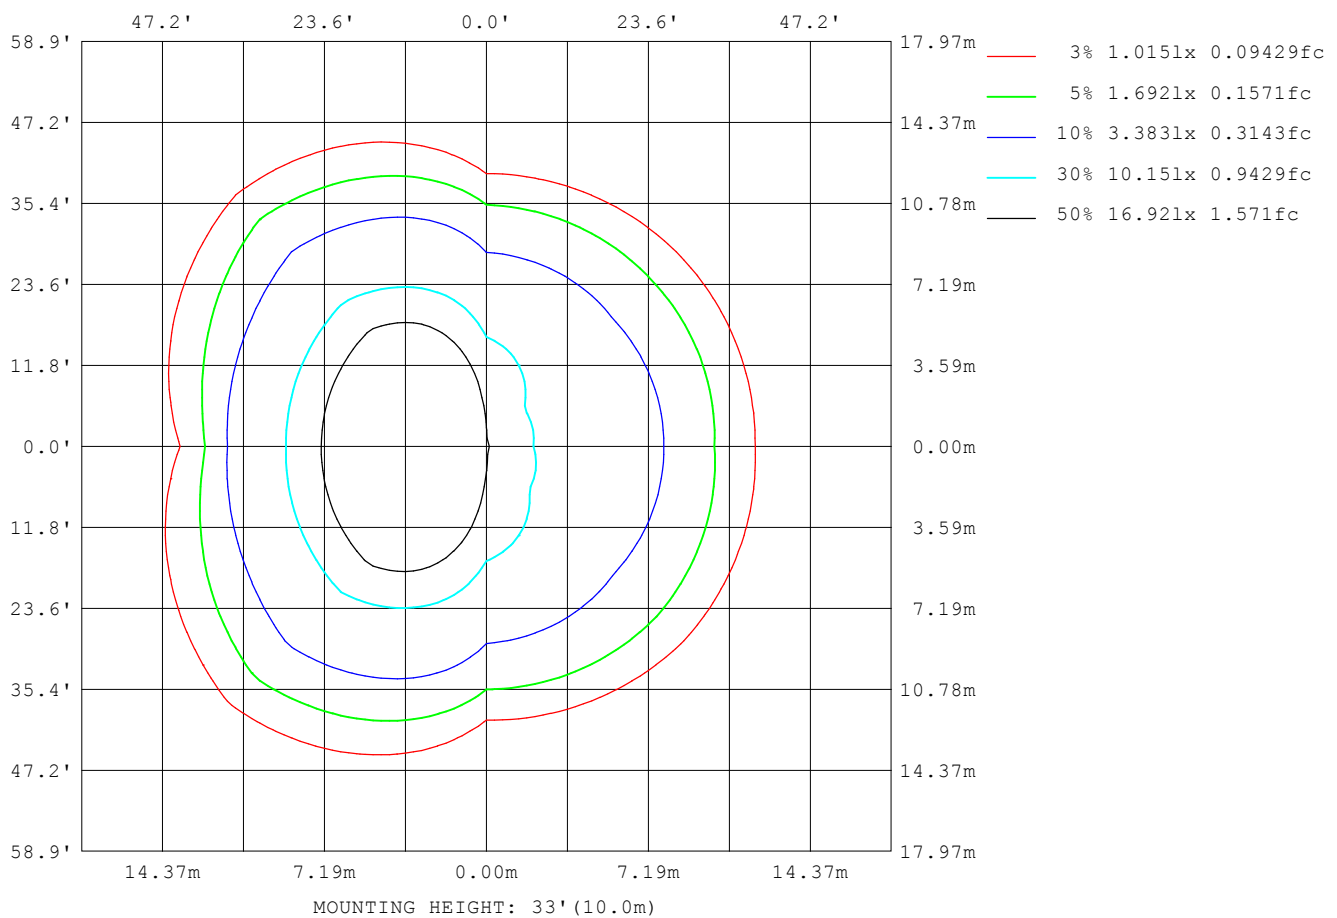

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.7V I:0.3120A P:37.50W PF:0.9960 Freq:60.00Hz Lamp Flux:4408.74x1 lm		
NAME: 4FT 偏光	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	4749
L_0~180 (75) av	2554
L_0~180 (85) av	1114
L_90~270 (65) av	4486
L_90~270 (75) av	2695
L_90~270 (85) av	1049
L_45 (65) av	5130
L_45 (75) av	2696
L_45 (85) av	1183

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

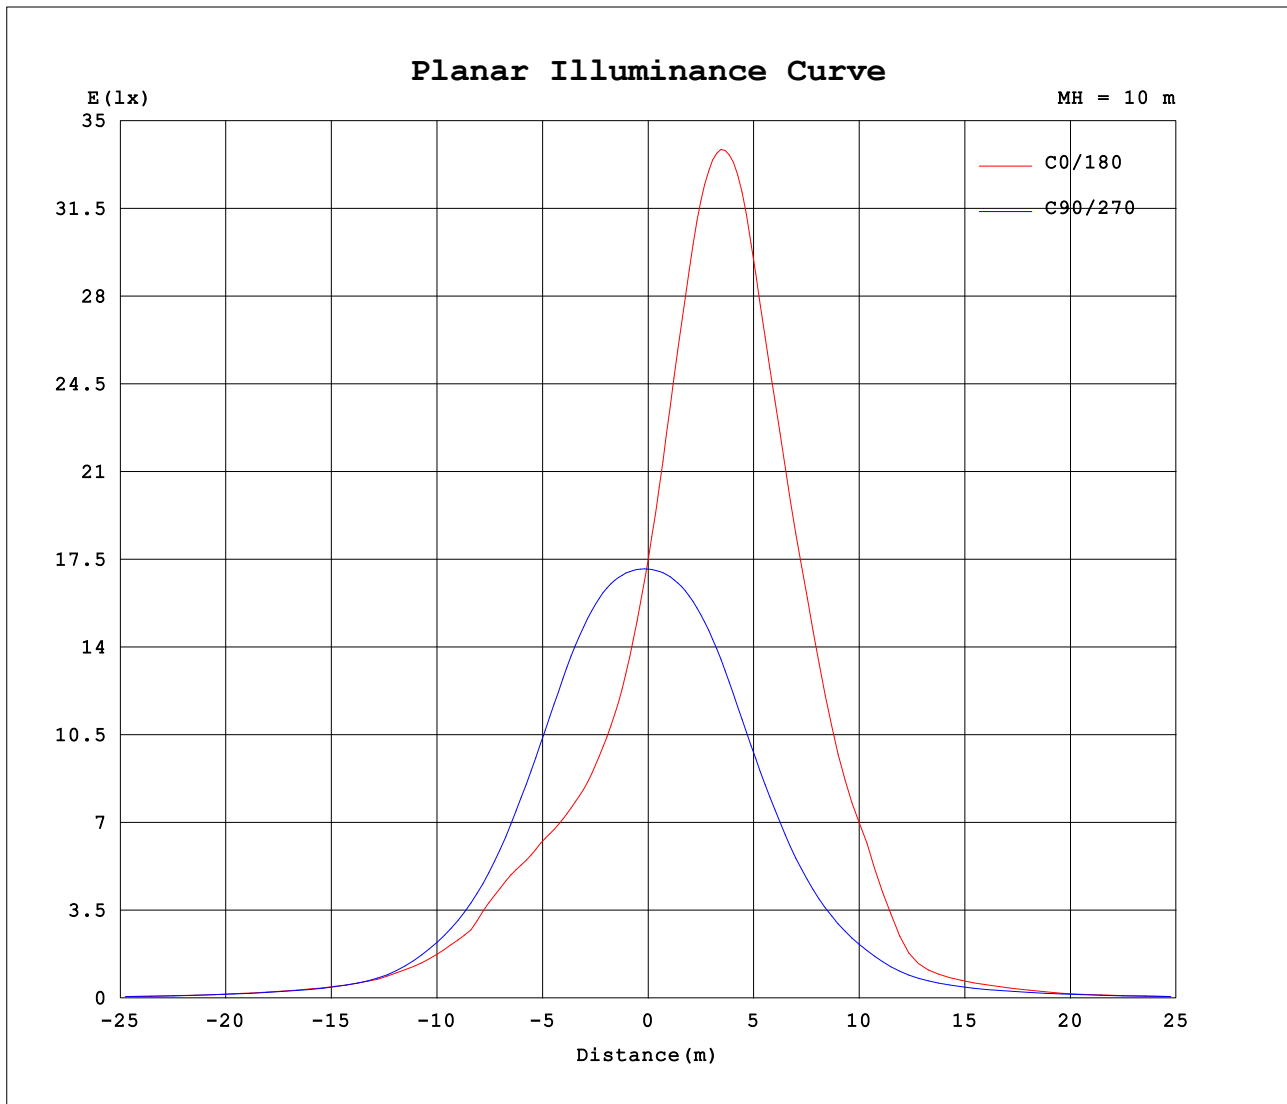

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.7V I:0.3120A P:37.50W PF:0.9960 Freq:60.00Hz Lamp Flux:4408.74x1 lm		
NAME: 4FT 偏光	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1713	1713	1713	1713	1713	1713	1713	1713										
5	1347	1448	1722	2051	2231	2054	1711	1451										
10	1113	1242	1732	2494	2867	2485	1702	1254										
15	972	1093	1714	3002	3526	2963	1666	1117										
20	896	977	1647	3521	3990	3402	1577	1007										
25	862	886	1507	3859	4107	3657	1426	938										
30	830	817	1315	3929	3786	3641	1236	876										
35	784	751	1084	3613	3298	3252	1018	806										
40	593	663	846	2997	2630	2651	804	716										
45	486	563	631	2299	1940	2008	609	579										
50	376	419	416	1621	910	1377	406	418										
55	278	305	280	1018	430	858	279	306										
60	223	219	217	546	308	413	217	221										
65	164	157	160	227	173	187	158	157										
70	101	101	106	131	111	107	102	96.3										
75	53.4	54.0	61.0	73.8	57.6	58.5	56.2	48.1										
80	20.7	22.7	28.9	35.6	27.9	27.0	25.3	18.2										
85	5.66	6.24	8.77	14.2	10.6	9.70	6.59	4.53										
90	0.06	0.07	0.51	3.72	2.35	1.87	0.03	0.08										
95	0.10	0.11	0.09	0.09	0.06	0.09	0.04	0.09										
100	0.16	0.20	0.13	0.14	0.09	0.09	0.07	0.16										
105	0.25	0.37	0.21	0.18	0.12	0.13	0.13	0.27										
110	0.46	0.64	0.31	0.26	0.15	0.17	0.20	0.45										
115	0.88	0.97	0.46	0.34	0.22	0.23	0.33	0.71										
120	1.31	1.37	0.66	0.45	0.29	0.30	0.47	1.03										
125	1.81	1.79	0.88	0.56	0.38	0.39	0.65	1.38										
130	2.32	2.21	1.14	0.67	0.47	0.48	0.88	1.72										
135	2.79	2.58	1.42	0.81	0.57	0.59	1.11	2.07										
140	3.13	2.89	1.71	0.95	0.66	0.72	1.37	2.41										
145	3.33	3.11	1.99	1.12	0.75	0.87	1.65	2.79										
150	3.37	3.25	2.25	1.33	0.91	1.08	1.95	3.26										
155	3.30	3.32	2.45	1.57	1.08	1.30	2.24	3.58										
160	3.17	3.35	2.65	1.86	1.31	1.54	2.50	3.84										
165	3.05	3.30	2.77	2.20	1.53	1.82	2.72	3.95										
170	2.89	3.19	2.89	2.57	1.77	2.11	2.88	3.88										
175	2.63	2.99	2.99	2.95	2.01	2.38	2.96	3.66										
180	2.30	2.68	3.00	3.30	2.29	2.68	3.00	3.31										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: