


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.6V I:0.3170A P:38.10W PF:0.9960 Freq:60.00Hz Lamp Flux:4376.53x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 114.87 lm/W			
MODEL		Imax(cd)	5958	S/MH(C0/180)	0.58
NOMINAL POWER(W)	40W	LOR(%)	100.0	S/MH(C90/270)	0.95
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	4376.5	η UP,DN(C0-180)	0.1,50.9
NOMINAL FLUX(lm)	4376.53	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,49.0
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

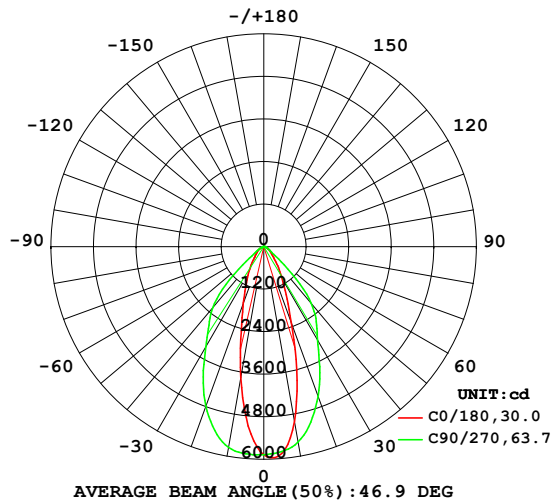

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

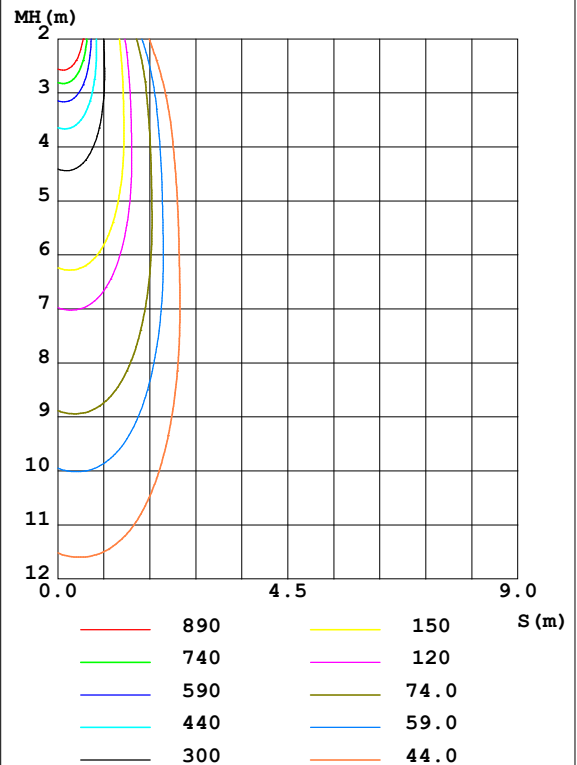

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	5001	5526	5594	4756	3746	4511	5751	5226	0- 10	519.2	519.2	11.9,11.9
20	2291	3424	4487	2641	1689	2457	4783	3070	10- 20	1125	1644	37.6,37.6
30	1033	1456	3045	1231	868.8	1193	3270	1314	20- 30	1054	2698	61.7,61.7
40	488.3	655.9	2086	607.8	423.2	588.8	2239	606.0	30- 40	800.6	3499	79.9,79.9
50	275.2	330.3	544.2	316.6	257.2	309.8	652.7	307.4	40- 50	503.1	4002	91.4,91.4
60	156.8	171.5	173.2	169.4	137.0	165.4	183.1	159.9	50- 60	218.4	4220	96.4,96.4
70	62.34	63.98	68.15	64.89	50.60	62.87	69.79	59.16	60- 70	106.8	4327	98.9,98.9
80	15.96	15.79	19.58	15.73	11.19	14.38	20.38	13.69	70- 80	38.19	4365	99.7,99.7
90	0.9633	0.4279	0.3346	0.4334	0.0097	0.0719	0.2321	0.0778	80- 90	6.599	4372	99.9,99.9
100	0.0438	0.0585	0.0604	0.0457	0.0463	0.0389	0.0412	0.0408	90-100	0.0466	4372	99.9,99.9
110	0.1070	0.1267	0.2246	0.1225	0.1023	0.1071	0.1864	0.1103	100-110	0.0912	4372	99.9,99.9
120	0.2188	0.2632	0.5411	0.2738	0.2119	0.2507	0.4598	0.2375	110-120	0.2106	4372	99.9,99.9
130	0.3940	0.5265	1.003	0.5932	0.4141	0.5768	0.8832	0.4869	120-130	0.3957	4373	99.9,99.9
140	0.7514	0.9871	1.573	1.196	0.8454	1.220	1.427	0.9355	130-140	0.6474	4373	99.9,99.9
150	1.496	1.659	2.180	2.067	1.805	2.092	2.041	1.617	140-150	0.9162	4374	99.9,99.9
160	2.720	2.376	2.741	2.876	3.097	2.862	2.622	2.375	150-160	1.052	4375	100,100
170	3.684	2.921	3.148	3.293	3.756	3.293	3.098	2.966	160-170	0.8474	4376	100,100
180	3.770	3.330	3.325	3.374	3.765	3.325	3.322	3.372	170-180	0.3213	4377	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.6V I:0.3170A P:38.10W PF:0.9960 Freq:60.00Hz Lamp Flux:4376.53x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

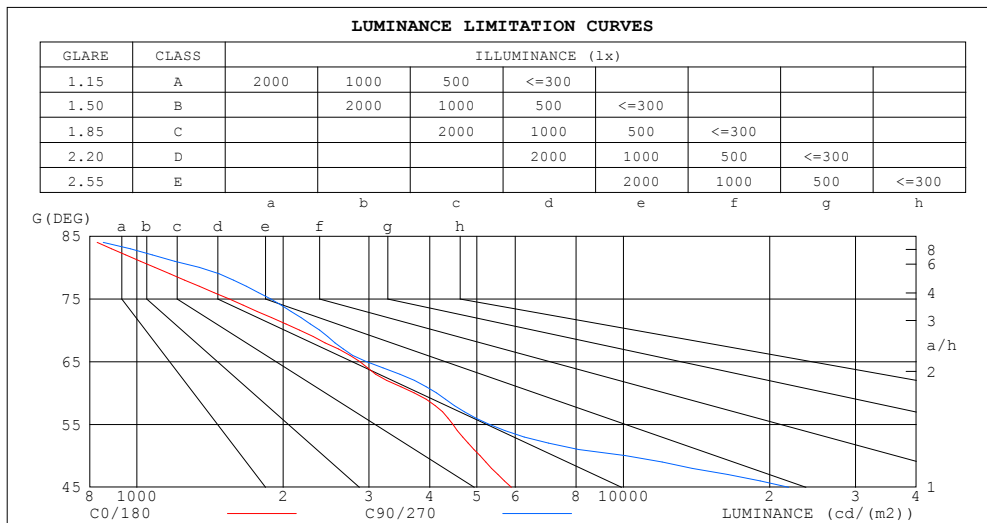

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	789	744
80	1089	1345
75	1545	1882
70	2159	2376
65	2871	2961
60	3716	4129
55	4460	5299
50	5072	10096
45	5892	21856


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.6V I:0.3170A P:38.10W PF:0.9960 Freq:60.00Hz Lamp Flux:4376.53x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.10	1.07	1.04	1.08	1.05	1.03	1.03	1.01	.00	.00	.98	.97	.96	.95	.94	.92
2.0	1.01	.97	.93	.99	.95	.92	.96	.93	.90	.93	.90	.88	.90	.88	.86	.84
3.0	.93	.88	.83	.92	.87	.83	.89	.85	.81	.87	.83	.80	.84	.81	.79	.77
4.0	.86	.80	.76	.85	.80	.75	.83	.78	.74	.81	.77	.73	.79	.76	.73	.71
5.0	.80	.74	.69	.79	.74	.69	.78	.72	.68	.76	.71	.68	.74	.70	.67	.66
6.0	.75	.69	.64	.74	.68	.64	.73	.67	.63	.71	.67	.63	.70	.66	.62	.61
7.0	.70	.64	.59	.70	.64	.59	.68	.63	.59	.67	.62	.59	.66	.62	.58	.57
8.0	.66	.60	.55	.66	.59	.55	.64	.59	.55	.63	.58	.55	.62	.58	.55	.53
9.0	.62	.56	.52	.62	.56	.52	.61	.55	.52	.60	.55	.51	.59	.55	.51	.50
10.0	.59	.53	.49	.59	.53	.49	.58	.52	.49	.57	.52	.48	.56	.52	.48	.47

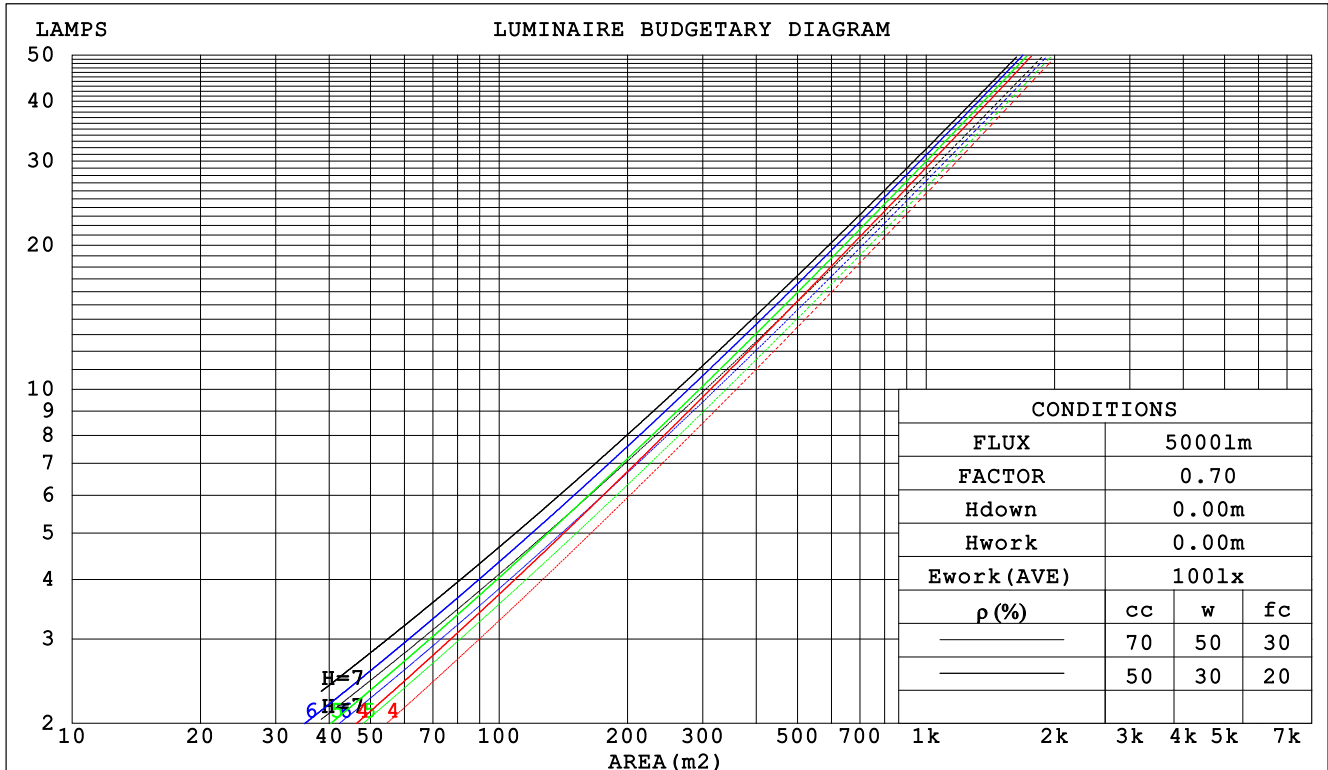

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.6V I:0.3170A P:38.10W PF:0.9960 Freq:60.00Hz Lamp Flux:4376.53x1 lm								
NAME: 4FT 2570			TYPE:4000K			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: EVERFINE			SUR.:			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.197	.112	.036	.191	.109	.035	.178	.102	.033	.166	.096	.031	.155	.090	.029		
2.0	.190	.104	.032	.184	.101	.031	.173	.096	.030	.163	.092	.029	.154	.087	.027		
3.0	.180	.096	.029	.176	.094	.028	.166	.090	.027	.158	.086	.026	.150	.083	.026		
4.0	.171	.089	.026	.167	.087	.026	.159	.084	.025	.151	.081	.024	.144	.078	.024		
5.0	.162	.082	.024	.158	.081	.024	.151	.079	.023	.144	.076	.023	.138	.074	.022		
6.0	.153	.077	.022	.150	.076	.022	.144	.074	.021	.138	.072	.021	.133	.070	.021		
7.0	.146	.072	.020	.143	.071	.020	.137	.069	.020	.132	.068	.020	.127	.066	.019		
8.0	.138	.068	.019	.136	.067	.019	.131	.065	.019	.126	.064	.018	.122	.063	.018		
9.0	.132	.064	.018	.130	.063	.018	.125	.062	.018	.121	.061	.017	.117	.059	.017		
10.0	.126	.060	.017	.124	.060	.017	.120	.059	.017	.116	.058	.016	.112	.057	.016		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.112	.112	.112	.064	.064	.064	.020	.020	.020	
1.0	.173	.158	.144	.148	.136	.124	.101	.093	.086	.058	.054	.050	.019	.017	.016	
2.0	.159	.133	.111	.137	.115	.096	.094	.079	.067	.054	.046	.039	.017	.015	.013	
3.0	.148	.114	.088	.127	.099	.076	.087	.069	.053	.050	.040	.031	.016	.013	.010	
4.0	.138	.100	.071	.119	.086	.061	.082	.060	.043	.047	.035	.026	.015	.011	.008	
5.0	.130	.089	.058	.112	.077	.051	.077	.054	.036	.045	.031	.021	.014	.010	.007	
6.0	.123	.080	.049	.105	.069	.042	.073	.048	.030	.042	.028	.018	.014	.009	.006	
7.0	.116	.072	.041	.100	.063	.036	.069	.044	.025	.040	.026	.015	.013	.008	.005	
8.0	.110	.066	.036	.095	.057	.031	.066	.040	.022	.038	.024	.013	.012	.008	.004	
9.0	.105	.061	.031	.090	.053	.027	.063	.037	.019	.037	.022	.011	.012	.007	.004	
10.0	.100	.056	.027	.086	.049	.024	.060	.034	.017	.035	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.6V I:0.3170A P:38.10W PF:0.9960 Freq:60.00Hz Lamp Flux:4376.53x1 lm										
NAME: 4FT 2570					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.7	15.8	15.0	16.0	16.1	18.7	19.8	19.0	19.9	20.1
3H	15.1	16.1	15.4	16.3	16.5	18.7	19.7	19.0	19.9	20.1
4H	15.2	16.1	15.5	16.3	16.6	18.7	19.6	19.0	19.9	20.1
6H	15.2	16.0	15.5	16.3	16.5	18.7	19.5	19.0	19.8	20.0
8H	15.2	16.0	15.5	16.2	16.5	18.6	19.5	19.0	19.7	20.0
12H	15.1	15.9	15.5	16.2	16.5	18.6	19.4	18.9	19.7	20.0
4H 2H	15.0	15.9	15.2	16.1	16.3	18.6	19.5	18.9	19.7	20.0
3H	15.4	16.2	15.8	16.5	16.8	18.7	19.5	19.0	19.8	20.0
4H	15.6	16.3	15.9	16.6	16.9	18.7	19.4	19.1	19.7	20.0
6H	15.6	16.2	16.0	16.5	16.9	18.7	19.3	19.1	19.6	20.0
8H	15.6	16.2	16.0	16.5	16.9	18.6	19.2	19.0	19.6	20.0
12H	15.5	16.1	16.0	16.5	16.8	18.6	19.1	19.0	19.5	19.9
8H 4H	15.5	16.1	15.9	16.5	16.8	18.6	19.2	19.0	19.5	19.9
6H	15.6	16.1	16.0	16.5	16.9	18.6	19.1	19.0	19.5	19.9
8H	15.6	16.0	16.0	16.4	16.9	18.6	19.0	19.0	19.4	19.9
12H	15.6	15.9	16.1	16.4	16.9	18.5	18.9	19.0	19.3	19.8
12H 4H	15.5	16.0	15.9	16.4	16.8	18.6	19.1	19.0	19.5	19.9
6H	15.6	16.0	16.0	16.4	16.8	18.6	19.0	19.0	19.4	19.8
8H	15.6	15.9	16.0	16.4	16.8	18.5	18.9	19.0	19.3	19.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.8 / - 1.1					+ 3.3 / - 3.9				
1.5H	+ 0.9 / - 0.9					+ 4.4 / - 3.9				
2.0H	+ 1.1 / - 1.2					+ 6.3 / - 3.3				

CIE Pub.117 Corrected 4377 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.1)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.6V I:0.3170A P:38.10W PF:0.9960 Freq:60.00Hz Lamp Flux:4376.53x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	79	71	66	78	71	66	77	70	66	62
0.80	87	80	75	87	80	75	85	79	75	70
1.00	93	86	82	92	86	82	91	86	81	76
1.25	98	92	88	97	91	87	95	90	86	82
1.50	102	96	92	100	95	91	98	94	90	85
2.00	106	100	97	104	99	96	101	97	94	89
2.50	108	103	99	106	102	99	103	99	97	90
3.00	110	106	102	108	104	101	104	101	99	92
4.00	112	109	106	110	107	105	106	104	102	94
5.00	114	111	108	111	109	107	107	105	104	96
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.6V I:0.3170A P:38.10W PF:0.9960 Freq:60.00Hz Lamp Flux:4376.53x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

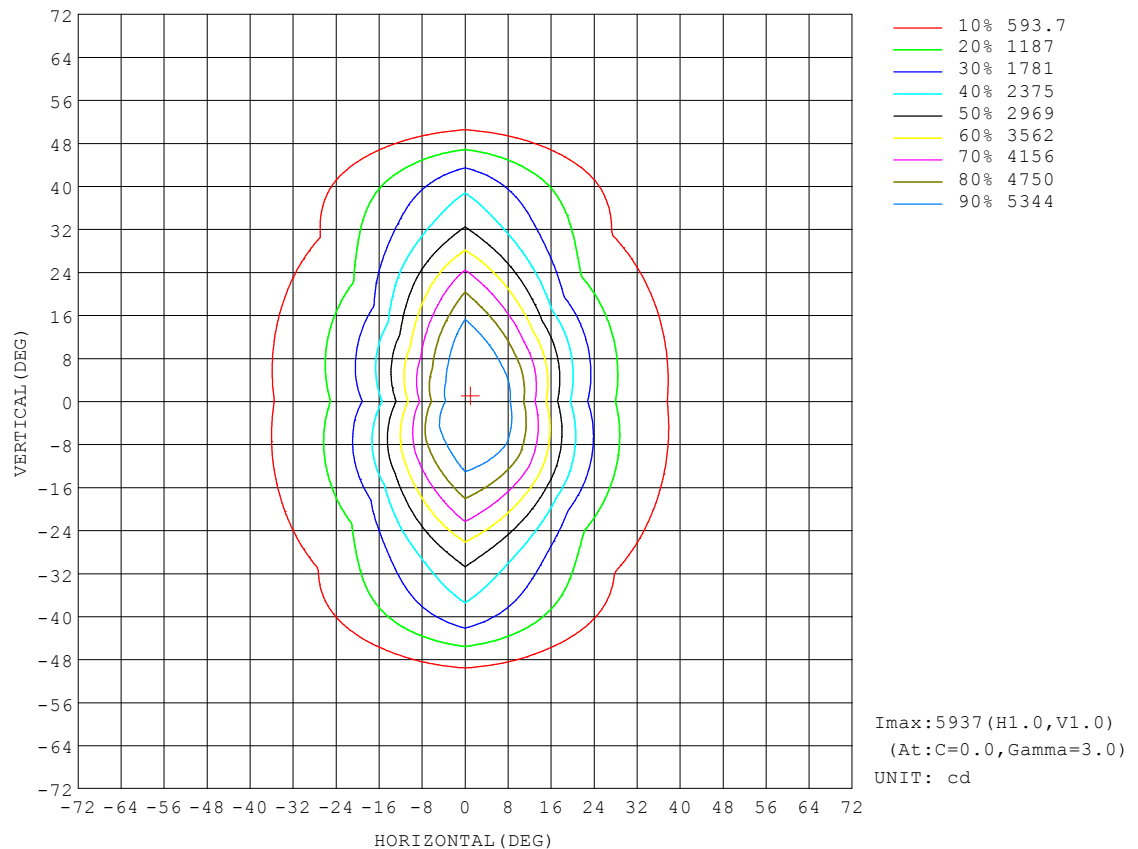


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.6V I:0.3170A P:38.10W PF:0.9960 Freq:60.00Hz Lamp Flux:4376.53x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

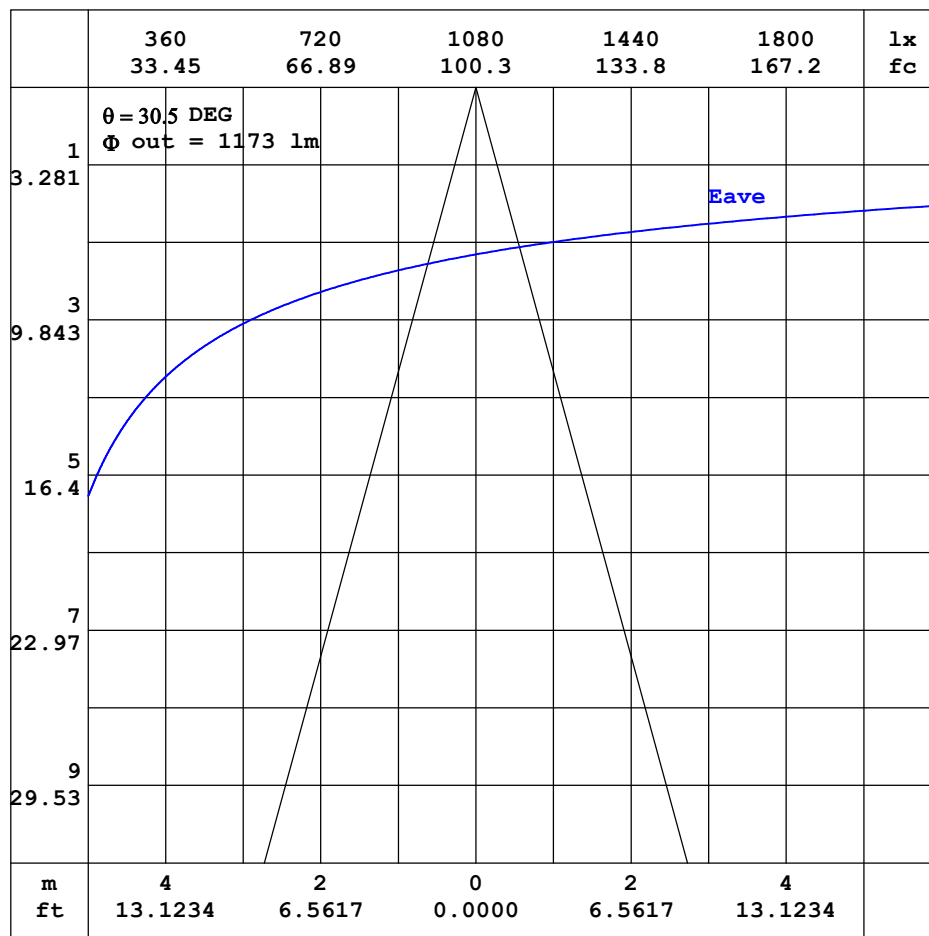


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.6V I:0.3170A P:38.10W PF:0.9960 Freq:60.00Hz Lamp Flux:4376.53x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

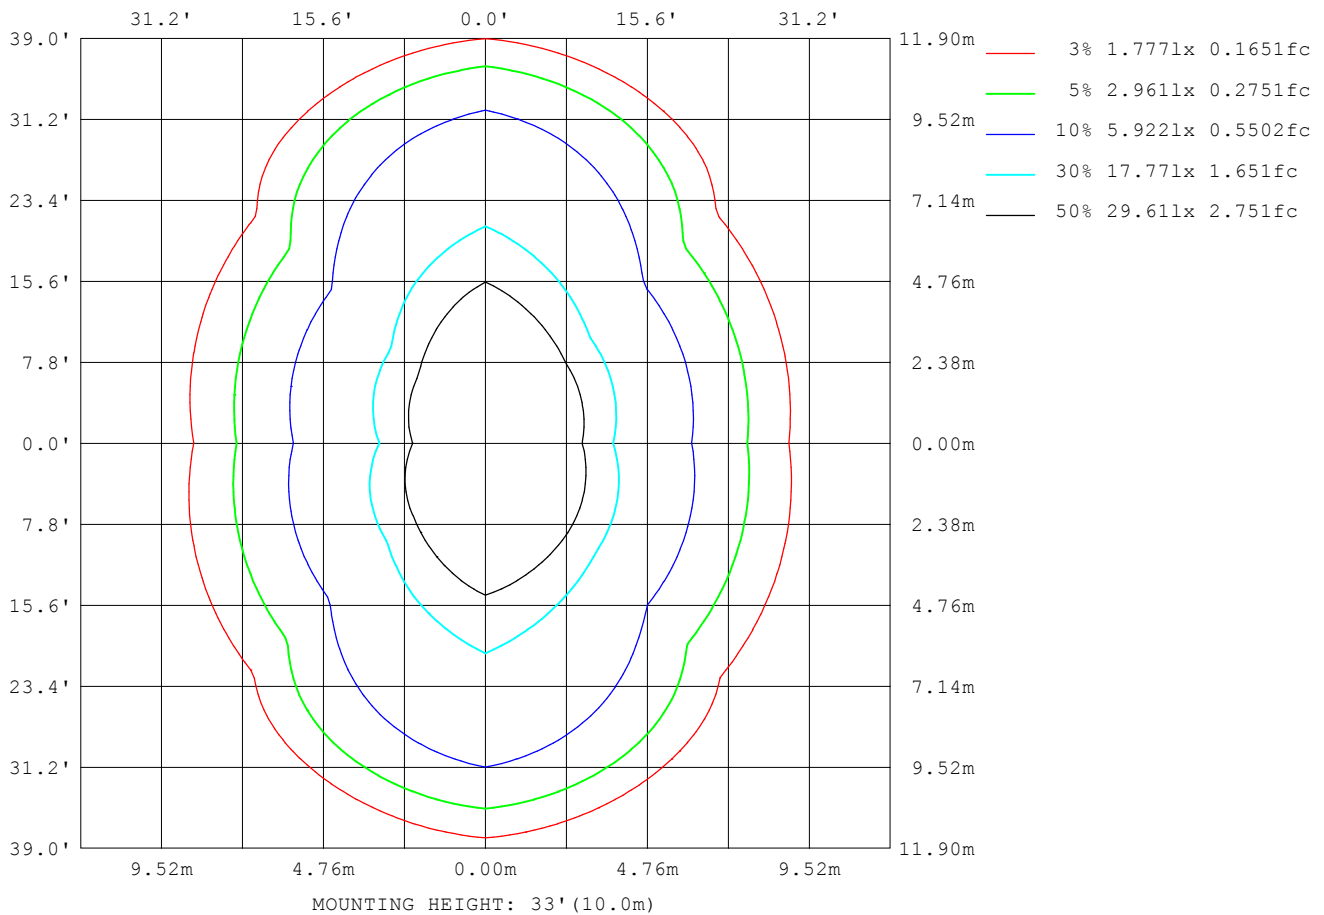

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.6V I:0.3170A P:38.10W PF:0.9960 Freq:60.00Hz Lamp Flux:4376.53x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2713
L_0~180 (75) av	1370
L_0~180 (85) av	658
L_90~270 (65) av	3022
L_90~270 (75) av	1905
L_90~270 (85) av	747
L_45 (65) av	3061
L_45 (75) av	1560
L_45 (85) av	662

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

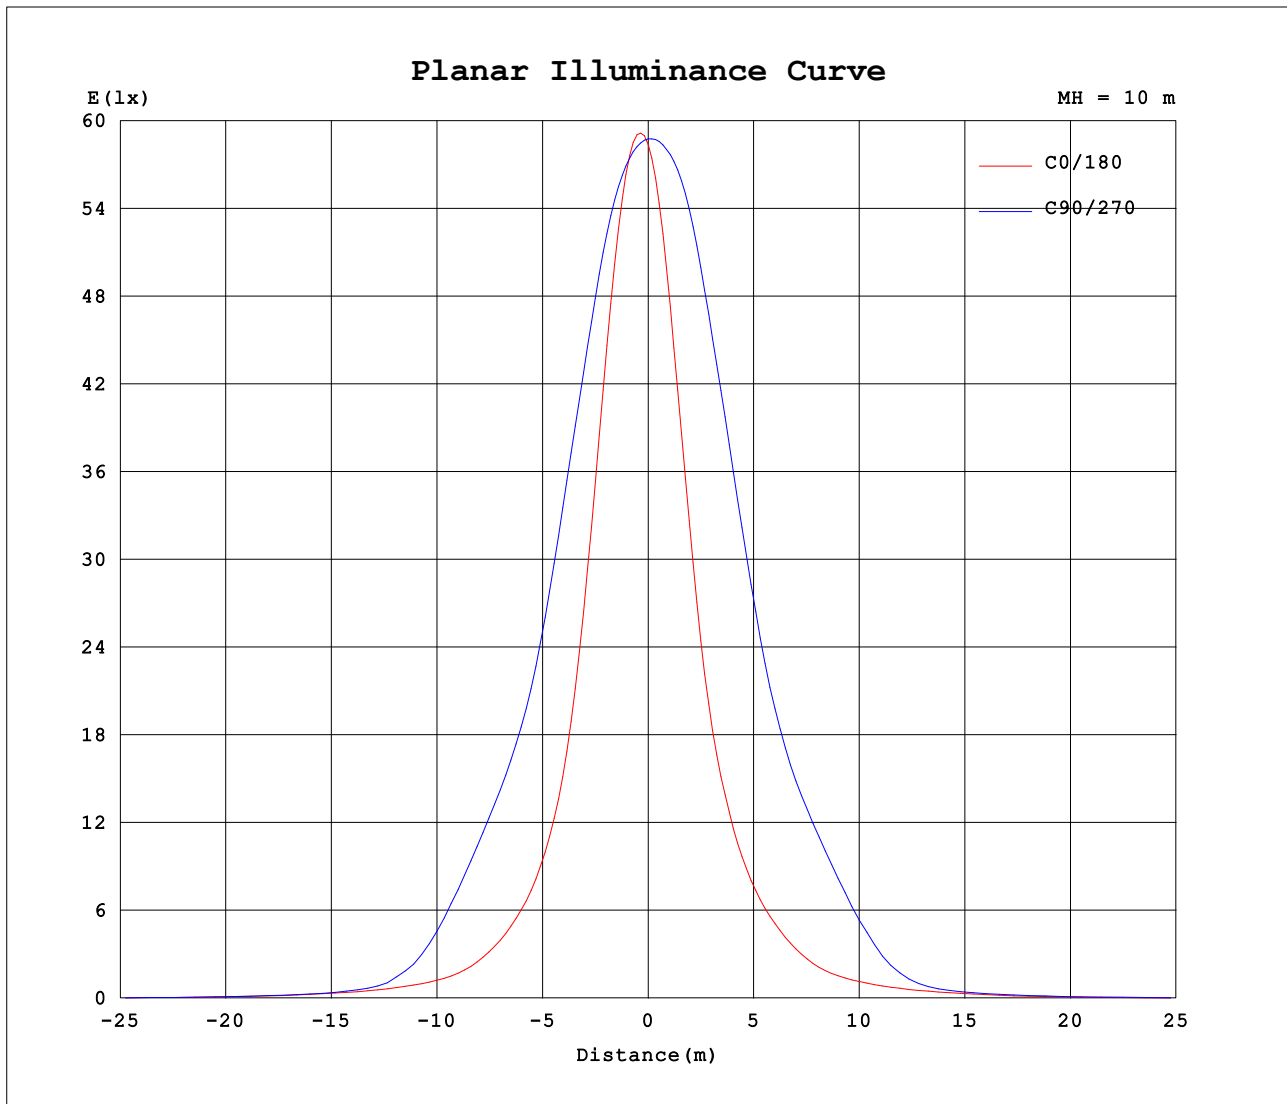

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.6V I:0.3170A P:38.10W PF:0.9960 Freq:60.00Hz Lamp Flux:4376.53x1 lm		
NAME: 4FT 2570	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	5867	5867	5867	5867	5867	5867	5867	5867										
5	5858	5922	5802	5523	5074	5383	5862	5785										
10	5001	5526	5594	4756	3746	4511	5751	5226										
15	3600	4617	5125	3721	2474	3460	5362	4242										
20	2291	3424	4487	2641	1689	2457	4783	3070										
25	1497	2277	3738	1786	1195	1708	4056	2012										
30	1033	1456	3045	1231	869	1193	3270	1314										
35	726	953	2589	859	619	838	2700	886										
40	488	656	2086	608	423	589	2239	606										
45	352	461	1296	435	325	425	1512	427										
50	275	330	544	317	257	310	653	307										
55	216	239	255	233	204	229	279	224										
60	157	171	173	169	137	165	183	160										
65	102	111	105	112	90.2	109	110	103										
70	62.3	64.0	68.1	64.9	50.6	62.9	69.8	59.2										
75	33.8	35.3	40.8	35.4	25.8	33.4	42.0	31.6										
80	16.0	15.8	19.6	15.7	11.2	14.4	20.4	13.7										
85	5.81	5.20	5.44	5.29	3.82	4.57	5.49	4.33										
90	0.96	0.43	0.33	0.43	0.01	0.07	0.23	0.08										
95	0.02	0.03	0.03	0.02	0.02	0.01	0.02	0.02										
100	0.04	0.06	0.06	0.05	0.05	0.04	0.04	0.04										
105	0.07	0.09	0.14	0.08	0.07	0.07	0.09	0.08										
110	0.11	0.13	0.22	0.12	0.10	0.11	0.19	0.11										
115	0.15	0.19	0.36	0.18	0.15	0.16	0.30	0.17										
120	0.22	0.26	0.54	0.27	0.21	0.25	0.46	0.24										
125	0.29	0.37	0.76	0.40	0.29	0.38	0.66	0.34										
130	0.39	0.53	1.00	0.59	0.41	0.58	0.88	0.49										
135	0.54	0.72	1.28	0.85	0.58	0.85	1.15	0.68										
140	0.75	0.99	1.57	1.20	0.85	1.22	1.43	0.94										
145	1.06	1.30	1.88	1.61	1.24	1.64	1.73	1.26										
150	1.50	1.66	2.18	2.07	1.80	2.09	2.04	1.62										
155	2.08	2.02	2.48	2.51	2.47	2.53	2.35	2.02										
160	2.72	2.38	2.74	2.88	3.10	2.86	2.62	2.38										
165	3.27	2.67	2.97	3.13	3.54	3.13	2.88	2.69										
170	3.68	2.92	3.15	3.29	3.76	3.29	3.10	2.97										
175	3.86	3.16	3.28	3.39	3.80	3.37	3.25	3.23										
180	3.77	3.33	3.32	3.37	3.77	3.32	3.32	3.37										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: