


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:122.90V I:0.1620A P:19.400W PF:0.9740 Freq:50.00Hz Lamp Flux:1656.72x1 lm					
NAME: 20PERLED120MV40S			TYPE:4000K		WEIGHT:
SPEC.:			DIM.: 1191*41*28MM		SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd			SUR.:28*1177mm		Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 85.40 lm/W
MODEL		I _{max} (cd)	583.0	S/MH(C0/180)	1.26	
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	1.26	
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1656.7	η UP, DN(C0-180)	0.2, 49.8	
NOMINAL FLUX(lm)	1656.72	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1, 49.9	
LAMPS INSIDE	1	η up(%)	0.3	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	119.4	η down(%)	99.7	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

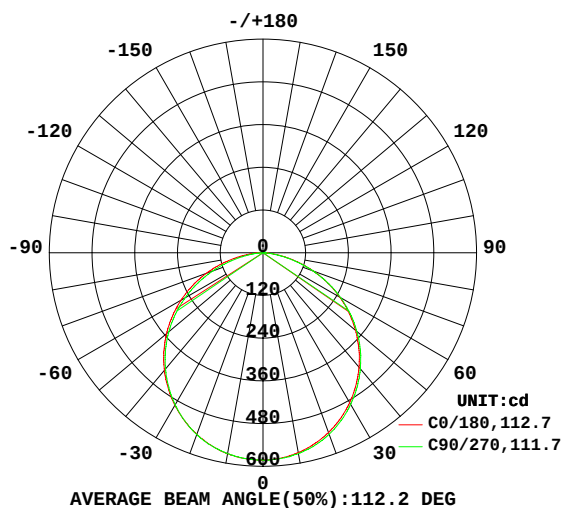

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

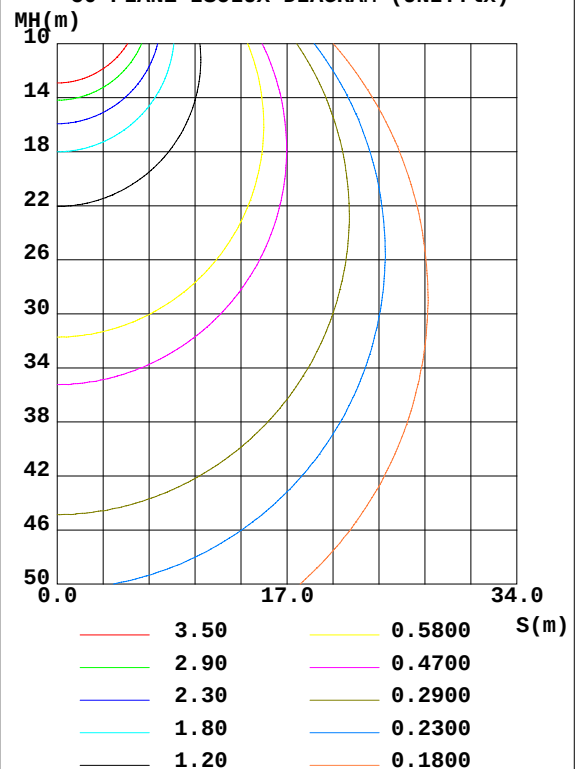

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-25

γ Range: 0 - 150DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity: 50.0%
 Test Distance: 6.770m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	569.9	570.9	572.5	574.8	573.2	573.2	572.7	569.2	0- 10	55.10	55.10	3.33,3.33
20	537.7	539.6	542.8	547.1	542.7	543.8	543.6	536.5	10- 20	157.9	213.0	12.9,12.9
30	486.5	489.2	492.4	500.8	495.0	496.4	493.5	484.4	20- 30	239.3	452.2	27.3,27.3
40	419.6	421.7	425.4	436.5	430.8	430.7	426.2	415.4	30- 40	288.2	740.5	44.7,44.7
50	339.8	341.2	344.3	358.7	353.9	351.8	345.3	332.4	40- 50	298.7	1039	62.7,62.7
60	248.7	248.7	251.7	269.6	265.4	261.4	252.4	239.8	50- 60	269.3	1309	79,79
70	150.5	149.7	149.5	174.5	169.4	163.3	150.6	142.2	60- 70	203.7	1512	91.3,91.3
80	54.51	54.94	49.67	76.93	71.44	68.32	50.95	47.89	70- 80	112.5	1625	98.1,98.1
90	3.564	3.782	0.1974	7.269	5.914	5.140	0.1933	2.474	80- 90	27.15	1652	99.7,99.7
100	0.6962	1.819	0.6864	1.976	0.6521	1.642	0.6637	1.927	90-100	1.692	1654	99.8,99.8
110	0.5494	1.422	0.2066	1.658	0.5738	1.340	0.1435	1.568	100-110	1.197	1655	99.9,99.9
120	0.4216	1.080	0.2653	1.259	0.4462	1.025	0.2558	1.196	110-120	0.8383	1656	99.9,99.9
130	0.3566	0.8124	0.2449	0.9313	0.3851	0.7961	0.2028	0.8937	120-130	0.5899	1656	100,100
140	0.3243	0.2405	0.2601	0.6553	0.3489	0.6281	0.2238	0.2472	130-140	0.3404	1656	100,100
150	0.3127	0.2519	0.5413	0.4255	0.3261	0.4371	0.5566	0.2549	140-150	0.2240	1657	100,100
160	0	0	0	0	0	0	0	0	150-160	0.0053	1657	100,100
170	0	0	0	0	0	0	0	0	160-170	0	1657	100,100
180	0	0	0	0	0	0	0	0	170-180	0	1657	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-03-25

γ Range: 0 - 150DEG
 γ Interval: 0.5DEG
 γ Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:122.90V I:0.1620A P:19.400W PF:0.9740 Freq:50.00Hz Lamp Flux:1656.72x1 lm		
NAME: 20PERLED120MV40S	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 1191*41*28MM	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:28*1177mm	Shielding Angle:

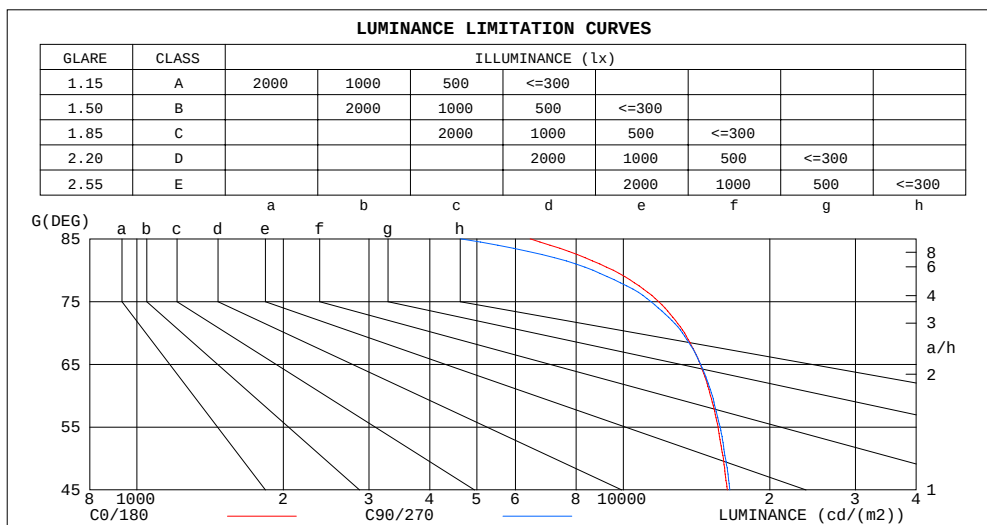

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	6435	4626
80	9534	8660
75	11817	11394
70	13363	13231
65	14391	14418
60	15108	15242
55	15659	15811
50	16055	16219
45	16364	16558


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

γ Range: 0 - 150DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:122.90V I:0.1620A P:19.400W PF:0.9740 Freq:50.00Hz Lamp Flux:1656.72x1 lm		
NAME: 20PERLED120MV40S	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 1191*41*28MM	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:28*1177mm	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

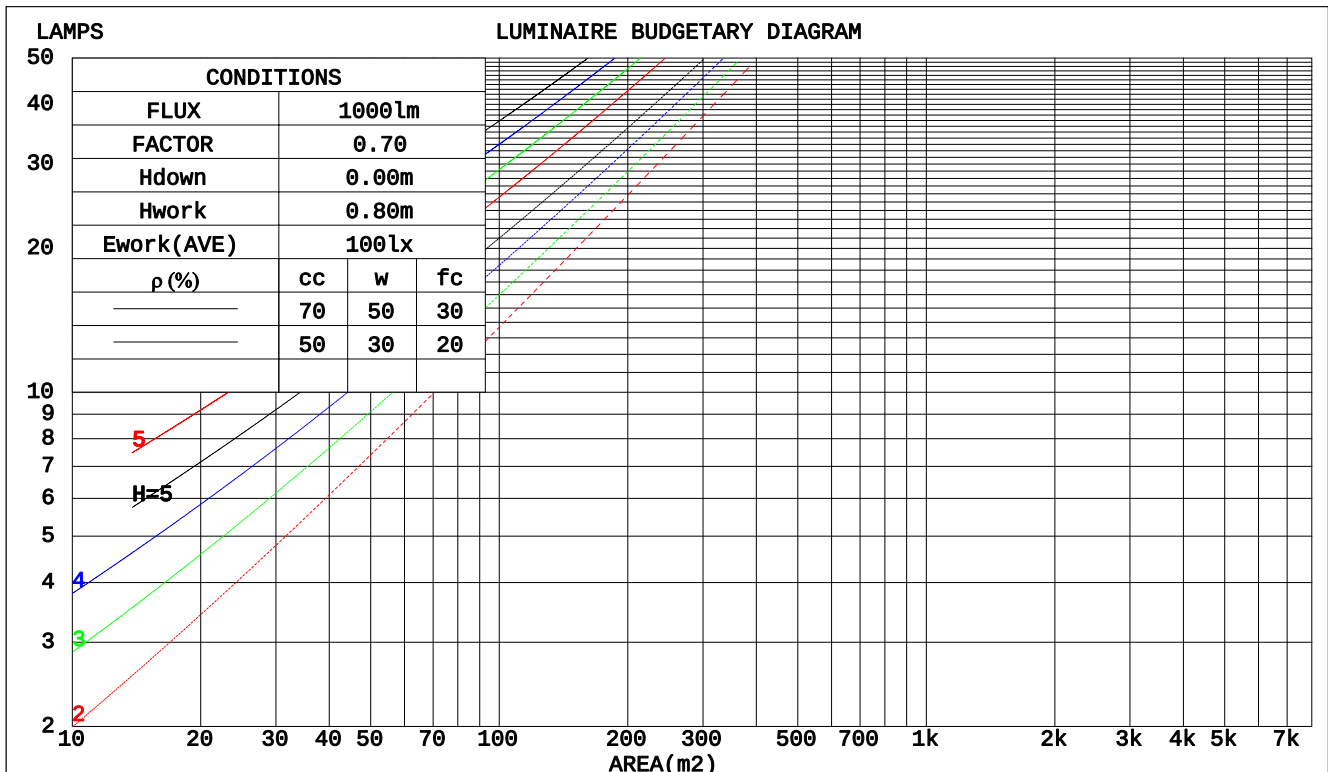

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

γ Range: 0 - 150DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:122.90V I:0.1620A P:19.400W PF:0.9740 Freq:50.00Hz Lamp Flux:1656.72x1 lm					
NAME: 20PERLED120MV40S			TYPE:4000K		WEIGHT:
SPEC.:			DIM.: 1191*41*28MM		SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd			SUR.:28*1177mm		Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.306	.174	.055	.299	.171	.054	.286	.164	.052	.273	.158	.051	.262	.152	.049		
2.0	.290	.159	.049	.283	.156	.048	.271	.151	.047	.261	.146	.046	.250	.142	.045		
3.0	.269	.143	.043	.263	.141	.042	.253	.137	.042	.243	.133	.041	.234	.129	.040		
4.0	.248	.129	.038	.243	.127	.038	.234	.124	.037	.225	.121	.037	.217	.118	.036		
5.0	.230	.117	.034	.225	.116	.034	.217	.113	.033	.209	.110	.033	.202	.108	.032		
6.0	.213	.107	.031	.209	.106	.030	.202	.103	.030	.195	.101	.030	.189	.099	.029		
7.0	.198	.098	.028	.195	.097	.028	.188	.095	.027	.182	.093	.027	.176	.092	.027		
8.0	.185	.091	.025	.182	.090	.025	.176	.088	.025	.171	.087	.025	.166	.085	.025		
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023		
10.0	.163	.078	.022	.161	.078	.022	.156	.076	.022	.152	.075	.021	.147	.074	.021		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.112	.112	.112	.065	.065	.065	.021	.021	.021	
1.0	.182	.158	.137	.156	.136	.118	.107	.094	.081	.061	.054	.047	.020	.017	.015	
2.0	.174	.134	.101	.149	.116	.087	.102	.080	.061	.059	.046	.036	.019	.015	.012	
3.0	.167	.117	.077	.143	.101	.067	.098	.070	.047	.057	.041	.028	.018	.013	.009	
4.0	.159	.103	.061	.136	.089	.053	.094	.062	.037	.054	.036	.022	.017	.012	.007	
5.0	.152	.093	.050	.130	.080	.043	.090	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.144	.085	.042	.124	.073	.036	.086	.051	.026	.050	.030	.015	.016	.010	.005	
7.0	.138	.078	.036	.118	.067	.031	.082	.047	.022	.048	.028	.013	.015	.009	.004	
8.0	.131	.072	.031	.113	.062	.027	.078	.044	.019	.045	.026	.011	.015	.008	.004	
9.0	.125	.067	.028	.108	.058	.024	.075	.041	.017	.043	.024	.010	.014	.008	.003	
10.0	.119	.063	.025	.103	.054	.022	.071	.038	.015	.042	.023	.009	.014	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

γ Range: 0 - 150DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:122.90V I:0.1620A P:19.400W PF:0.9740 Freq:50.00Hz Lamp Flux:1656.72x1 lm										
NAME: 20PERLED120MV40S					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.: 1191*41*28MM			SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co., ltd					SUR.:28*1177mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.4	23.9	22.6	24.1	24.3	22.4	23.9	22.7	24.1	24.3
3H	23.8	25.2	24.1	25.4	25.7	23.8	25.2	24.1	25.5	25.7
4H	24.3	25.7	24.7	25.9	26.2	24.3	25.6	24.6	25.9	26.2
6H	24.7	25.9	25.0	26.2	26.5	24.6	25.8	24.9	26.1	26.4
8H	24.7	25.9	25.1	26.2	26.5	24.6	25.9	25.0	26.1	26.4
12H	24.7	25.9	25.1	26.2	26.5	24.6	25.8	25.0	26.1	26.4
4H 2H	23.0	24.3	23.3	24.5	24.8	23.0	24.3	23.3	24.6	24.8
3H	24.6	25.7	24.9	26.0	26.3	24.6	25.7	24.9	26.0	26.3
4H	25.2	26.3	25.6	26.6	26.9	25.2	26.2	25.6	26.6	26.9
6H	25.6	26.6	26.0	26.9	27.3	25.6	26.5	26.0	26.9	27.2
8H	25.8	26.6	26.2	27.0	27.4	25.6	26.5	26.1	26.9	27.3
12H	25.8	26.6	26.2	27.0	27.4	25.7	26.5	26.1	26.9	27.3
8H 4H	25.4	26.3	25.8	26.7	27.1	25.4	26.3	25.8	26.7	27.0
6H	26.0	26.7	26.4	27.1	27.6	25.9	26.6	26.4	27.0	27.5
8H	26.2	26.8	26.6	27.2	27.7	26.0	26.7	26.5	27.1	27.6
12H	26.2	26.8	26.7	27.3	27.7	26.1	26.7	26.6	27.1	27.6
12H 4H	25.4	26.2	25.9	26.6	27.0	25.4	26.2	25.8	26.6	27.0
6H	26.0	26.7	26.5	27.1	27.5	25.9	26.6	26.4	27.0	27.5
8H	26.2	26.8	26.7	27.2	27.7	26.1	26.7	26.6	27.1	27.6
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 1657 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 1.8$)
Area: 0.033 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

γ Range: 0 - 150DEG
 γ Interval: 0.5DEG
 γ Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:122.90V I:0.1620A P:19.400W PF:0.9740 Freq:50.00Hz Lamp Flux:1656.72x1 lm		
NAME: 20PERLED120MV40S	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 1191*41*28MM	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:28*1177mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	56	48	65	55	48	41
1.00	76	65	58	75	64	57	73	66	57	50
1.25	83	73	66	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	76	70	62
2.00	95	87	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	95	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-03-25

γ Range: 0 - 150DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:122.90V I:0.1620A P:19.400W PF:0.9740 Freq:50.00Hz Lamp Flux:1656.72x1 lm		
NAME: 20PERLED120MV40S	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 1191*41*28MM	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:28*1177mm	Shielding Angle:

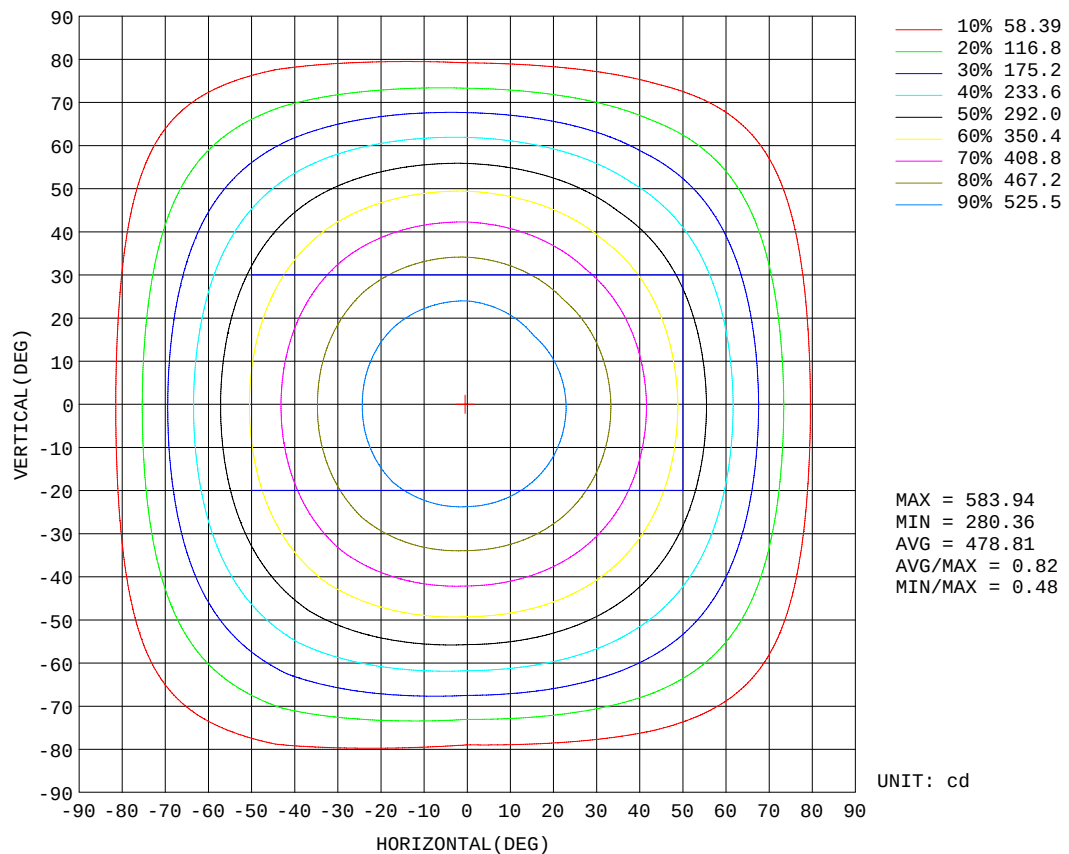


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

γ Range: 0 - 150DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

AAI Figure

Test:U:122.90V I:0.1620A P:19.400W PF:0.9740 Freq:50.00Hz Lamp Flux:1656.72x1 lm		
NAME: 20PERLED120MV40S	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 1191*41*28MM	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:28*1177mm	Shielding Angle:

Flux out:1207 lm

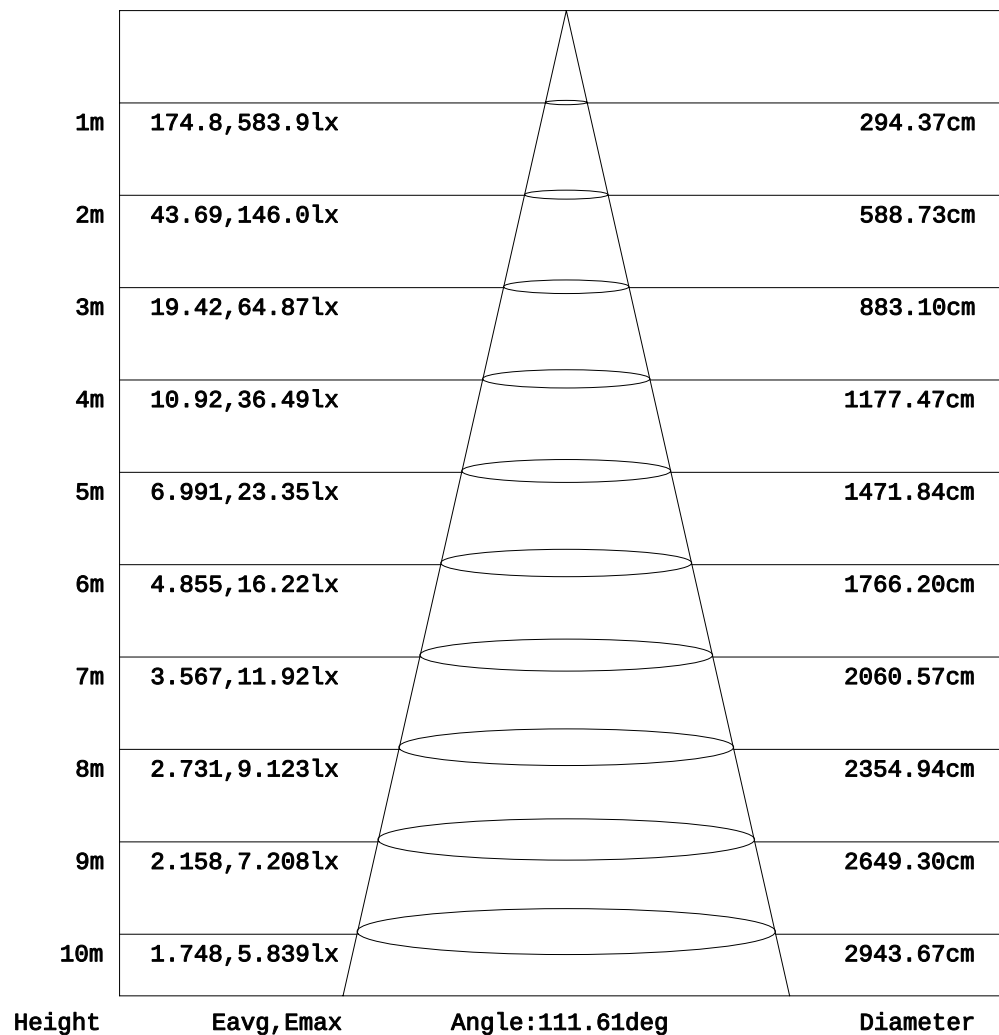


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-25

γ Range: 0 - 150DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity: 50.0%
 Test Distance: 6.770m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:122.90V I:0.1620A P:19.400W PF:0.9740 Freq:50.00Hz Lamp Flux:1656.72x1 lm		
NAME: 20PERLED120MV40S	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 1191*41*28MM	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:28*1177mm	Shielding Angle:

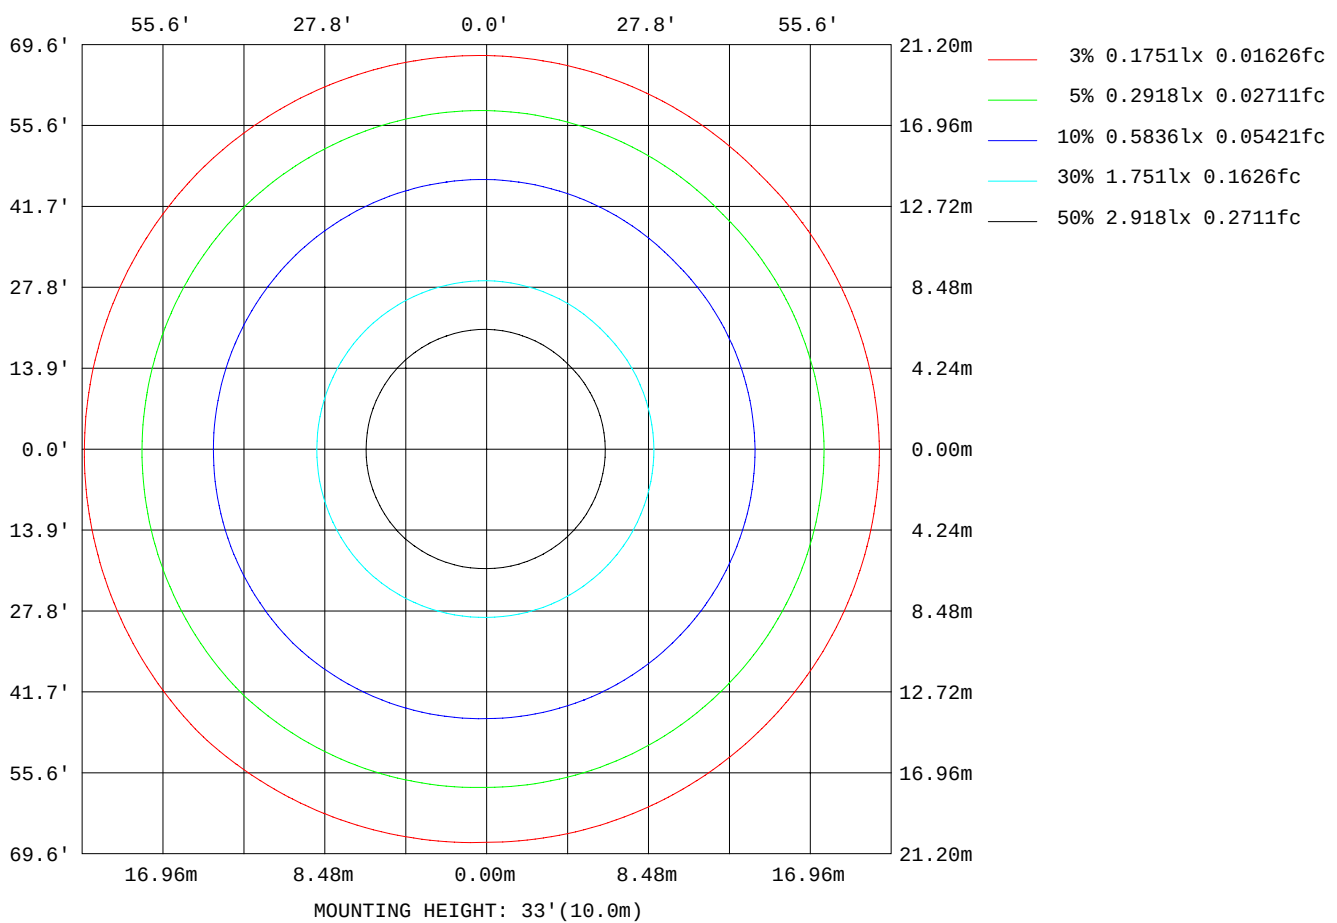

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-25

γ Range: 0 - 150DEG
 γ Interval: 0.5DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity: 50.0%
Test Distance: 6.770m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:122.90V I:0.1620A P:19.400W PF:0.9740 Freq:50.00Hz Lamp Flux:1656.72x1 lm		
NAME: 20PERLED120MV40S	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 1191*41*28MM	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:28*1177mm	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	15002
L_0~180(75)av	12934
L_0~180(85)av	8528
L_90~270(65)av	14463
L_90~270(75)av	11459
L_90~270(85)av	4782
L_45(65)av	14806
L_45(75)av	12689
L_45(85)av	8348

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-03-25

γ Range: 0 - 150DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks:

Planar Illuminance Curve

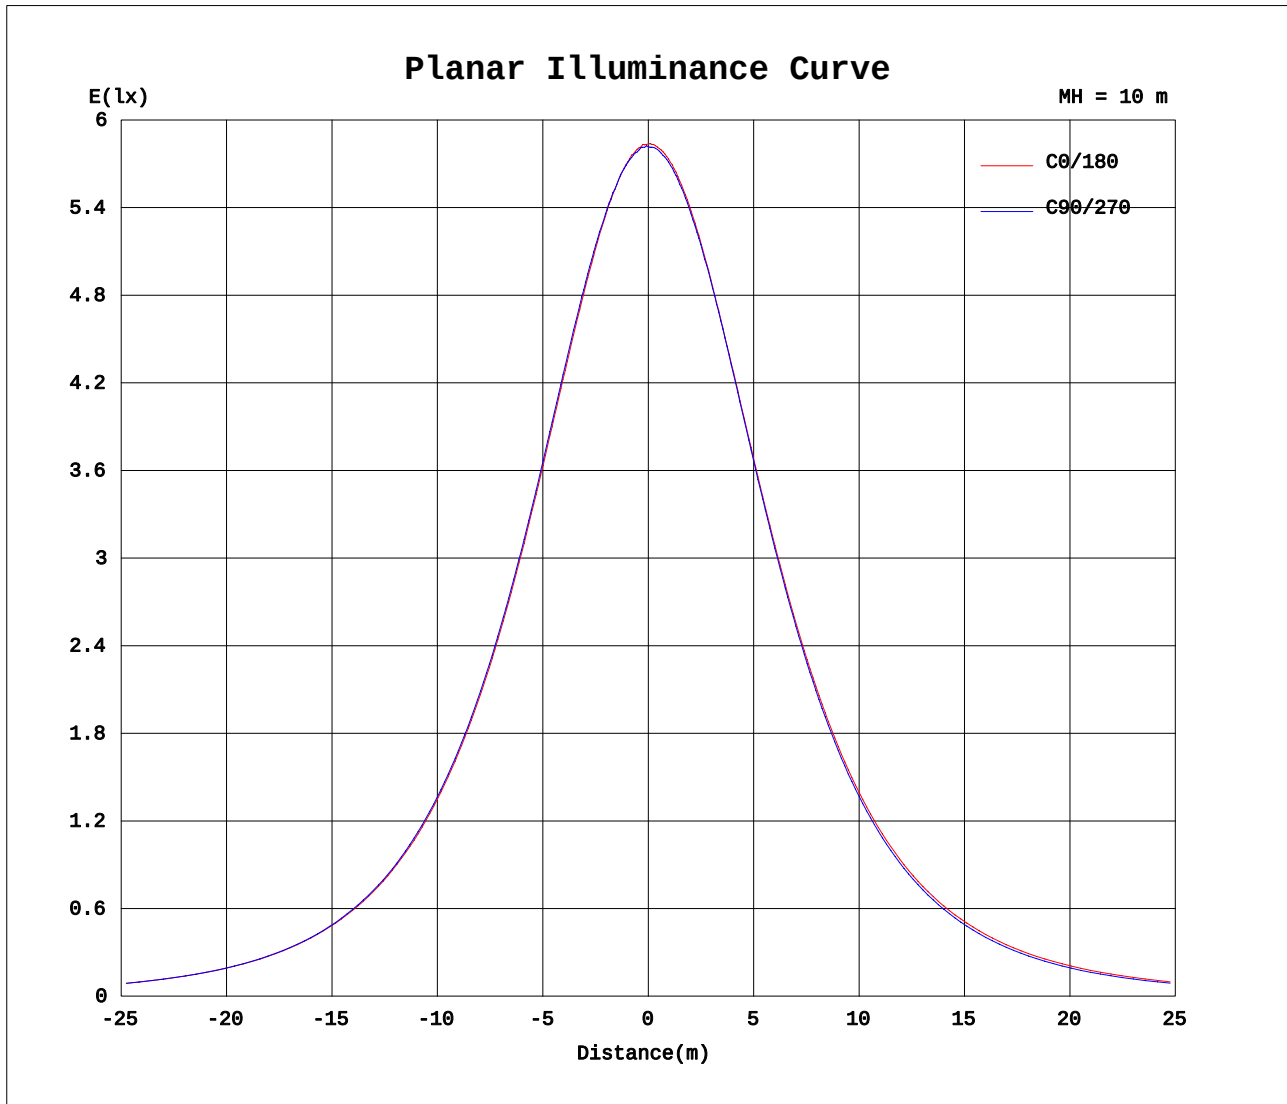

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-25

γ Range: 0 - 150DEG
 γ Interval: 0.5DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity: 50.0%
Test Distance: 6.770m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:122.90V I:0.1620A P:19.400W PF:0.9740 Freq:50.00Hz Lamp Flux:1656.72x1 lm		
NAME: 20PERLED120MV40S	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 1191*41*28MM	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:28*1177mm	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	582	582	582	582	582	582	582	582										
5	579	579	580	582	580	580	580	578										
10	570	571	572	575	573	573	573	569										
15	556	558	560	563	561	561	560	555										
20	538	540	543	547	543	544	544	536										
25	514	517	520	526	521	523	521	513										
30	487	489	492	501	495	496	493	484										
35	455	458	461	470	464	465	461	452										
40	420	422	425	437	431	431	426	415										
45	381	383	387	399	394	393	388	376										
50	340	341	344	359	354	352	345	332										
55	296	296	300	315	311	308	300	287										
60	249	249	252	270	265	261	252	240										
65	200	199	201	222	218	213	202	191										
70	150	150	149	175	169	163	151	142										
75	101	100	97.4	126	120	115	98.4	93.0										
80	54.5	54.9	49.7	76.9	71.4	68.3	50.9	47.9										
85	18.5	18.8	13.3	34.7	30.6	28.6	14.2	14.0										
90	3.56	3.78	0.20	7.27	5.91	5.14	0.19	2.47										
95	0.73	1.96	0.65	2.07	0.70	1.74	0.64	2.04										
100	0.70	1.82	0.69	1.98	0.65	1.64	0.66	1.93										
105	0.64	1.63	0.69	1.84	0.63	1.51	0.66	1.76										
110	0.55	1.42	0.21	1.66	0.57	1.34	0.14	1.57										
115	0.48	1.24	0.22	1.46	0.50	1.17	0.16	1.37										
120	0.42	1.08	0.27	1.26	0.45	1.03	0.26	1.20										
125	0.38	0.94	0.25	1.09	0.41	0.90	0.19	1.05										
130	0.36	0.81	0.24	0.93	0.39	0.80	0.20	0.89										
135	0.34	0.31	0.25	0.79	0.37	0.71	0.22	0.24										
140	0.32	0.24	0.26	0.66	0.35	0.63	0.22	0.25										
145	0.32	0.25	0.26	0.53	0.34	0.53	0.24	0.25										
150	0.31	0.25	0.54	0.43	0.33	0.44	0.56	0.25										
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-03-25

γ Range: 0 - 150DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks: