


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.6V I:0.4600A P:54.90W PF:0.9970 Freq:60.00Hz Lamp Flux:7276.49x1 lm		
NAME: 13代B款	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 132.54 lm/W			
MODEL	1.3FT	I _{max} (cd)	4935	S/MH(C0/180)	1.17
NOMINAL POWER(W)	50W	LOR(%)	100.0	S/MH(C90/270)	1.05
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	7276.5	η UP,DN(C0-180)	0.2,53.9
NOMINAL FLUX(lm)	7276.49	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,45.8
LAMPS INSIDE	1	η up(%)	0.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	99.7	CIBSE SHR MAX	1.25

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

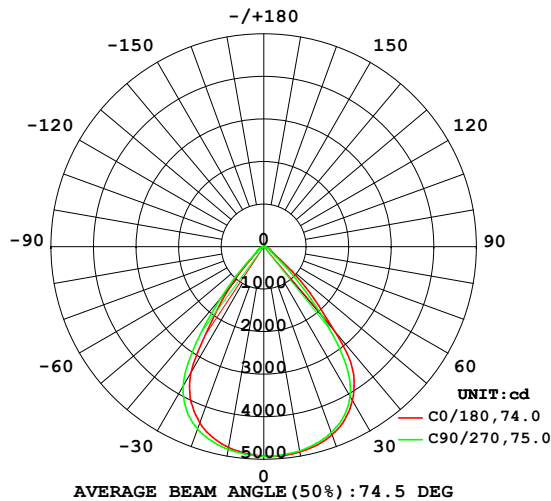

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

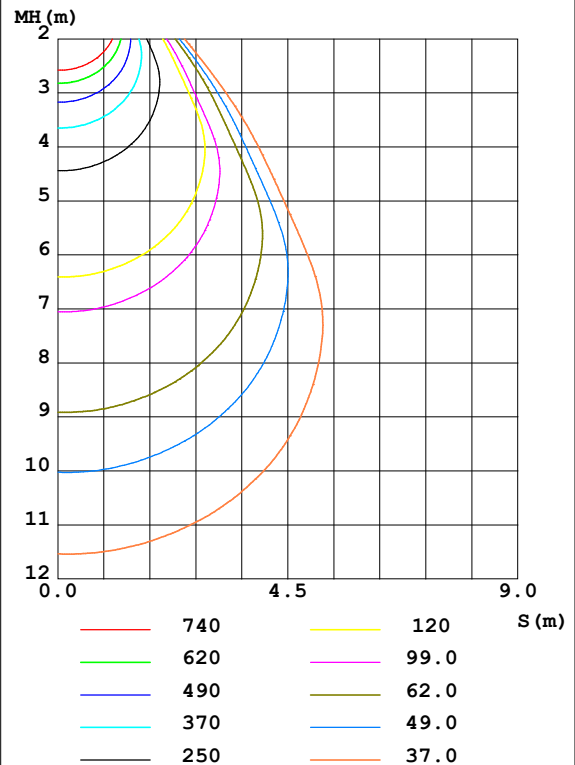

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	4897	4890	4872	4837	4790	4793	4836	4862	0- 10	466.4	466.4	6.41,6.41
20	4699	4696	4649	4555	4404	4442	4558	4610	10- 20	1338	1804	24.8,24.8
30	4170	4209	4057	3907	3430	3648	3800	4013	20- 30	1976	3781	52,52
40	2606	3148	2129	2569	1225	2007	1575	2732	30- 40	1961	5742	78.9,78.9
50	725.7	1222	413.7	691.5	245.2	471.5	291.7	803.3	40- 50	1013	6755	92.8,92.8
60	199.5	289.5	178.4	192.3	152.1	152.7	165.1	211.1	50- 60	299.2	7054	96.9,96.9
70	125.4	115.1	94.84	80.15	57.05	61.45	72.85	92.07	60- 70	134.6	7189	98.8,98.8
80	39.14	35.78	25.95	19.99	12.26	12.95	17.47	25.40	70- 80	53.66	7242	99.5,99.5
90	5.174	3.867	0.3327	0.2133	0.0340	0.0412	0.0072	0.2657	80- 90	10.74	7253	99.7,99.7
100	0.3194	0.3780	0.3920	0.4507	0.0679	0.0774	0.0389	0.0678	90-100	0.3164	7254	99.7,99.7
110	0.5664	0.7950	0.8102	1.132	0.1625	0.2033	0.1480	0.1524	100-110	0.3488	7254	99.7,99.7
120	1.480	2.834	3.137	3.832	0.5406	0.6171	0.5237	0.4574	110-120	0.9524	7255	99.7,99.7
130	5.556	6.913	7.195	8.192	1.348	1.331	1.263	1.079	120-130	2.519	7257	99.7,99.7
140	10.56	10.48	10.27	11.51	2.297	2.319	2.286	1.929	130-140	4.133	7262	99.8,99.8
150	12.92	12.83	12.38	13.45	5.416	6.085	6.029	5.044	140-150	4.813	7266	99.9,99.9
160	14.46	14.39	14.13	14.17	11.11	10.98	10.48	9.517	150-160	4.981	7271	99.9,99.9
170	15.46	15.19	14.88	14.40	14.19	13.89	13.69	12.78	160-170	3.791	7275	100,100
180	15.27	14.99	14.81	14.21	15.29	15.00	14.83	14.20	170-180	1.393	7276	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.6V I:0.4600A P:54.90W PF:0.9970 Freq:60.00Hz Lamp Flux:7276.49x1 lm		
NAME: 13代B款	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:

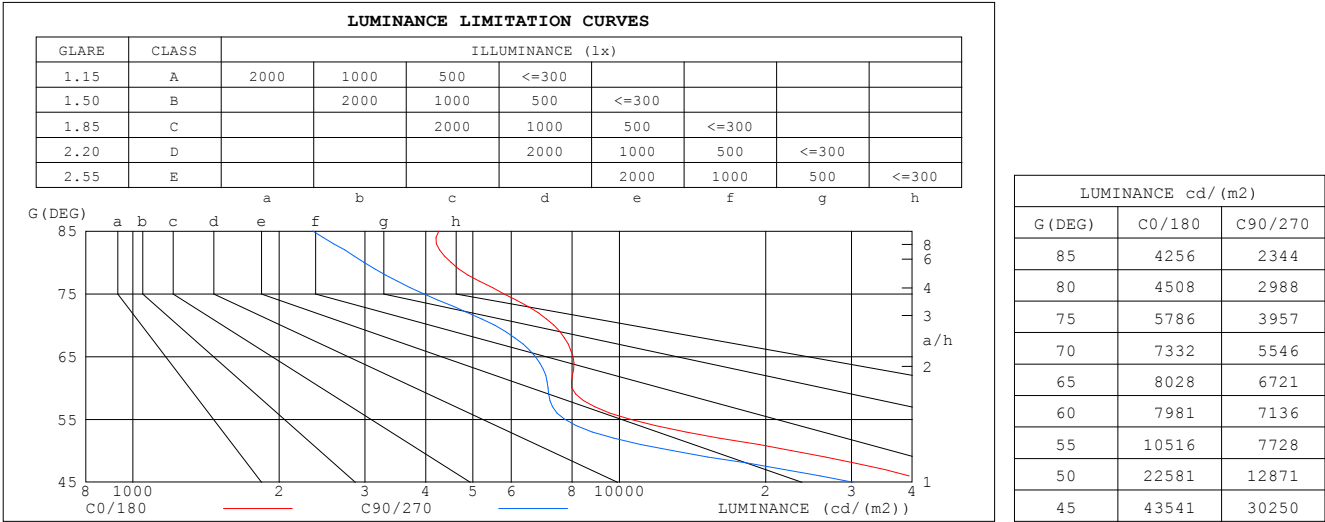


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.6V I:0.4600A P:54.90W PF:0.9970 Freq:60.00Hz Lamp Flux:7276.49x1 lm		
NAME: 13代B款	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.09	1.06	1.04	1.07	1.04	1.02	1.03	1.01	.99	.99	.97	.96	.95	.94	.93	.91
2.0	.00	.95	.91	.98	.94	.90	.95	.91	.88	.92	.89	.86	.89	.86	.84	.82
3.0	.92	.86	.81	.90	.85	.80	.87	.83	.79	.85	.81	.78	.82	.79	.76	.75
4.0	.84	.78	.73	.83	.77	.72	.81	.75	.71	.78	.74	.70	.76	.73	.70	.68
5.0	.77	.71	.66	.76	.70	.65	.75	.69	.65	.73	.68	.64	.71	.67	.63	.62
6.0	.72	.65	.60	.71	.64	.59	.69	.63	.59	.68	.62	.58	.66	.62	.58	.56
7.0	.66	.59	.54	.66	.59	.54	.64	.58	.54	.63	.58	.54	.62	.57	.53	.52
8.0	.62	.55	.50	.61	.54	.50	.60	.54	.50	.59	.53	.49	.58	.53	.49	.47
9.0	.57	.51	.46	.57	.50	.46	.56	.50	.46	.55	.49	.46	.54	.49	.45	.44
10.0	.54	.47	.43	.53	.47	.42	.52	.46	.42	.51	.46	.42	.50	.46	.42	.41

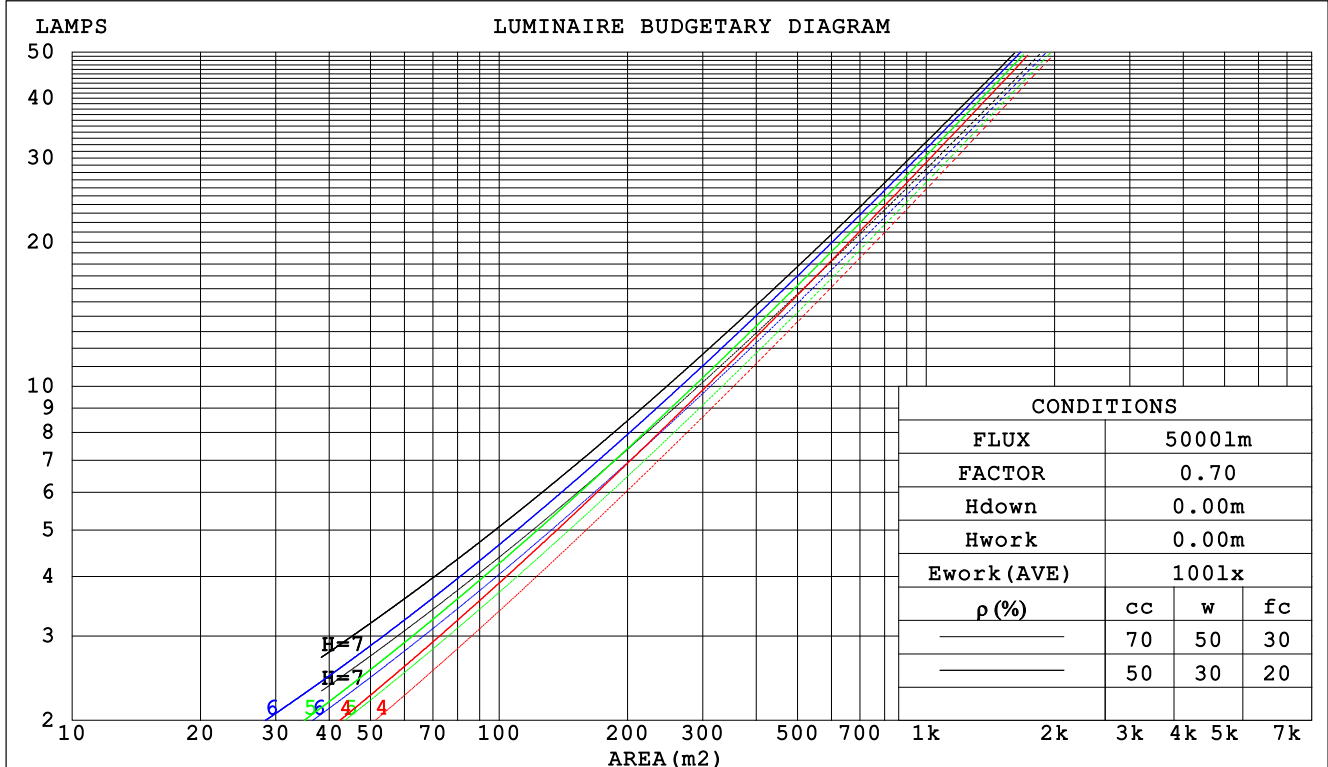

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.6V I:0.4600A P:54.90W PF:0.9970 Freq:60.00Hz Lamp Flux:7276.49x1 lm		
NAME: 13代B款	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.207	.118	.037	.200	.114	.036	.187	.107	.034	.175	.101	.032	.164	.095	.031	
2.0	.200	.110	.034	.194	.107	.033	.183	.102	.032	.173	.097	.030	.164	.093	.029	
3.0	.191	.102	.031	.186	.100	.030	.177	.096	.029	.168	.092	.028	.160	.088	.027	
4.0	.182	.095	.028	.178	.093	.027	.169	.090	.027	.162	.087	.026	.154	.084	.026	
5.0	.173	.088	.026	.169	.087	.025	.162	.084	.025	.155	.082	.024	.149	.079	.024	
6.0	.165	.083	.024	.161	.082	.023	.155	.079	.023	.149	.077	.023	.143	.075	.022	
7.0	.157	.078	.022	.154	.077	.022	.148	.075	.022	.143	.073	.021	.137	.071	.021	
8.0	.150	.073	.021	.147	.072	.020	.142	.071	.020	.137	.069	.020	.132	.068	.020	
9.0	.143	.069	.019	.140	.068	.019	.135	.067	.019	.131	.066	.019	.127	.064	.019	
10.0	.136	.065	.018	.134	.065	.018	.130	.064	.018	.126	.062	.018	.122	.061	.018	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.176	.160	.145	.150	.137	.125	.103	.094	.086	.059	.054	.050	.019	.018	.016	
2.0	.162	.135	.112	.139	.116	.096	.095	.080	.067	.055	.047	.039	.018	.015	.013	
3.0	.152	.116	.088	.130	.100	.076	.089	.070	.053	.052	.041	.032	.017	.013	.010	
4.0	.143	.102	.071	.123	.088	.061	.084	.061	.043	.049	.036	.026	.016	.012	.008	
5.0	.135	.091	.058	.116	.079	.051	.080	.055	.036	.046	.032	.021	.015	.011	.007	
6.0	.128	.082	.049	.110	.071	.042	.076	.050	.030	.044	.029	.018	.014	.010	.006	
7.0	.122	.075	.041	.105	.065	.036	.073	.045	.026	.042	.027	.015	.014	.009	.005	
8.0	.117	.069	.036	.100	.060	.031	.069	.042	.022	.040	.025	.013	.013	.008	.004	
9.0	.111	.064	.031	.096	.055	.027	.067	.039	.019	.039	.023	.012	.013	.008	.004	
10.0	.107	.059	.028	.092	.052	.024	.064	.036	.017	.037	.021	.010	.012	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.6V I:0.4600A P:54.90W PF:0.9970 Freq:60.00Hz Lamp Flux:7276.49x1 lm										
NAME: 13代B款					TYPE:3000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:1.13*0.045			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.3	24.4	23.5	24.6	24.8	22.7	23.9	23.0	24.0	24.2
3H	23.3	24.3	23.6	24.5	24.8	22.7	23.7	23.0	23.9	24.1
4H	23.3	24.2	23.6	24.5	24.7	22.6	23.6	22.9	23.8	24.1
6H	23.2	24.1	23.5	24.4	24.6	22.6	23.5	22.9	23.7	24.0
8H	23.2	24.1	23.5	24.3	24.6	22.5	23.4	22.8	23.7	23.9
12H	23.1	24.0	23.5	24.3	24.6	22.5	23.3	22.8	23.6	23.9
4H 2H	23.1	24.1	23.4	24.4	24.6	22.6	23.6	22.9	23.8	24.0
3H	23.2	24.0	23.5	24.3	24.6	22.6	23.4	22.9	23.7	24.0
4H	23.2	24.0	23.6	24.3	24.6	22.6	23.3	22.9	23.6	24.0
6H	23.2	23.8	23.6	24.2	24.5	22.5	23.2	22.9	23.5	23.9
8H	23.2	23.8	23.6	24.1	24.5	22.5	23.1	22.9	23.5	23.9
12H	23.1	23.7	23.6	24.1	24.5	22.5	23.0	22.9	23.4	23.8
8H 4H	23.1	23.7	23.5	24.1	24.5	22.5	23.1	22.9	23.5	23.9
6H	23.1	23.6	23.5	24.0	24.4	22.5	23.0	22.9	23.4	23.8
8H	23.1	23.5	23.6	24.0	24.4	22.5	22.9	22.9	23.3	23.8
12H	23.1	23.5	23.6	23.9	24.4	22.4	22.8	22.9	23.3	23.7
12H 4H	23.1	23.6	23.5	24.0	24.4	22.5	23.0	22.9	23.4	23.8
6H	23.1	23.5	23.5	23.9	24.4	22.4	22.9	22.9	23.3	23.8
8H	23.1	23.4	23.5	23.9	24.4	22.4	22.8	22.9	23.3	23.7
Variations with the observer position at spacings:										
S = 1.0H	+ 2.1 / - 5.2					+ 2.4 / - 5.5				
1.5H	+ 2.5 / - 4.3					+ 2.6 / - 5.9				
2.0H	+ 4.6 / - 4.2					+ 4.2 / - 4.0				

CIE Pub.117 Corrected 7276 lm Total Lamp Luminous Flux.(8log(F/F0) = 6.9)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.6V I:0.4600A P:54.90W PF:0.9970 Freq:60.00Hz Lamp Flux:7276.49x1 lm		
NAME: 13代B款	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	78	70	66	78	70	65	77	70	65	61
0.80	87	79	75	86	79	75	85	78	74	70
1.00	93	86	82	92	86	81	90	86	81	76
1.25	98	92	87	97	91	87	95	90	86	81
1.50	102	96	92	100	95	91	98	93	90	85
2.00	106	100	97	104	99	96	101	97	94	88
2.50	108	103	99	106	102	98	103	99	96	90
3.00	110	106	102	108	104	101	104	101	99	92
4.00	112	109	106	110	107	104	106	104	102	94
5.00	113	111	108	111	109	107	107	105	103	95
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:119.6V I:0.4600A P:54.90W PF:0.9970 Freq:60.00Hz Lamp Flux:7276.49x1 lm		
NAME: 13代B款	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:

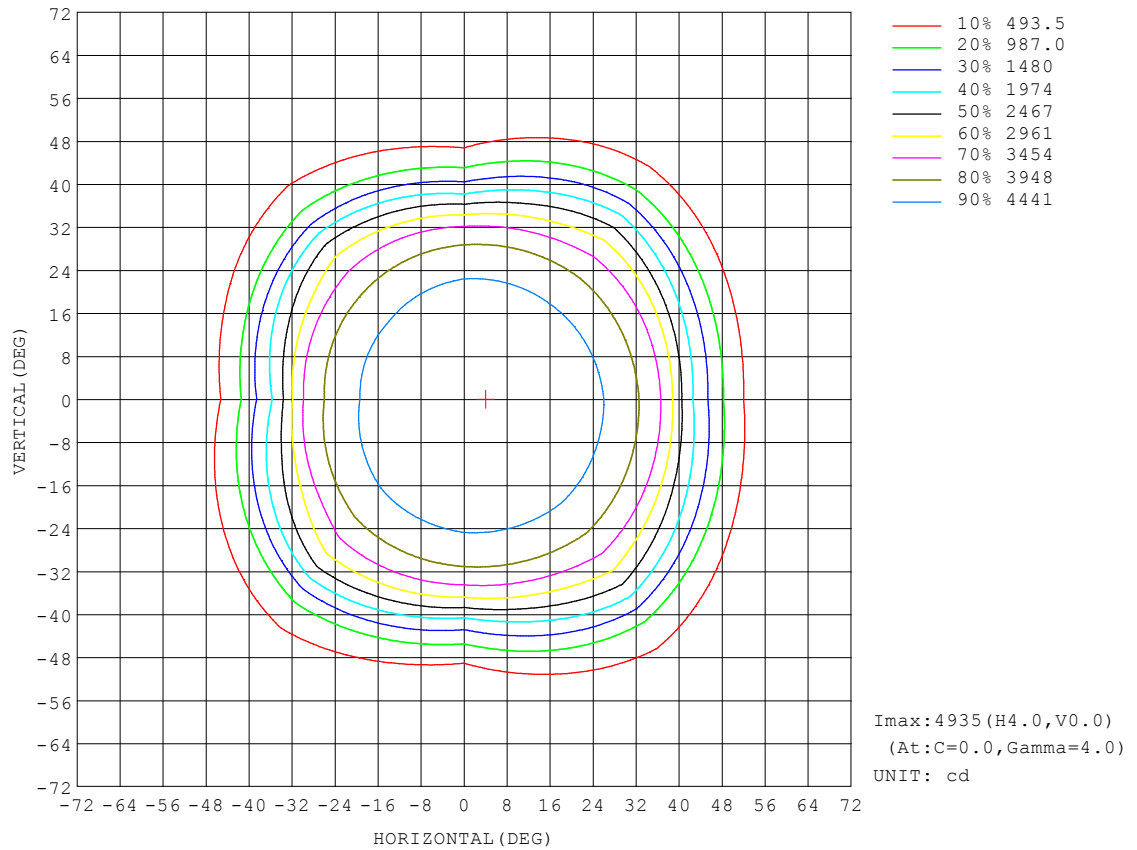


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:119.6V I:0.4600A P:54.90W PF:0.9970 Freq:60.00Hz Lamp Flux:7276.49x1 lm		
NAME: 13代B款	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:

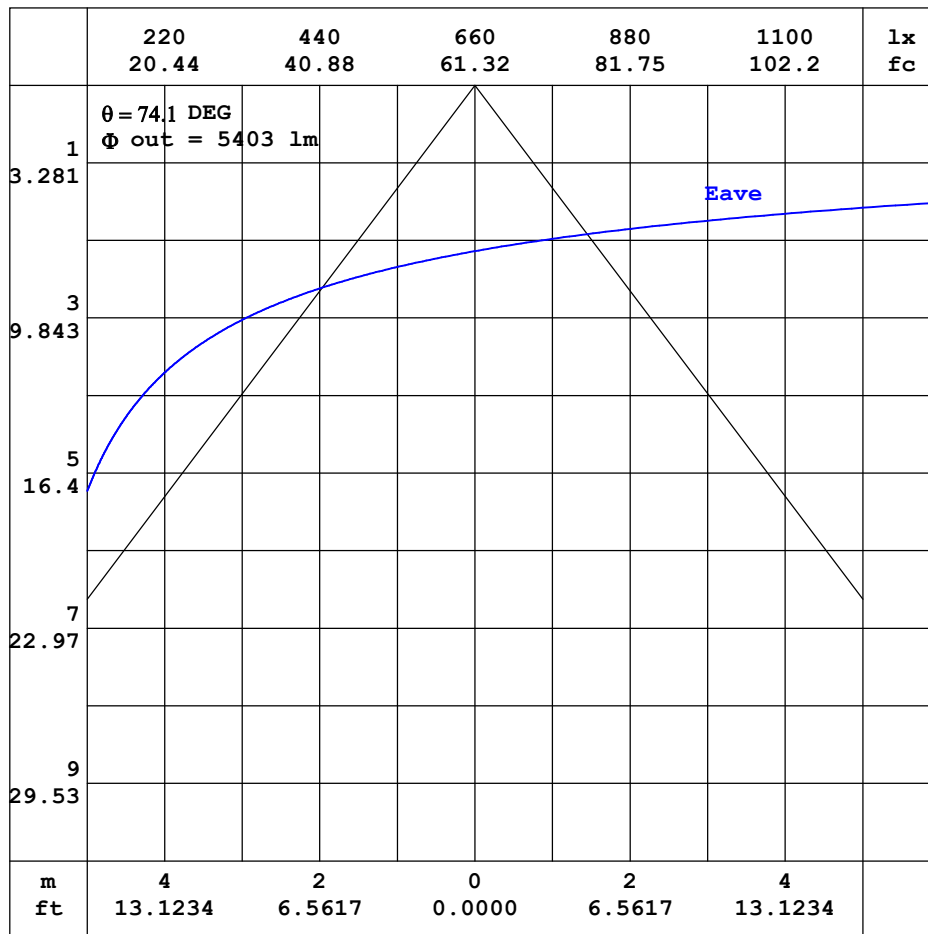


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.6V I:0.4600A P:54.90W PF:0.9970 Freq:60.00Hz Lamp Flux:7276.49x1 lm		
NAME: 13代B款	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:

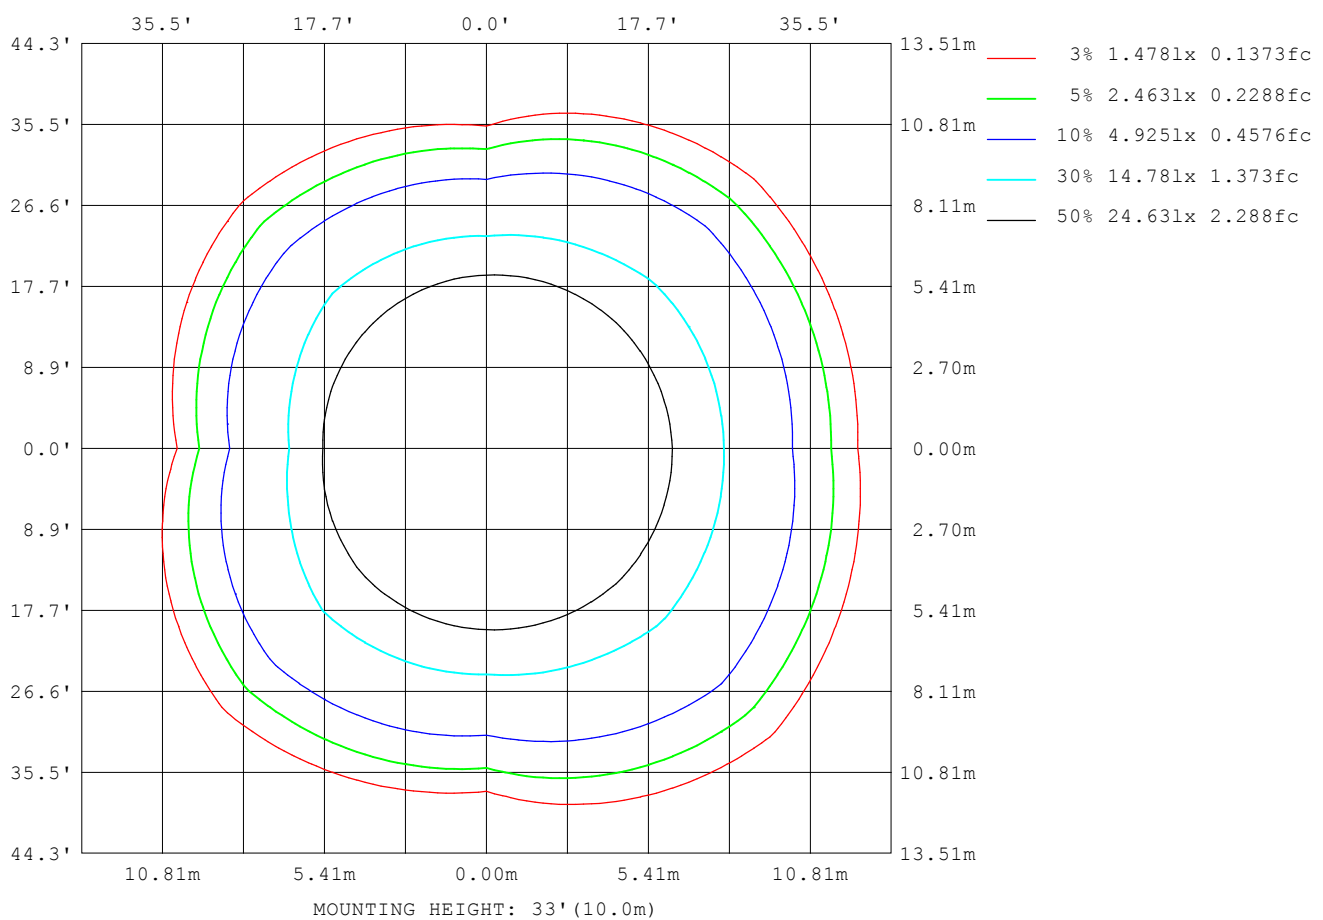

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.6V I:0.4600A P:54.90W PF:0.9970 Freq:60.00Hz Lamp Flux:7276.49x1 lm		
NAME: 13代B款	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	6475
L_0~180 (75) av	4022
L_0~180 (85) av	2250
L_90~270 (65) av	6225
L_90~270 (75) av	3435
L_90~270 (85) av	1682
L_45 (65) av	6382
L_45 (75) av	3766
L_45 (85) av	1946

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

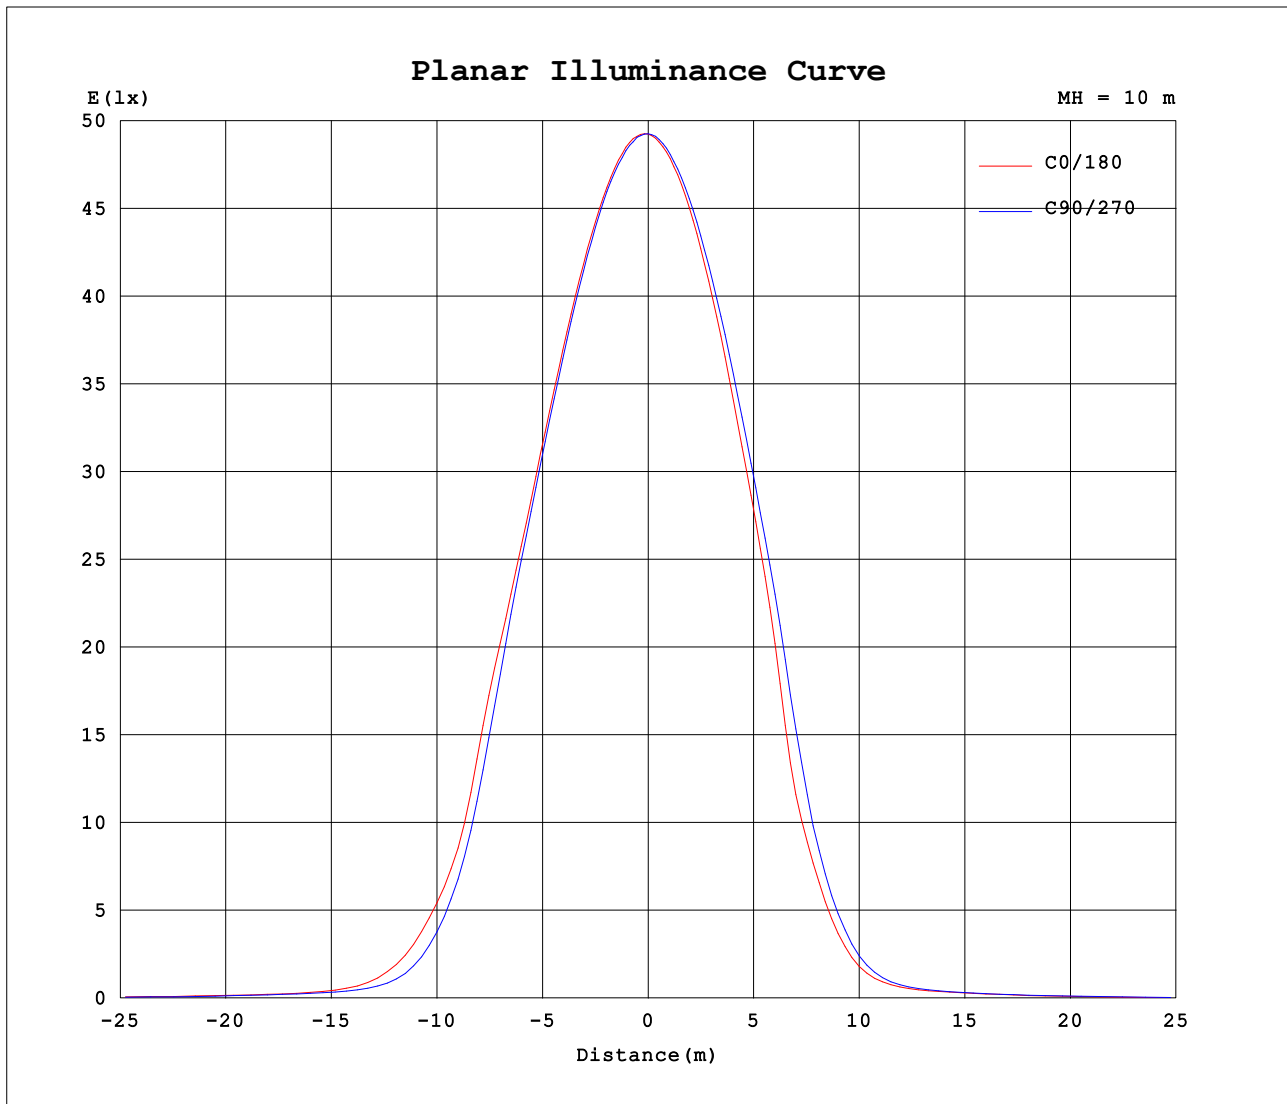

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.6V I:0.4600A P:54.90W PF:0.9970 Freq:60.00Hz Lamp Flux:7276.49x1 lm		
NAME: 13代B款	TYPE:3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	4925	4926	4926	4927	4925	4926	4926	4927										
5	4932	4925	4916	4902	4878	4879	4900	4915										
10	4897	4890	4872	4837	4790	4793	4836	4862										
15	4828	4819	4787	4729	4640	4653	4730	4765										
20	4699	4696	4649	4555	4404	4442	4558	4610										
25	4497	4500	4429	4291	4039	4120	4277	4370										
30	4170	4209	4057	3907	3430	3648	3800	4013										
35	3688	3774	3360	3341	2113	2983	2793	3484										
40	2606	3148	2129	2569	1225	2007	1575	2732										
45	1539	2290	1070	1480	514	980	685	1737										
50	726	1222	414	691	245	471	292	803										
55	302	567	222	347	187	250	199	381										
60	200	290	178	192	152	153	165	211										
65	170	169	142	126	104	105	121	139										
70	125	115	94.8	80.2	57.1	61.4	72.9	92.1										
75	74.9	69.7	51.2	42.8	29.2	30.7	37.7	51.8										
80	39.1	35.8	25.9	20.0	12.3	12.9	17.5	25.4										
85	18.5	16.0	10.2	6.46	1.06	1.77	4.44	9.70										
90	5.17	3.87	0.33	0.21	0.03	0.04	0.01	0.27										
95	0.20	0.26	0.26	0.33	0.05	0.05	0.02	0.05										
100	0.32	0.38	0.39	0.45	0.07	0.08	0.04	0.07										
105	0.45	0.53	0.53	0.65	0.10	0.12	0.08	0.09										
110	0.57	0.80	0.81	1.13	0.16	0.20	0.15	0.15										
115	0.77	1.48	1.62	2.17	0.29	0.37	0.29	0.28										
120	1.48	2.83	3.14	3.83	0.54	0.62	0.52	0.46										
125	3.17	4.78	5.08	5.97	0.90	0.94	0.85	0.74										
130	5.56	6.91	7.19	8.19	1.35	1.33	1.26	1.08										
135	8.66	8.86	9.06	10.1	1.79	1.75	1.72	1.46										
140	10.6	10.5	10.3	11.5	2.30	2.32	2.29	1.93										
145	11.9	11.8	11.2	12.6	3.28	3.72	3.56	3.01										
150	12.9	12.8	12.4	13.4	5.42	6.08	6.03	5.04										
155	13.8	13.7	13.4	13.9	7.95	8.54	8.31	7.27										
160	14.5	14.4	14.1	14.2	11.1	11.0	10.5	9.52										
165	15.1	14.9	14.6	14.3	13.0	12.7	12.4	11.4										
170	15.5	15.2	14.9	14.4	14.2	13.9	13.7	12.8										
175	15.6	15.3	15.0	14.5	14.9	14.6	14.4	13.6										
180	15.3	15.0	14.8	14.2	15.3	15.0	14.8	14.2										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: