


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.5V I:0.4580A P:54.80W PF:0.9990 Freq:60.00Hz Lamp Flux:7368.31x1 lm		
NAME: 13代B款	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 134.46 lm/W			
MODEL	1.3FT	I _{max} (cd)	4997	S/MH(C0/180)	1.17
NOMINAL POWER(W)	50W	LOR(%)	100.0	S/MH(C90/270)	1.05
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	7368.3	η UP,DN(C0-180)	0.2,53.9
NOMINAL FLUX(lm)	7368.31	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,45.8
LAMPS INSIDE	1	η up(%)	0.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	99.7	CIBSE SHR MAX	1.25

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

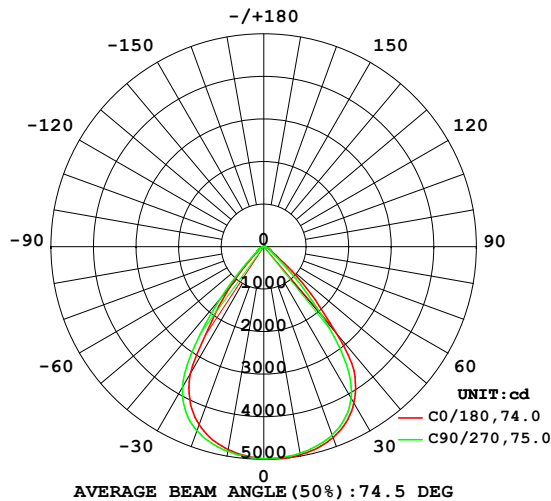

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

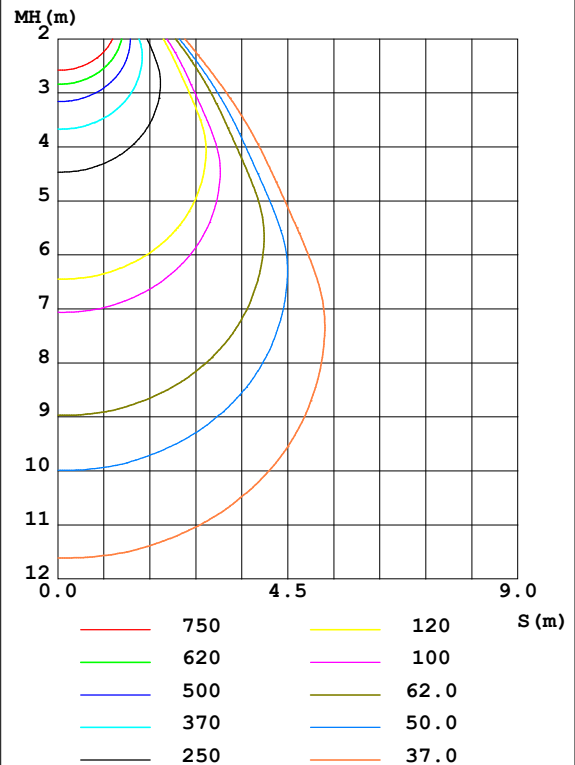

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-06-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	4964	4958	4928	4891	4842	4844	4885	4920	0- 10	471.8	471.8	6.4,6.4
20	4775	4762	4709	4600	4448	4476	4605	4670	10- 20	1353	1825	24.8,24.8
30	4237	4266	4106	3938	3467	3674	3833	4067	20- 30	2000	3825	51.9,51.9
40	2645	3206	2162	2581	1233	2027	1577	2778	30- 40	1984	5809	78.8,78.8
50	742.3	1241	416.2	701.8	251.1	479.3	296.0	813.3	40- 50	1029	6838	92.8,92.8
60	202.1	292.7	181.0	195.1	156.6	156.2	168.3	217.1	50- 60	304.2	7142	96.9,96.9
70	127.0	116.3	96.18	81.71	58.29	62.75	74.18	93.85	60- 70	136.9	7279	98.8,98.8
80	39.71	36.16	26.21	20.38	12.53	13.23	17.74	25.65	70- 80	54.49	7333	99.5,99.5
90	5.251	3.884	0.3207	0.2278	0.0411	0.0460	0.0073	0.2390	80- 90	10.89	7344	99.7,99.7
100	0.3339	0.3998	0.4139	0.4773	0.0703	0.0775	0.0485	0.0654	90-100	0.3259	7344	99.7,99.7
110	0.5979	0.8580	0.8466	1.183	0.1698	0.2033	0.1528	0.1597	100-110	0.3678	7345	99.7,99.7
120	1.542	2.982	3.316	4.064	0.5625	0.6291	0.5406	0.4718	110-120	1.003	7346	99.7,99.7
130	5.810	7.236	7.550	8.619	1.406	1.365	1.302	1.096	120-130	2.639	7348	99.7,99.7
140	11.04	10.92	10.77	12.06	2.390	2.403	2.351	1.953	130-140	4.315	7353	99.8,99.8
150	13.46	13.36	12.91	14.04	5.644	6.346	6.223	5.150	140-150	5.013	7358	99.9,99.9
160	15.06	14.99	14.71	14.77	11.60	11.44	10.88	9.776	150-160	5.182	7363	99.9,99.9
170	16.12	15.87	15.50	15.02	14.80	14.47	14.24	13.22	160-170	3.946	7367	100,100
180	15.94	15.65	15.41	14.74	15.94	15.66	15.44	14.77	170-180	1.451	7368	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.5V I:0.4580A P:54.80W PF:0.9990 Freq:60.00Hz Lamp Flux:7368.31x1 lm		
NAME: 13代B款	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:

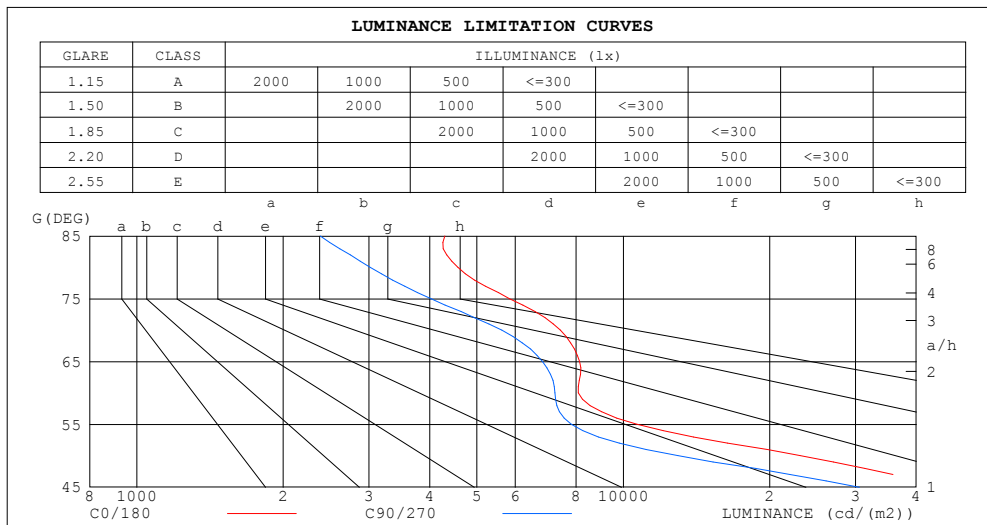

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	4299	2384
80	4573	3019
75	5837	4023
70	7427	5624
65	8132	6819
60	8084	7239
55	10670	7821
50	23095	12951
45	44410	30550


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.5V I:0.4580A P:54.80W PF:0.9990 Freq:60.00Hz Lamp Flux:7368.31x1 lm		
NAME: 13代B款	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.09	1.06	1.04	1.07	1.04	1.02	1.03	1.01	.99	.99	.97	.96	.95	.94	.93	.91
2.0	.00	.95	.91	.98	.94	.90	.95	.91	.88	.92	.89	.86	.89	.86	.84	.82
3.0	.92	.86	.81	.90	.85	.80	.87	.83	.79	.85	.81	.78	.82	.79	.76	.75
4.0	.84	.78	.73	.83	.77	.72	.81	.75	.71	.78	.74	.70	.76	.73	.69	.68
5.0	.77	.71	.66	.76	.70	.65	.74	.69	.65	.73	.68	.64	.71	.67	.63	.62
6.0	.72	.65	.60	.71	.64	.59	.69	.63	.59	.67	.62	.58	.66	.62	.58	.56
7.0	.66	.59	.54	.66	.59	.54	.64	.58	.54	.63	.57	.54	.62	.57	.53	.52
8.0	.62	.55	.50	.61	.54	.50	.60	.54	.50	.59	.53	.49	.57	.53	.49	.47
9.0	.57	.51	.46	.57	.50	.46	.56	.50	.46	.55	.49	.45	.54	.49	.45	.44
10.0	.54	.47	.43	.53	.47	.42	.52	.46	.42	.51	.46	.42	.50	.46	.42	.41

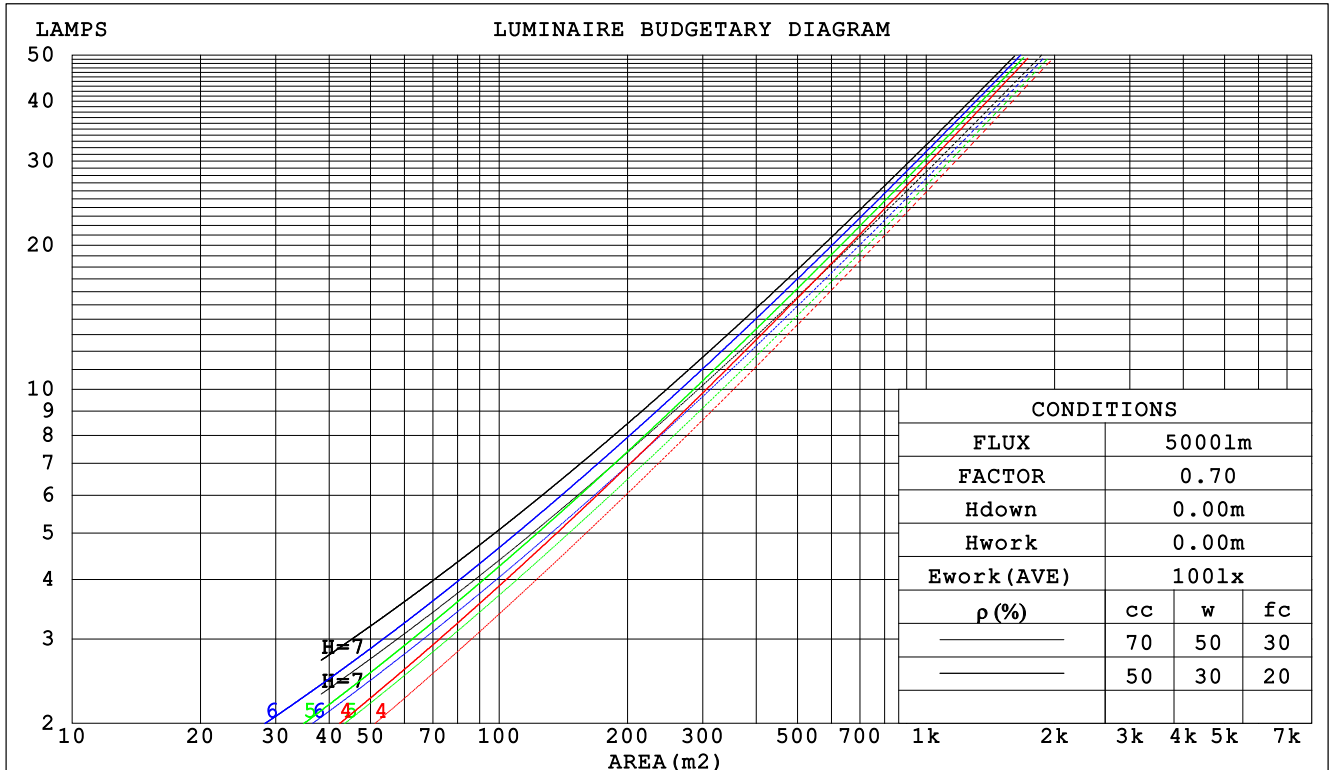

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.5V I:0.4580A P:54.80W PF:0.9990 Freq:60.00Hz Lamp Flux:7368.31x1 lm					
NAME: 13代B款			TYPE:3500K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:1.13*0.045		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.207	.118	.037	.200	.114	.036	.187	.107	.034	.175	.101	.032	.164	.095	.031		
2.0	.200	.110	.034	.194	.107	.033	.183	.102	.032	.173	.097	.030	.164	.093	.029		
3.0	.191	.102	.031	.186	.100	.030	.177	.096	.029	.168	.092	.028	.160	.088	.027		
4.0	.182	.095	.028	.178	.093	.028	.169	.090	.027	.162	.087	.026	.154	.084	.026		
5.0	.173	.088	.026	.169	.087	.025	.162	.084	.025	.155	.082	.024	.149	.080	.024		
6.0	.165	.083	.024	.161	.082	.023	.155	.079	.023	.149	.077	.023	.143	.075	.022		
7.0	.157	.078	.022	.154	.077	.022	.148	.075	.022	.143	.073	.021	.137	.071	.021		
8.0	.150	.073	.021	.147	.072	.020	.142	.071	.020	.137	.069	.020	.132	.068	.020		
9.0	.143	.069	.019	.140	.068	.019	.135	.067	.019	.131	.066	.019	.127	.064	.019		
10.0	.136	.065	.018	.134	.065	.018	.130	.064	.018	.126	.062	.018	.122	.061	.018		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.176	.160	.145	.150	.137	.125	.103	.094	.086	.059	.055	.050	.019	.018	.016	
2.0	.163	.135	.112	.139	.116	.096	.095	.080	.067	.055	.047	.039	.018	.015	.013	
3.0	.152	.116	.088	.130	.100	.076	.089	.070	.053	.052	.041	.032	.017	.013	.010	
4.0	.143	.102	.071	.123	.088	.062	.084	.061	.043	.049	.036	.026	.016	.012	.008	
5.0	.135	.091	.058	.116	.079	.051	.080	.055	.036	.046	.032	.021	.015	.011	.007	
6.0	.128	.082	.049	.110	.071	.042	.076	.050	.030	.044	.029	.018	.014	.010	.006	
7.0	.122	.075	.042	.105	.065	.036	.073	.045	.026	.042	.027	.015	.014	.009	.005	
8.0	.117	.069	.036	.100	.060	.031	.069	.042	.022	.040	.025	.013	.013	.008	.004	
9.0	.112	.064	.031	.096	.055	.027	.067	.039	.020	.039	.023	.012	.013	.008	.004	
10.0	.107	.060	.028	.092	.052	.024	.064	.036	.017	.037	.022	.010	.012	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.5V I:0.4580A P:54.80W PF:0.9990 Freq:60.00Hz Lamp Flux:7368.31x1 lm										
NAME: 13代B款					TYPE:3500K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:1.13*0.045			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.4	24.5	23.6	24.7	24.9	22.8	23.9	23.0	24.1	24.3
3H	23.4	24.4	23.6	24.6	24.8	22.7	23.8	23.0	24.0	24.2
4H	23.3	24.3	23.6	24.5	24.8	22.7	23.7	23.0	23.9	24.1
6H	23.3	24.2	23.6	24.5	24.7	22.6	23.5	22.9	23.8	24.1
8H	23.3	24.1	23.6	24.4	24.7	22.6	23.5	22.9	23.7	24.0
12H	23.2	24.1	23.6	24.3	24.6	22.5	23.4	22.9	23.7	24.0
4H 2H	23.2	24.2	23.5	24.4	24.7	22.7	23.6	22.9	23.9	24.1
3H	23.3	24.1	23.6	24.4	24.7	22.7	23.5	23.0	23.8	24.1
4H	23.3	24.0	23.6	24.3	24.7	22.6	23.4	23.0	23.7	24.0
6H	23.2	23.9	23.6	24.3	24.6	22.6	23.3	23.0	23.6	24.0
8H	23.2	23.8	23.6	24.2	24.6	22.6	23.2	23.0	23.5	23.9
12H	23.2	23.8	23.6	24.1	24.5	22.5	23.1	22.9	23.5	23.9
8H 4H	23.2	23.8	23.6	24.1	24.5	22.6	23.2	23.0	23.5	23.9
6H	23.2	23.7	23.6	24.1	24.5	22.5	23.0	23.0	23.4	23.9
8H	23.2	23.6	23.6	24.0	24.5	22.5	23.0	23.0	23.4	23.8
12H	23.2	23.5	23.6	24.0	24.5	22.5	22.9	23.0	23.3	23.8
12H 4H	23.1	23.7	23.6	24.1	24.5	22.5	23.1	22.9	23.5	23.9
6H	23.1	23.6	23.6	24.0	24.5	22.5	22.9	23.0	23.4	23.8
8H	23.1	23.5	23.6	24.0	24.4	22.5	22.9	23.0	23.3	23.8
Variations with the observer position at spacings:										
S = 1.0H	+ 2.1 / - 5.2					+ 2.4 / - 5.6				
1.5H	+ 2.5 / - 4.3					+ 2.6 / - 5.9				
2.0H	+ 4.6 / - 4.2					+ 4.2 / - 4.0				

CIE Pub.117 Corrected 7368 lm Total Lamp Luminous Flux.(8log(F/F0) = 6.9)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.5V I:0.4580A P:54.80W PF:0.9990 Freq:60.00Hz Lamp Flux:7368.31x1 lm		
NAME: 13代B款	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	78	70	65	78	70	65	77	70	65	61
0.80	87	79	75	86	79	75	85	78	74	70
1.00	93	86	82	92	86	81	90	86	81	76
1.25	98	92	87	97	91	87	95	90	86	81
1.50	102	96	92	100	95	91	98	93	90	85
2.00	106	100	97	104	99	96	101	97	94	88
2.50	108	103	99	106	102	98	103	99	96	90
3.00	110	105	102	108	104	101	104	101	99	92
4.00	112	109	106	110	107	104	106	104	102	94
5.00	113	111	108	111	109	107	107	105	103	95
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:119.5V I:0.4580A P:54.80W PF:0.9990 Freq:60.00Hz Lamp Flux:7368.31x1 lm		
NAME: 13代B款	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:

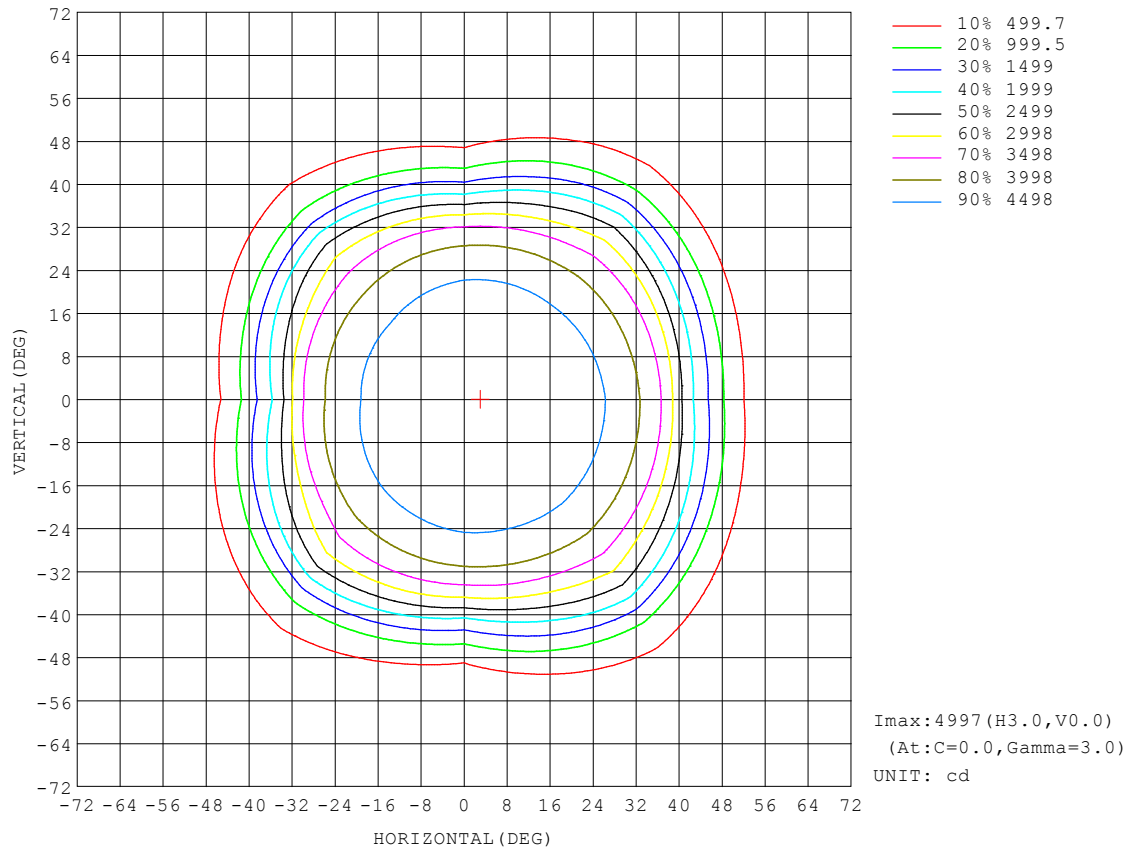


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:119.5V I:0.4580A P:54.80W PF:0.9990 Freq:60.00Hz Lamp Flux:7368.31x1 lm		
NAME: 13代B款	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:

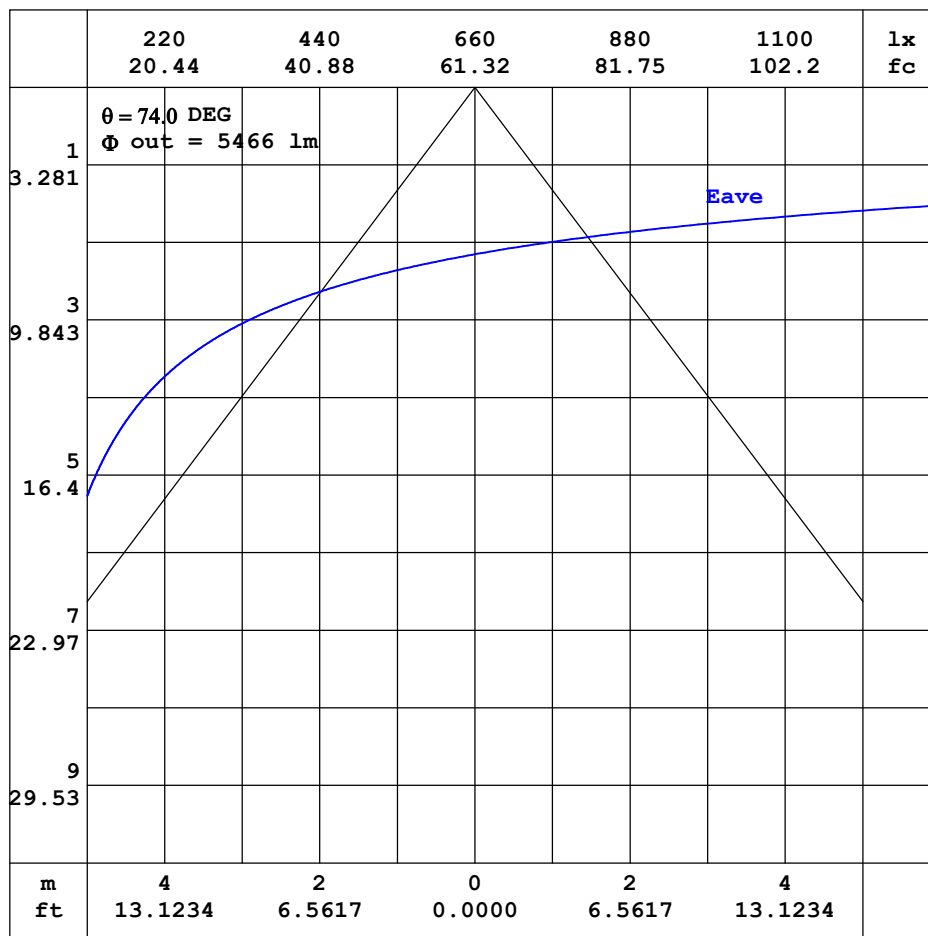


Note: The Curves indicate the illuminated area and the average illuminance when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.5V I:0.4580A P:54.80W PF:0.9990 Freq:60.00Hz Lamp Flux:7368.31x1 lm		
NAME: 13代B款	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:

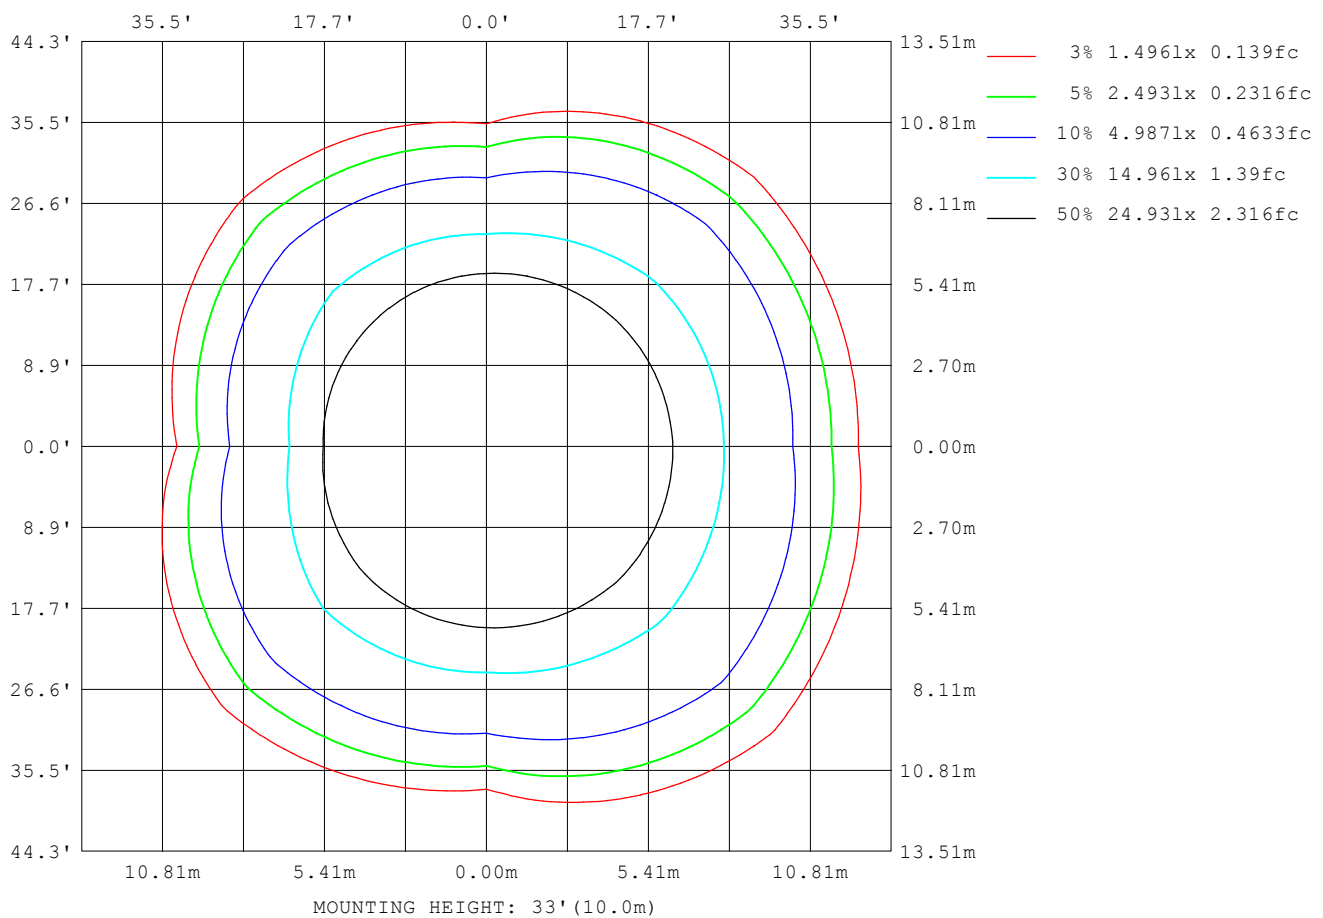

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.5V I:0.4580A P:54.80W PF:0.9990 Freq:60.00Hz Lamp Flux:7368.31x1 lm		
NAME: 13代B款	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	6585
L_0~180 (75) av	4071
L_0~180 (85) av	2275
L_90~270 (65) av	6327
L_90~270 (75) av	3495
L_90~270 (85) av	1708
L_45 (65) av	6501
L_45 (75) av	3826
L_45 (85) av	1977

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

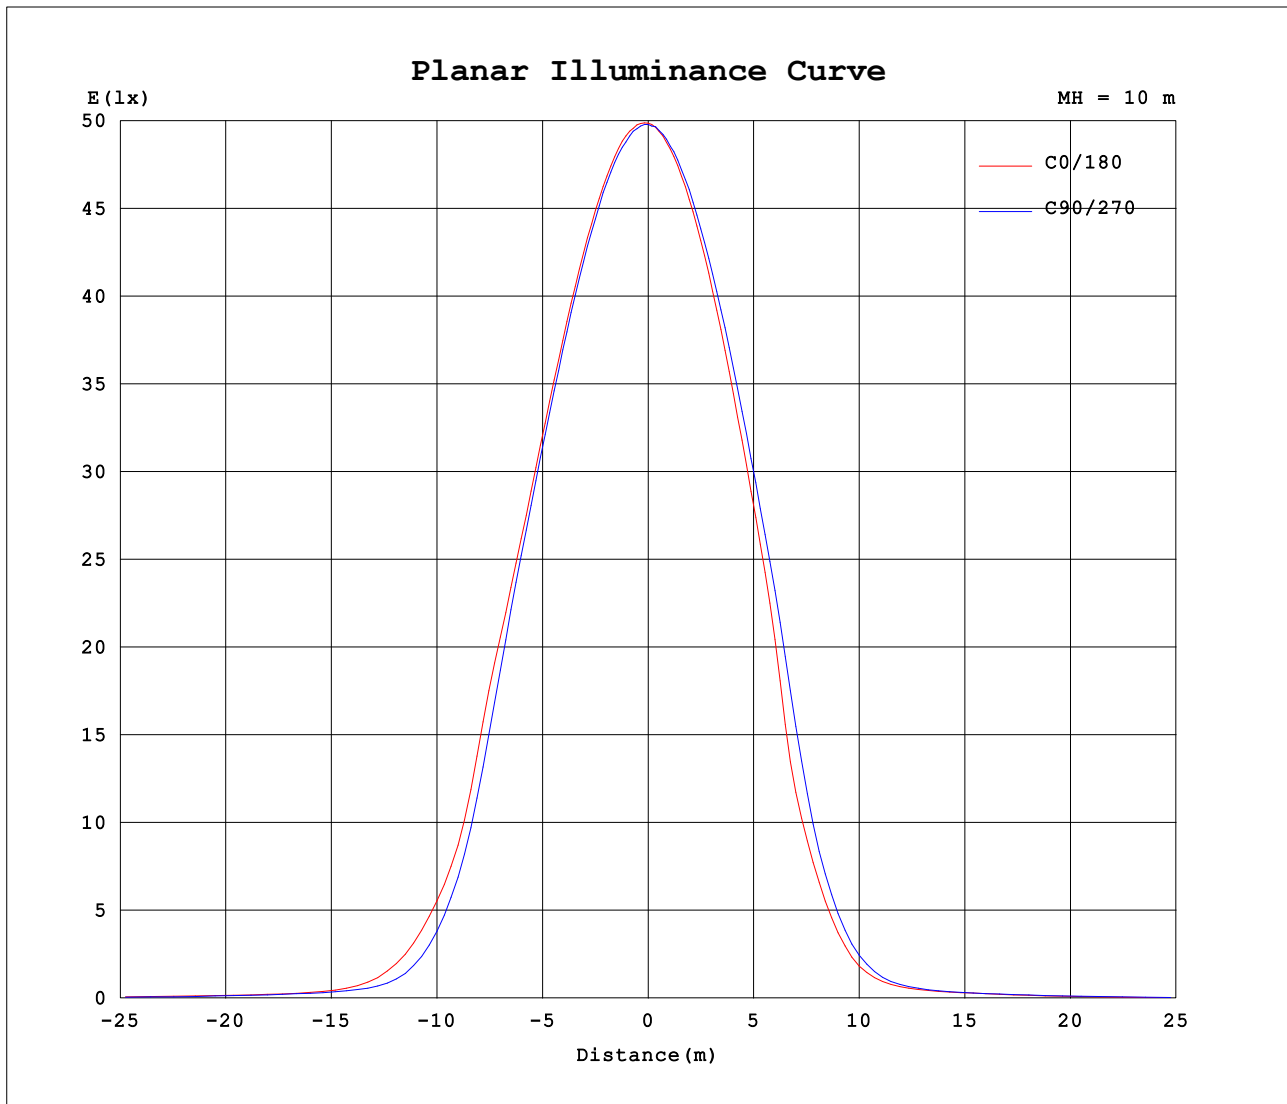

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.5V I:0.4580A P:54.80W PF:0.9990 Freq:60.00Hz Lamp Flux:7368.31x1 lm		
NAME: 13代B款	TYPE:3500K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	4987	4985	4979	4981	4987	4985	4979	4981										
5	4997	4990	4969	4956	4933	4931	4952	4969										
10	4964	4958	4928	4891	4842	4844	4885	4920										
15	4896	4883	4847	4774	4695	4698	4777	4825										
20	4775	4762	4709	4600	4448	4476	4605	4670										
25	4571	4560	4482	4331	4082	4154	4320	4432										
30	4237	4266	4106	3938	3467	3674	3833	4067										
35	3744	3835	3400	3370	2136	3003	2818	3541										
40	2645	3206	2162	2581	1233	2027	1577	2778										
45	1570	2338	1080	1492	520	998	696	1760										
50	742	1241	416	702	251	479	296	813										
55	306	570	224	354	192	254	202	394										
60	202	293	181	195	157	156	168	217										
65	172	172	144	129	106	107	123	142										
70	127	116	96.2	81.7	58.3	62.7	74.2	93.8										
75	75.5	70.6	52.1	43.6	29.8	31.3	38.4	52.5										
80	39.7	36.2	26.2	20.4	12.5	13.2	17.7	25.7										
85	18.7	16.2	10.4	6.61	1.09	1.81	4.50	9.84										
90	5.25	3.88	0.32	0.23	0.04	0.05	0.01	0.24										
95	0.21	0.27	0.27	0.34	0.05	0.05	0.02	0.05										
100	0.33	0.40	0.41	0.48	0.07	0.08	0.05	0.07										
105	0.48	0.55	0.55	0.69	0.10	0.12	0.08	0.10										
110	0.60	0.86	0.85	1.18	0.17	0.20	0.15	0.16										
115	0.81	1.57	1.70	2.29	0.31	0.38	0.30	0.28										
120	1.54	2.98	3.32	4.06	0.56	0.63	0.54	0.47										
125	3.31	5.01	5.33	6.29	0.95	0.96	0.88	0.75										
130	5.81	7.24	7.55	8.62	1.41	1.37	1.30	1.10										
135	9.04	9.26	9.50	10.6	1.88	1.79	1.77	1.49										
140	11.0	10.9	10.8	12.1	2.39	2.40	2.35	1.95										
145	12.4	12.3	11.7	13.2	3.41	3.83	3.67	3.12										
150	13.5	13.4	12.9	14.0	5.64	6.35	6.22	5.15										
155	14.3	14.2	14.0	14.5	8.30	8.89	8.61	7.45										
160	15.1	15.0	14.7	14.8	11.6	11.4	10.9	9.78										
165	15.7	15.5	15.2	14.9	13.6	13.3	12.8	11.8										
170	16.1	15.9	15.5	15.0	14.8	14.5	14.2	13.2										
175	16.2	15.9	15.6	15.1	15.5	15.2	15.0	14.1										
180	15.9	15.7	15.4	14.7	15.9	15.7	15.4	14.8										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: