


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.6V I:0.4600A P:55.00W PF:0.9980 Freq:60.00Hz Lamp Flux:7430.35x1 lm		
NAME: 13代B款	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 135.10 lm/W			
MODEL	1.3FT	I _{max} (cd)	5055	S/MH(C0/180)	1.17
NOMINAL POWER(W)	50W	LOR(%)	100.0	S/MH(C90/270)	1.05
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	7430.3	η UP,DN(C0-180)	0.2,53.8
NOMINAL FLUX(lm)	7430.35	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,45.9
LAMPS INSIDE	1	η up(%)	0.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	99.7	CIBSE SHR MAX	1.25

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

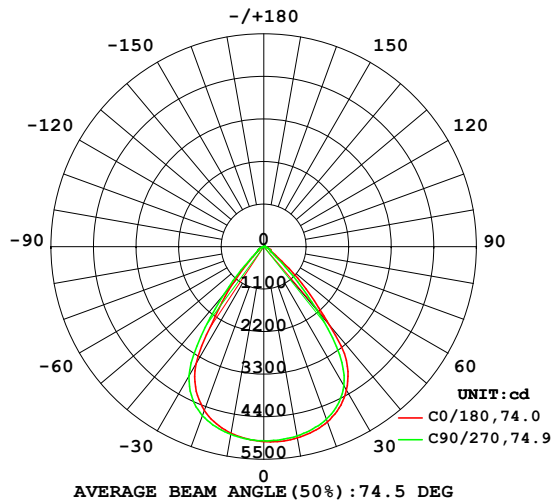

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

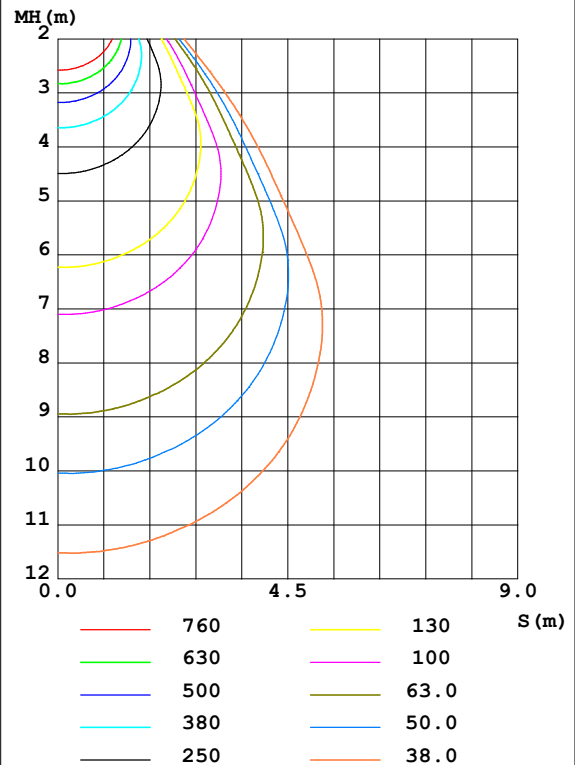

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	5018	4998	4968	4931	4899	4887	4927	4958	0- 10	476.2	476.2	6.41,6.41
20	4818	4806	4743	4643	4504	4527	4648	4705	10- 20	1366	1842	24.8,24.8
30	4275	4306	4141	3979	3515	3716	3872	4099	20- 30	2018	3860	52,52
40	2648	3222	2156	2607	1266	2064	1594	2794	30- 40	2004	5864	78.9,78.9
50	722.6	1238	420.4	709.2	256.6	489.9	299.8	814.8	40- 50	1035	6899	92.8,92.8
60	203.3	292.5	182.2	197.0	159.1	157.8	169.3	218.7	50- 60	305.4	7204	97,97
70	126.9	116.6	96.21	82.44	59.75	63.59	74.90	94.03	60- 70	137.9	7342	98.8,98.8
80	39.36	36.03	26.41	20.58	12.98	13.53	17.93	25.79	70- 80	54.78	7397	99.5,99.5
90	4.981	3.760	0.3255	0.2108	0.0509	0.0508	0.0170	0.2367	80- 90	10.92	7408	99.7,99.7
100	0.3170	0.3780	0.3848	0.4386	0.0800	0.0775	0.0509	0.0702	90-100	0.3069	7408	99.7,99.7
110	0.5592	0.7927	0.7765	1.079	0.1746	0.2153	0.1600	0.1646	100-110	0.3465	7408	99.7,99.7
120	1.446	2.749	2.989	3.667	0.5553	0.6388	0.5431	0.4743	110-120	0.9310	7409	99.7,99.7
130	5.404	6.644	6.875	7.882	1.391	1.368	1.297	1.111	120-130	2.447	7412	99.7,99.7
140	10.25	10.10	9.859	11.12	2.363	2.357	2.324	1.963	130-140	4.023	7416	99.8,99.8
150	12.56	12.42	12.03	13.04	5.413	6.024	6.002	5.008	140-150	4.698	7420	99.9,99.9
160	14.13	14.00	13.74	13.78	10.95	10.79	10.37	9.323	150-160	4.872	7425	99.9,99.9
170	15.18	14.85	14.52	14.02	13.98	13.59	13.45	12.50	160-170	3.710	7429	100,100
180	15.00	14.69	14.47	13.90	15.04	14.67	14.49	13.86	170-180	1.364	7430	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.6V I:0.4600A P:55.00W PF:0.9980 Freq:60.00Hz Lamp Flux:7430.35x1 lm		
NAME: 13代B款	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:

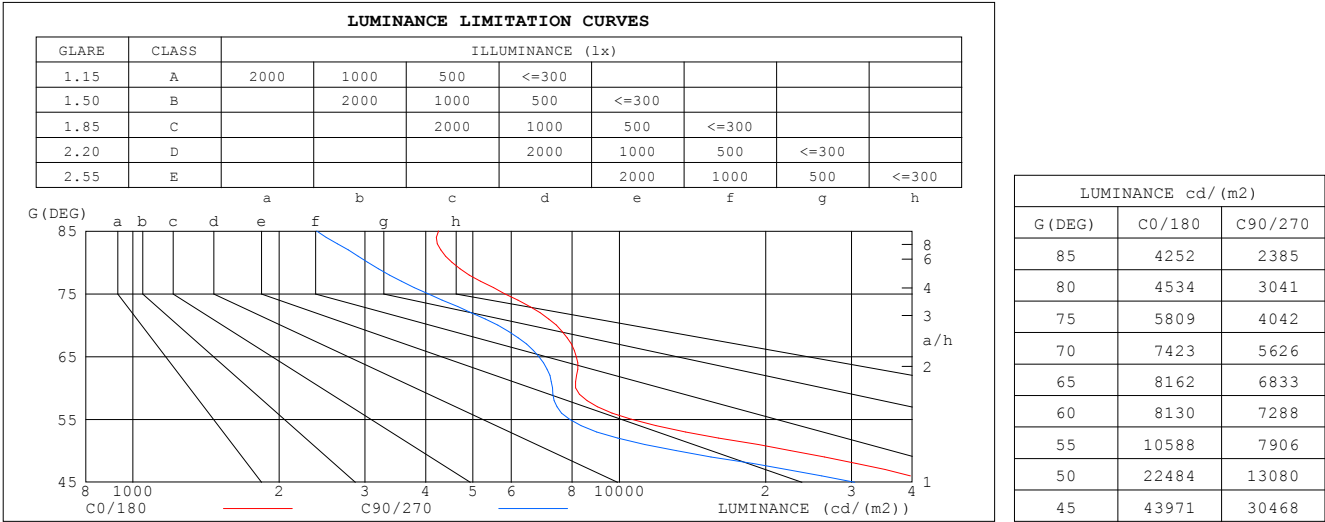


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.6V I:0.4600A P:55.00W PF:0.9980 Freq:60.00Hz Lamp Flux:7430.35x1 lm		
NAME: 13代B款	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.09	1.06	1.04	1.07	1.04	1.02	1.03	1.01	.99	.99	.97	.96	.95	.94	.93	.91
2.0	.00	.95	.91	.98	.94	.90	.95	.91	.88	.92	.89	.86	.89	.86	.84	.82
3.0	.92	.86	.81	.90	.85	.80	.87	.83	.79	.85	.81	.78	.82	.79	.76	.75
4.0	.84	.78	.73	.83	.77	.72	.81	.75	.71	.78	.74	.70	.76	.73	.70	.68
5.0	.77	.71	.66	.76	.70	.65	.75	.69	.65	.73	.68	.64	.71	.67	.63	.62
6.0	.72	.65	.60	.71	.64	.59	.69	.63	.59	.68	.62	.58	.66	.62	.58	.56
7.0	.66	.59	.54	.66	.59	.54	.64	.58	.54	.63	.58	.54	.62	.57	.53	.52
8.0	.62	.55	.50	.61	.54	.50	.60	.54	.50	.59	.53	.49	.58	.53	.49	.47
9.0	.57	.51	.46	.57	.50	.46	.56	.50	.46	.55	.49	.46	.54	.49	.45	.44
10.0	.54	.47	.43	.53	.47	.42	.52	.46	.42	.51	.46	.42	.50	.46	.42	.41

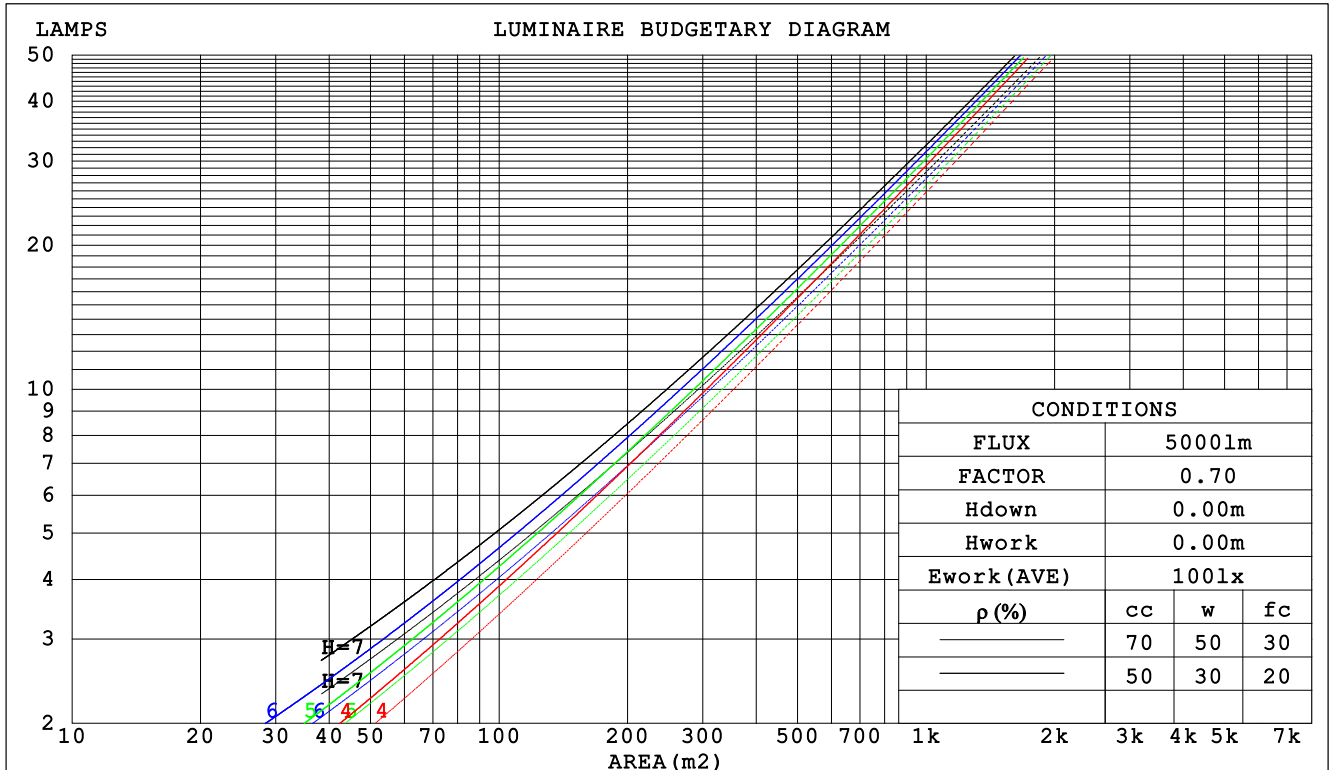

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.6V I:0.4600A P:55.00W PF:0.9980 Freq:60.00Hz Lamp Flux:7430.35x1 lm		
NAME: 13代B款	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.207	.118	.037	.200	.114	.036	.187	.107	.034	.175	.101	.032	.164	.095	.031	
2.0	.200	.110	.034	.194	.107	.033	.183	.102	.032	.173	.097	.030	.164	.093	.029	
3.0	.191	.102	.031	.186	.100	.030	.177	.096	.029	.168	.092	.028	.160	.088	.027	
4.0	.182	.095	.028	.178	.093	.027	.169	.090	.027	.162	.087	.026	.154	.084	.026	
5.0	.173	.088	.026	.169	.087	.025	.162	.084	.025	.155	.082	.024	.149	.080	.024	
6.0	.165	.083	.024	.161	.082	.023	.155	.079	.023	.149	.077	.023	.143	.075	.022	
7.0	.157	.078	.022	.154	.077	.022	.148	.075	.022	.143	.073	.021	.137	.071	.021	
8.0	.150	.073	.021	.147	.072	.020	.142	.071	.020	.137	.069	.020	.132	.068	.020	
9.0	.143	.069	.019	.140	.068	.019	.135	.067	.019	.131	.066	.019	.127	.064	.019	
10.0	.136	.065	.018	.134	.065	.018	.130	.064	.018	.126	.062	.018	.122	.061	.018	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.193	.193	.193	.165	.165	.165	.112	.112	.112	.065	.065	.065	.021	.021	.021	
1.0	.176	.159	.145	.150	.137	.125	.103	.094	.086	.059	.054	.050	.019	.018	.016	
2.0	.162	.135	.111	.139	.116	.096	.095	.080	.067	.055	.047	.039	.018	.015	.013	
3.0	.152	.116	.088	.130	.100	.076	.089	.070	.053	.052	.041	.031	.017	.013	.010	
4.0	.143	.102	.071	.122	.088	.061	.084	.061	.043	.049	.036	.026	.016	.012	.008	
5.0	.135	.091	.058	.116	.078	.050	.080	.055	.036	.046	.032	.021	.015	.011	.007	
6.0	.128	.082	.049	.110	.071	.042	.076	.050	.030	.044	.029	.018	.014	.010	.006	
7.0	.122	.075	.041	.105	.065	.036	.073	.045	.026	.042	.027	.015	.014	.009	.005	
8.0	.116	.069	.036	.100	.059	.031	.069	.042	.022	.040	.025	.013	.013	.008	.004	
9.0	.111	.064	.031	.096	.055	.027	.066	.039	.019	.039	.023	.012	.013	.008	.004	
10.0	.107	.059	.028	.092	.052	.024	.064	.036	.017	.037	.021	.010	.012	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.6V I:0.4600A P:55.00W PF:0.9980 Freq:60.00Hz Lamp Flux:7430.35x1 lm										
NAME: 13代B款					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:1.13*0.045			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.4	24.5	23.6	24.7	24.9	22.8	23.9	23.0	24.1	24.3
3H	23.3	24.4	23.6	24.6	24.8	22.7	23.8	23.0	24.0	24.2
4H	23.3	24.3	23.6	24.5	24.8	22.7	23.7	23.0	23.9	24.1
6H	23.3	24.2	23.6	24.4	24.7	22.6	23.5	22.9	23.8	24.0
8H	23.2	24.1	23.6	24.4	24.7	22.6	23.5	22.9	23.7	24.0
12H	23.2	24.0	23.5	24.3	24.6	22.5	23.4	22.9	23.7	23.9
4H 2H	23.2	24.2	23.5	24.4	24.7	22.6	23.6	22.9	23.9	24.1
3H	23.2	24.1	23.6	24.4	24.6	22.7	23.5	23.0	23.8	24.1
4H	23.2	24.0	23.6	24.3	24.6	22.6	23.4	23.0	23.7	24.0
6H	23.2	23.9	23.6	24.2	24.6	22.6	23.3	23.0	23.6	24.0
8H	23.2	23.8	23.6	24.2	24.6	22.6	23.2	23.0	23.5	23.9
12H	23.2	23.7	23.6	24.1	24.5	22.5	23.1	22.9	23.5	23.9
8H 4H	23.2	23.8	23.6	24.1	24.5	22.6	23.2	23.0	23.5	23.9
6H	23.2	23.7	23.6	24.1	24.5	22.5	23.0	23.0	23.4	23.9
8H	23.1	23.6	23.6	24.0	24.5	22.5	22.9	23.0	23.4	23.8
12H	23.1	23.5	23.6	24.0	24.4	22.5	22.9	23.0	23.3	23.8
12H 4H	23.1	23.7	23.5	24.0	24.4	22.5	23.1	22.9	23.5	23.9
6H	23.1	23.6	23.6	24.0	24.4	22.5	22.9	22.9	23.4	23.8
8H	23.1	23.5	23.6	23.9	24.4	22.5	22.9	23.0	23.3	23.8
Variations with the observer position at spacings:										
S = 1.0H	+ 2.1 / - 5.2					+ 2.4 / - 5.6				
1.5H	+ 2.5 / - 4.4					+ 2.6 / - 5.9				
2.0H	+ 4.6 / - 4.2					+ 4.2 / - 4.0				

CIE Pub.117 Corrected 7430 lm Total Lamp Luminous Flux.(8log(F/F0) = 7.0)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.6V I:0.4600A P:55.00W PF:0.9980 Freq:60.00Hz Lamp Flux:7430.35x1 lm		
NAME: 13代B款	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	78	70	66	78	70	65	77	70	65	61
0.80	87	79	75	86	79	75	85	78	74	70
1.00	93	86	82	92	86	81	90	86	81	76
1.25	98	92	87	97	91	87	95	90	86	81
1.50	102	96	92	100	95	91	98	93	90	85
2.00	106	100	97	104	99	96	101	97	94	88
2.50	108	103	99	106	102	98	103	99	97	90
3.00	110	106	102	108	104	101	104	101	99	92
4.00	112	109	106	110	107	104	106	104	102	94
5.00	113	111	108	111	109	107	107	105	103	95
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:119.6V I:0.4600A P:55.00W PF:0.9980 Freq:60.00Hz Lamp Flux:7430.35x1 lm		
NAME: 13代B款	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:

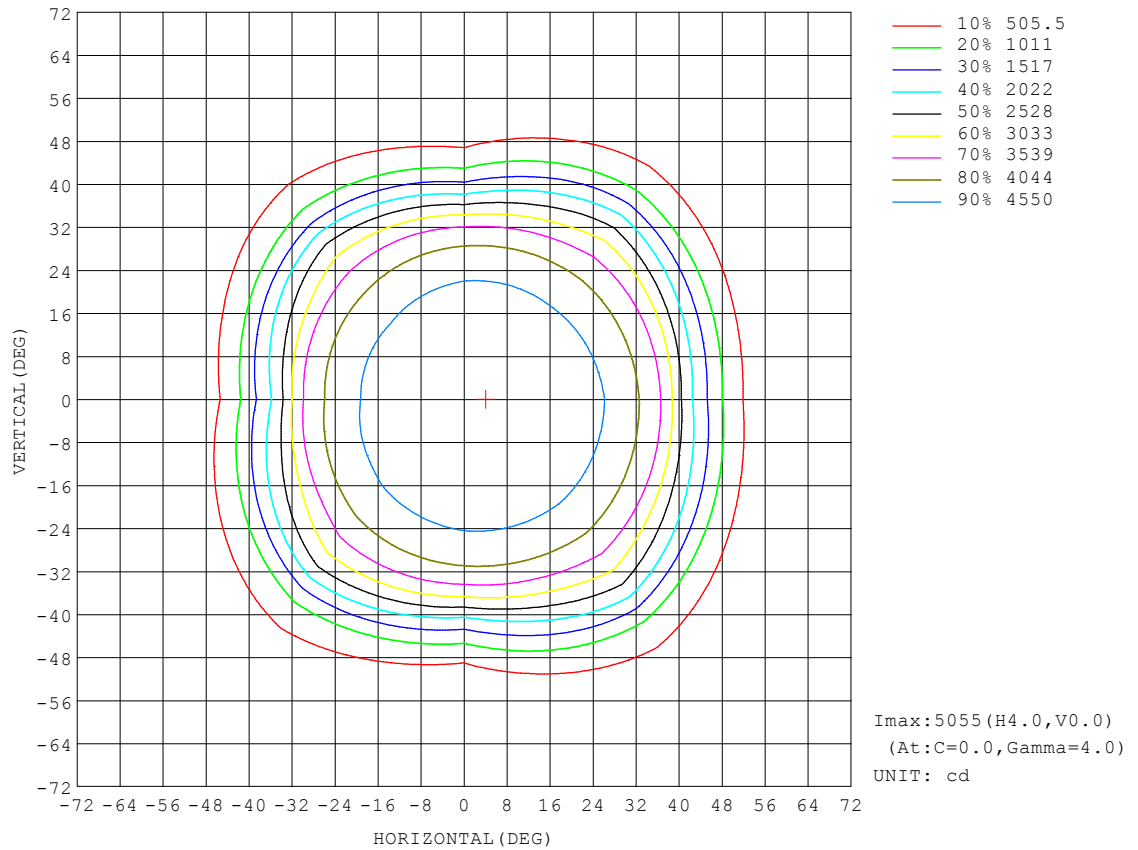


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:119.6V I:0.4600A P:55.00W PF:0.9980 Freq:60.00Hz Lamp Flux:7430.35x1 lm		
NAME: 13代B款	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:

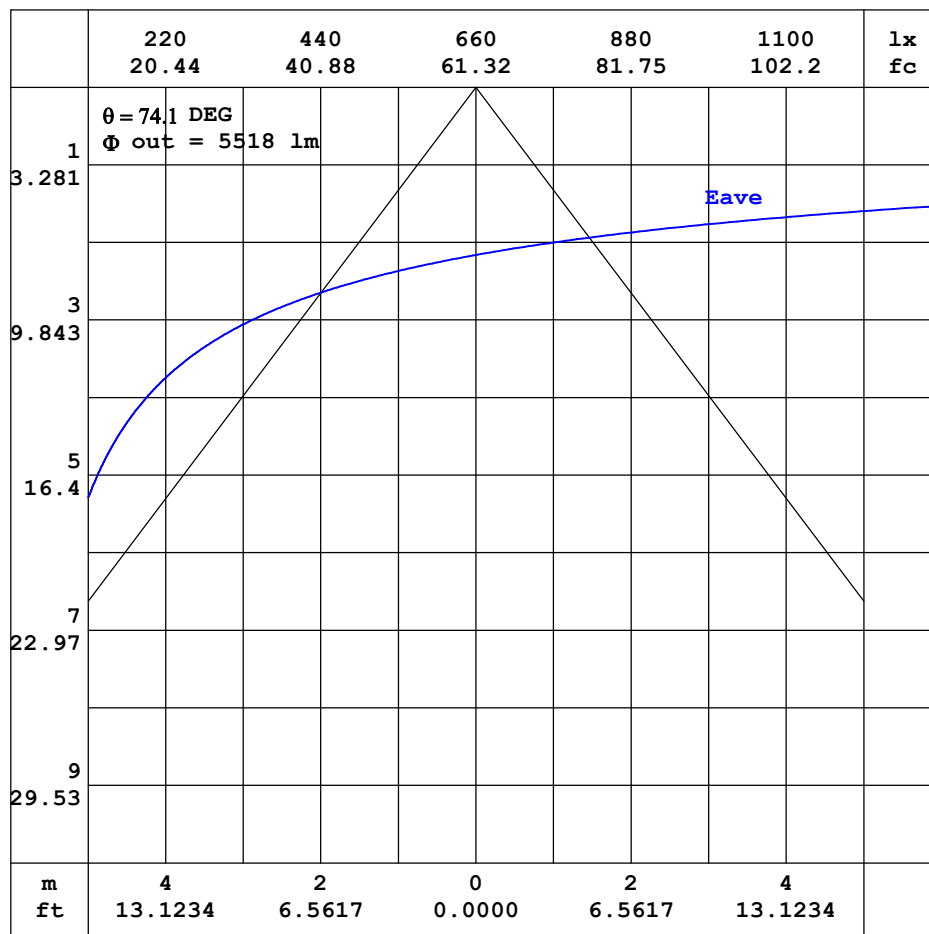


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.6V I:0.4600A P:55.00W PF:0.9980 Freq:60.00Hz Lamp Flux:7430.35x1 lm		
NAME: 13代B款	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:

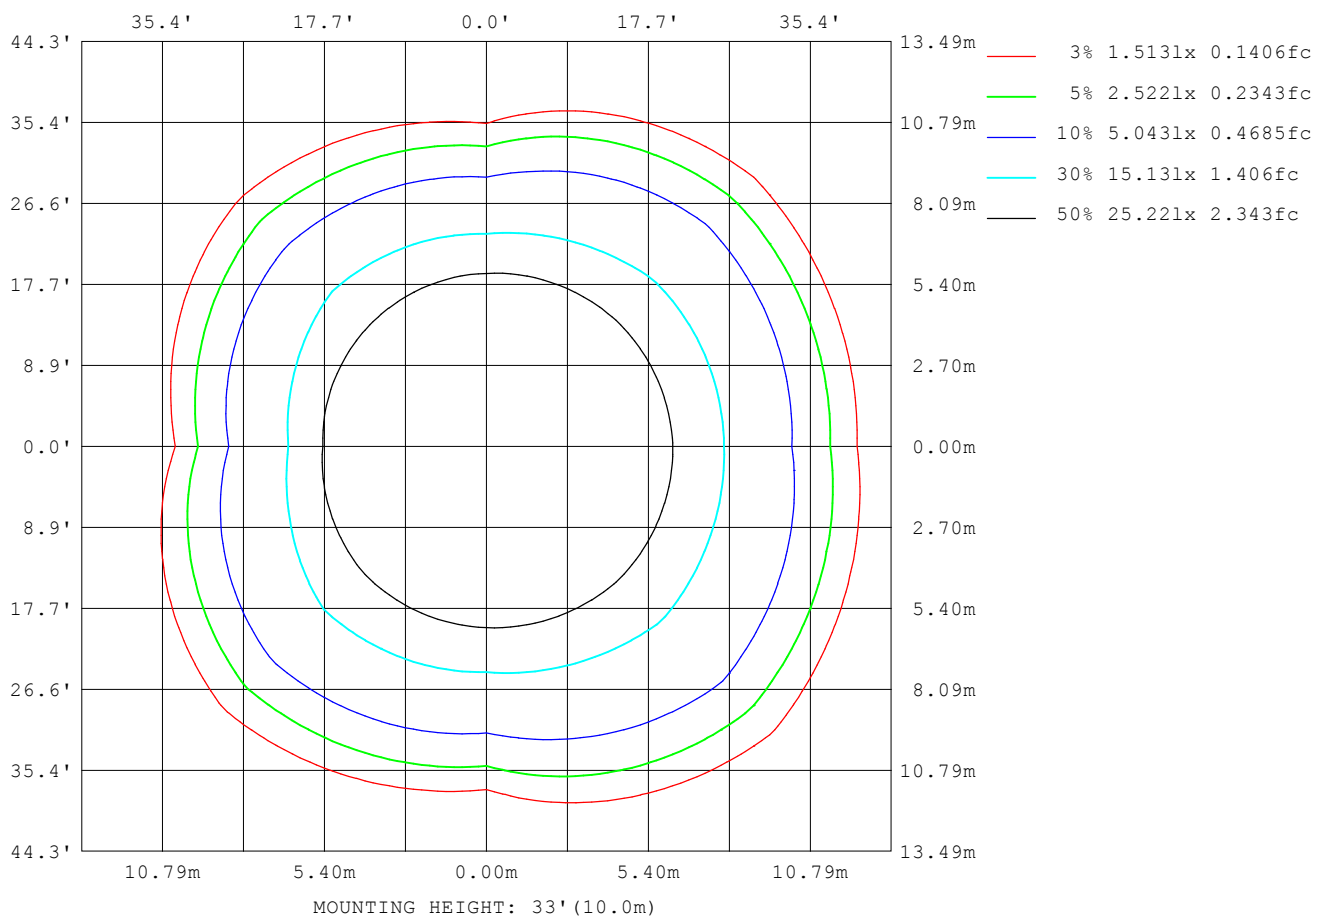

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.6V I:0.4600A P:55.00W PF:0.9980 Freq:60.00Hz Lamp Flux:7430.35x1 lm		
NAME: 13代B款	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	6653
L_0~180 (75) av	4088
L_0~180 (85) av	2276
L_90~270 (65) av	6356
L_90~270 (75) av	3517
L_90~270 (85) av	1721
L_45 (65) av	6543
L_45 (75) av	3844
L_45 (85) av	1983

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

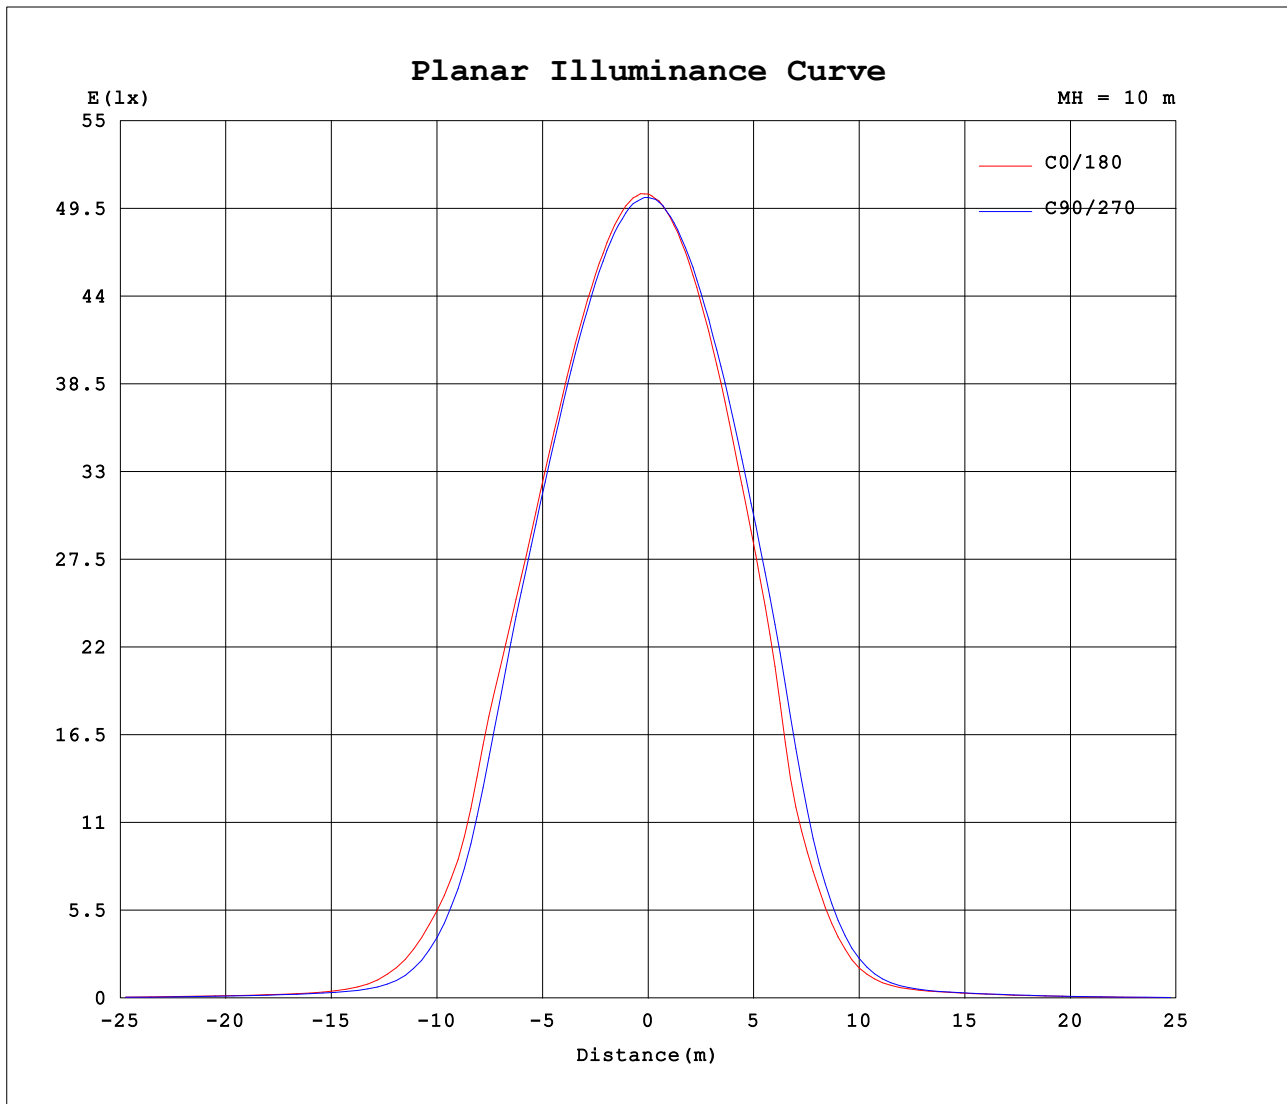

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.6V I:0.4600A P:55.00W PF:0.9980 Freq:60.00Hz Lamp Flux:7430.35x1 lm		
NAME: 13代B款	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1.13*0.045	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	5042	5031	5020	5020	5042	5031	5020	5020										
5	5050	5035	5013	4989	4989	4978	4991	5010										
10	5018	4998	4968	4931	4899	4887	4927	4958										
15	4945	4927	4886	4819	4743	4742	4816	4862										
20	4818	4806	4743	4643	4504	4527	4648	4705										
25	4608	4606	4520	4366	4131	4201	4357	4467										
30	4275	4306	4141	3979	3515	3716	3872	4099										
35	3777	3863	3419	3401	2183	3041	2848	3561										
40	2648	3222	2156	2607	1266	2064	1594	2794										
45	1555	2345	1077	1507	538	1018	706	1768										
50	723	1238	420	709	257	490	300	815										
55	304	570	227	357	194	258	204	397										
60	203	292	182	197	159	158	169	219										
65	172	172	144	130	109	109	124	142										
70	127	117	96.2	82.4	59.8	63.6	74.9	94.0										
75	75.2	70.4	52.3	44.0	30.6	31.9	38.7	52.6										
80	39.4	36.0	26.4	20.6	13.0	13.5	17.9	25.8										
85	18.5	16.1	10.4	6.69	1.30	1.97	4.60	9.82										
90	4.98	3.76	0.33	0.21	0.05	0.05	0.02	0.24										
95	0.20	0.26	0.25	0.32	0.06	0.06	0.03	0.06										
100	0.32	0.38	0.38	0.44	0.08	0.08	0.05	0.07										
105	0.45	0.52	0.51	0.63	0.11	0.12	0.08	0.10										
110	0.56	0.79	0.78	1.08	0.17	0.22	0.16	0.16										
115	0.76	1.45	1.54	2.05	0.31	0.38	0.30	0.28										
120	1.45	2.75	2.99	3.67	0.56	0.64	0.54	0.47										
125	3.07	4.60	4.83	5.72	0.93	0.98	0.87	0.76										
130	5.40	6.64	6.88	7.88	1.39	1.37	1.30	1.11										
135	8.41	8.53	8.69	9.74	1.85	1.80	1.76	1.48										
140	10.2	10.1	9.86	11.1	2.36	2.36	2.32	1.96										
145	11.6	11.4	10.8	12.2	3.33	3.70	3.57	3.03										
150	12.6	12.4	12.0	13.0	5.41	6.02	6.00	5.01										
155	13.4	13.3	13.1	13.5	7.87	8.41	8.22	7.16										
160	14.1	14.0	13.7	13.8	11.0	10.8	10.4	9.32										
165	14.7	14.5	14.2	13.9	12.8	12.5	12.2	11.1										
170	15.2	14.9	14.5	14.0	14.0	13.6	13.4	12.5										
175	15.3	14.9	14.6	14.1	14.7	14.3	14.1	13.3										
180	15.0	14.7	14.5	13.9	15.0	14.7	14.5	13.9										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: