


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.6V I:0.3270A P:39.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4460.54x1 lm		
NAME: 17代 下发光	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:1.2*0.05	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 112.64 lm/W			
MODEL		I _{max} (cd)	1603	S/MH(C0/180)	1.20
NOMINAL POWER(W)	40W	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	4460.5	η UP,DN(C0-180)	0.1,49.6
NOMINAL FLUX(lm)	4460.54	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,50.2
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	99.8	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

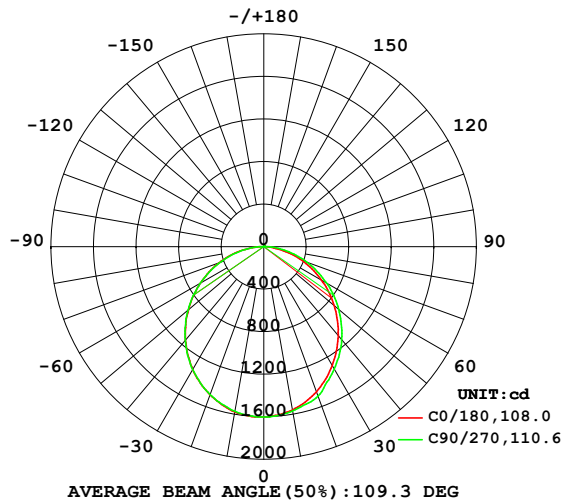

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

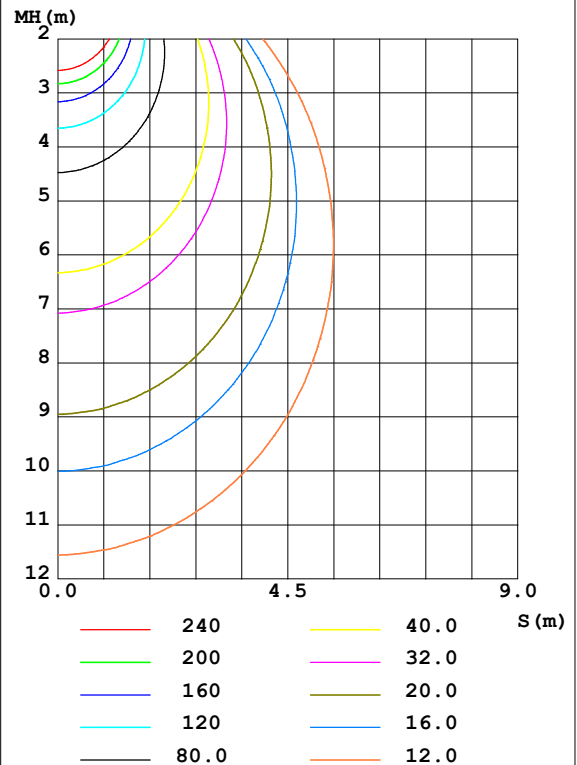

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-07-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1560	1563	1569	1576	1578	1576	1573	1561	0- 10	151.3	151.3	3.39,3.39
20	1451	1460	1495	1485	1482	1486	1479	1461	10- 20	431.1	582.4	13.1,13.1
30	1290	1322	1328	1342	1337	1341	1336	1299	20- 30	647.7	1230	27.6,27.6
40	1091	1111	1141	1157	1146	1152	1150	1104	30- 40	770.2	2000	44.8,44.8
50	864.8	889.8	920.2	938.2	925.6	931.7	930.0	879.5	40- 50	789.6	2790	62.5,62.5
60	623.5	651.2	679.3	702.1	689.9	687.9	692.0	633.7	50- 60	708.3	3498	78.4,78.4
70	384.9	409.9	434.8	459.5	449.3	444.0	442.0	390.1	60- 70	542.3	4041	90.6,90.6
80	142.2	176.1	199.6	225.6	206.7	206.1	202.7	153.4	70- 80	324.2	4365	97.9,97.9
90	0.7147	0.6043	0.8841	5.250	1.541	0.9721	0.2058	0.2429	80- 90	86.82	4452	99.8,99.8
100	1.053	0.9717	0.9416	0.8040	0.3827	0.3116	0.3417	0.3859	90-100	0.6258	4452	99.8,99.8
110	1.454	1.387	1.356	1.205	0.5619	0.5121	0.5646	0.5971	100-110	0.8451	4453	99.8,99.8
120	1.844	1.800	1.770	1.620	0.7894	0.7514	0.8406	0.8520	110-120	1.111	4454	99.9,99.9
130	2.219	2.165	2.145	2.011	1.044	1.031	1.127	1.126	120-130	1.291	4455	99.9,99.9
140	2.561	2.472	2.306	2.356	1.332	1.334	1.444	1.430	130-140	1.367	4457	99.9,99.9
150	2.897	2.765	2.644	2.686	2.177	2.186	2.302	2.228	140-150	1.321	4458	99.9,99.9
160	3.229	3.047	2.918	2.984	2.734	2.665	2.754	2.666	150-160	1.241	4459	100,100
170	3.391	3.178	3.073	3.050	3.142	2.970	2.994	2.957	160-170	0.8487	4460	100,100
180	3.239	3.069	3.035	3.016	3.232	3.071	3.052	3.030	170-180	0.2976	4461	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-07-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:121.6V I:0.3270A P:39.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4460.54x1 lm		
NAME: 17代 下发光	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:1.2*0.05	Shielding Angle:

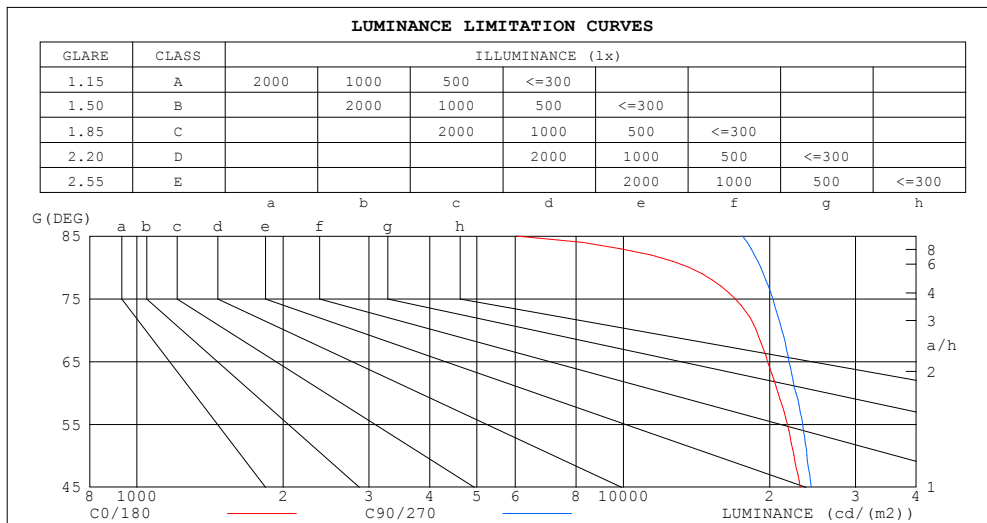

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	6012	17581
80	13652	19158
75	16988	20312
70	18762	21185
65	19801	21916
60	20793	22642
55	21739	23386
50	22432	23858
45	23097	24338


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-07-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.6V I:0.3270A P:39.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4460.54x1 lm		
NAME: 17代 下发光	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:1.2*0.05	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.96	1.01	.98	.94	.97	.94	.91	.93	.91	.88	.90	.87	.85	.83
2.0	.90	.83	.78	.88	.82	.77	.85	.80	.75	.82	.77	.73	.78	.75	.72	.69
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.53	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.56	.50	.45	.43
6.0	.57	.48	.41	.56	.47	.41	.54	.46	.41	.52	.45	.40	.50	.44	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.36	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.29	.27
10.0	.40	.32	.26	.39	.32	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

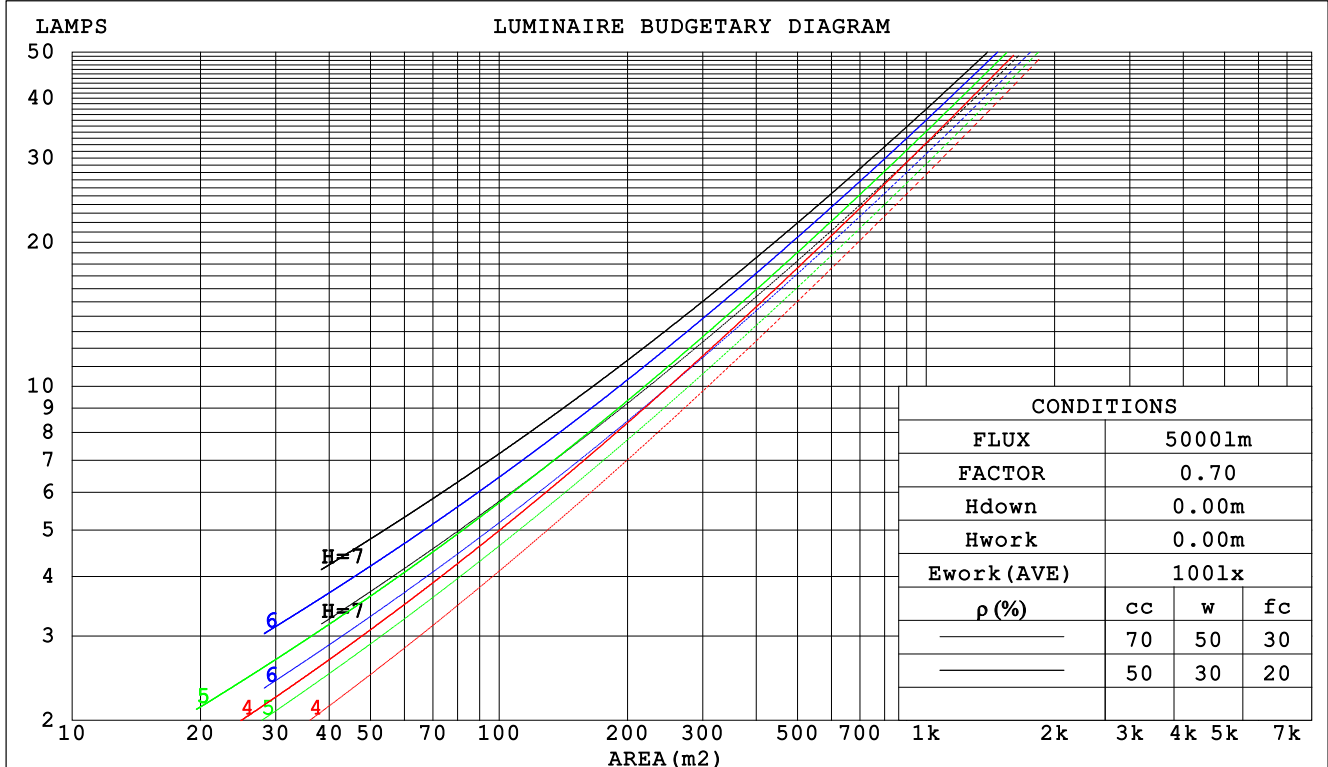

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-07-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:121.6V I:0.3270A P:39.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4460.54x1 lm					
NAME: 17代 下发光			TYPE:4000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: WS			SUR.:1.2*0.05		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.311	.177	.056	.304	.173	.055	.290	.167	.053	.278	.160	.051	.267	.155	.050		
2.0	.292	.160	.049	.286	.157	.048	.274	.152	.047	.263	.148	.046	.253	.143	.045		
3.0	.270	.144	.043	.264	.142	.043	.254	.138	.042	.244	.134	.041	.235	.130	.040		
4.0	.249	.129	.038	.244	.128	.038	.235	.125	.037	.226	.121	.037	.218	.119	.036		
5.0	.230	.117	.034	.226	.116	.034	.217	.113	.033	.210	.111	.033	.203	.108	.033		
6.0	.213	.107	.031	.209	.106	.030	.202	.104	.030	.195	.101	.030	.189	.099	.030		
7.0	.198	.098	.028	.195	.097	.028	.188	.095	.027	.182	.093	.027	.177	.092	.027		
8.0	.185	.091	.025	.182	.090	.025	.176	.088	.025	.171	.087	.025	.166	.085	.025		
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023		
10.0	.163	.078	.022	.161	.078	.022	.156	.076	.022	.152	.075	.021	.147	.074	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.182	.158	.136	.156	.135	.117	.106	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.174	.133	.100	.149	.115	.086	.102	.079	.060	.059	.046	.035	.019	.015	.011	
3.0	.166	.116	.076	.142	.100	.066	.098	.069	.046	.056	.041	.027	.018	.013	.009	
4.0	.158	.103	.060	.136	.089	.052	.093	.062	.037	.054	.036	.022	.017	.012	.007	
5.0	.151	.092	.049	.130	.080	.042	.089	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.144	.084	.041	.124	.073	.036	.085	.051	.025	.049	.030	.015	.016	.010	.005	
7.0	.137	.077	.035	.118	.067	.030	.081	.047	.022	.047	.028	.013	.015	.009	.004	
8.0	.130	.071	.030	.112	.062	.026	.078	.043	.019	.045	.026	.011	.015	.008	.004	
9.0	.124	.066	.027	.107	.057	.023	.074	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.119	.062	.024	.102	.054	.021	.071	.038	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-07-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:121.6V I:0.3270A P:39.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4460.54x1 lm											
NAME: 17代 下发光					TYPE:4000K			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: WS					SUR.:1.2*0.05			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise				Viewed endwise					
x = 2H y = 2H	23.4	24.9	23.7	25.1	25.3	23.7	25.2	24.0	25.4	25.6	
	3H	24.9	26.3	25.2	26.5	26.7	25.3	26.7	25.6	26.9	27.2
	4H	25.4	26.8	25.7	27.0	27.3	25.9	27.3	26.2	27.5	27.8
	6H	25.8	27.0	26.1	27.3	27.6	26.4	27.7	26.8	28.0	28.3
	8H	25.8	27.1	26.2	27.3	27.6	26.6	27.8	27.0	28.1	28.4
	12H	25.8	27.0	26.2	27.3	27.6	26.7	27.9	27.1	28.2	28.5
4H	2H	24.0	25.4	24.4	25.6	25.9	24.3	25.6	24.6	25.9	26.1
	3H	25.7	26.9	26.0	27.2	27.5	26.0	27.2	26.4	27.5	27.8
	4H	26.4	27.4	26.8	27.8	28.1	26.8	27.9	27.2	28.2	28.6
	6H	26.9	27.8	27.3	28.2	28.5	27.5	28.4	27.9	28.8	29.1
	8H	27.0	27.8	27.4	28.2	28.6	27.7	28.6	28.1	29.0	29.4
	12H	27.0	27.8	27.4	28.2	28.6	27.9	28.7	28.3	29.1	29.5
8H	4H	26.7	27.6	27.1	27.9	28.3	27.1	28.0	27.5	28.3	28.7
	6H	27.3	28.0	27.7	28.4	28.9	27.9	28.6	28.3	29.0	29.5
	8H	27.5	28.1	27.9	28.6	29.0	28.2	28.8	28.7	29.3	29.7
	12H	27.5	28.1	28.0	28.6	29.0	28.4	29.0	28.9	29.4	29.9
12H	4H	26.7	27.5	27.1	27.9	28.3	27.1	27.9	27.5	28.3	28.7
	6H	27.4	28.0	27.8	28.5	28.9	27.9	28.6	28.4	29.0	29.5
	8H	27.6	28.1	28.1	28.6	29.1	28.3	28.8	28.7	29.3	29.8
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.2					

CIE Pub.117 Corrected 4461 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.2)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-07-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:121.6V I:0.3270A P:39.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4460.54x1 lm		
NAME: 17代 下发光	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:1.2*0.05	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	56	49	65	55	48	41
1.00	76	65	58	75	64	57	73	66	57	50
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	70	62
2.00	95	86	80	93	85	79	89	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	86	78
4.00	106	100	96	104	99	94	99	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-07-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:121.6V I:0.3270A P:39.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4460.54x1 lm		
NAME: 17代 下发光	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:1.2*0.05	Shielding Angle:

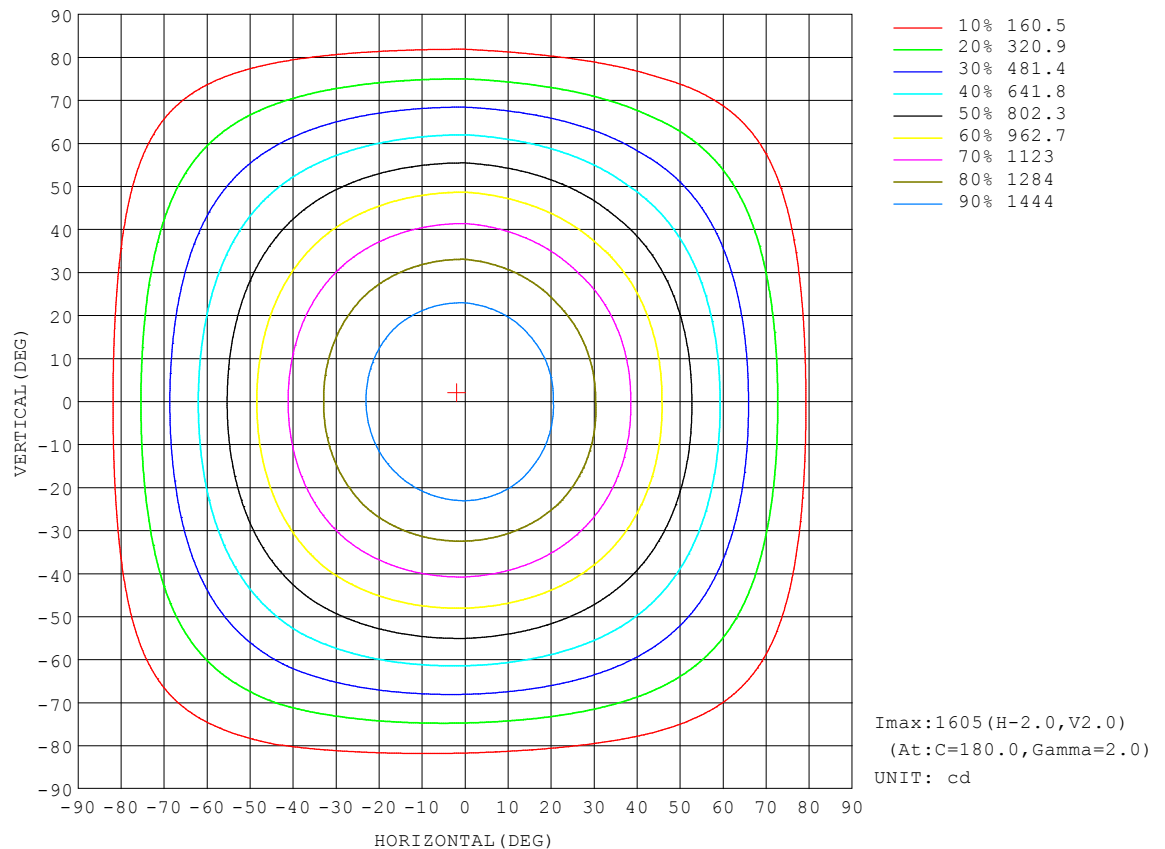


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-07-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI Figure

Test:U:121.6V I:0.3270A P:39.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4460.54x1 lm		
NAME: 17代 下发光	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:1.2*0.05	Shielding Angle:

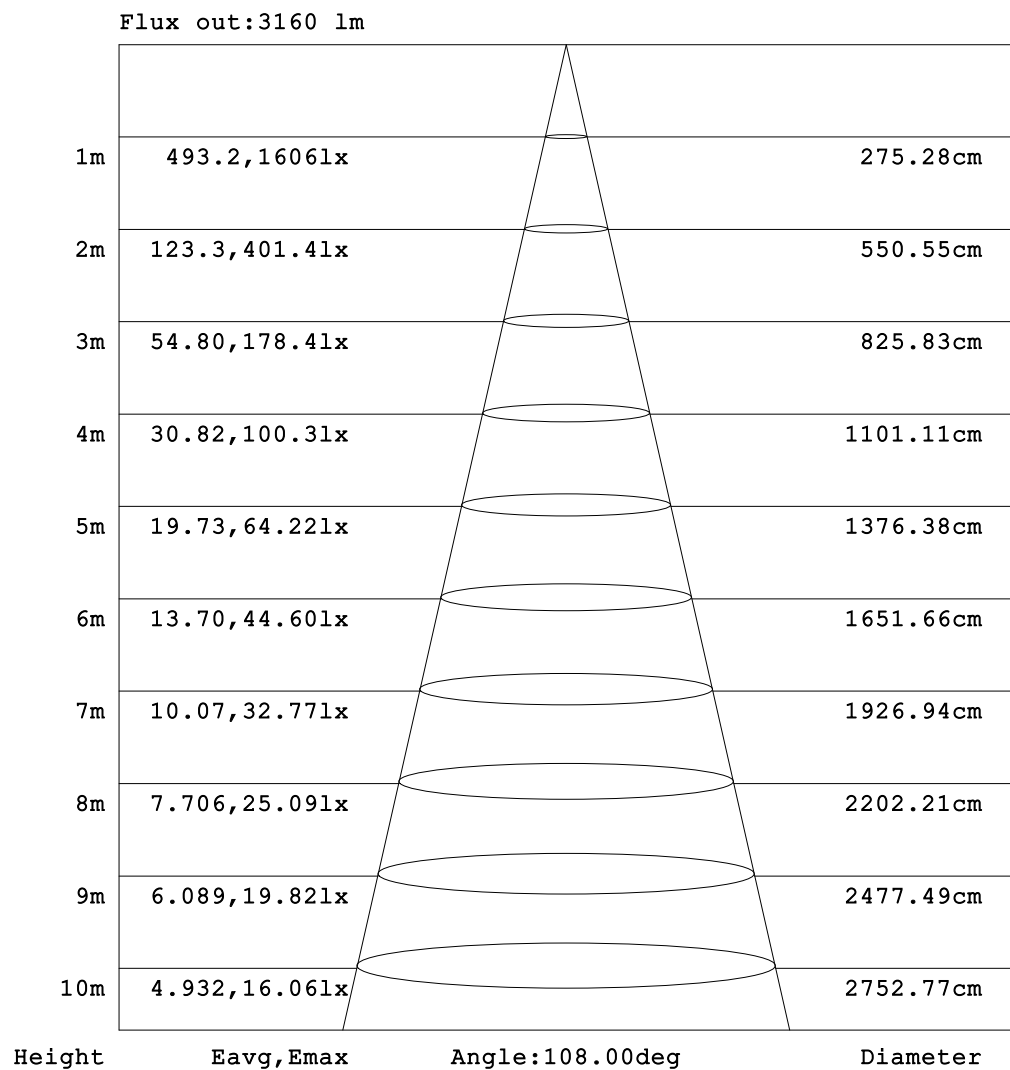


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-07-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:121.6V I:0.3270A P:39.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4460.54x1 lm		
NAME: 17代 下发光	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:1.2*0.05	Shielding Angle:

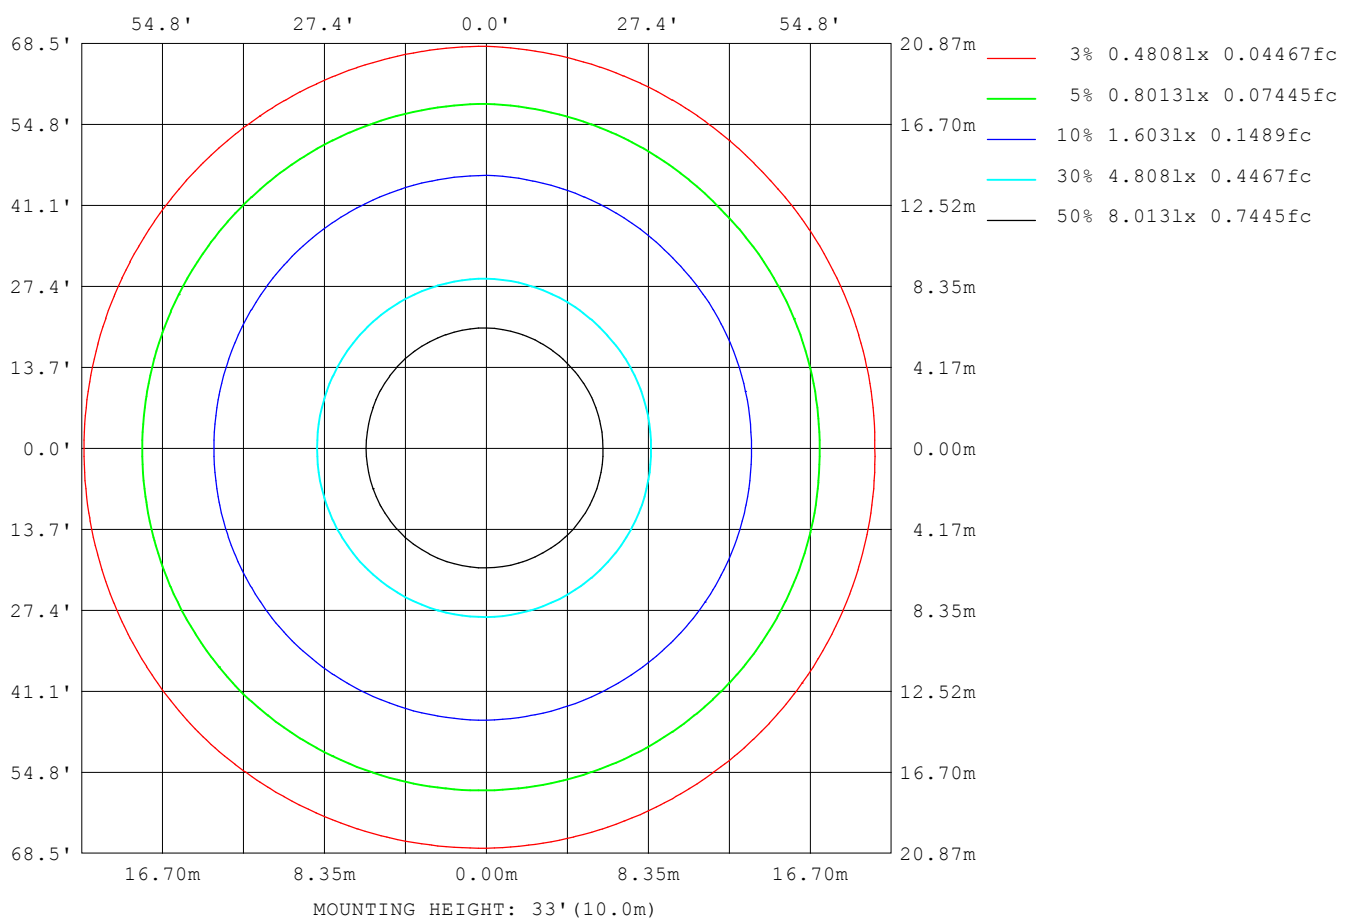

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-07-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:121.6V I:0.3270A P:39.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4460.54x1 lm		
NAME: 17代 下发光	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:1.2*0.05	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	21116
L_0~180 (75) av	19126
L_0~180 (85) av	11027
L_90~270 (65) av	22125
L_90~270 (75) av	20446
L_90~270 (85) av	17335
L_45 (65) av	21575
L_45 (75) av	19773
L_45 (85) av	13724

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-07-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

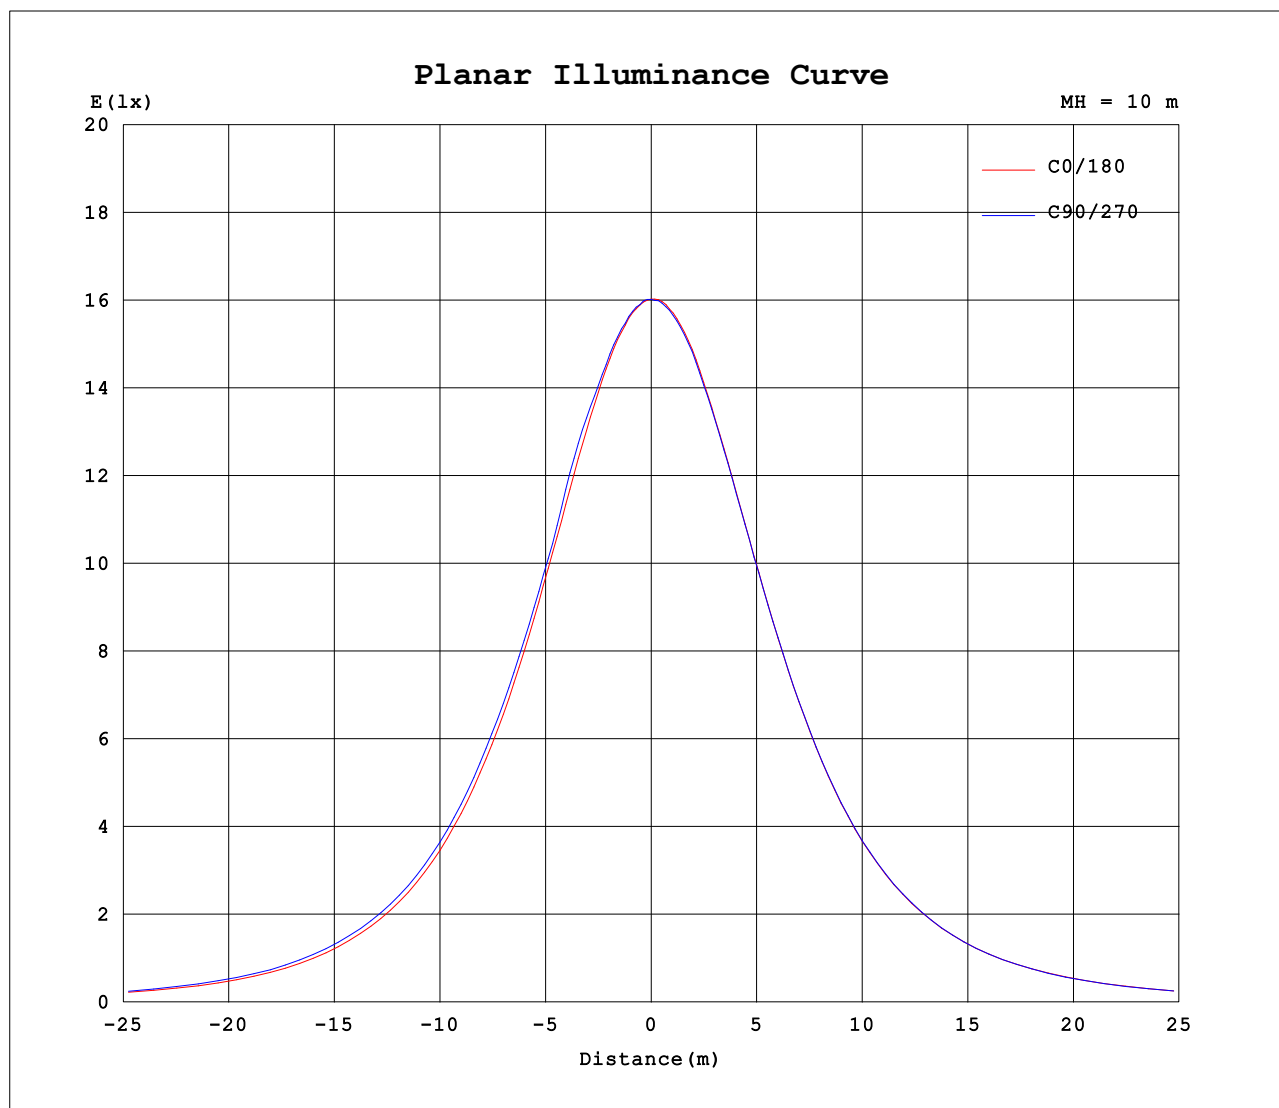

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-07-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.6V I:0.3270A P:39.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4460.54x1 lm		
NAME: 17代 下发光	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:1.2*0.05	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1602	1602	1602	1602	1602	1602	1602	1602										
5	1590	1589	1593	1596	1598	1595	1595	1590										
10	1560	1563	1569	1576	1578	1576	1573	1561										
15	1512	1517	1534	1536	1536	1539	1533	1516										
20	1451	1460	1495	1485	1482	1486	1479	1461										
25	1377	1404	1405	1420	1415	1419	1416	1390										
30	1290	1322	1328	1342	1337	1341	1336	1299										
35	1193	1212	1240	1255	1247	1252	1248	1206										
40	1091	1111	1141	1157	1146	1152	1150	1104										
45	980	1003	1033	1050	1039	1046	1042	995										
50	865	890	920	938	926	932	930	880										
55	748	772	805	822	809	813	812	761										
60	624	651	679	702	690	688	692	634										
65	502	530	556	581	569	566	566	512										
70	385	410	435	459	449	444	442	390										
75	264	292	315	341	330	323	320	272										
80	142	176	200	226	207	206	203	153										
85	31.4	57.3	91.9	104	83.9	86.4	89.4	38.9										
90	0.71	0.60	0.88	5.25	1.54	0.97	0.21	0.24										
95	0.88	0.78	0.75	0.62	0.32	0.24	0.26	0.29										
100	1.05	0.97	0.94	0.80	0.38	0.31	0.34	0.39										
105	1.25	1.18	1.16	1.00	0.47	0.40	0.44	0.48										
110	1.45	1.39	1.36	1.20	0.56	0.51	0.56	0.60										
115	1.65	1.60	1.57	1.41	0.68	0.64	0.70	0.73										
120	1.84	1.80	1.77	1.62	0.79	0.75	0.84	0.85										
125	2.04	1.98	1.96	1.82	0.91	0.88	0.97	0.97										
130	2.22	2.17	2.15	2.01	1.04	1.03	1.13	1.13										
135	2.40	2.32	2.31	2.20	1.21	1.20	1.31	1.29										
140	2.56	2.47	2.31	2.36	1.33	1.33	1.44	1.43										
145	2.73	2.62	2.42	2.54	1.49	1.51	1.59	1.59										
150	2.90	2.76	2.64	2.69	2.18	2.19	2.30	2.23										
155	3.08	2.91	2.80	2.85	2.47	2.44	2.56	2.45										
160	3.23	3.05	2.92	2.98	2.73	2.66	2.75	2.67										
165	3.36	3.13	3.01	3.05	2.97	2.84	2.93	2.84										
170	3.39	3.18	3.07	3.05	3.14	2.97	2.99	2.96										
175	3.34	3.17	3.08	3.12	3.20	3.04	3.02	3.01										
180	3.24	3.07	3.03	3.02	3.23	3.07	3.05	3.03										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-07-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: