


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.6V I:0.3110A P:37.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4578.26x1 lm		
NAME: 17代 下发光	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:1.2*0.05	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 121.76 lm/W			
MODEL		I _{max} (cd)	1647	S/MH(C0/180)	1.21
NOMINAL POWER(W)	40W	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	4578.3	η UP,DN(C0-180)	0.1,49.8
NOMINAL FLUX(lm)	4578.26	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,49.9
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	99.8	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

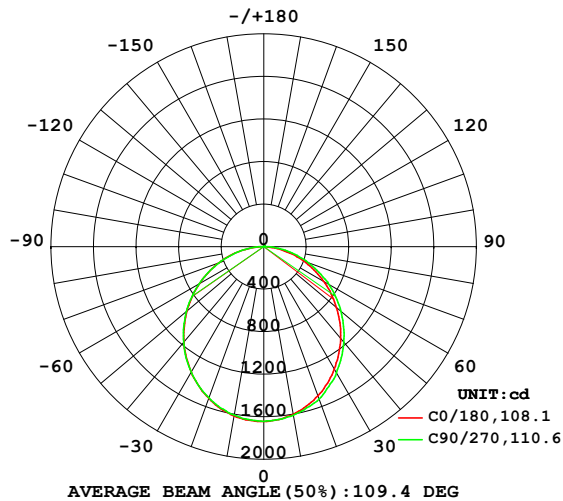

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

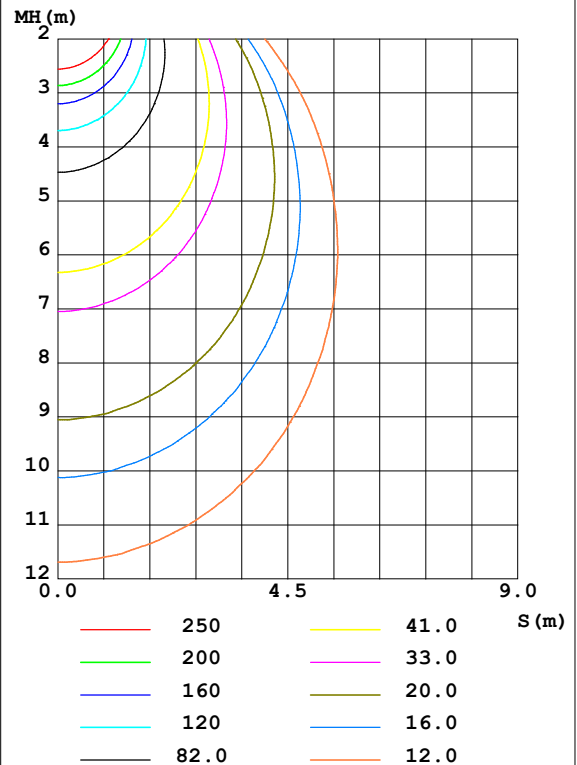

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-07-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1600	1607	1610	1621	1617	1613	1609	1610	0- 10	155.2	155.2	3.39,3.39
20	1493	1500	1525	1526	1515	1519	1512	1497	10- 20	442.3	597.5	13.1,13.1
30	1329	1354	1369	1382	1364	1369	1365	1334	20- 30	664.0	1262	27.6,27.6
40	1126	1153	1174	1191	1169	1176	1174	1134	30- 40	790.4	2052	44.8,44.8
50	894.3	920.1	948.2	966.3	944.5	950.7	950.2	901.6	40- 50	810.2	2862	62.5,62.5
60	649.4	675.1	703.7	722.4	701.2	702.5	704.1	651.8	50- 60	727.2	3589	78.4,78.4
70	402.8	425.7	448.5	473.4	453.5	449.9	450.4	400.7	60- 70	557.2	4147	90.6,90.6
80	153.2	185.5	206.2	231.6	204.5	206.5	206.2	157.7	70- 80	332.9	4479	97.8,97.8
90	0.7982	0.7063	1.016	5.059	1.130	0.8292	0.2055	0.2523	80- 90	88.88	4568	99.8,99.8
100	1.181	1.115	1.085	0.9436	0.3933	0.3167	0.3459	0.3830	90-100	0.6803	4569	99.8,99.8
110	1.623	1.577	1.561	1.404	0.5681	0.5221	0.5853	0.6108	100-110	0.9331	4570	99.8,99.8
120	2.082	2.041	2.020	1.863	0.8061	0.7856	0.8801	0.8824	110-120	1.227	4571	99.8,99.8
130	2.497	2.448	2.436	2.302	1.085	1.088	1.204	1.178	120-130	1.430	4573	99.9,99.9
140	2.876	2.798	2.625	2.692	1.410	1.412	1.545	1.503	130-140	1.512	4574	99.9,99.9
150	3.244	3.112	2.953	3.051	2.411	2.436	2.547	2.465	140-150	1.467	4576	99.9,99.9
160	3.592	3.419	3.261	3.363	3.008	2.947	3.068	2.965	150-160	1.385	4577	100,100
170	3.757	3.564	3.440	3.429	3.456	3.303	3.336	3.293	160-170	0.9444	4578	100,100
180	3.580	3.427	3.403	3.387	3.585	3.436	3.403	3.378	170-180	0.3313	4578	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-07-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:121.6V I:0.3110A P:37.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4578.26x1 lm		
NAME: 17代 下发光	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:1.2*0.05	Shielding Angle:

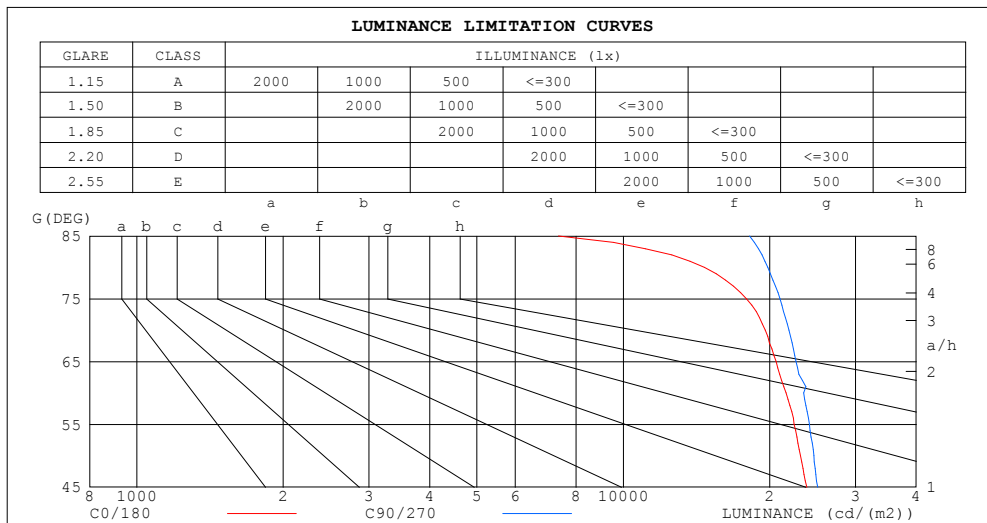

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	7360	18168
80	14671	19829
75	17901	20978
70	19587	21896
65	20622	22662
60	21599	23501
55	22441	24151
50	23139	24634
45	23825	25104


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-07-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.6V I:0.3110A P:37.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4578.26x1 lm		
NAME: 17代 下发光	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:1.2*0.05	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.96	1.01	.98	.94	.97	.94	.91	.93	.91	.88	.90	.87	.85	.83
2.0	.90	.83	.78	.88	.82	.77	.85	.80	.75	.82	.77	.73	.78	.75	.71	.69
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.53	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.56	.50	.45	.43
6.0	.57	.48	.41	.56	.47	.41	.54	.46	.41	.52	.45	.40	.50	.44	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.36	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.29	.27
10.0	.40	.32	.26	.39	.32	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

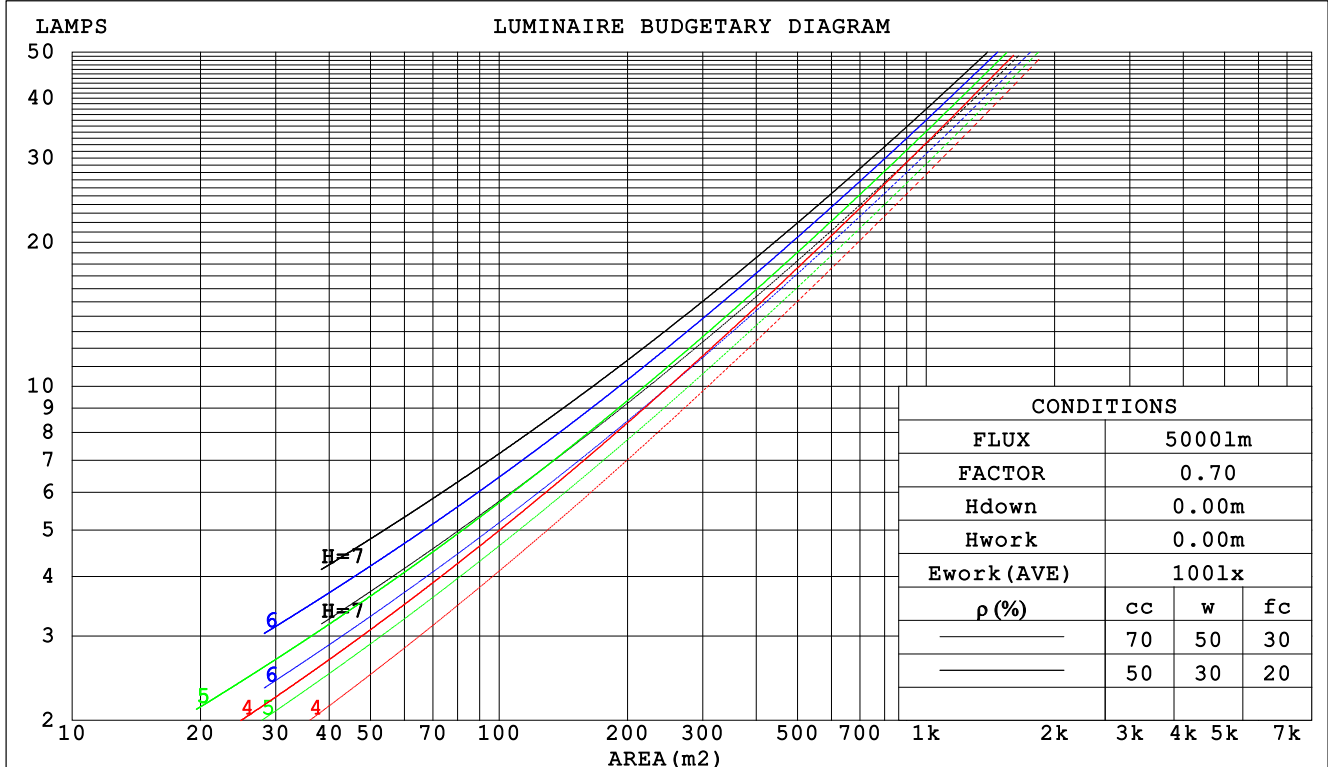

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-07-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:121.6V I:0.3110A P:37.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4578.26x1 lm					
NAME: 17代 下发光			TYPE:5000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: WS			SUR.:1.2*0.05		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.311	.177	.056	.304	.173	.055	.290	.167	.053	.278	.160	.051	.267	.155	.050	
2.0	.292	.160	.049	.286	.157	.048	.274	.152	.047	.263	.148	.046	.253	.143	.045	
3.0	.270	.144	.043	.264	.142	.043	.254	.138	.042	.244	.134	.041	.235	.130	.040	
4.0	.249	.129	.038	.244	.128	.038	.235	.125	.037	.226	.121	.037	.218	.119	.036	
5.0	.230	.117	.034	.226	.116	.034	.217	.113	.033	.210	.111	.033	.203	.108	.033	
6.0	.213	.107	.031	.209	.106	.030	.202	.104	.030	.195	.101	.030	.189	.099	.030	
7.0	.198	.098	.028	.195	.097	.028	.188	.095	.027	.182	.093	.027	.177	.092	.027	
8.0	.185	.091	.025	.182	.090	.025	.176	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.163	.078	.022	.161	.078	.022	.156	.076	.022	.152	.075	.021	.147	.074	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.182	.158	.136	.156	.135	.117	.107	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.174	.134	.100	.149	.115	.086	.102	.080	.060	.059	.046	.035	.019	.015	.011	
3.0	.166	.116	.076	.142	.100	.066	.098	.070	.046	.056	.041	.027	.018	.013	.009	
4.0	.158	.103	.060	.136	.089	.052	.094	.062	.037	.054	.036	.022	.017	.012	.007	
5.0	.151	.092	.049	.130	.080	.043	.089	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.144	.084	.041	.124	.073	.036	.085	.051	.025	.049	.030	.015	.016	.010	.005	
7.0	.137	.077	.035	.118	.067	.030	.081	.047	.022	.047	.028	.013	.015	.009	.004	
8.0	.131	.071	.030	.112	.062	.027	.078	.043	.019	.045	.026	.011	.015	.008	.004	
9.0	.124	.066	.027	.107	.057	.024	.074	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.119	.062	.024	.102	.054	.021	.071	.038	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-07-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:121.6V I:0.3110A P:37.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4578.26x1 lm											
NAME: 17代 下发光						TYPE:5000K			WEIGHT:		
SPEC.:						DIM.:			SERIAL No.:		
MFR.: WS						SUR.:1.2*0.05			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.5	25.1	23.8	25.3	25.5	23.8	25.4	24.1	25.6	25.8	
	3H	25.0	26.4	25.3	26.7	26.9	25.4	26.8	25.7	27.1	27.3
	4H	25.6	26.9	25.9	27.2	27.4	26.1	27.4	26.4	27.7	27.9
	6H	26.0	27.2	26.3	27.5	27.8	26.6	27.8	26.9	28.1	28.4
	8H	26.0	27.3	26.4	27.5	27.8	26.8	28.0	27.1	28.3	28.6
12H	26.1	27.2	26.4	27.5	27.8	26.9	28.1	27.2	28.4	28.7	
4H	2H	24.2	25.5	24.5	25.8	26.0	24.4	25.8	24.7	26.0	26.3
	3H	25.8	27.0	26.2	27.3	27.6	26.2	27.4	26.5	27.6	28.0
	4H	26.6	27.6	26.9	28.0	28.3	27.0	28.0	27.4	28.4	28.7
	6H	27.1	28.0	27.5	28.4	28.7	27.6	28.6	28.0	28.9	29.3
	8H	27.2	28.1	27.6	28.4	28.8	27.9	28.7	28.3	29.1	29.5
12H	27.2	28.0	27.6	28.4	28.8	28.0	28.8	28.5	29.2	29.6	
8H	4H	26.9	27.8	27.3	28.1	28.5	27.2	28.1	27.7	28.5	28.9
	6H	27.5	28.2	28.0	28.7	29.1	28.0	28.8	28.5	29.2	29.6
	8H	27.7	28.4	28.2	28.8	29.2	28.4	29.0	28.8	29.4	29.9
	12H	27.8	28.3	28.3	28.8	29.3	28.6	29.2	29.1	29.6	30.1
12H	4H	26.9	27.7	27.3	28.1	28.5	27.2	28.1	27.7	28.4	28.9
	6H	27.6	28.2	28.0	28.7	29.1	28.1	28.7	28.5	29.2	29.6
	8H	27.8	28.4	28.3	28.8	29.3	28.4	29.0	28.9	29.5	29.9
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.2					

CIE Pub.117 Corrected 4578 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.3)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-07-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:121.6V I:0.3110A P:37.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4578.26x1 lm		
NAME: 17代 下发光	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:1.2*0.05	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	56	49	65	55	48	41
1.00	76	65	58	75	64	57	73	66	57	50
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	70	62
2.00	95	86	80	93	85	79	89	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	86	78
4.00	106	100	96	104	99	94	99	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-07-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:121.6V I:0.3110A P:37.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4578.26x1 lm		
NAME: 17代 下发光	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:1.2*0.05	Shielding Angle:

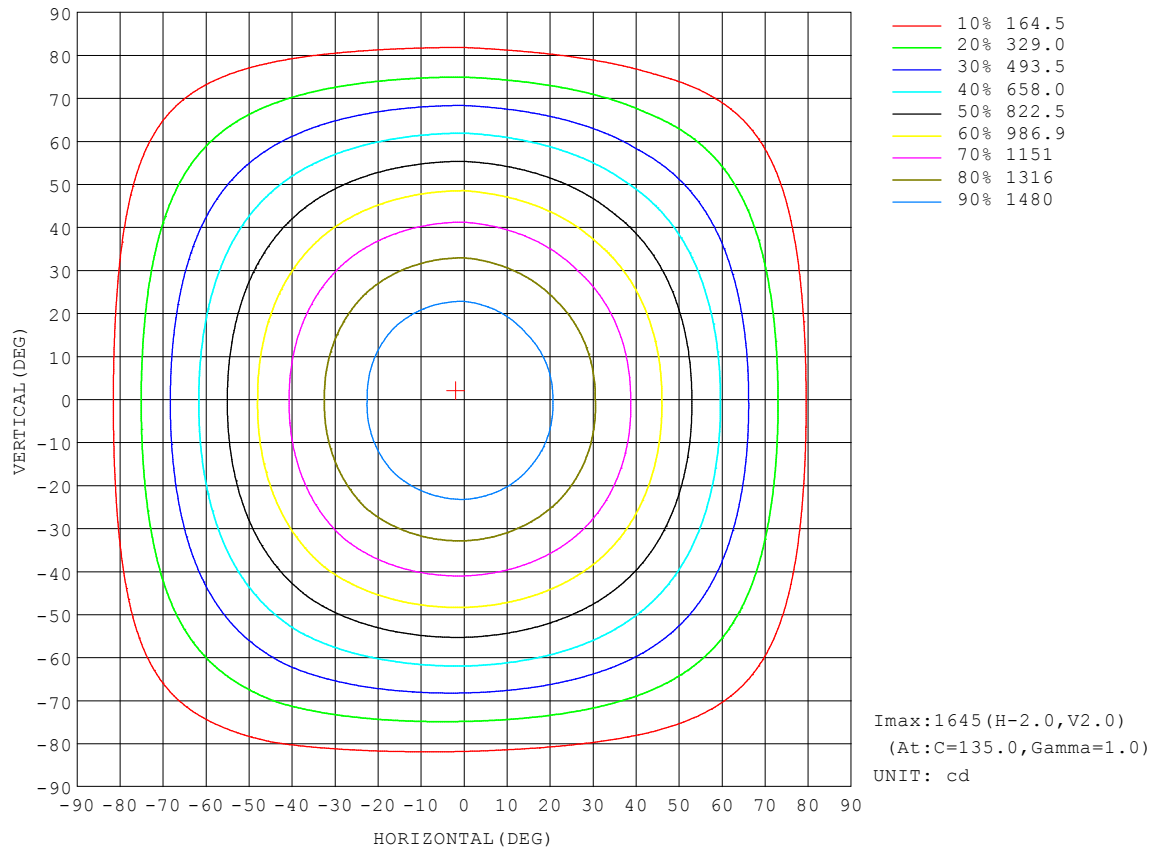


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-07-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI Figure

Test:U:121.6V I:0.3110A P:37.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4578.26x1 lm		
NAME: 17代 下发光	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:1.2*0.05	Shielding Angle:

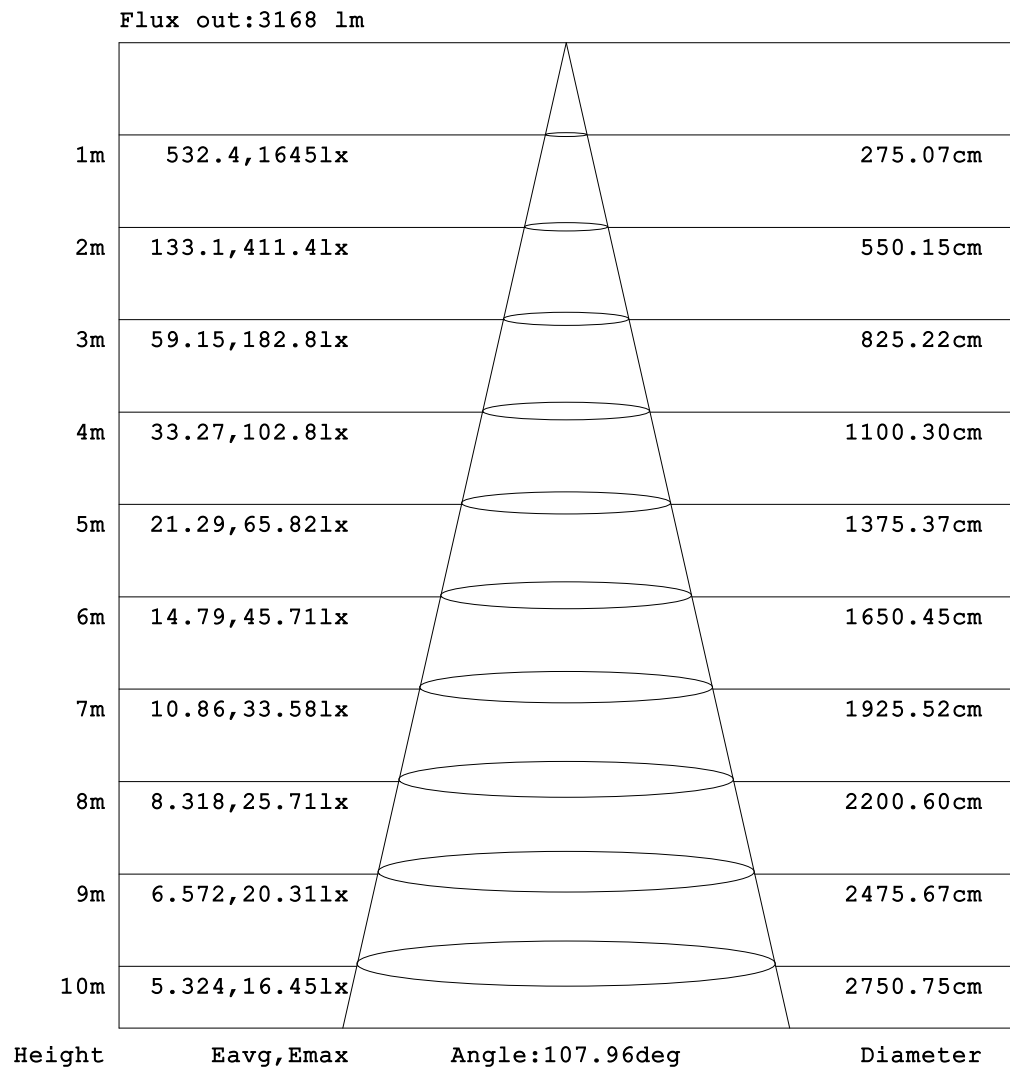


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-07-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:121.6V I:0.3110A P:37.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4578.26x1 lm		
NAME: 17代 下发光	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:1.2*0.05	Shielding Angle:

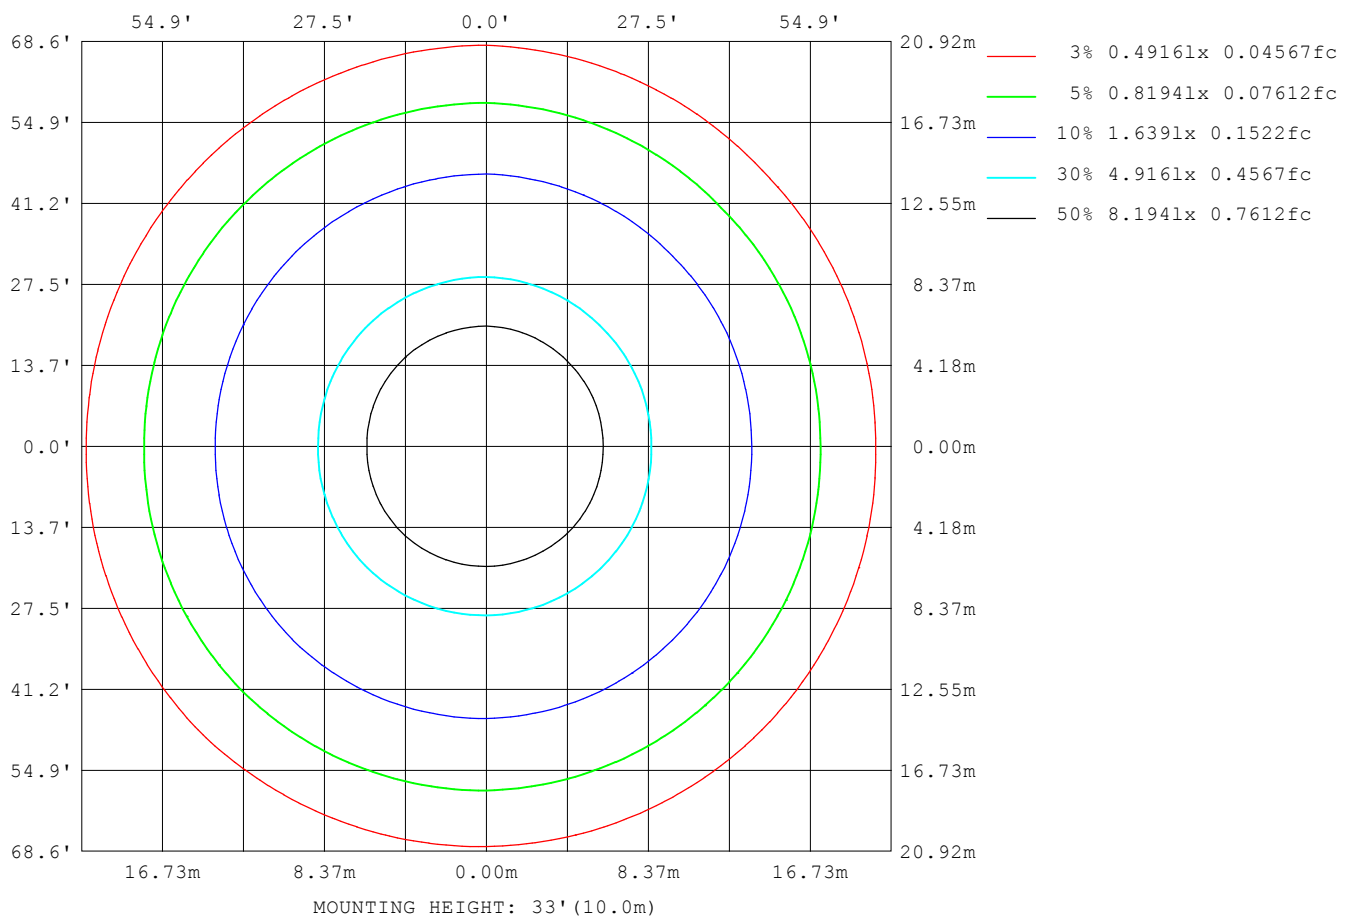

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-07-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:121.6V I:0.3110A P:37.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4578.26x1 lm		
NAME: 17代 下发光	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:1.2*0.05	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	21710
L_0~180 (75) av	19656
L_0~180 (85) av	11226
L_90~270 (65) av	22702
L_90~270 (75) av	20953
L_90~270 (85) av	17748
L_45 (65) av	22172
L_45 (75) av	20331
L_45 (85) av	14109

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-07-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

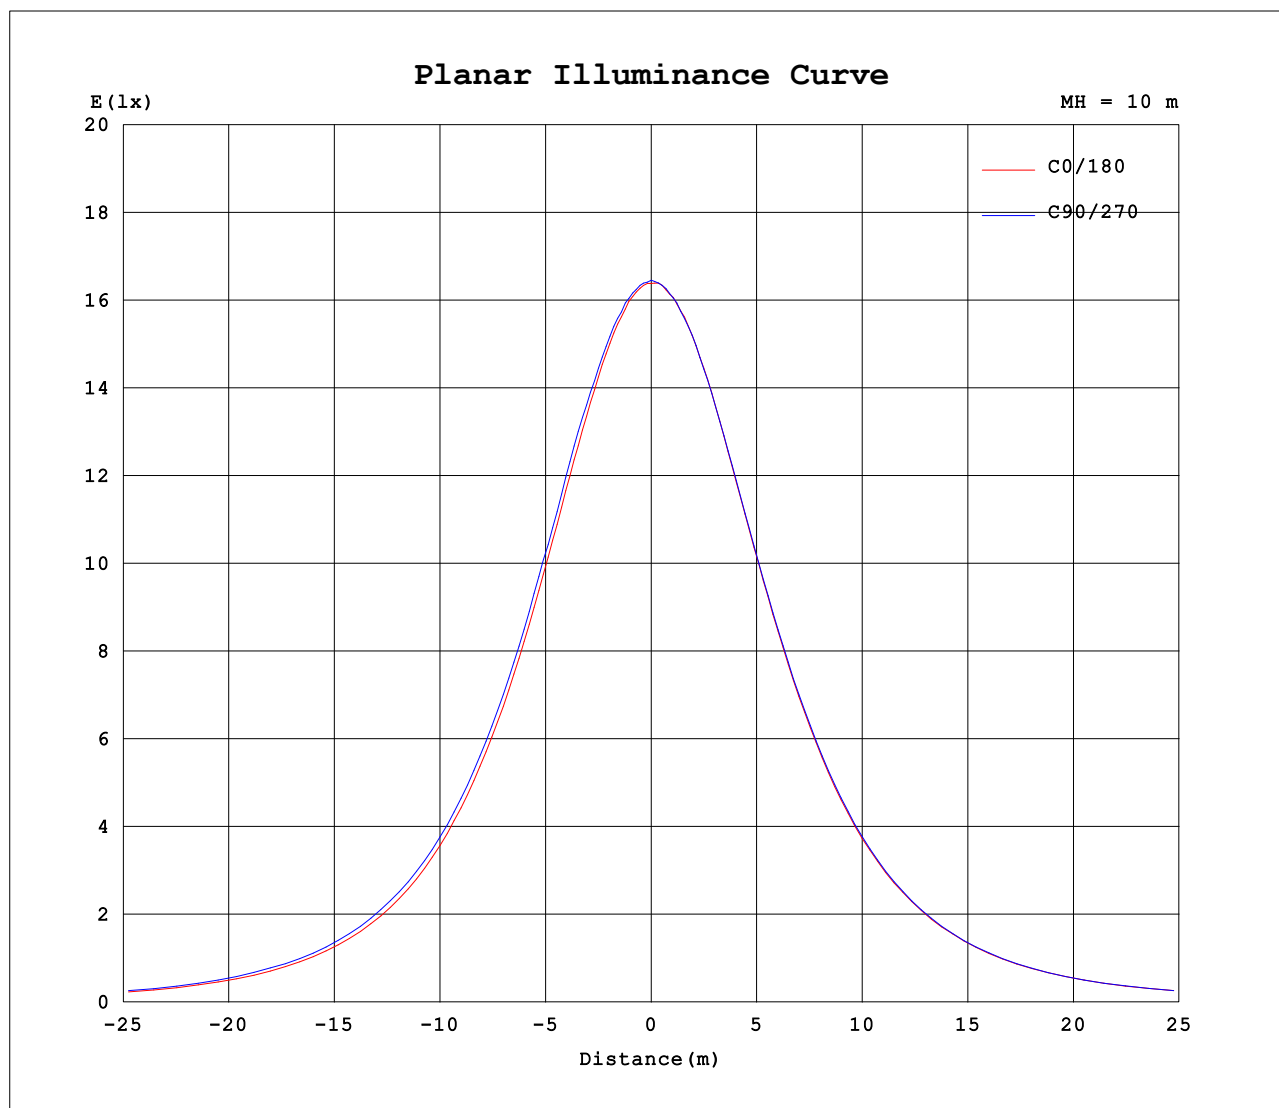

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-07-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.6V I:0.3110A P:37.60W PF:0.9960 Freq:60.00Hz Lamp Flux:4578.26x1 lm		
NAME: 17代 下发光	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:1.2*0.05	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1642	1642	1642	1642	1642	1642	1642	1642										
5	1630	1631	1632	1640	1637	1634	1631	1630										
10	1600	1607	1610	1621	1617	1613	1609	1610										
15	1553	1560	1569	1582	1578	1575	1571	1558										
20	1493	1500	1525	1526	1515	1519	1512	1497										
25	1418	1435	1451	1462	1446	1451	1446	1423										
30	1329	1354	1369	1382	1364	1369	1365	1334										
35	1230	1256	1274	1291	1271	1278	1276	1237										
40	1126	1153	1174	1191	1169	1176	1174	1134										
45	1013	1036	1063	1083	1059	1066	1066	1021										
50	894	920	948	966	945	951	950	902										
55	774	798	830	848	825	829	829	779										
60	649	675	704	722	701	703	704	652										
65	524	550	574	598	577	576	578	525										
70	403	426	448	473	454	450	450	401										
75	279	305	325	351	332	327	326	279										
80	153	186	206	232	204	207	206	158										
85	38.6	63.0	94.8	106	78.8	85.0	90.8	40.6										
90	0.80	0.71	1.02	5.06	1.13	0.83	0.21	0.25										
95	0.97	0.89	0.86	0.74	0.32	0.24	0.26	0.30										
100	1.18	1.12	1.08	0.94	0.39	0.32	0.35	0.38										
105	1.40	1.34	1.32	1.16	0.47	0.41	0.45	0.48										
110	1.62	1.58	1.56	1.40	0.57	0.52	0.59	0.61										
115	1.85	1.81	1.80	1.63	0.68	0.65	0.73	0.75										
120	2.08	2.04	2.02	1.86	0.81	0.79	0.88	0.88										
125	2.30	2.25	2.23	2.09	0.94	0.92	1.03	1.02										
130	2.50	2.45	2.44	2.30	1.09	1.09	1.20	1.18										
135	2.68	2.63	2.61	2.50	1.27	1.26	1.40	1.37										
140	2.88	2.80	2.63	2.69	1.41	1.41	1.54	1.50										
145	3.07	2.96	2.71	2.87	1.60	1.62	1.70	1.70										
150	3.24	3.11	2.95	3.05	2.41	2.44	2.55	2.47										
155	3.42	3.27	3.15	3.22	2.72	2.70	2.86	2.73										
160	3.59	3.42	3.26	3.36	3.01	2.95	3.07	2.97										
165	3.72	3.52	3.38	3.43	3.26	3.15	3.24	3.15										
170	3.76	3.56	3.44	3.43	3.46	3.30	3.34	3.29										
175	3.69	3.53	3.44	3.47	3.53	3.37	3.37	3.34										
180	3.58	3.43	3.40	3.39	3.58	3.44	3.40	3.38										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-07-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: