


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.60V I:0.2430A P:28.600W PF:0.9850 Freq:50.00Hz Lamp Flux:1000x1 lm		
NAME: 洗墙灯	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:0.6*1.2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 95.93 lm/W			
MODEL		Imax(cd/klm)	1275	S/MH(C0/180)	0.93
NOMINAL POWER(W)	30	LOR(%)	274.4	S/MH(C90/270)	1.33
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm/klm)	2743.7	η UP, DN(C0-180)	0.2, 126.1
NOMINAL FLUX(lm)	1000	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.2, 147.9
LAMPS INSIDE	1	η up(%)	0.4	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	120.0	η down(%)	274.0	CIBSE SHR MAX	1.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

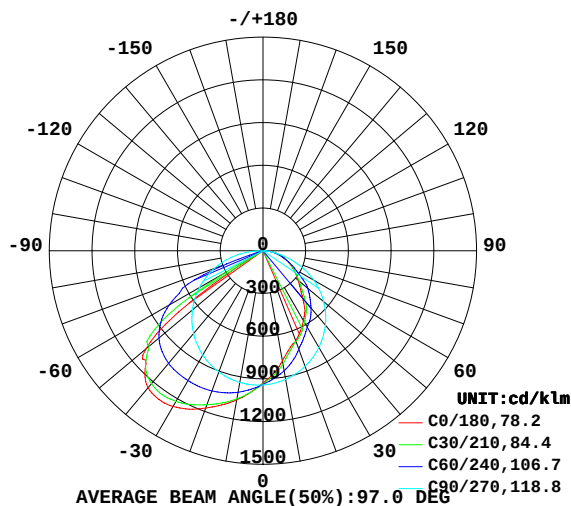

C0 PLANE ISOLUX DIAGRAM (UNIT:lx/klm)

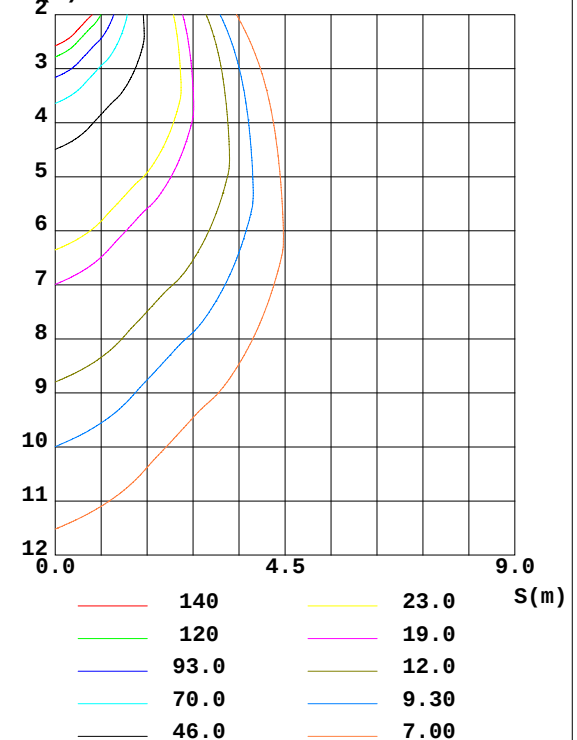

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.407.13
Humidity: 50.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	785.3	832.0	917.1	1024	1063	1032	939.1	849.4	0- 10	89.38	89.38	3.26, 8.94
20	673.6	706.5	863.7	1075	1176	1099	906.1	733.5	10- 20	259.7	349.1	12.7, 34.9
30	568.2	602.1	784.5	1096	1263	1137	845.3	627.6	20- 30	410.0	759.2	27.7, 75.9
40	434.0	495.1	681.7	1068	1256	1125	758.3	524.3	30- 40	523.6	1283	46.8, 128
50	321.9	370.6	556.6	934.7	1071	997.9	647.1	397.5	40- 50	568.7	1851	67.5, 185
60	241.0	253.1	410.3	489.8	58.48	526.8	514.3	287.5	50- 60	480.1	2332	85, 233
70	166.3	162.4	245.3	154.5	30.26	153.2	362.7	179.7	60- 70	259.4	2591	94.4, 259
80	91.86	80.12	83.17	11.98	9.609	15.27	195.8	94.25	70- 80	112.2	2703	98.5, 270
90	24.72	4.899	0.1018	0.0630	0.0388	0.0351	3.321	19.54	80- 90	36.68	2740	99.9, 274
100	0.0217	0.1053	0.2157	0.1295	0.0824	0.0884	0.1428	0.0860	90-100	0.8632	2741	99.9, 274
110	0.2249	0.3088	0.3852	0.2349	0.1502	0.1744	0.2928	0.2652	100-110	0.1836	2741	99.9, 274
120	0.5518	0.5461	0.5935	0.3717	0.2399	0.2930	0.4745	0.4880	110-120	0.3405	2741	99.9, 274
130	0.7941	0.7701	0.7703	0.5122	0.3368	0.4275	0.6465	0.6964	120-130	0.4700	2742	99.9, 274
140	1.017	1.006	0.9204	0.6563	0.4530	0.5704	0.8087	0.9336	130-140	0.5443	2742	99.9, 274
150	1.235	1.184	1.061	0.8161	0.5960	0.7290	0.9613	1.137	140-150	0.5523	2743	100, 274
160	1.320	1.287	1.187	0.9954	0.8238	0.9191	1.114	1.258	150-160	0.4800	2743	100, 274
170	1.274	1.296	1.245	1.129	1.029	1.074	1.208	1.301	160-170	0.3284	2744	100, 274
180	1.107	1.176	1.235	1.213	1.109	1.171	1.233	1.213	170-180	0.1141	2744	100, 274
DEG	LUMINOUS INTENSITY:cd/klm									UNIT: lm/klm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.407.13
 Humidity: 50.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.60V I:0.2430A P:28.600W PF:0.9850 Freq:50.00Hz Lamp Flux:1000x1 lm		
NAME: 洗墙灯	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:0.6*1.2	Shielding Angle:

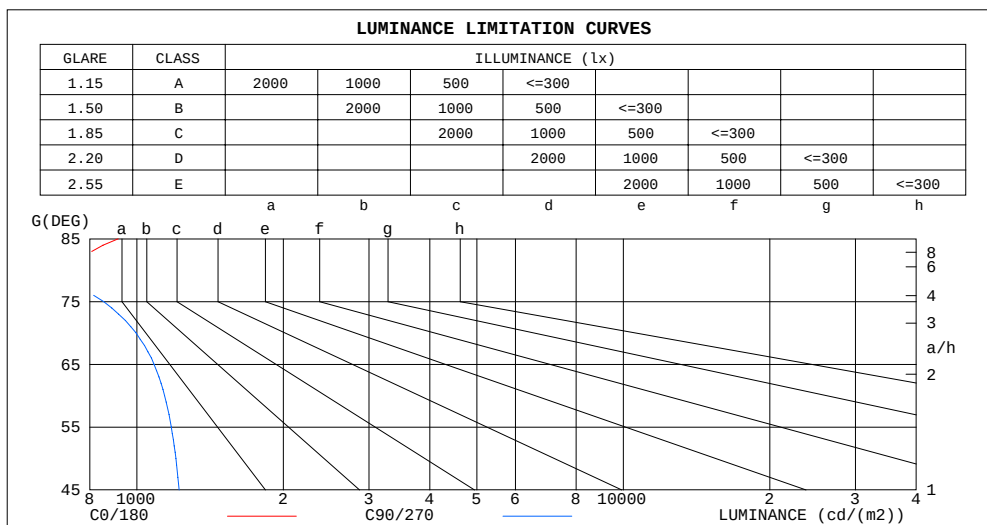

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	915	426
80	735	665
75	692	854
70	675	996
65	671	1084
60	670	1140
55	678	1177
50	696	1203
45	728	1222


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-01-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.60V I:0.2430A P:28.600W PF:0.9850 Freq:50.00Hz Lamp Flux:1000x1 lm		
NAME: 洗墙灯	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:0.6*1.2	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	3.27	3.27	3.27	3.19	3.19	3.19	3.05	3.05	3.05	2.92	2.92	2.92	2.80	2.80	2.80	2.74
1.0	2.88	2.78	2.68	2.82	2.72	2.63	2.71	2.62	2.55	2.60	2.53	2.47	2.50	2.45	2.40	2.34
2.0	2.53	2.36	2.21	2.48	2.32	2.18	2.39	2.25	2.13	2.30	2.18	2.08	2.21	2.12	2.04	1.98
3.0	2.24	2.02	1.85	2.19	1.99	1.83	2.11	1.94	1.80	2.04	1.89	1.77	1.97	1.84	1.74	1.68
4.0	1.98	1.75	1.57	1.95	1.73	1.56	1.88	1.69	1.54	1.82	1.65	1.52	1.76	1.61	1.50	1.44
5.0	1.77	1.53	1.36	1.74	1.52	1.35	1.68	1.48	1.33	1.63	1.45	1.32	1.58	1.43	1.30	1.25
6.0	1.59	1.35	1.18	1.57	1.34	1.18	1.52	1.32	1.16	1.47	1.29	1.15	1.43	1.27	1.14	1.09
7.0	1.44	1.21	1.04	1.42	1.20	1.04	1.38	1.18	1.03	1.34	1.16	1.02	1.30	1.14	1.01	.96
8.0	1.31	1.08	.93	1.30	1.08	.92	1.26	1.06	.92	1.22	1.04	.91	1.19	1.03	.90	.85
9.0	1.20	.98	.83	1.19	.97	.83	1.16	.96	.82	1.13	.95	.82	1.10	.93	.81	.76
10.0	1.11	.89	.75	1.09	.89	.75	1.07	.88	.74	1.04	.86	.74	1.02	.85	.74	.69

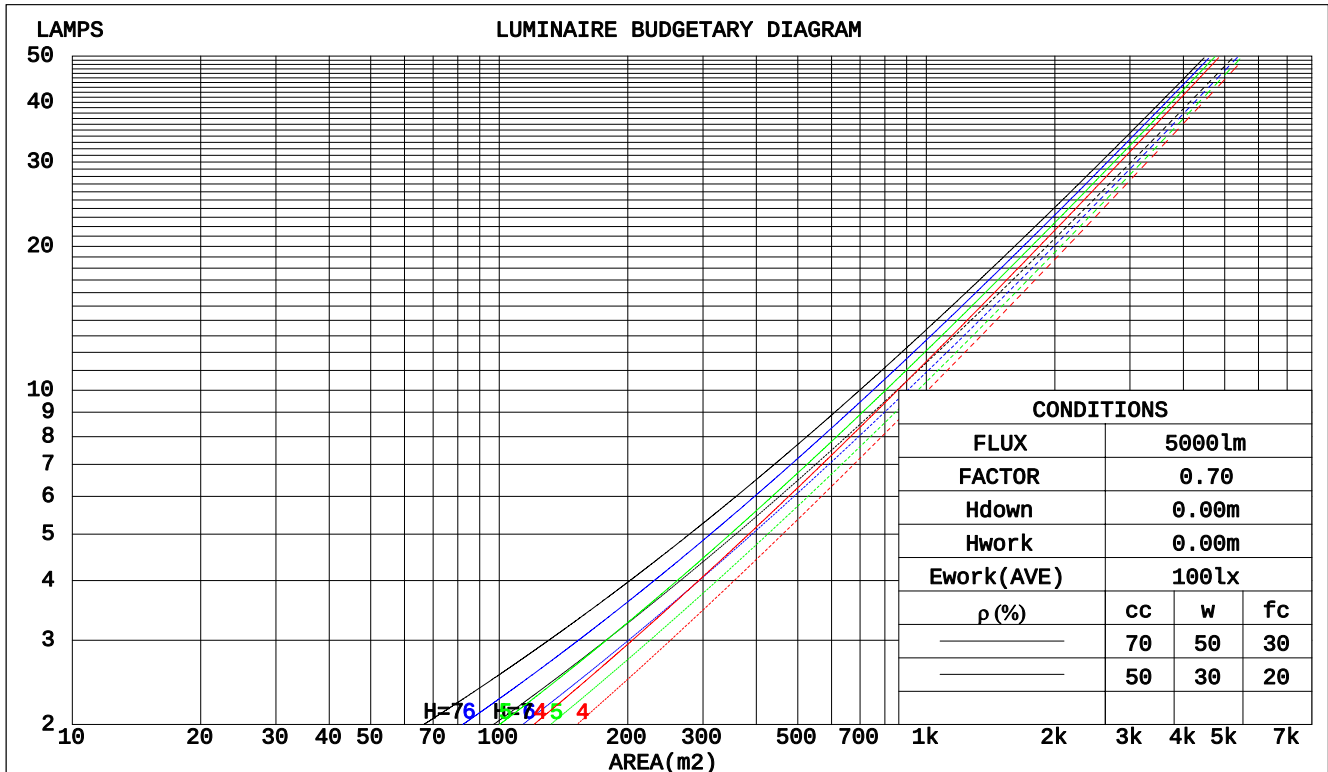

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.60V I:0.2430A P:28.600W PF:0.9850 Freq:50.00Hz Lamp Flux:1000x1 lm									
NAME: 洗墙灯					TYPE:5000K			WEIGHT:	
SPEC.:					DIM.:			SERIAL No.:	
MFR.:					SUR.:0.6*1.2			Shielding Angle:	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.783	.445	.141	.763	.435	.138	.727	.417	.133	.694	.400	.128	.663	.384	.124	
2.0	.749	.411	.126	.732	.403	.124	.700	.389	.121	.671	.376	.118	.644	.364	.115	
3.0	.703	.374	.112	.688	.369	.111	.660	.358	.109	.634	.347	.107	.610	.338	.104	
4.0	.656	.341	.100	.643	.336	.099	.618	.328	.098	.595	.319	.096	.573	.311	.095	
5.0	.612	.312	.090	.600	.308	.090	.578	.301	.089	.557	.294	.087	.538	.287	.086	
6.0	.571	.286	.082	.561	.283	.082	.541	.277	.081	.523	.272	.080	.505	.266	.079	
7.0	.534	.264	.075	.525	.262	.075	.507	.257	.074	.491	.252	.073	.475	.247	.073	
8.0	.501	.245	.069	.493	.243	.069	.477	.238	.068	.462	.234	.068	.448	.230	.067	
9.0	.471	.228	.064	.464	.226	.063	.449	.222	.063	.436	.219	.063	.423	.215	.062	
10.0	.444	.213	.059	.437	.211	.059	.424	.208	.059	.412	.205	.058	.401	.202	.058	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.526	.526	.526	.449	.449	.449	.307	.307	.307	.176	.176	.176	.056	.056	.056	
1.0	.493	.432	.377	.422	.371	.324	.289	.255	.224	.166	.148	.130	.053	.048	.042	
2.0	.469	.365	.278	.401	.314	.240	.275	.217	.168	.159	.127	.098	.051	.041	.032	
3.0	.447	.316	.212	.383	.273	.184	.263	.190	.129	.152	.111	.076	.049	.036	.025	
4.0	.427	.279	.167	.366	.242	.145	.252	.168	.102	.146	.099	.060	.047	.032	.020	
5.0	.407	.251	.135	.350	.217	.118	.241	.152	.083	.139	.089	.049	.045	.029	.016	
6.0	.388	.228	.113	.334	.197	.098	.230	.138	.069	.134	.081	.041	.043	.027	.014	
7.0	.370	.209	.096	.319	.181	.083	.220	.127	.059	.128	.075	.035	.041	.024	.012	
8.0	.353	.193	.083	.304	.167	.072	.211	.118	.051	.122	.069	.031	.040	.023	.010	
9.0	.337	.180	.073	.291	.156	.064	.201	.110	.045	.117	.065	.027	.038	.021	.009	
10.0	.322	.168	.065	.278	.146	.057	.193	.103	.040	.112	.061	.024	.036	.020	.008	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.60V I:0.2430A P:28.600W PF:0.9850 Freq:50.00Hz Lamp Flux:1000x1 lm											
NAME: 洗墙灯					TYPE:5000K			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.:					SUR.:0.6*1.2			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	9.9	11.3	10.1	11.5	11.7	12.0	13.4	12.2	13.6	13.8	
	3H	11.5	12.9	11.8	13.1	13.3	13.6	14.9	13.9	15.2	
	4H	12.3	13.6	12.6	13.8	14.1	14.2	15.5	14.5	15.7	
	6H	13.0	14.2	13.3	14.5	14.7	14.6	15.8	14.9	16.0	
	8H	13.3	14.5	13.6	14.7	15.0	14.7	15.8	15.0	16.1	
	12H	13.6	14.7	13.9	15.0	15.3	14.7	15.8	15.1	16.1	
4H	2H	10.5	11.8	10.9	12.1	12.3	12.2	13.5	12.5	13.7	
	3H	12.4	13.5	12.7	13.8	14.1	14.0	15.1	14.3	15.4	
	4H	13.3	14.3	13.7	14.6	15.0	14.7	15.7	15.1	16.1	
	6H	14.1	15.0	14.5	15.4	15.8	15.2	16.1	15.6	16.5	
	8H	14.5	15.4	14.9	15.7	16.1	15.4	16.2	15.8	16.6	
	12H	14.9	15.7	15.3	16.1	16.5	15.5	16.2	15.9	16.6	
8H	4H	13.6	14.5	14.0	14.8	15.2	14.9	15.7	15.3	16.1	
	6H	14.7	15.3	15.1	15.7	16.2	15.5	16.2	16.0	16.6	
	8H	15.2	15.8	15.6	16.2	16.6	15.8	16.4	16.2	16.8	
	12H	15.7	16.2	16.2	16.6	17.1	15.9	16.5	16.4	16.9	
12H	4H	13.6	14.4	14.1	14.8	15.2	14.9	15.7	15.3	16.0	
	6H	14.7	15.3	15.2	15.8	16.2	15.6	16.2	16.1	16.6	
	8H	15.3	15.8	15.8	16.3	16.7	15.9	16.4	16.4	16.9	
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.1					
1.5H	+ 0.1 / - 0.2					+ 0.3 / - 0.3					
2.0H	+ 0.1 / - 0.2					+ 0.7 / - 0.7					

CIE Pub.117, 1000 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 0.0$)
Area: 0.72 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.60V I:0.2430A P:28.600W PF:0.9850 Freq:50.00Hz Lamp Flux:1000x1 lm		
NAME: 洗墙灯	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:0.6*1.2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	159	128	109	157	127	108	154	126	108	90
0.80	189	157	138	186	156	137	181	154	136	117
1.00	213	184	165	210	183	164	204	186	163	144
1.25	233	206	188	230	204	186	222	200	184	165
1.50	247	222	203	243	219	202	235	214	199	179
2.00	266	244	227	261	241	225	251	234	221	200
2.50	275	256	240	270	252	238	260	245	232	210
3.00	284	267	253	278	262	250	267	254	244	221
4.00	294	280	268	288	275	264	276	265	256	233
5.00	300	287	277	293	282	273	281	272	264	239
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.60V I:0.2430A P:28.600W PF:0.9850 Freq:50.00Hz Lamp Flux:1000x1 lm		
NAME: 洗墙灯	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:0.6*1.2	Shielding Angle:

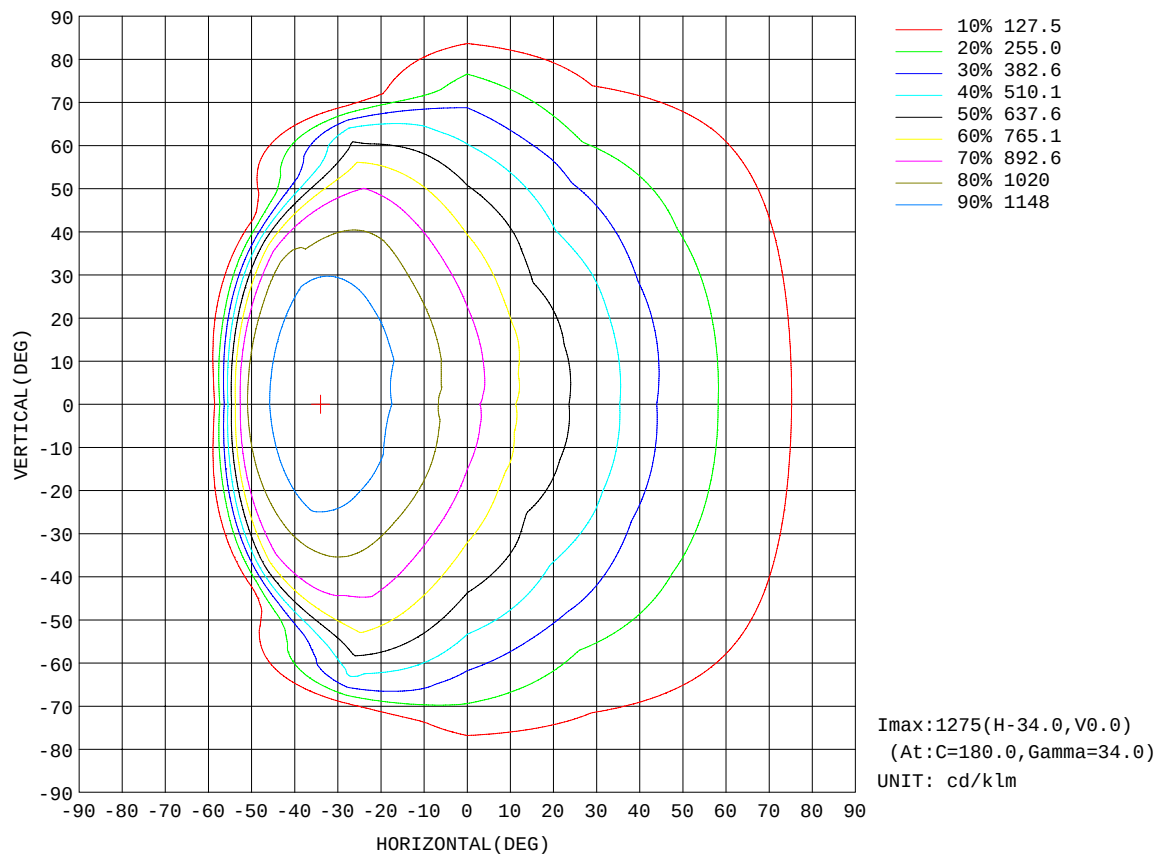


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-01-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:119.60V I:0.2430A P:28.600W PF:0.9850 Freq:50.00Hz Lamp Flux:1000x1 lm		
NAME: 洗墙灯	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:0.6*1.2	Shielding Angle:

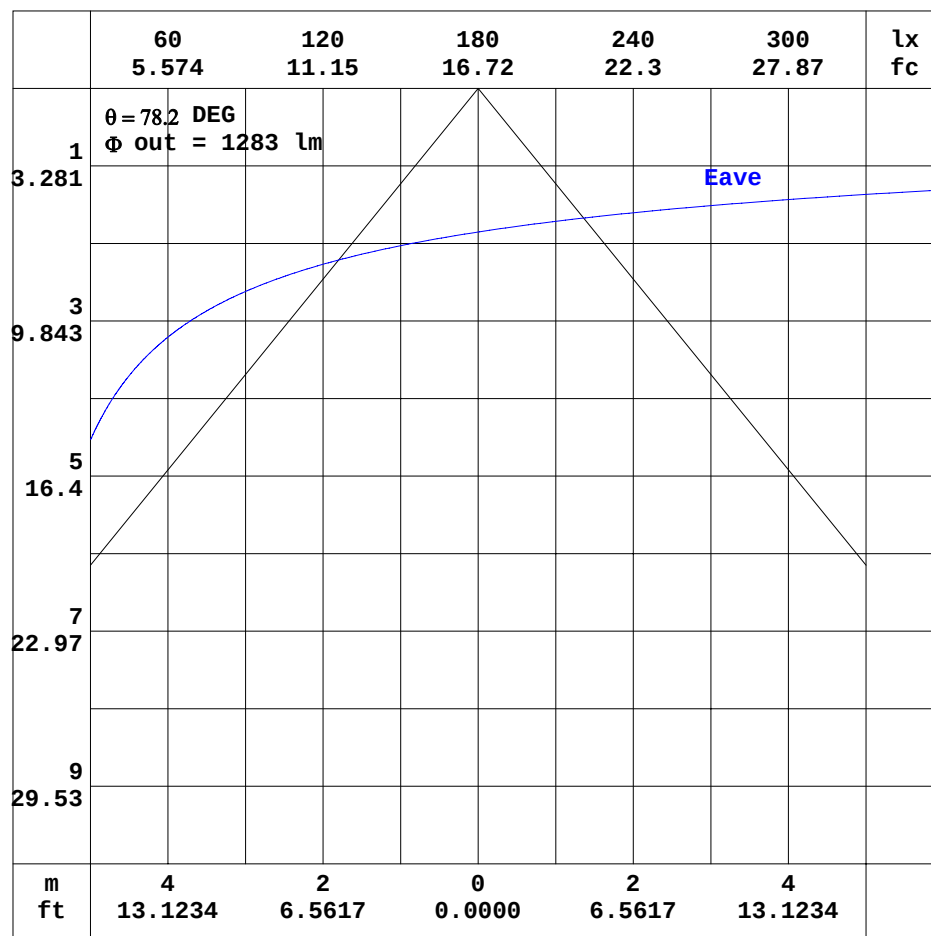

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-01-13


```

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:7.540m [K=1.0000]
Remarks:

```

ISOLUX DIAGRAM

Test:U:119.60V I:0.2430A P:28.600W PF:0.9850 Freq:50.00Hz Lamp Flux:1000x1 lm		
NAME: 洗墙灯	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:0.6*1.2	Shielding Angle:

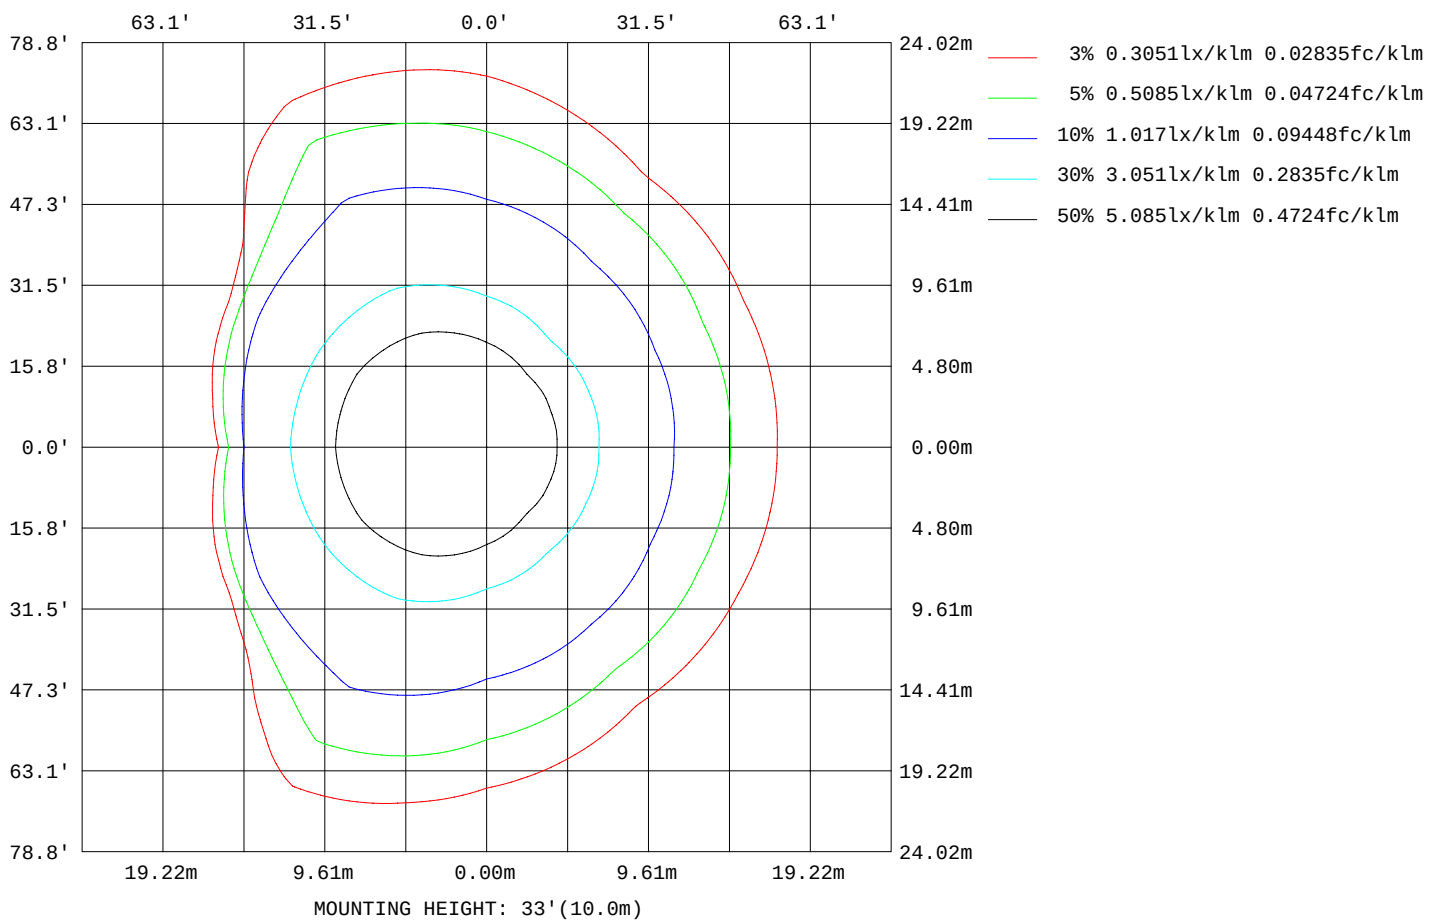

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-01-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.60V I:0.2430A P:28.600W PF:0.9850 Freq:50.00Hz Lamp Flux:1000x1 lm		
NAME: 洗墙灯	TYPE:5000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:0.6*1.2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	406
L_0~180(75)av	398
L_0~180(85)av	469
L_90~270(65)av	1266
L_90~270(75)av	1181
L_90~270(85)av	1005
L_45(65)av	876
L_45(75)av	366
L_45(85)av	378

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

Planar Illuminance Curve

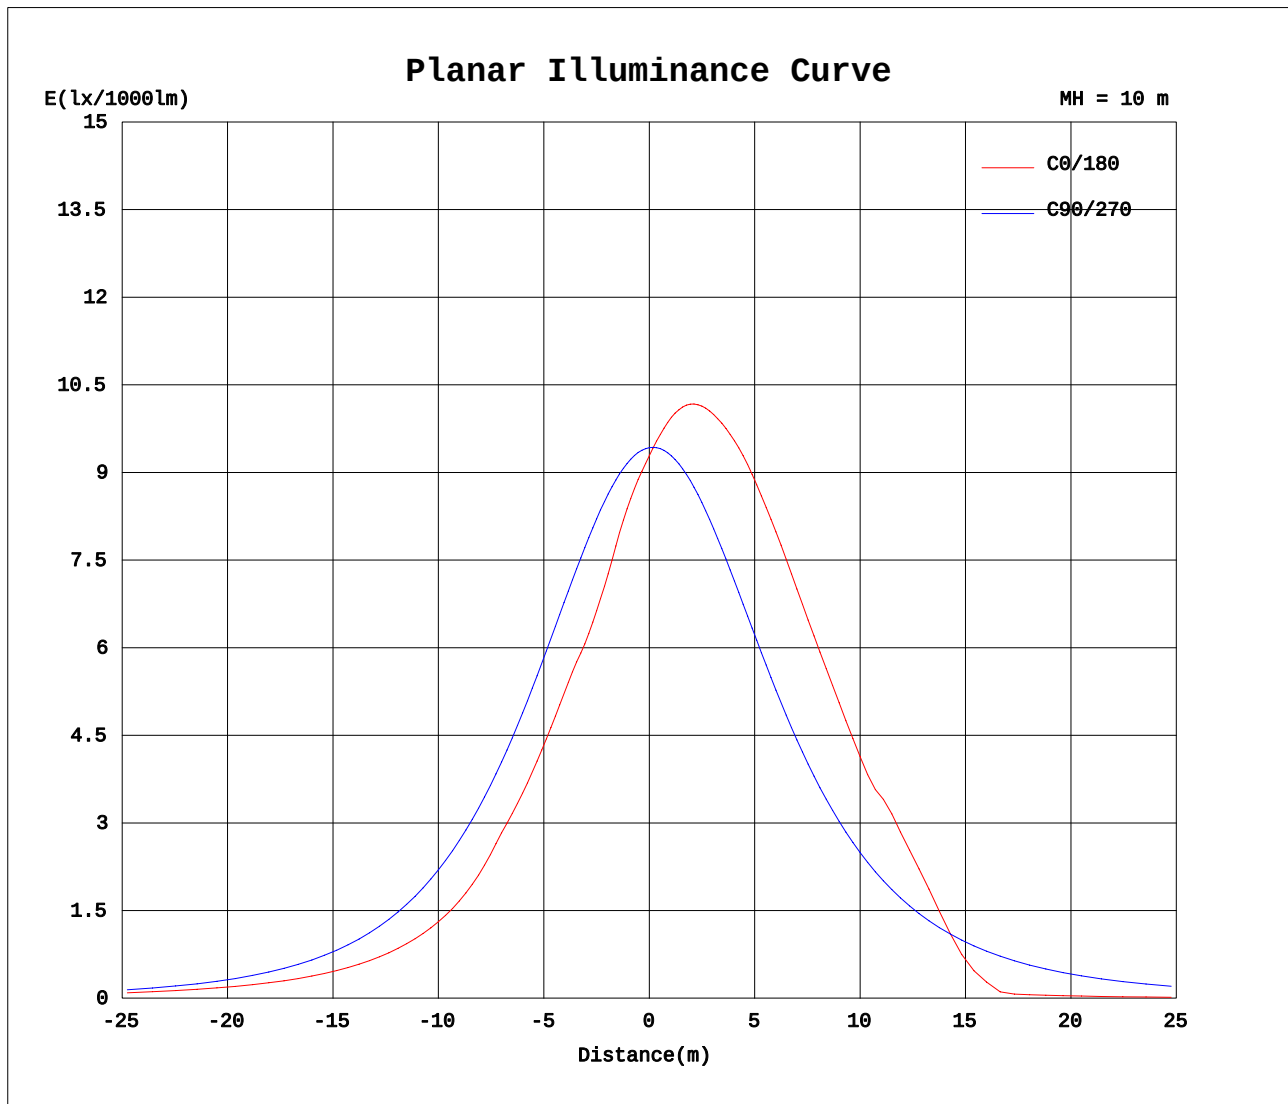

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.407.13
Humidity: 50.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.60V I:0.2430A P:28.600W PF:0.9850 Freq:50.00Hz Lamp Flux:1000x1 lm																	
NAME: 洗墙灯									TYPE:5000K						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.:									SUR.:0.6*1.2						Shielding Angle:		

Table--1

UNIT: cd/klm

γ (DEG)	C (DEG)																
	0	30	60	90	120	150	180	210	240	270	300	330					
0	929	935	939	943	947	938	929	935	939	943	947	938					
5	866	877	900	934	977	995	997	997	977	945	914	883					
10	785	808	856	917	999	1048	1063	1056	1009	939	877	822					
15	715	731	802	894	1014	1092	1121	1106	1033	926	833	746					
20	674	677	736	864	1020	1130	1176	1151	1048	906	780	687					
25	623	637	676	827	1016	1164	1227	1193	1054	879	717	649					
30	568	583	622	785	1005	1187	1263	1221	1053	845	657	598					
35	516	529	580	736	987	1193	1275	1234	1046	805	601	545					
40	434	465	525	682	963	1172	1256	1218	1032	758	556	493					
45	371	389	467	622	928	1117	1170	1165	1001	706	503	416					
50	322	331	410	557	878	991	1071	1042	954	647	445	350					
55	280	284	334	486	802	837	585	880	876	583	385	299					
60	241	242	264	410	693	287	58.5	294	759	514	320	255					
65	204	203	208	330	534	45.9	42.8	48.5	625	441	243	214					
70	166	164	161	245	277	32.1	30.3	34.7	272	363	185	175					
75	129	123	118	159	28.1	20.1	19.2	22.8	31.9	281	136	135					
80	91.9	84.9	75.3	83.2	14.1	9.90	9.61	12.4	18.1	196	92.3	96.2					
85	57.4	48.8	35.3	26.8	3.41	1.30	1.38	3.51	7.17	99.4	51.0	58.8					
90	24.7	9.70	0.10	0.10	0.07	0.06	0.04	0.03	0.04	3.32	14.2	24.9					
95	0.01	0.01	0.10	0.15	0.10	0.08	0.06	0.05	0.06	0.10	0.08	0.00					
100	0.02	0.04	0.17	0.22	0.15	0.11	0.08	0.08	0.10	0.14	0.14	0.03					
105	0.09	0.12	0.27	0.29	0.21	0.15	0.11	0.11	0.14	0.21	0.24	0.11					
110	0.22	0.25	0.36	0.39	0.27	0.20	0.15	0.15	0.20	0.29	0.32	0.22					
115	0.39	0.41	0.46	0.48	0.35	0.26	0.19	0.20	0.26	0.38	0.40	0.35					
120	0.55	0.54	0.56	0.59	0.42	0.32	0.24	0.25	0.34	0.47	0.50	0.48					
125	0.68	0.65	0.66	0.69	0.51	0.37	0.28	0.31	0.41	0.57	0.60	0.58					
130	0.79	0.76	0.78	0.77	0.58	0.44	0.34	0.37	0.48	0.65	0.71	0.69					
135	0.91	0.87	0.92	0.85	0.67	0.50	0.39	0.43	0.57	0.73	0.84	0.80					
140	1.02	1.00	1.02	0.92	0.74	0.57	0.45	0.49	0.65	0.81	0.94	0.92					
145	1.13	1.14	1.08	0.99	0.82	0.64	0.52	0.56	0.73	0.89	1.03	1.07					
150	1.23	1.24	1.13	1.06	0.90	0.73	0.60	0.65	0.81	0.96	1.10	1.18					
155	1.29	1.30	1.20	1.13	0.98	0.83	0.70	0.74	0.91	1.04	1.16	1.25					
160	1.32	1.33	1.24	1.19	1.06	0.94	0.82	0.86	0.98	1.11	1.21	1.31					
165	1.32	1.35	1.26	1.23	1.12	1.03	0.94	0.96	1.05	1.17	1.25	1.33					
170	1.27	1.33	1.26	1.24	1.16	1.09	1.03	1.04	1.11	1.21	1.27	1.33					
175	1.17	1.25	1.23	1.25	1.21	1.14	1.07	1.10	1.16	1.23	1.26	1.26					
180	1.11	1.16	1.19	1.24	1.23	1.20	1.11	1.16	1.18	1.23	1.23	1.20					

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-01-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: