


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:218.5V I:0.1360A P:28.80W PF:0.9690 Freq:50.00Hz Lamp Flux:2431.49x1 lm		
NAME: 4FT 澳规 白色	TYPE:30W 4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 84.61 lm/W			
MODEL	嵌入式	I _{max} (cd/klm)	497.2	S/MH(C0/180)	2.06
NOMINAL POWER(W)	30	LOR(%)	100.2	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	220.0	TOTAL FLUX(lm/klm)	1002.2	η UP, DN(C0-180)	0.1, 56.6
NOMINAL FLUX(lm)	2431.49	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1, 43.5
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	220.0	η down(%)	100.1	CIBSE SHR MAX	1.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

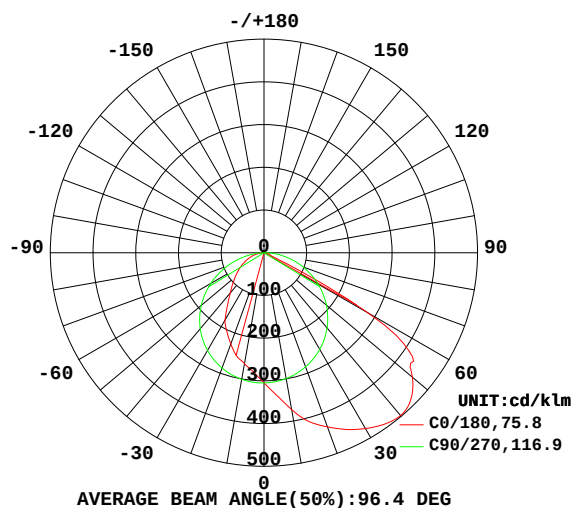

C0 PLANE ISOLUX DIAGRAM (UNIT:lx/klm)

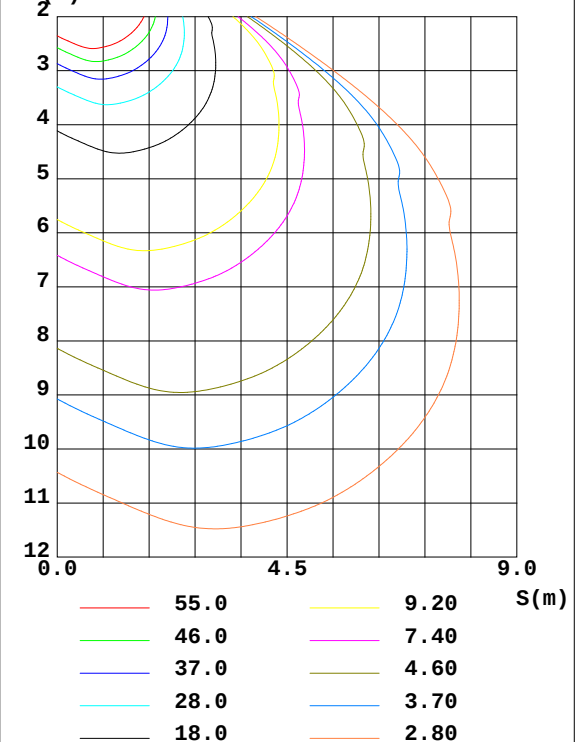

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:何俊伟
Test Date:2025-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	372.7	342.0	299.1	273.5	263.9	270.4	300.8	355.4	0- 10	29.34	29.34	2.93, 2.93
20	433.7	387.5	284.4	247.3	227.5	244.7	287.3	399.4	10- 20	88.82	118.2	11.8, 11.8
30	475.2	406.7	261.1	210.2	183.4	205.4	264.3	417.3	20- 30	143.0	261.2	26.1, 26.1
40	497.2	412.2	229.6	169.9	123.3	161.1	232.3	420.3	30- 40	183.5	444.7	44.4, 44.5
50	453.6	394.8	190.9	112.6	87.80	107.0	191.7	395.7	40- 50	202.9	647.5	64.6, 64.8
60	281.0	318.4	146.0	74.82	61.07	71.14	143.9	304.4	50- 60	191.6	839.2	83.7, 83.9
70	15.52	95.19	97.44	45.43	37.22	42.70	91.46	39.89	60- 70	114.9	954.1	95.2, 95.4
80	7.257	7.947	48.18	20.70	16.58	18.12	38.24	6.663	70- 80	36.01	990.1	98.8, 99
90	1.109	0.8511	0.4462	0.0548	0.0130	0.0269	0.0388	0.1871	80- 90	10.48	1001	99.8, 100
100	0.0647	0.0817	0.1662	0.2352	0.0529	0.0876	0.0638	0.0358	90-100	0.1028	1001	99.9, 100
110	0.0986	0.1216	0.2370	0.3895	0.1645	0.1732	0.1067	0.0597	100-110	0.1412	1001	99.9, 100
120	0.1443	0.1783	0.3007	0.4751	0.2770	0.2390	0.1554	0.0926	110-120	0.1999	1001	99.9, 100
130	0.2100	0.2351	0.3535	0.5339	0.3676	0.3406	0.2082	0.1295	120-130	0.2373	1001	99.9, 100
140	0.2798	0.2949	0.3924	0.5448	0.5081	0.4014	0.2530	0.1683	130-140	0.2519	1002	99.9, 100
150	0.3585	0.3746	0.4005	0.5441	0.7092	0.5607	0.3646	0.2659	140-150	0.2518	1002	100, 100
160	0.4620	0.4752	0.4412	0.5488	0.7341	0.6055	0.4124	0.3595	150-160	0.2191	1002	100, 100
170	0.5626	0.5518	0.4631	0.5388	0.7031	0.6126	0.4492	0.4322	160-170	0.1487	1002	100, 100
180	0.6275	0.5488	0.4392	0.4572	0.6275	0.5428	0.4363	0.4552	170-180	0.0509	1002	100, 100
DEG	LUMINOUS INTENSITY:cd/klm									UNIT: lm/klm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 何俊伟
 Test Date: 2025-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:218.5V I:0.1360A P:28.80W PF:0.9690 Freq:50.00Hz Lamp Flux:2431.49x1 lm		
NAME: 4FT 澳规 白色	TYPE:30W 4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:	Shielding Angle:

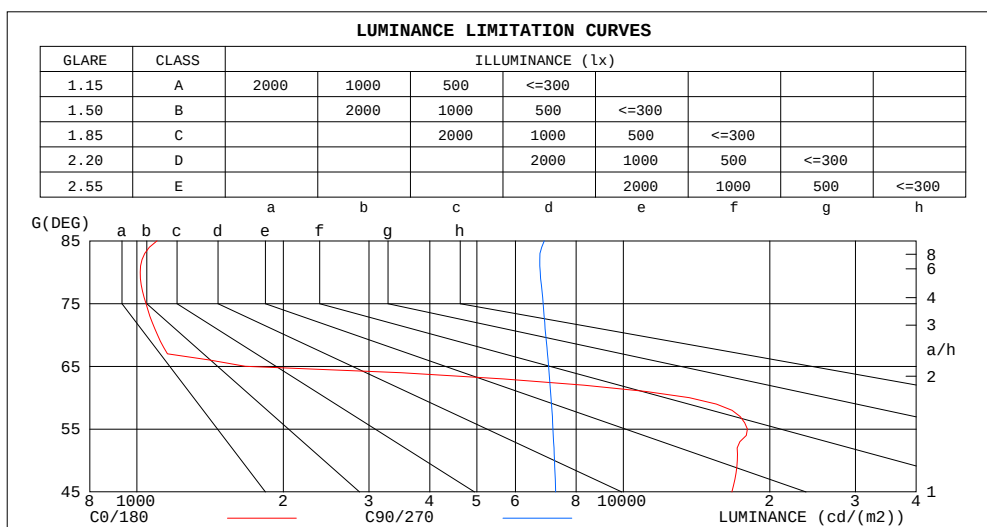

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	1100	6880
80	1016	6747
75	1044	6843
70	1103	6927
65	1670	7019
60	13663	7100
55	17988	7168
50	17158	7220
45	16716	7260


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:何俊伟
Test Date:2025-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:218.5V I:0.1360A P:28.80W PF:0.9690 Freq:50.00Hz Lamp Flux:2431.49x1 lm		
NAME: 4FT 澳规 白色	TYPE:30W 4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.87	.85
2.0	.92	.86	.80	.90	.84	.79	.87	.82	.77	.83	.79	.76	.80	.77	.74	.72
3.0	.81	.73	.67	.79	.72	.66	.76	.70	.65	.74	.68	.64	.71	.66	.63	.60
4.0	.72	.63	.56	.70	.62	.56	.68	.61	.55	.65	.59	.54	.63	.58	.54	.51
5.0	.64	.55	.48	.63	.54	.48	.60	.53	.47	.58	.52	.47	.57	.51	.46	.44
6.0	.57	.48	.42	.56	.48	.42	.54	.47	.41	.53	.46	.41	.51	.45	.40	.38
7.0	.52	.43	.37	.51	.42	.36	.49	.42	.36	.48	.41	.36	.46	.40	.36	.34
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.44	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

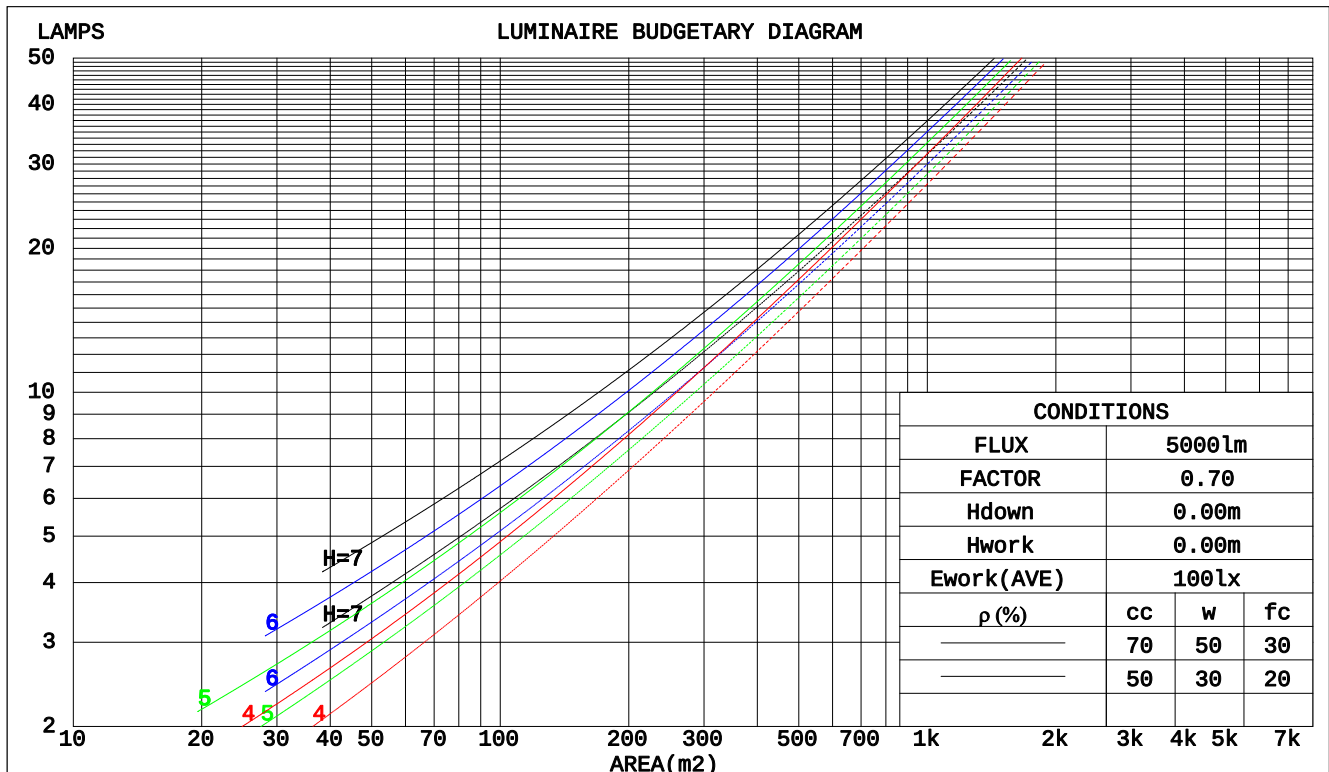

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:何俊伟
Test Date:2025-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:218.5V I:0.1360A P:28.80W PF:0.9690 Freq:50.00Hz Lamp Flux:2431.49x1 lm								
NAME: 4FT 澳规 白色				TYPE:30W 4000K			WEIGHT:	
SPEC.:				DIM.:			SERIAL No.:	
MFR.: WS				SUR.:			Shielding Angle:	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.288	.164	.052	.281	.160	.051	.267	.153	.049	.255	.147	.047	.244	.141	.046	
2.0	.278	.152	.047	.271	.149	.046	.260	.144	.045	.249	.140	.044	.239	.135	.043	
3.0	.261	.139	.042	.256	.137	.041	.245	.133	.040	.236	.129	.040	.227	.126	.039	
4.0	.244	.127	.037	.239	.125	.037	.230	.122	.036	.221	.119	.036	.214	.116	.035	
5.0	.228	.116	.034	.223	.115	.033	.215	.112	.033	.207	.109	.033	.200	.107	.032	
6.0	.212	.106	.030	.208	.105	.030	.201	.103	.030	.194	.101	.030	.188	.099	.029	
7.0	.198	.098	.028	.195	.097	.028	.188	.095	.027	.182	.093	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.024	.172	.084	.023	.166	.082	.023	.161	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.148	.075	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.180	.158	.138	.154	.136	.119	.106	.093	.082	.061	.054	.048	.019	.017	.015	
2.0	.172	.134	.101	.147	.115	.088	.101	.080	.061	.058	.046	.036	.019	.015	.012	
3.0	.164	.116	.077	.141	.100	.067	.097	.069	.047	.056	.041	.028	.018	.013	.009	
4.0	.157	.102	.061	.135	.088	.053	.093	.062	.037	.054	.036	.022	.017	.012	.007	
5.0	.150	.092	.049	.129	.080	.043	.089	.056	.030	.051	.033	.018	.017	.011	.006	
6.0	.143	.084	.041	.123	.072	.035	.085	.051	.025	.049	.030	.015	.016	.010	.005	
7.0	.137	.077	.035	.118	.066	.030	.081	.047	.021	.047	.027	.013	.015	.009	.004	
8.0	.130	.071	.030	.112	.062	.026	.078	.043	.019	.045	.025	.011	.015	.008	.004	
9.0	.124	.066	.027	.107	.057	.023	.074	.040	.016	.043	.024	.010	.014	.008	.003	
10.0	.119	.062	.024	.102	.054	.021	.071	.038	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:何俊伟
 Test Date:2025-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:218.5V I:0.1360A P:28.80W PF:0.9690 Freq:50.00Hz Lamp Flux:2431.49x1 lm											
NAME: 4FT 澳规 白色					TYPE:30W 4000K			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: WS					SUR.:			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.3	22.8	21.6	23.1	23.3	19.2	20.7	19.4	20.9	21.1	
	3H	21.3	22.7	21.6	22.9	23.2	20.2	21.6	20.5	21.8	22.0
	4H	21.2	22.5	21.5	22.8	23.0	20.4	21.8	20.8	22.0	22.3
	6H	21.1	22.3	21.4	22.6	22.9	20.7	21.9	21.0	22.2	22.5
	8H	21.1	22.2	21.4	22.5	22.8	20.8	22.0	21.2	22.3	22.6
	12H	21.0	22.1	21.4	22.4	22.8	20.9	22.1	21.3	22.4	22.7
4H	2H	21.9	23.2	22.2	23.4	23.7	20.4	21.7	20.7	21.9	22.2
	3H	21.9	23.0	22.3	23.3	23.6	21.2	22.4	21.6	22.7	23.0
	4H	21.8	22.8	22.2	23.2	23.5	21.5	22.5	21.9	22.8	23.2
	6H	21.7	22.6	22.1	23.0	23.4	21.8	22.7	22.2	23.0	23.4
	8H	21.7	22.5	22.1	22.9	23.3	21.9	22.8	22.3	23.1	23.5
	12H	21.7	22.4	22.1	22.8	23.2	22.0	22.8	22.5	23.2	23.6
8H	4H	21.7	22.6	22.1	22.9	23.3	21.4	22.2	21.8	22.6	23.0
	6H	21.7	22.4	22.1	22.8	23.2	21.7	22.4	22.2	22.8	23.3
	8H	21.6	22.2	22.1	22.7	23.1	21.9	22.5	22.4	23.0	23.4
	12H	21.6	22.1	22.1	22.6	23.1	22.1	22.6	22.6	23.1	23.6
12H	4H	21.7	22.5	22.1	22.9	23.3	21.3	22.1	21.8	22.5	22.9
	6H	21.6	22.2	22.1	22.7	23.1	21.7	22.3	22.2	22.7	23.2
	8H	21.6	22.1	22.1	22.6	23.1	21.9	22.4	22.4	22.9	23.3
Variations with the observer position at spacings:											
S = 1.0H	+ 0.4 / - 0.4					+ 0.3 / - 0.5					
1.5H	+ 1.3 / - 2.1					+ 0.6 / - 1.1					
2.0H	+ 1.2 / - 1.3					+ 1.0 / - 2.0					

CIE Pub.117 Corrected 1000 lm Total Lamp Luminous Flux.(8log(F/F0) = 0.0)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:何俊伟
 Test Date:2025-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:218.5V I:0.1360A P:28.80W PF:0.9690 Freq:50.00Hz Lamp Flux:2431.49x1 lm		
NAME: 4FT 澳规 白色	TYPE:30W 4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	45	38	56	45	38	55	44	38	31
0.80	68	56	48	66	55	48	65	55	48	41
1.00	77	66	59	76	65	58	73	67	58	51
1.25	84	74	67	83	73	67	80	72	66	59
1.50	89	80	73	88	79	73	85	77	71	64
2.00	96	88	82	95	87	81	91	85	80	72
2.50	100	93	87	98	91	86	94	89	84	76
3.00	103	97	92	101	95	91	97	93	88	80
4.00	107	102	98	105	100	96	101	97	93	85
5.00	110	105	101	107	103	100	103	99	96	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:何俊伟
 Test Date:2025-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:218.5V I:0.1360A P:28.80W PF:0.9690 Freq:50.00Hz Lamp Flux:2431.49x1 lm		
NAME: 4FT 澳规 白色	TYPE:30W 4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:	Shielding Angle:

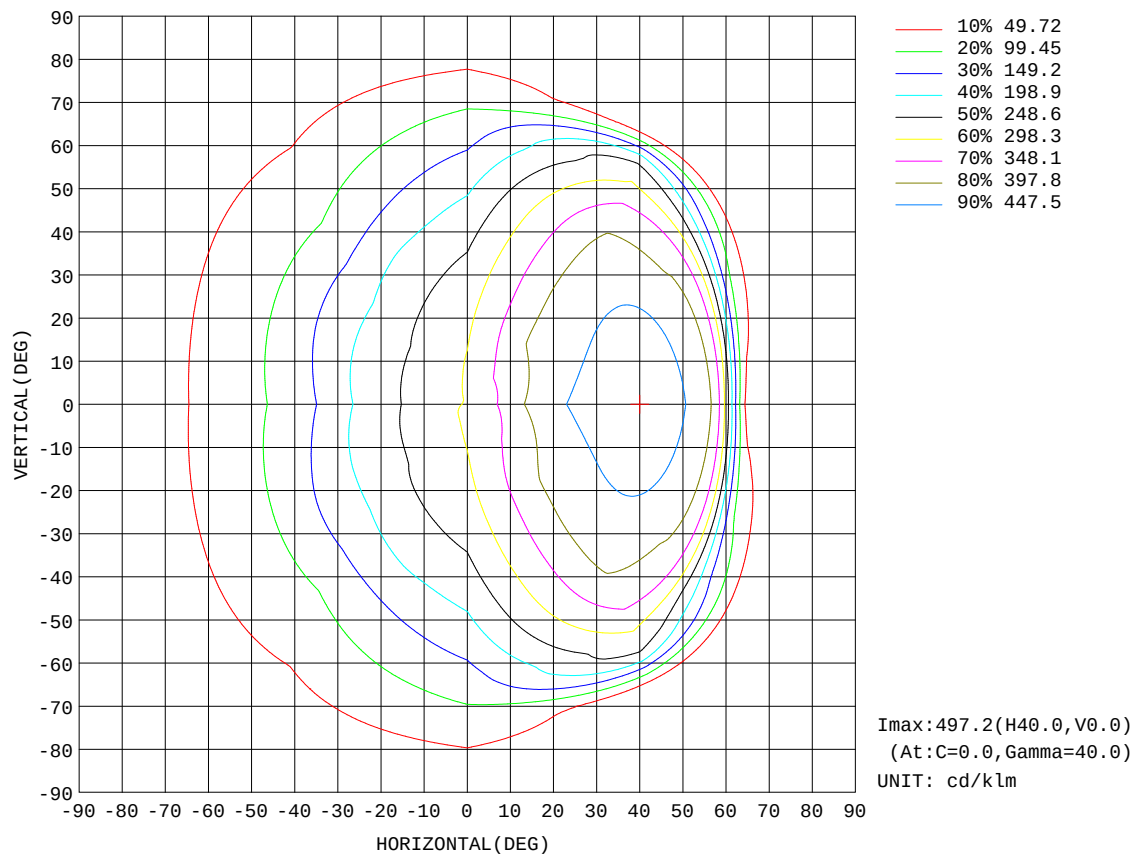


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 何俊伟
Test Date: 2025-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:218.5V I:0.1360A P:28.80W PF:0.9690 Freq:50.00Hz Lamp Flux:2431.49x1 lm		
NAME: 4FT 澳规 白色	TYPE:30W 4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:	Shielding Angle:

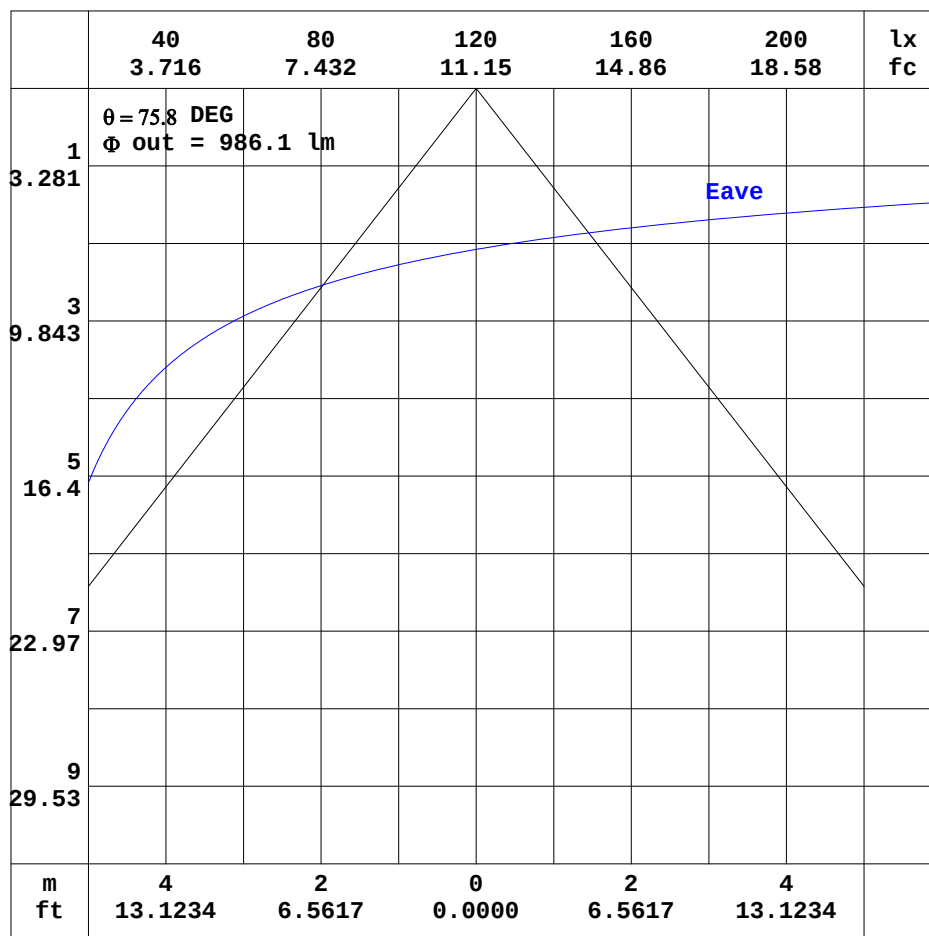


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 何俊伟
 Test Date: 2025-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:218.5V I:0.1360A P:28.80W PF:0.9690 Freq:50.00Hz Lamp Flux:2431.49x1 lm		
NAME: 4FT 澳规 白色	TYPE:30W 4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:	Shielding Angle:

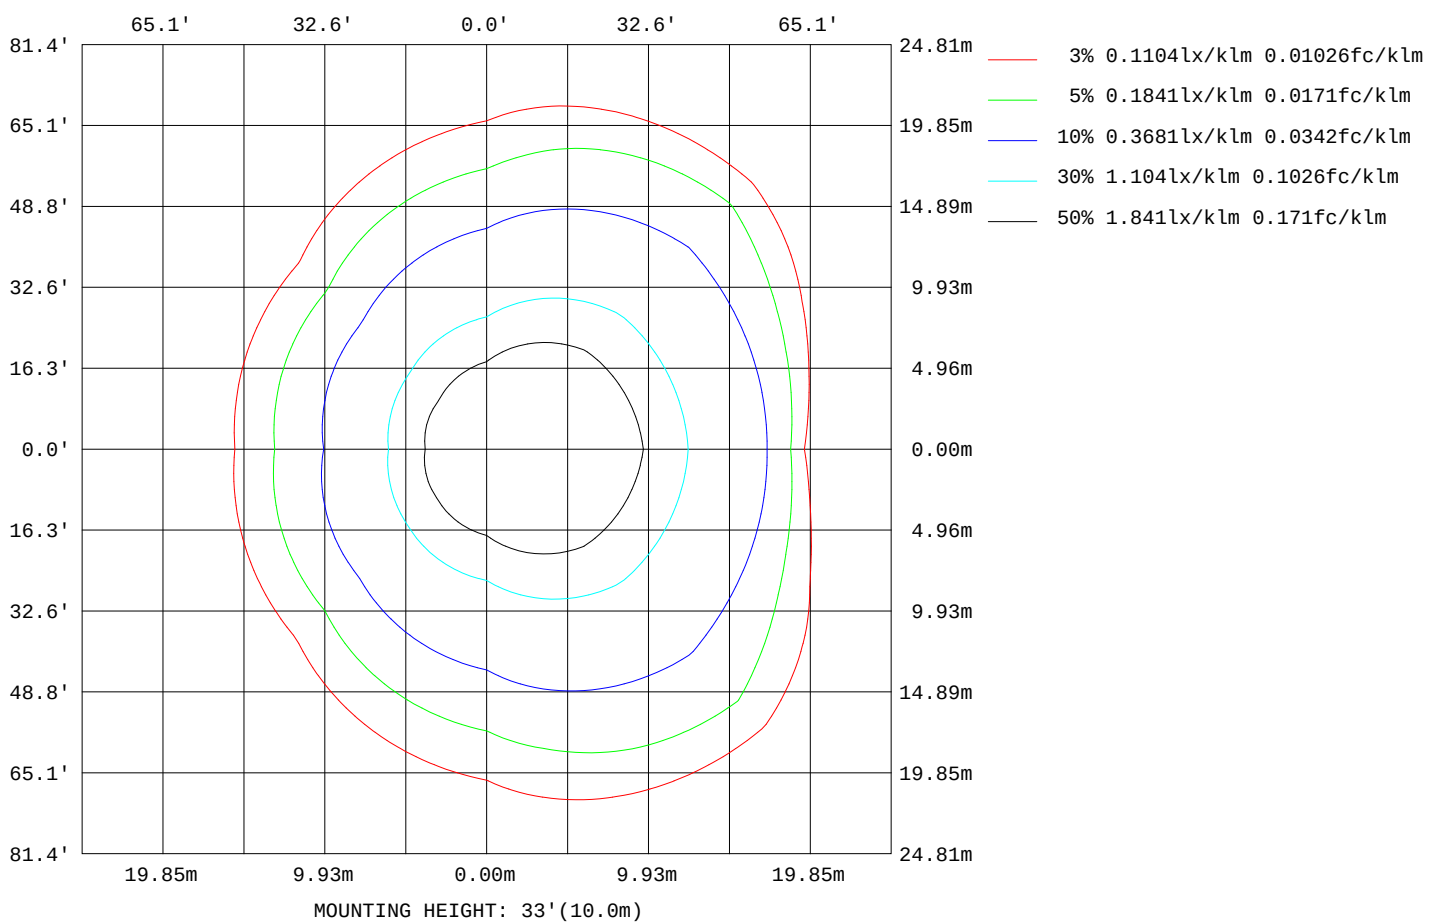

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 何俊伟
Test Date: 2025-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:218.5V I:0.1360A P:28.80W PF:0.9690 Freq:50.00Hz Lamp Flux:2431.49x1 lm		
NAME: 4FT 澳规 白色	TYPE:30W 4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	2235
L_0~180(75)av	1763
L_0~180(85)av	1557
L_90~270(65)av	6906
L_90~270(75)av	6448
L_90~270(85)av	5698
L_45(65)av	8783
L_45(75)av	2030
L_45(85)av	1759

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:何俊伟
Test Date:2025-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

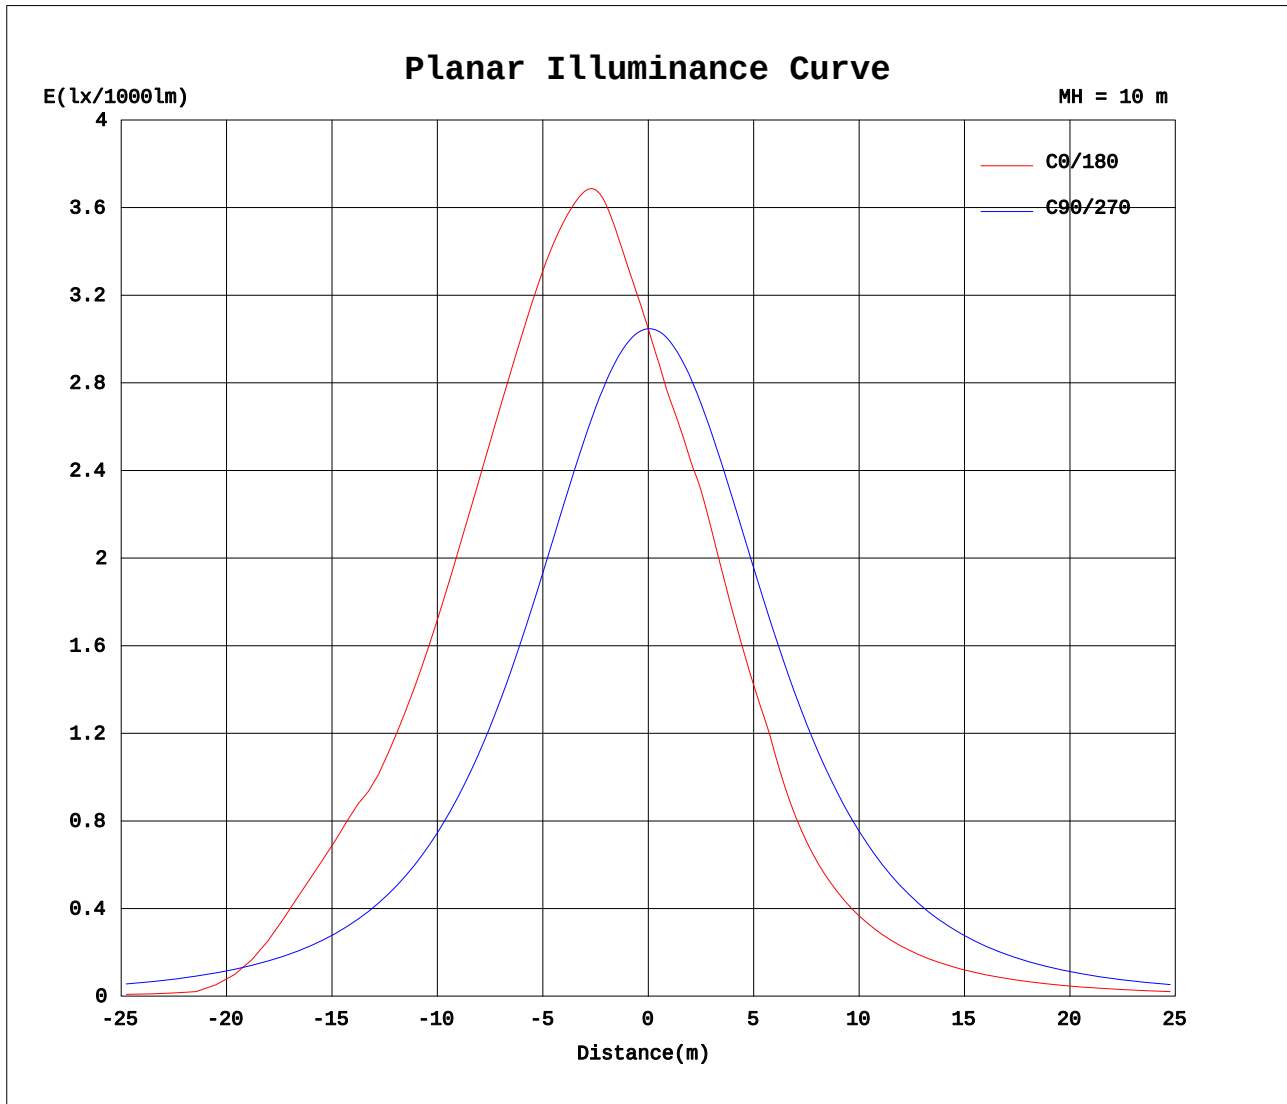

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 何俊伟
Test Date: 2025-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:218.5V I:0.1360A P:28.80W PF:0.9690 Freq:50.00Hz Lamp Flux:2431.49x1 lm		
NAME: 4FT 澳规 白色	TYPE:30W 4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:	Shielding Angle:

Table--1

UNIT: cd/klm

C(DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	305	302	305	310	305	302	305	310										
5	334	321	303	291	280	285	304	331										
10	373	342	299	274	264	270	301	355										
15	409	366	293	260	250	257	295	381										
20	434	387	284	247	228	245	287	399										
25	456	400	274	230	205	226	277	410										
30	475	407	261	210	183	205	264	417										
35	490	412	246	190	149	185	249	421										
40	497	412	230	170	123	161	232	420										
45	486	408	211	139	104	131	213	414										
50	454	395	191	113	87.8	107	192	396										
55	424	366	169	92.0	74.0	87.7	169	359										
60	281	318	146	74.8	61.1	71.1	144	304										
65	29.0	263	122	59.5	48.7	56.4	118	232										
70	15.5	95.2	97.4	45.4	37.2	42.7	91.5	39.9										
75	11.1	12.9	72.8	32.6	26.4	29.8	64.4	11.1										
80	7.26	7.95	48.2	20.7	16.6	18.1	38.2	6.66										
85	3.94	4.00	24.7	10.2	7.22	8.02	16.2	2.99										
90	1.11	0.85	0.45	0.05	0.01	0.03	0.04	0.19										
95	0.05	0.06	0.13	0.14	0.02	0.05	0.05	0.03										
100	0.06	0.08	0.17	0.24	0.05	0.09	0.06	0.04										
105	0.08	0.10	0.20	0.32	0.10	0.13	0.08	0.05										
110	0.10	0.12	0.24	0.39	0.16	0.17	0.11	0.06										
115	0.12	0.15	0.27	0.44	0.23	0.21	0.13	0.07										
120	0.14	0.18	0.30	0.48	0.28	0.24	0.16	0.09										
125	0.17	0.21	0.33	0.51	0.32	0.28	0.18	0.11										
130	0.21	0.24	0.35	0.53	0.37	0.34	0.21	0.13										
135	0.25	0.27	0.37	0.54	0.42	0.38	0.23	0.15										
140	0.28	0.29	0.39	0.54	0.51	0.40	0.25	0.17										
145	0.32	0.33	0.41	0.54	0.61	0.48	0.30	0.21										
150	0.36	0.37	0.40	0.54	0.71	0.56	0.36	0.27										
155	0.41	0.42	0.42	0.54	0.73	0.59	0.39	0.31										
160	0.46	0.48	0.44	0.55	0.73	0.61	0.41	0.36										
165	0.51	0.52	0.46	0.55	0.73	0.62	0.44	0.40										
170	0.56	0.55	0.46	0.54	0.70	0.61	0.45	0.43										
175	0.60	0.55	0.47	0.51	0.67	0.57	0.44	0.44										
180	0.63	0.55	0.44	0.46	0.63	0.54	0.44	0.46										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:何俊伟
 Test Date:2025-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: