


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.4V I:0.2260A P:26.90W PF:0.9960 Lamp Flux:4247.89x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.017*1.16m	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 157.91 lm/W			
MODEL		I _{max} (cd)	2970	S/MH(C0/180)	1.13
NOMINAL POWER(W)	27	LOR(%)	100.0	S/MH(C90/270)	1.20
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	4247.9	□ UP,DN(C0-180)	0.2,54.9
NOMINAL FLUX(lm)	4247.89	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.2,44.6
LAMPS INSIDE	1	□ up(%)	0.5	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	119.5	□ down(%)	99.5	CIBSE SHR MAX	1.15

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

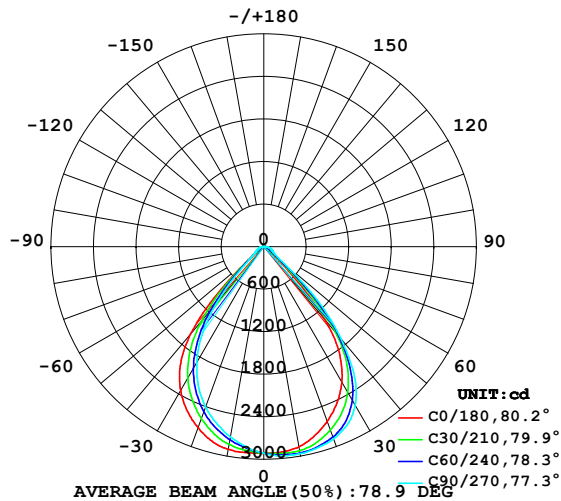

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

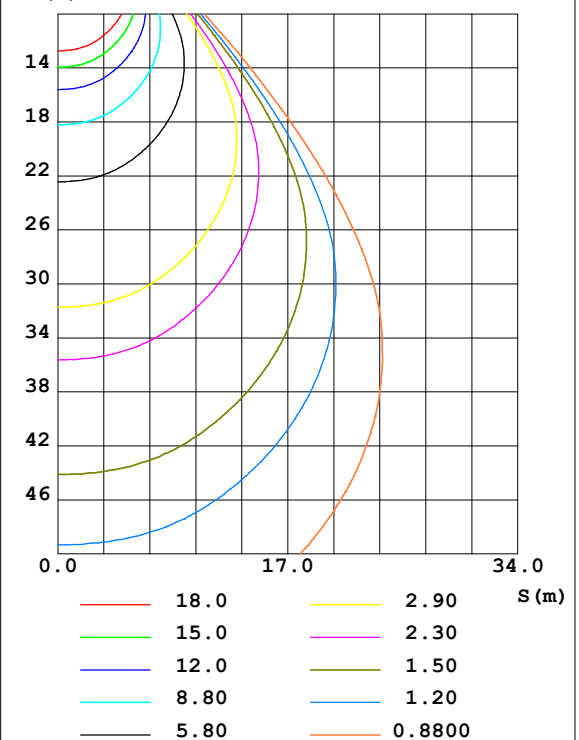


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	zone	total	%lum, lamp
5	2905	2939	2962	2952	2915	2868	2837	2850	0- 5	69.54	69.54	1.64,1.64
10	2866	2937	2963	2964	2901	2798	2724	2749	5- 10	206.3	275.8	6.49,6.49
15	2764	2893	2936	2955	2835	2684	2579	2612	10- 15	335.0	610.9	14.4,14.4
20	2621	2803	2882	2894	2716	2529	2407	2428	15- 20	448.8	1060	24.9,24.9
25	2439	2663	2779	2784	2555	2323	2181	2198	20- 25	540.6	1600	37.7,37.7
30	2205	2437	2579	2602	2346	2066	1892	1905	25- 30	601.1	2201	51.8,51.8
35	1875	2092	2232	2307	2054	1726	1525	1522	30- 35	615.7	2817	66.3,66.3
40	1330	1608	1692	1866	1608	1264	1023	965.9	35- 40	560.3	3377	79.5,79.5
45	557.5	870.7	1068	1221	856.4	666.2	484.7	415.7	40- 45	407.4	3785	89.1,89.1
50	125.2	256.9	408.5	458.6	213.7	228.8	213.8	166.8	45- 50	196.3	3981	93.7,93.7
55	66.71	118.0	188.4	150.7	78.11	109.1	154.9	109.6	50- 55	75.32	4056	95.5,95.5
60	45.61	84.52	146.4	99.77	50.67	75.74	126.9	80.72	55- 60	47.25	4104	96.6,96.6
65	31.01	64.11	126.3	77.81	34.94	56.38	102.8	59.83	60- 65	37.48	4141	97.5,97.5
70	21.87	46.39	107.6	58.26	23.71	40.01	81.17	44.44	65- 70	29.92	4171	98.2,98.2
75	18.01	29.88	86.83	38.77	19.45	24.11	65.60	28.97	70- 75	22.63	4194	98.7,98.7
80	30.52	18.05	59.55	20.92	52.08	15.10	46.30	15.62	75- 80	17.59	4211	99.1,99.1
85	16.74	13.94	20.56	12.39	17.60	11.65	13.07	10.93	80- 85	10.98	4222	99.4,99.4
90	8.747	5.219	0.2846	6.446	10.21	6.753	0.1470	6.401	85- 90	5.393	4228	99.5,99.5
95	5.369	4.943	0.2269	5.434	6.380	4.316	0.2946	3.866	90- 95	2.537	4230	99.6,99.6
100	4.399	3.667	0.4522	4.349	5.664	4.115	0.4175	3.002	95-100	2.051	4232	99.6,99.6
105	4.345	3.994	0.5076	4.195	4.981	4.139	0.5593	3.353	100-105	1.856	4234	99.7,99.7
110	4.665	3.172	0.3137	3.591	5.383	3.579	0.5634	2.758	105-110	1.709	4236	99.7,99.7
115	4.034	2.854	0.2568	3.311	4.926	3.413	0.5632	2.427	110-115	1.521	4237	99.8,99.8
120	3.764	2.674	0.2989	2.978	4.981	3.326	0.5938	2.378	115-120	1.328	4239	99.8,99.8
125	3.812	2.673	0.3199	3.143	5.044	3.674	0.6915	2.552	120-125	1.273	4240	99.8,99.8
130	4.345	2.800	0.3833	3.363	5.315	4.419	0.6551	2.861	125-130	1.292	4241	99.8,99.8
135	5.364	2.752	0.4830	3.801	6.659	4.340	0.7259	2.696	130-135	1.330	4243	99.9,99.9
140	4.374	2.448	0.6018	3.771	5.918	3.547	0.8351	2.374	135-140	1.191	4244	99.9,99.9
145	3.714	2.203	0.7224	3.154	4.615	3.151	0.9347	2.300	140-145	0.9307	4245	99.9,99.9
150	3.555	2.058	0.9293	2.981	3.962	3.041	1.059	2.604	145-150	0.7563	4245	99.9,99.9
155	4.716	2.342	1.023	3.516	4.398	3.737	1.157	3.023	150-155	0.6990	4246	100,100
160	5.460	2.623	1.115	4.005	5.489	4.589	1.241	2.968	155-160	0.6984	4247	100,100
165	4.783	2.145	1.205	3.829	4.525	4.328	1.316	2.120	160-165	0.5400	4247	100,100
170	2.984	1.598	1.280	3.343	3.466	2.879	1.360	1.564	165-170	0.3331	4248	100,100
175	1.458	1.372	1.330	2.016	1.464	1.490	1.372	1.378	170-175	0.1353	4248	100,100
180	1.413	1.354	1.360	1.383	1.415	1.352	1.362	1.385	175-180	0.0340	4248	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

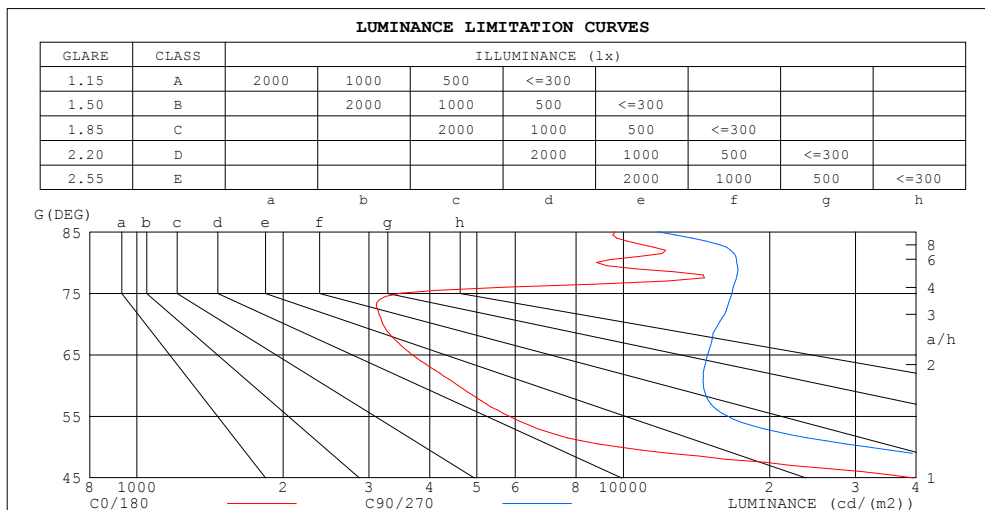

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	9625	11765
80	8809	17108
75	3488	16736
70	3204	15687
65	3678	14906
60	4572	14609
55	5828	16387
50	9763	31702
45	39513	75362


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.4V I:0.2260A P:26.90W PF:0.9960 Lamp Flux:4247.89x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.017*1.16m	PROTECTION ANGLE:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

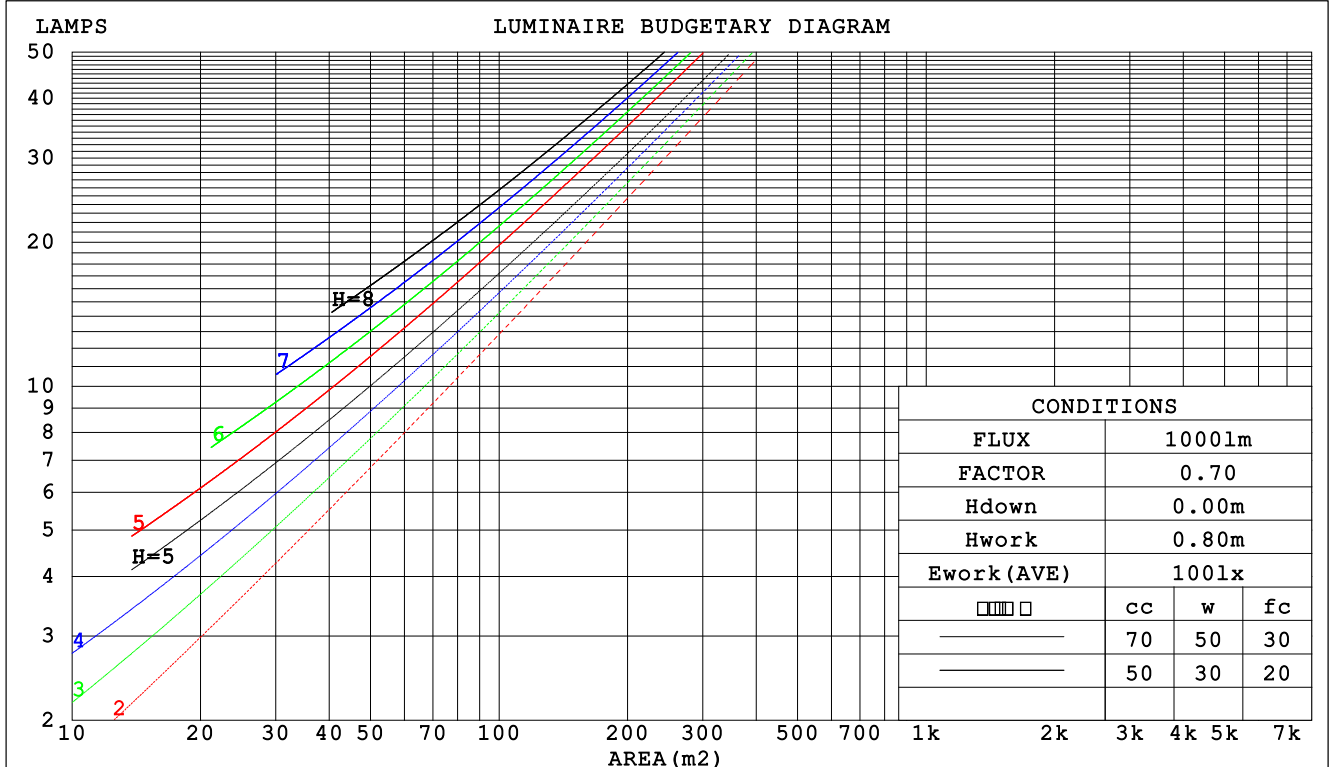

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K

WEC AND CCEC

Test:U:119.4V I:0.2260A P:26.90W PF:0.9960 Lamp Flux:4247.89x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.017*1.16m	PROTECTION ANGLE:

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.208 .119 .038	.201 .115 .037	.188 .108 .035	.176 .102 .033	.165 .096 .031	
2.0	.200 .110 .034	.194 .107 .033	.183 .102 .032	.173 .097 .030	.164 .093 .029	
3.0	.191 .102 .030	.186 .100 .030	.176 .095 .029	.167 .092 .028	.159 .088 .027	
4.0	.182 .094 .028	.177 .093 .027	.169 .089 .027	.161 .086 .026	.154 .083 .025	
5.0	.173 .088 .025	.169 .087 .025	.161 .084 .025	.154 .081 .024	.148 .079 .024	
6.0	.164 .082 .024	.161 .081 .023	.154 .079 .023	.148 .077 .023	.142 .075 .022	
7.0	.156 .077 .022	.153 .076 .022	.147 .074 .021	.142 .073 .021	.137 .071 .021	
8.0	.149 .073 .020	.146 .072 .020	.141 .070 .020	.136 .069 .020	.131 .067 .020	
9.0	.142 .069 .019	.140 .068 .019	.135 .067 .019	.130 .065 .019	.126 .064 .019	
10.0	.136 .065 .018	.134 .064 .018	.129 .063 .018	.125 .062 .018	.121 .061 .018	

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.194 .194 .194	.166 .166 .166	.113 .113 .113	.065 .065 .065	.021 .021 .021	
1.0	.177 .161 .146	.151 .138 .126	.104 .095 .087	.060 .055 .051	.019 .018 .016	
2.0	.164 .136 .113	.140 .117 .097	.096 .081 .068	.055 .047 .040	.018 .015 .013	
3.0	.153 .117 .089	.131 .101 .077	.090 .070 .054	.052 .041 .032	.017 .013 .010	
4.0	.144 .103 .072	.123 .089 .063	.085 .062 .044	.049 .036 .026	.016 .012 .009	
5.0	.136 .092 .059	.117 .080 .052	.081 .056 .037	.047 .033 .022	.015 .011 .007	
6.0	.129 .083 .050	.111 .072 .044	.077 .050 .031	.044 .030 .018	.014 .010 .006	
7.0	.123 .076 .043	.106 .066 .037	.073 .046 .026	.043 .027 .016	.014 .009 .005	
8.0	.118 .070 .037	.101 .061 .032	.070 .043 .023	.041 .025 .014	.013 .008 .005	
9.0	.113 .065 .033	.097 .056 .029	.067 .040 .020	.039 .023 .012	.013 .008 .004	
10.0	.108 .061 .029	.093 .053 .025	.064 .037 .018	.038 .022 .011	.012 .007 .004	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K

Uncorrected UGR Table

Test:U:119.4V I:0.2260A P:26.90W PF:0.9960 Lamp Flux:4247.89x1 lm										
NAME: 磁铁灯条					TYPE:T5窄灯条 3500K			WEIGHT:		
DIM.: 4FT*2					SPEC.:透镜款			SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co,ltd					SUR.:0.017*1.16m			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.6	23.7	22.9	23.9	24.1	23.9	25.1	24.2	25.2	25.4
3H	22.5	23.5	22.7	23.7	23.9	24.0	25.1	24.3	25.3	25.5
4H	22.4	23.3	22.7	23.6	23.8	24.2	25.1	24.5	25.4	25.6
6H	22.5	23.4	22.8	23.6	23.9	24.3	25.2	24.6	25.5	25.7
8H	22.5	23.4	22.8	23.7	23.9	24.4	25.2	24.7	25.5	25.8
12H	22.5	23.4	22.9	23.6	23.9	24.4	25.2	24.7	25.5	25.8
4H 2H	22.4	23.4	22.7	23.6	23.8	23.7	24.7	24.0	24.9	25.1
3H	22.3	23.1	22.6	23.4	23.7	23.9	24.7	24.2	25.0	25.3
4H	22.2	23.0	22.6	23.3	23.6	24.1	24.8	24.4	25.1	25.4
6H	22.4	23.0	22.7	23.4	23.7	24.3	24.9	24.7	25.3	25.6
8H	22.5	23.1	22.9	23.4	23.8	24.4	25.0	24.8	25.4	25.7
12H	22.5	23.1	22.9	23.5	23.9	24.4	25.0	24.9	25.4	25.8
8H 4H	22.1	22.7	22.5	23.1	23.5	23.9	24.6	24.3	24.9	25.3
6H	22.3	22.8	22.7	23.2	23.6	24.2	24.7	24.6	25.1	25.5
8H	22.5	22.9	22.9	23.3	23.8	24.3	24.8	24.8	25.2	25.7
12H	22.6	23.0	23.1	23.4	23.9	24.4	24.8	24.9	25.2	25.7
12H 4H	22.1	22.6	22.5	23.0	23.4	23.9	24.5	24.3	24.8	25.2
6H	22.3	22.7	22.7	23.2	23.6	24.2	24.6	24.6	25.0	25.5
8H	22.5	22.8	22.9	23.3	23.8	24.3	24.7	24.8	25.1	25.6
Variations with the observer position at spacings:										
S = 1.0H	+ 2.3 / - 5.8					+ 1.7 / - 3.6				
1.5H	+ 4.0 / - 5.7					+ 3.1 / - 4.3				
2.0H	+ 5.1 / - 2.6					+ 5.4 / - 2.5				

CIE Pub.117 Corrected 4248 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.0)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K

UTILIZATION FACTORS TABLE

Test:U:119.4V I:0.2260A P:26.90W PF:0.9960 Lamp Flux:4247.89x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.017*1.16m	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	79	71	66	78	71	66	77	70	66	62
0.80	87	80	75	87	80	75	85	79	75	70
1.00	93	86	82	92	86	82	91	86	81	76
1.25	98	92	88	97	91	87	95	90	86	81
1.50	102	96	92	100	95	91	98	93	90	85
2.00	106	100	97	104	99	96	101	97	94	88
2.50	108	103	99	106	102	98	103	99	96	90
3.00	110	105	102	108	104	101	104	101	99	92
4.00	112	108	106	110	107	104	106	104	102	94
5.00	113	110	108	111	109	106	107	105	103	95
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: BQE46-1000-42-PV-S1
 佑明B档
 3500K

ISOCANDELA DIAGRAM

Test:U:119.4V I:0.2260A P:26.90W PF:0.9960 Lamp Flux:4247.89x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.017*1.16m	PROTECTION ANGLE:

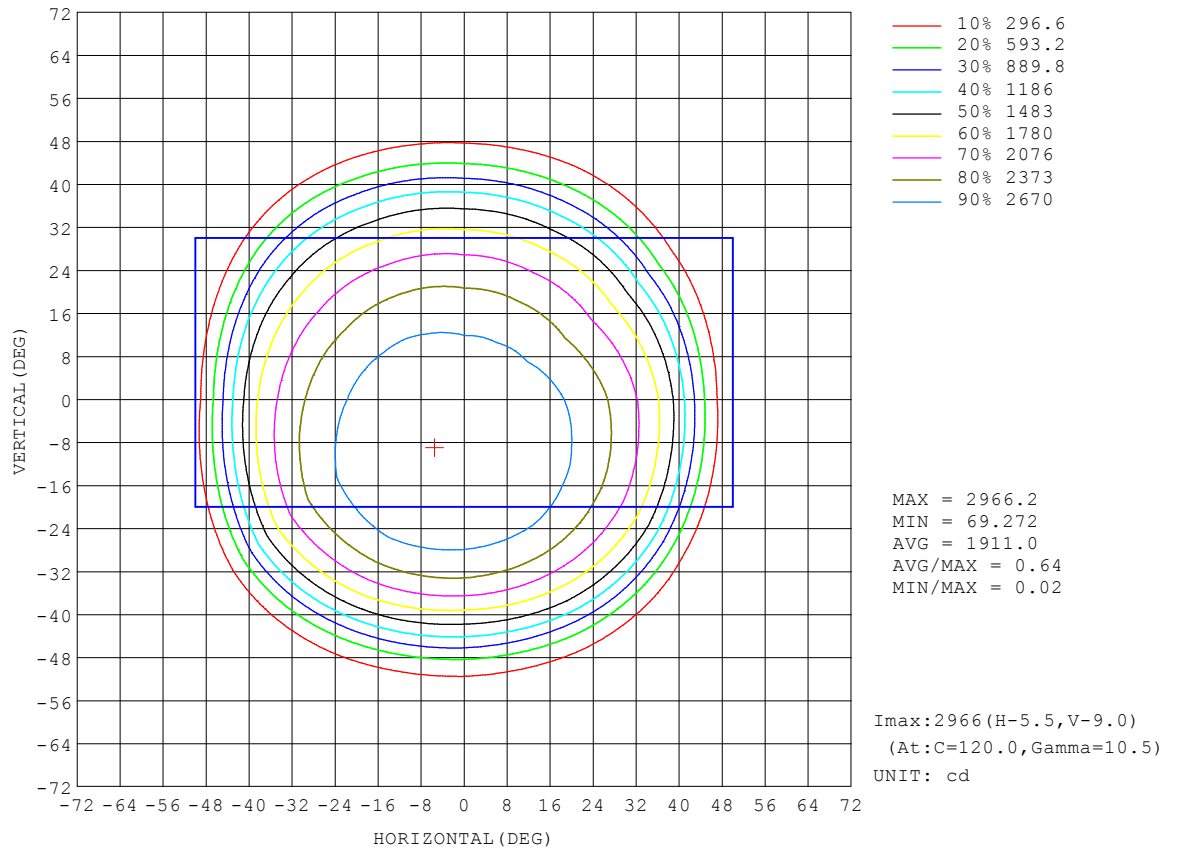


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K

AAI Figure

Test:U:119.4V I:0.2260A P:26.90W PF:0.9960 Lamp Flux:4247.89x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.017*1.16m	PROTECTION ANGLE:

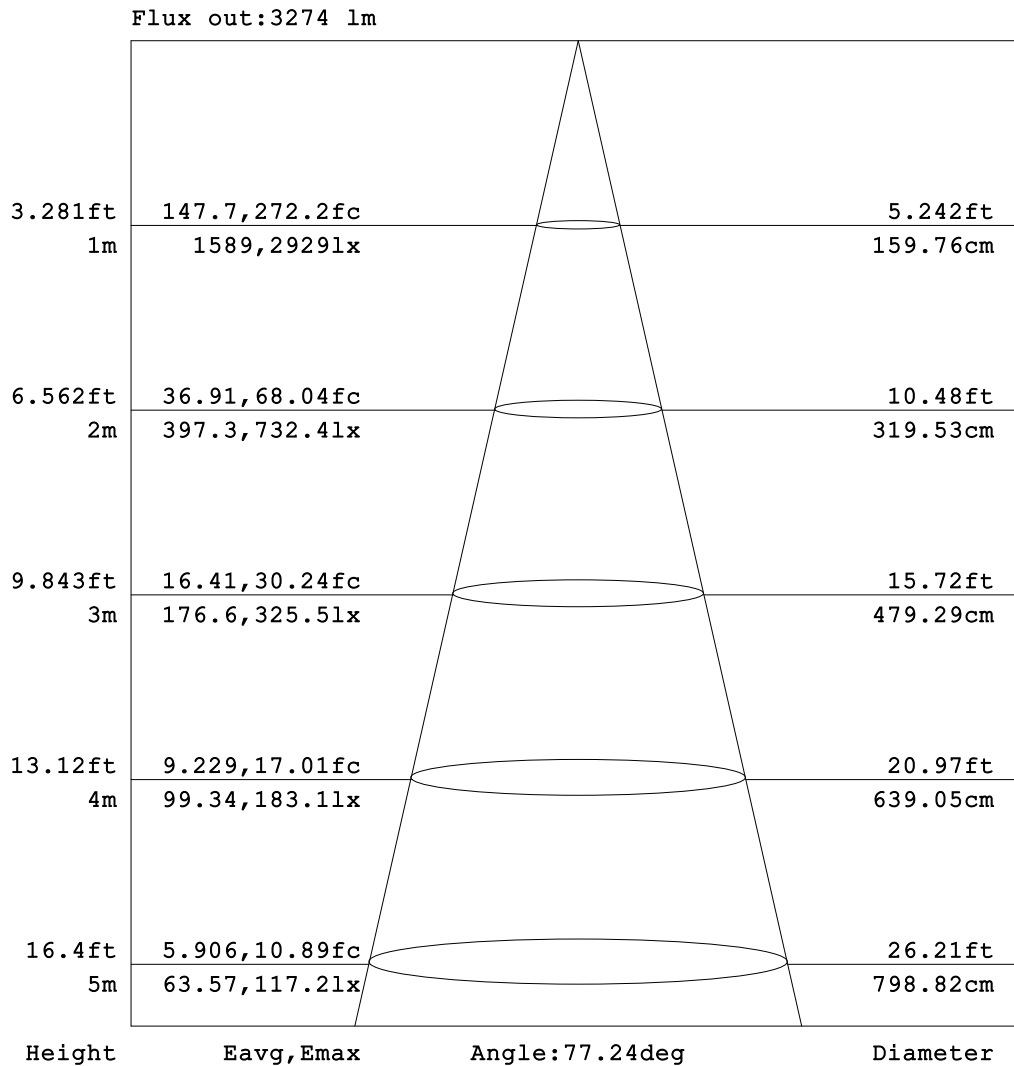


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K

ISOLUX DIAGRAM


Test:U:119.4V I:0.2260A P:26.90W PF:0.9960 Lamp Flux:4247.89x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.017*1.16m	PROTECTION ANGLE:

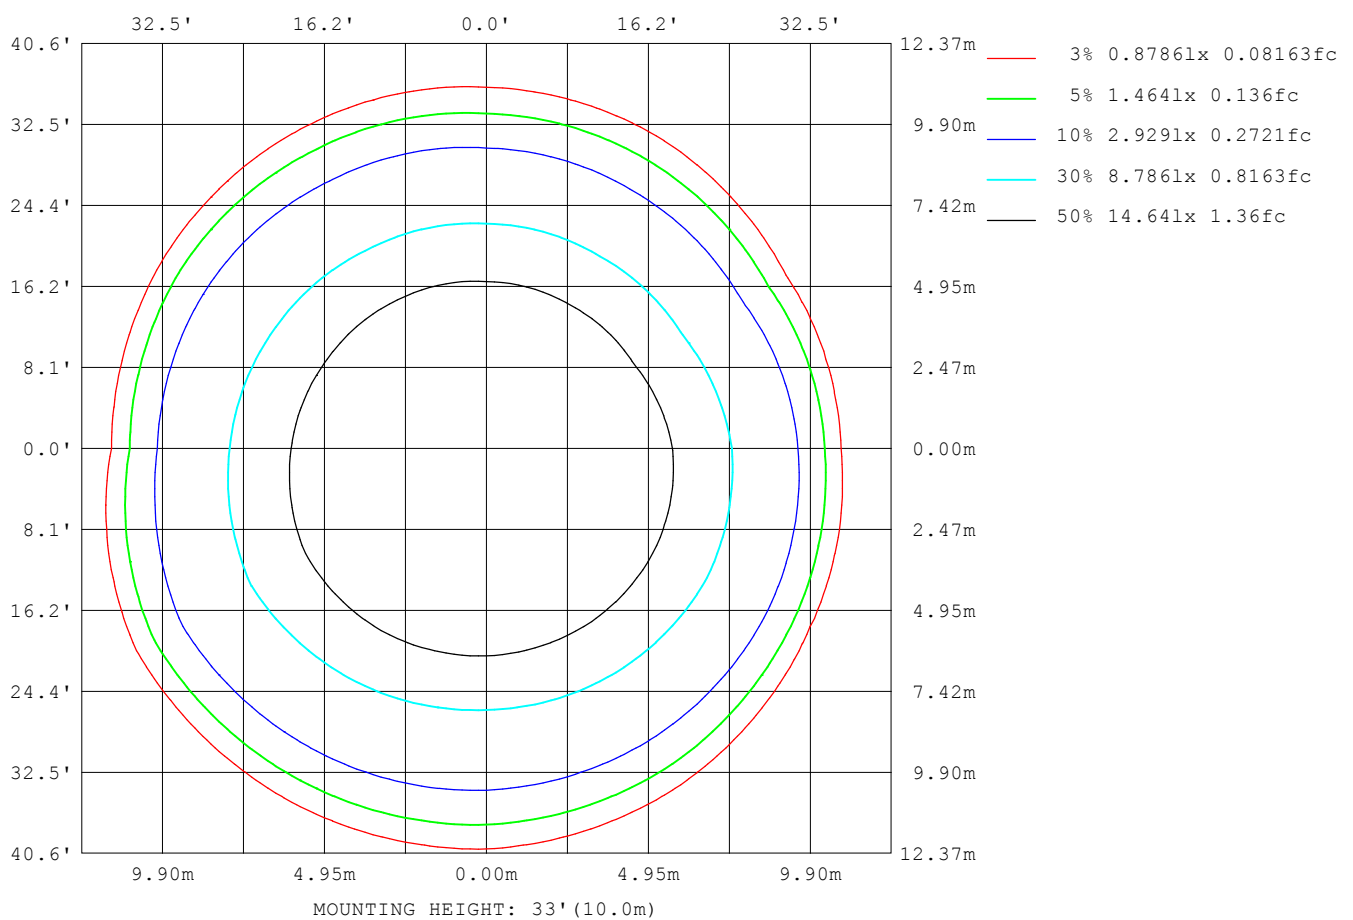

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K

Planar Illuminance Curve

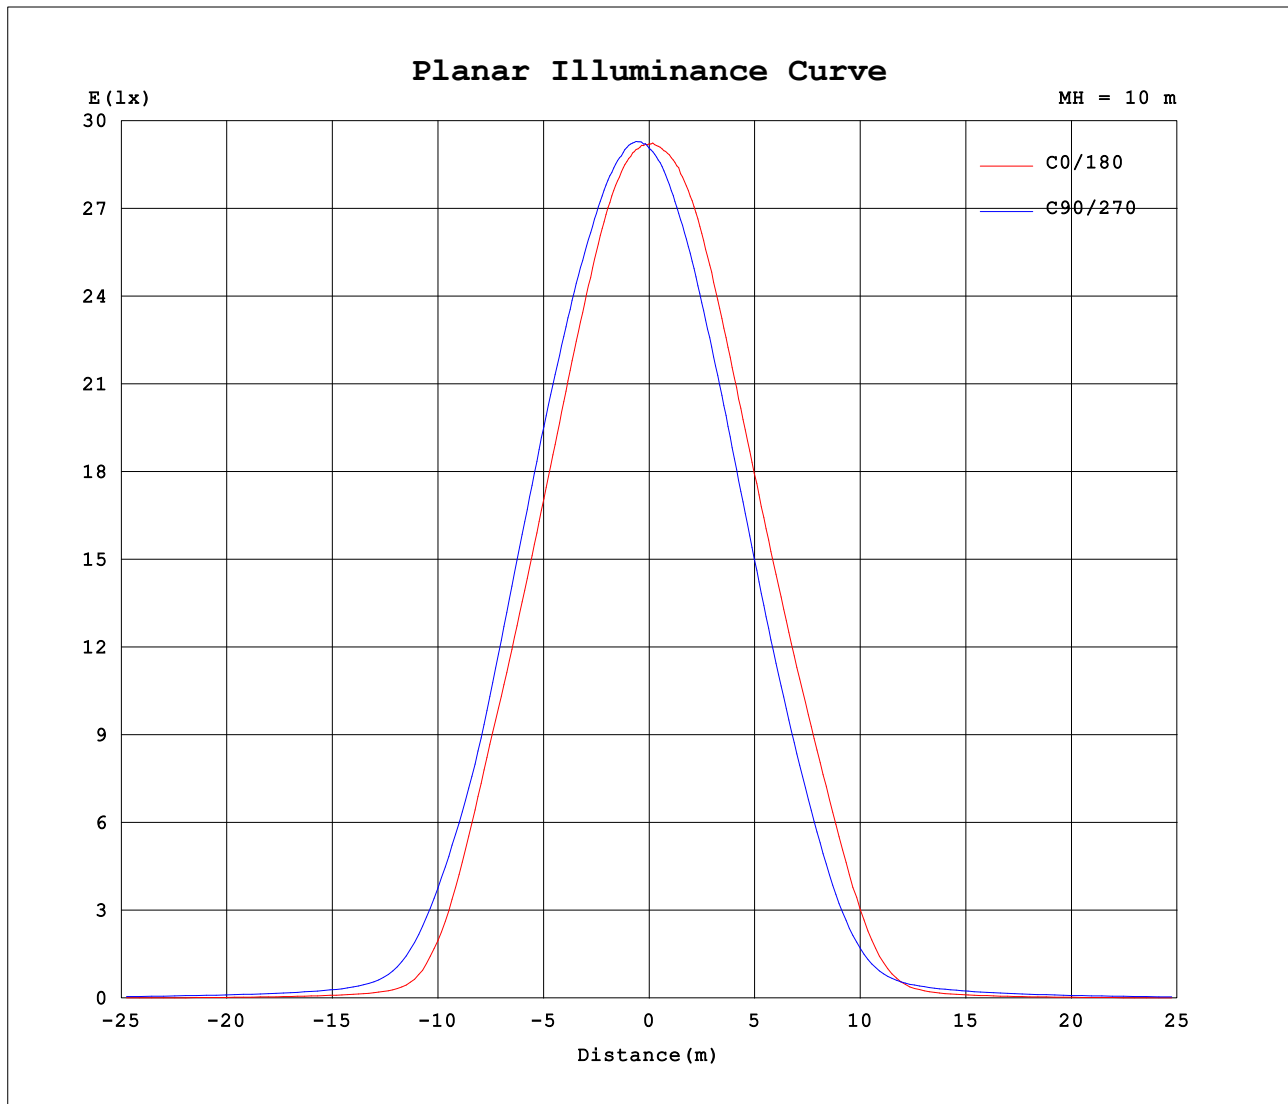

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.4V I:0.2260A P:26.90W PF:0.9960 Lamp Flux:4247.89x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:0.017*1.16m	PROTECTION ANGLE:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2914	2914	2914	2914	2914	2914	2914	2914	2914	2914	2914	2914						
5	2905	2929	2949	2962	2958	2946	2915	2885	2851	2837	2838	2861						
10	2866	2920	2955	2963	2968	2960	2901	2830	2766	2724	2728	2771						
15	2764	2862	2924	2936	2953	2958	2835	2728	2640	2579	2592	2632						
20	2621	2750	2856	2882	2912	2876	2716	2580	2479	2407	2406	2451						
25	2439	2598	2728	2779	2814	2753	2555	2385	2261	2181	2171	2226						
30	2205	2371	2503	2579	2627	2576	2346	2146	1986	1892	1874	1935						
35	1875	2049	2135	2232	2299	2315	2054	1820	1631	1525	1492	1553						
40	1330	1573	1643	1692	1820	1913	1608	1367	1161	1023	961	971						
45	558	783	958	1068	1168	1273	856	745	587	485	441	391						
50	125	196	318	409	449	468	214	229	229	214	193	141						
55	66.7	88.5	147	188	173	128	78.1	82.8	135	155	138	80.9						
60	45.6	62.4	107	146	124	76.1	50.7	49.9	102	127	111	50.5						
65	31.0	43.8	84.5	126	99.7	56.0	34.9	35.3	77.5	103	87.0	32.7						
70	21.9	27.4	65.4	108	79.3	37.2	23.7	24.2	55.9	81.2	65.4	23.5						
75	18.0	18.6	41.2	86.8	55.8	21.7	19.5	17.3	31.0	65.6	41.0	17.0						
80	30.5	15.8	20.3	59.6	26.9	15.0	52.1	12.0	18.2	46.3	19.9	11.4						
85	16.7	17.8	10.0	20.6	12.2	12.5	17.6	14.1	9.23	13.1	9.58	12.3						
90	8.75	7.38	3.06	0.28	3.37	9.52	10.2	10.7	2.79	0.15	1.96	10.8						
95	5.37	7.23	2.65	0.23	2.73	8.14	6.38	5.67	2.96	0.29	1.99	5.74						
100	4.40	4.28	3.06	0.45	2.84	5.86	5.66	4.79	3.44	0.42	2.03	3.97						
105	4.34	3.87	4.12	0.51	3.52	4.87	4.98	4.49	3.79	0.56	3.09	3.62						
110	4.67	4.00	2.35	0.31	2.75	4.43	5.38	4.41	2.75	0.56	2.00	3.52						
115	4.03	3.50	2.20	0.26	2.31	4.31	4.93	4.12	2.70	0.56	1.79	3.07						
120	3.76	3.33	2.02	0.30	2.23	3.73	4.98	3.97	2.68	0.59	1.71	3.05						
125	3.81	3.35	2.00	0.32	2.29	4.00	5.04	4.18	3.17	0.69	1.94	3.16						
130	4.35	3.53	2.07	0.38	2.45	4.28	5.31	5.16	3.67	0.66	2.02	3.70						
135	5.36	3.70	1.80	0.48	2.69	4.91	6.66	5.62	3.06	0.73	1.88	3.51						
140	4.37	3.36	1.53	0.60	2.51	5.04	5.92	4.33	2.76	0.84	1.85	2.89						
145	3.71	2.96	1.44	0.72	2.36	3.95	4.61	3.68	2.62	0.93	1.97	2.63						
150	3.56	2.57	1.55	0.93	2.44	3.52	3.96	3.41	2.68	1.06	2.16	3.05						
155	4.72	2.84	1.85	1.02	2.94	4.09	4.40	4.13	3.34	1.16	2.37	3.68						
160	5.46	3.25	1.99	1.12	3.06	4.95	5.49	5.10	4.08	1.24	2.16	3.78						
165	4.78	2.32	1.97	1.21	3.02	4.64	4.53	5.33	3.32	1.32	1.41	2.83						
170	2.98	1.85	1.35	1.28	2.43	4.25	3.47	3.39	2.37	1.36	1.36	1.77						
175	1.46	1.40	1.34	1.33	1.38	2.65	1.46	1.59	1.39	1.37	1.36	1.40						
180	1.41	1.37	1.34	1.36	1.36	1.40	1.41	1.36	1.34	1.36	1.37	1.40						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
佑明B档
3500K