


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.5V I:0.3670A P:43.70W PF:0.9940 Lamp Flux:6862.69x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*3	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 157.04 lm/W			
MODEL		Imax(cd)	4838	S/MH(C0/180)	1.12
NOMINAL POWER(W)	44	LOR(%)	100.0	S/MH(C90/270)	1.20
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	6862.7	□ UP,DN(C0-180)	0.2,54.7
NOMINAL FLUX(lm)	6862.69	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.2,45.0
LAMPS INSIDE	1	□ up(%)	0.3	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	119.5	□ down(%)	99.7	CIBSE SHR MAX	1.15

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

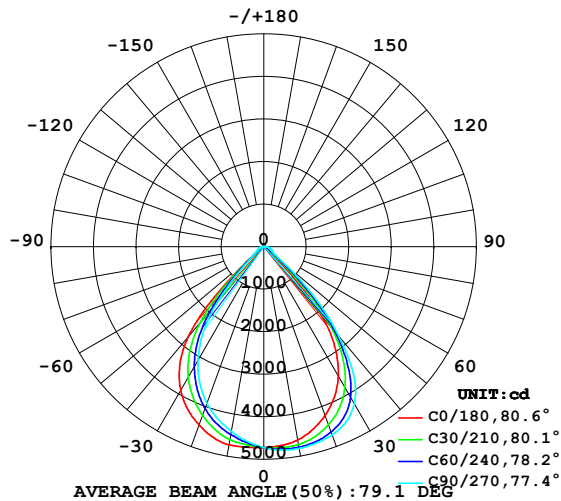

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

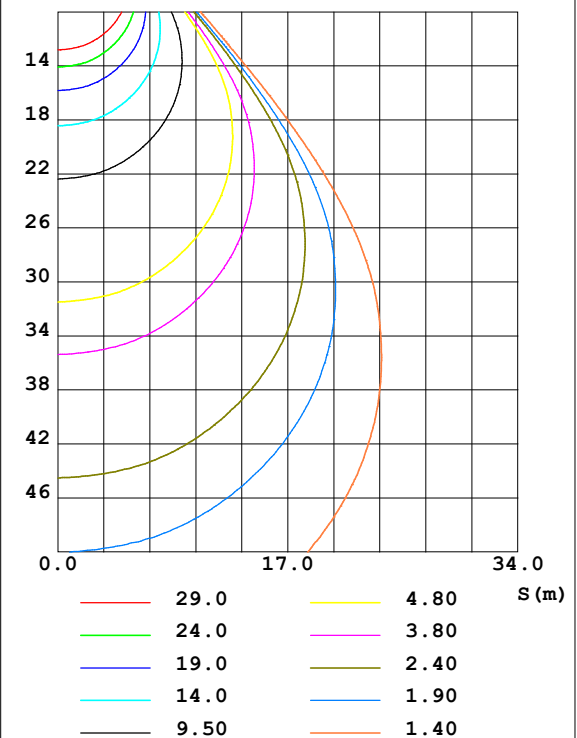


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1170-38-PV
佑明B档
3500K

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	zone	total	%lum, lamp
5	4688	4758	4799	4789	4727	4650	4590	4611	0- 5	112.7	112.7	1.64,1.64
10	4611	4753	4814	4820	4728	4545	4412	4452	5- 10	334.3	447.0	6.51,6.51
15	4449	4685	4785	4810	4638	4375	4189	4232	10- 15	543.9	990.9	14.4,14.4
20	4219	4546	4707	4731	4459	4131	3914	3945	15- 20	730.2	1721	25.1,25.1
25	3917	4321	4561	4565	4224	3813	3558	3577	20- 25	881.8	2603	37.9,37.9
30	3509	3948	4257	4279	3905	3412	3097	3106	25- 30	982.9	3586	52.2,52.2
35	2939	3367	3692	3799	3449	2877	2504	2490	30- 35	1008	4594	66.9,66.9
40	2094	2525	2749	3038	2762	2126	1674	1605	35- 40	916.6	5511	80.3,80.3
45	704.6	1321	1693	1956	1476	1072	756.5	626.2	40- 45	657.3	6168	89.9,89.9
50	165.8	392.9	696.6	702.1	323.4	333.1	312.9	243.0	45- 50	302.5	6471	94.3,94.3
55	99.39	182.3	301.5	235.5	130.7	163.8	220.5	157.4	50- 55	114.4	6585	96,96
60	68.74	131.8	231.0	160.9	82.05	113.2	180.2	116.0	55- 60	72.12	6657	97,97
65	44.92	99.23	197.8	123.9	53.91	82.54	145.9	86.65	60- 65	56.97	6714	97.8,97.8
70	32.14	69.75	169.1	90.73	35.33	58.34	115.9	64.60	65- 70	45.02	6759	98.5,98.5
75	23.51	43.97	134.6	60.09	26.60	34.93	94.82	41.13	70- 75	33.82	6793	99,99
80	69.79	24.43	90.92	30.37	76.41	21.02	66.60	21.98	75- 80	24.87	6818	99.3,99.3
85	21.76	18.77	31.28	15.81	23.47	13.05	18.58	13.00	80- 85	15.72	6834	99.6,99.6
90	11.66	6.894	0.4827	9.471	14.33	6.534	0.1943	8.286	85- 90	6.783	6840	99.7,99.7
95	5.843	6.055	0.2784	6.514	7.803	4.532	0.2796	4.356	90- 95	3.096	6843	99.7,99.7
100	4.714	3.849	0.4948	4.829	6.113	3.504	0.4616	3.198	95-100	2.258	6846	99.8,99.8
105	4.366	4.330	0.6284	4.003	5.021	3.647	0.6131	3.563	100-105	1.847	6848	99.8,99.8
110	4.426	3.250	0.4733	3.488	5.258	3.158	0.7416	2.986	105-110	1.705	6849	99.8,99.8
115	4.272	3.154	0.4792	3.442	5.023	2.954	0.7322	2.827	110-115	1.560	6851	99.8,99.8
120	3.901	2.967	0.5250	3.020	4.791	2.839	0.8333	2.706	115-120	1.365	6852	99.8,99.8
125	4.007	3.051	0.5365	3.032	4.692	2.977	0.9543	3.025	120-125	1.293	6853	99.9,99.9
130	4.510	3.321	0.6078	3.225	4.728	3.433	1.044	3.420	125-130	1.300	6855	99.9,99.9
135	5.674	3.371	0.7708	3.645	5.575	3.895	1.192	3.442	130-135	1.343	6856	99.9,99.9
140	4.787	3.005	0.9624	3.866	5.730	3.699	1.359	3.153	135-140	1.288	6857	99.9,99.9
145	4.440	2.879	1.148	3.620	4.807	3.569	1.521	3.191	140-145	1.095	6858	99.9,99.9
150	4.553	2.736	1.411	3.547	4.073	3.893	1.690	3.604	145-150	0.9421	6859	100,100
155	5.868	3.208	1.579	3.907	4.518	5.167	1.834	4.259	150-155	0.8935	6860	100,100
160	7.195	3.593	1.740	5.318	7.180	6.711	1.974	3.866	155-160	0.9109	6861	100,100
165	5.465	2.984	1.898	5.512	7.781	5.555	2.093	3.052	160-165	0.7702	6862	100,100
170	3.634	2.636	2.039	4.577	4.491	3.685	2.171	2.539	165-170	0.4532	6862	100,100
175	2.541	2.254	2.139	2.802	2.528	2.541	2.194	2.204	170-175	0.1999	6863	100,100
180	2.294	2.181	2.185	2.226	2.305	2.179	2.181	2.225	175-180	0.0551	6863	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

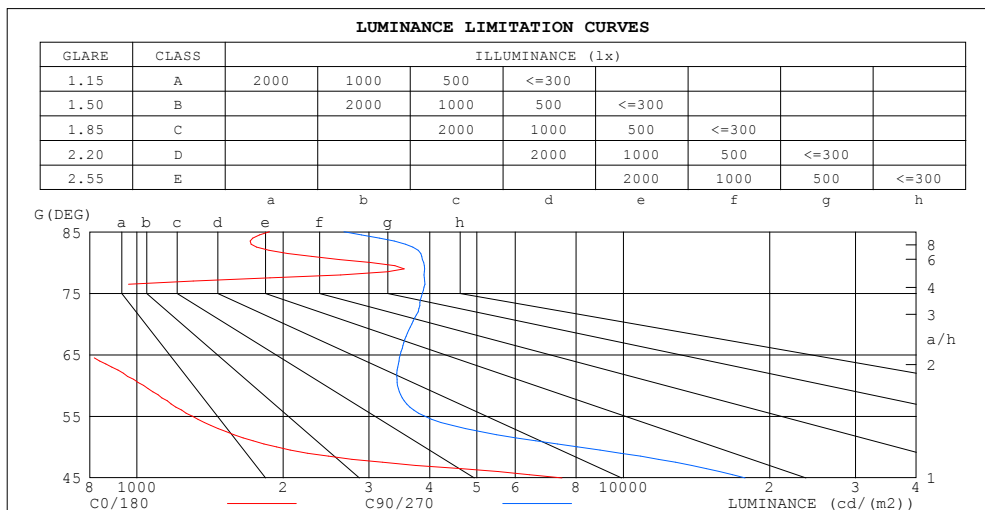

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1874	2667
80	3017	3891
75	682	3865
70	705	3674
65	798	3479
60	1032	3433
55	1301	3907
50	1936	8054
45	7479	17792


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1170-38-PV
佑明B档
3500K

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.5V I:0.3670A P:43.70W PF:0.9940 Lamp Flux:6862.69x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*3	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.09	1.06	1.04	1.07	1.04	1.02	1.03	1.01	.99	.99	.97	.96	.95	.94	.93	.91
2.0	1.00	.95	.91	.98	.94	.90	.95	.91	.88	.92	.89	.86	.89	.87	.84	.83
3.0	.92	.86	.81	.90	.85	.81	.88	.83	.79	.85	.81	.78	.83	.79	.77	.75
4.0	.84	.78	.73	.83	.77	.73	.81	.76	.72	.79	.74	.71	.77	.73	.70	.68
5.0	.78	.71	.66	.77	.71	.66	.75	.69	.65	.73	.68	.65	.71	.67	.64	.62
6.0	.72	.65	.60	.71	.65	.60	.69	.64	.59	.68	.63	.59	.67	.62	.59	.57
7.0	.67	.60	.55	.66	.59	.55	.65	.59	.54	.63	.58	.54	.62	.57	.54	.52
8.0	.62	.55	.50	.61	.55	.50	.60	.54	.50	.59	.54	.50	.58	.53	.50	.48
9.0	.58	.51	.47	.57	.51	.46	.56	.50	.46	.55	.50	.46	.54	.49	.46	.44
10.0	.54	.47	.43	.53	.47	.43	.53	.47	.43	.52	.46	.43	.51	.46	.42	.41

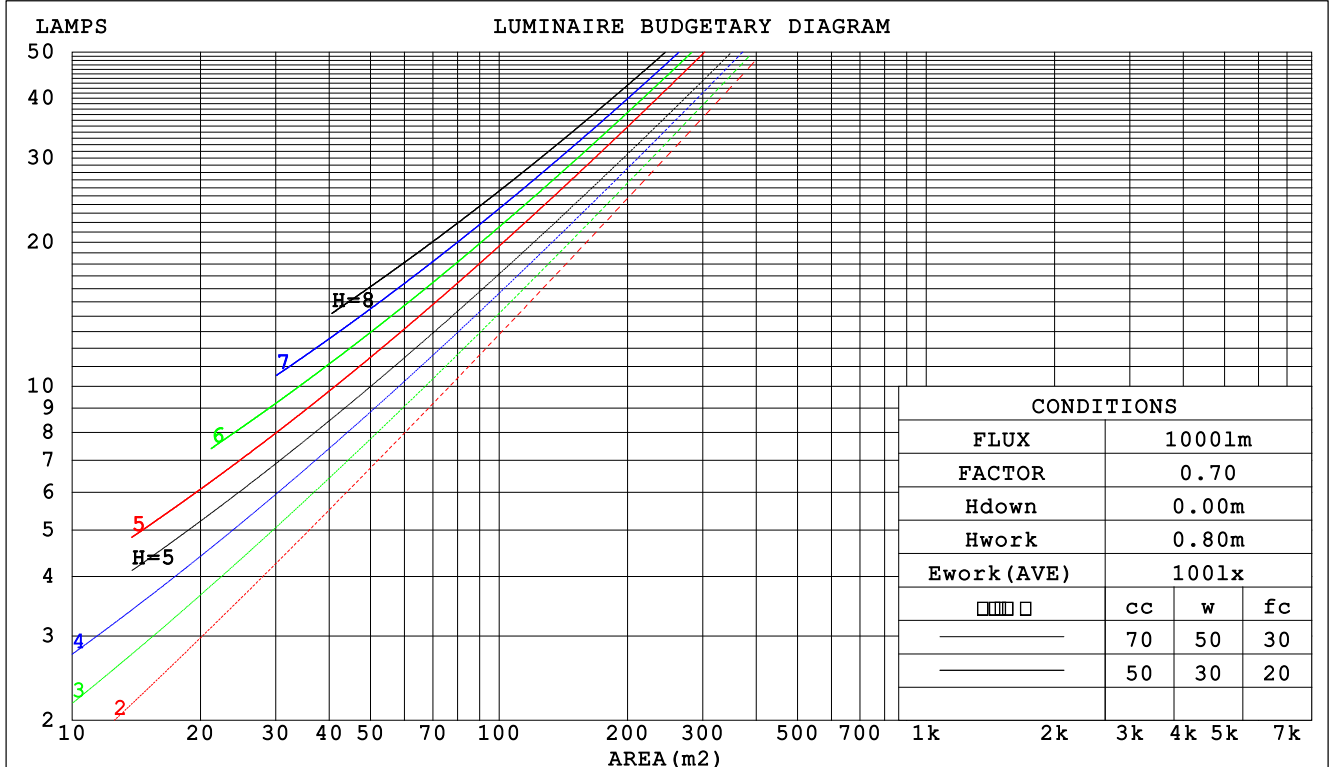

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1170-38-PV
佑明B档
3500K

WEC AND CCEC

Test:U:119.5V I:0.3670A P:43.70W PF:0.9940 Lamp Flux:6862.69x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*3	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients (WEC)					
0.0						
1.0	.207 .117 .037	.200 .114 .036	.187 .107 .034	.175 .101 .032	.164 .095 .031	
2.0	.199 .109 .033	.193 .106 .033	.182 .101 .031	.172 .096 .030	.162 .092 .029	
3.0	.190 .101 .030	.185 .099 .030	.175 .095 .029	.166 .091 .028	.158 .088 .027	
4.0	.181 .094 .028	.176 .092 .027	.168 .089 .027	.160 .086 .026	.153 .083 .025	
5.0	.172 .088 .025	.168 .086 .025	.160 .084 .025	.154 .081 .024	.147 .079 .024	
6.0	.163 .082 .023	.160 .081 .023	.153 .079 .023	.147 .077 .023	.142 .075 .022	
7.0	.156 .077 .022	.153 .076 .022	.147 .074 .021	.141 .072 .021	.136 .071 .021	
8.0	.148 .073 .020	.146 .072 .020	.140 .070 .020	.136 .069 .020	.131 .067 .020	
9.0	.142 .069 .019	.139 .068 .019	.135 .067 .019	.130 .065 .019	.126 .064 .018	
10.0	.135 .065 .018	.133 .064 .018	.129 .063 .018	.125 .062 .018	.121 .061 .017	

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients (CCEC)					
0.0	.193 .193 .193	.165 .165 .165	.113 .113 .113	.065 .065 .065	.021 .021 .021	
1.0	.176 .160 .145	.150 .137 .125	.103 .094 .086	.059 .055 .050	.019 .018 .016	
2.0	.162 .135 .112	.139 .116 .097	.095 .080 .067	.055 .047 .040	.018 .015 .013	
3.0	.152 .116 .088	.130 .100 .076	.089 .070 .054	.052 .041 .032	.017 .013 .010	
4.0	.142 .102 .071	.122 .088 .062	.084 .061 .043	.049 .036 .026	.016 .012 .008	
5.0	.135 .091 .058	.116 .079 .051	.080 .055 .036	.046 .032 .021	.015 .011 .007	
6.0	.128 .082 .049	.110 .071 .043	.076 .050 .030	.044 .029 .018	.014 .010 .006	
7.0	.122 .075 .042	.105 .065 .036	.072 .045 .026	.042 .027 .015	.014 .009 .005	
8.0	.116 .069 .036	.100 .060 .031	.069 .042 .022	.040 .025 .013	.013 .008 .004	
9.0	.111 .064 .032	.096 .055 .028	.066 .039 .020	.039 .023 .012	.013 .008 .004	
10.0	.106 .059 .028	.092 .052 .024	.064 .036 .017	.037 .021 .010	.012 .007 .003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1170-38-PV
佑明B档
3500K

Uncorrected UGR Table

Test:U:119.5V I:0.3670A P:43.70W PF:0.9940 Lamp Flux:6862.69x1 lm										
NAME: 磁铁灯条					TYPE:T5窄灯条 3500K			WEIGHT:		
DIM.: 4FT*3					SPEC.:透镜款			SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co,ltd					SUR.:1.22*0.11m			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.4	18.5	17.7	18.7	18.9	18.9	20.1	19.2	20.2	20.4
3H	17.3	18.3	17.5	18.5	18.7	19.0	20.1	19.3	20.3	20.5
4H	17.2	18.1	17.5	18.4	18.6	19.1	20.1	19.4	20.3	20.6
6H	17.3	18.2	17.6	18.4	18.7	19.3	20.2	19.6	20.4	20.7
8H	17.3	18.1	17.6	18.4	18.7	19.3	20.2	19.6	20.5	20.7
12H	17.3	18.1	17.6	18.4	18.7	19.3	20.2	19.7	20.4	20.7
4H 2H	17.2	18.2	17.5	18.4	18.6	18.7	19.7	19.0	19.9	20.1
3H	17.1	17.9	17.4	18.2	18.5	18.9	19.7	19.2	20.0	20.3
4H	17.0	17.8	17.4	18.1	18.4	19.0	19.8	19.4	20.1	20.4
6H	17.2	17.8	17.5	18.2	18.5	19.2	19.9	19.6	20.2	20.6
8H	17.2	17.8	17.6	18.2	18.5	19.3	19.9	19.7	20.3	20.7
12H	17.2	17.8	17.6	18.1	18.5	19.4	19.9	19.8	20.3	20.7
8H 4H	16.9	17.5	17.3	17.9	18.3	18.9	19.5	19.3	19.9	20.3
6H	17.1	17.6	17.5	18.0	18.4	19.1	19.6	19.6	20.0	20.5
8H	17.2	17.6	17.6	18.0	18.5	19.2	19.7	19.7	20.1	20.6
12H	17.2	17.6	17.7	18.1	18.5	19.3	19.7	19.8	20.1	20.6
12H 4H	16.9	17.4	17.3	17.8	18.2	18.9	19.4	19.3	19.8	20.2
6H	17.1	17.5	17.5	17.9	18.4	19.1	19.5	19.5	19.9	20.4
8H	17.1	17.5	17.6	18.0	18.4	19.2	19.6	19.7	20.0	20.5
Variations with the observer position at spacings:										
S = 1.0H	+ 2.3 / - 6.6					+ 1.9 / - 3.8				
1.5H	+ 4.2 / - 6.7					+ 3.3 / - 4.5				
2.0H	+ 4.7 / - 2.4					+ 5.5 / - 2.7				

CIE Pub.117 Corrected 6863 lm Total Lamp Luminous Flux.(8log(F/F0) = 6.7)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1170-38-PV
佑明B档
3500K

UTILIZATION FACTORS TABLE

Test:U:119.5V I:0.3670A P:43.70W PF:0.9940 Lamp Flux:6862.69x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*3	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	79	71	67	79	71	67	78	71	67	62
0.80	88	80	76	87	80	76	86	79	75	71
1.00	94	87	82	93	86	82	91	87	82	77
1.25	99	92	88	98	92	88	95	91	87	82
1.50	102	96	92	101	95	92	98	94	90	85
2.00	106	101	97	104	100	96	101	98	95	89
2.50	108	103	100	106	102	99	103	99	97	90
3.00	110	106	102	108	104	101	104	101	99	92
4.00	112	109	106	110	107	105	106	104	102	94
5.00	113	111	108	111	109	107	107	105	104	96
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: BQE46-1170-38-PV
 佑明B档
 3500K

ISOCANDELA DIAGRAM

Test:U:119.5V I:0.3670A P:43.70W PF:0.9940 Lamp Flux:6862.69x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*3	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

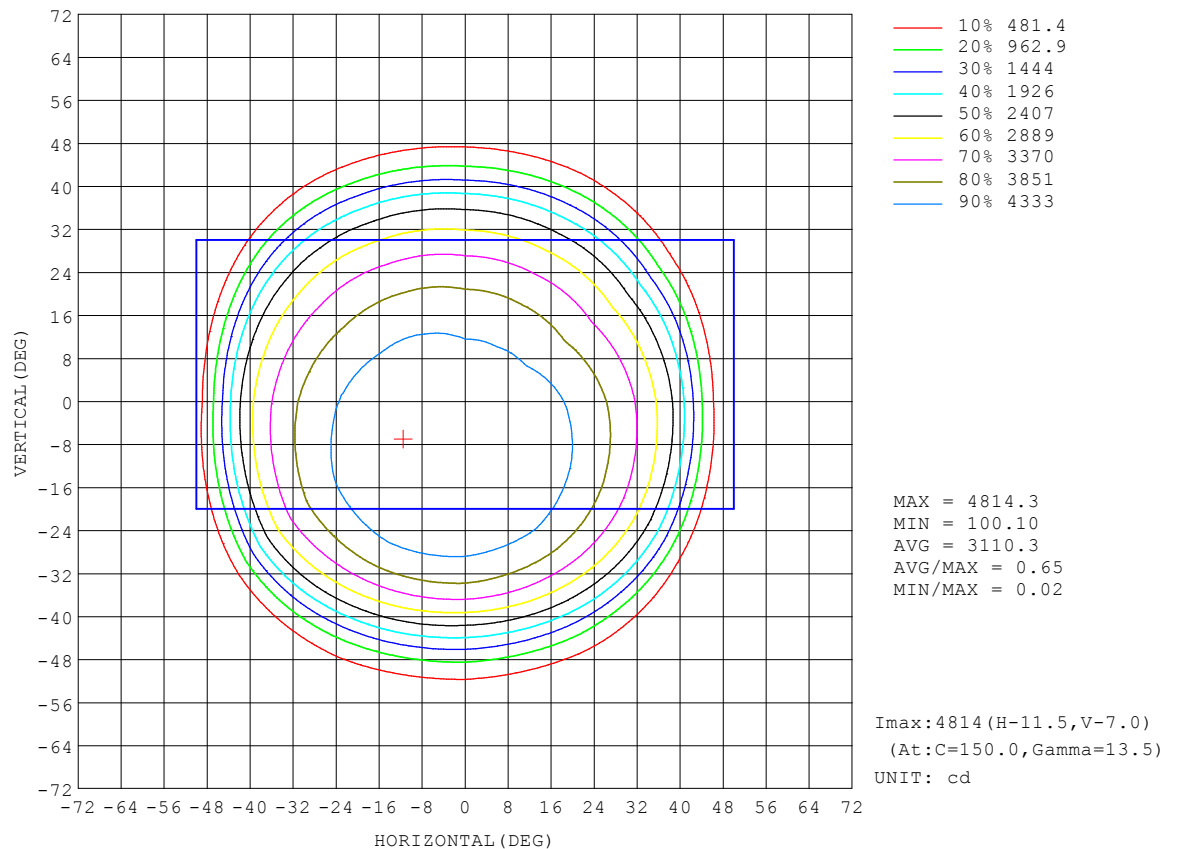


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1170-38-PV
佑明B档
3500K

AAI Figure

Test:U:119.5V I:0.3670A P:43.70W PF:0.9940 Lamp Flux:6862.69x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*3	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

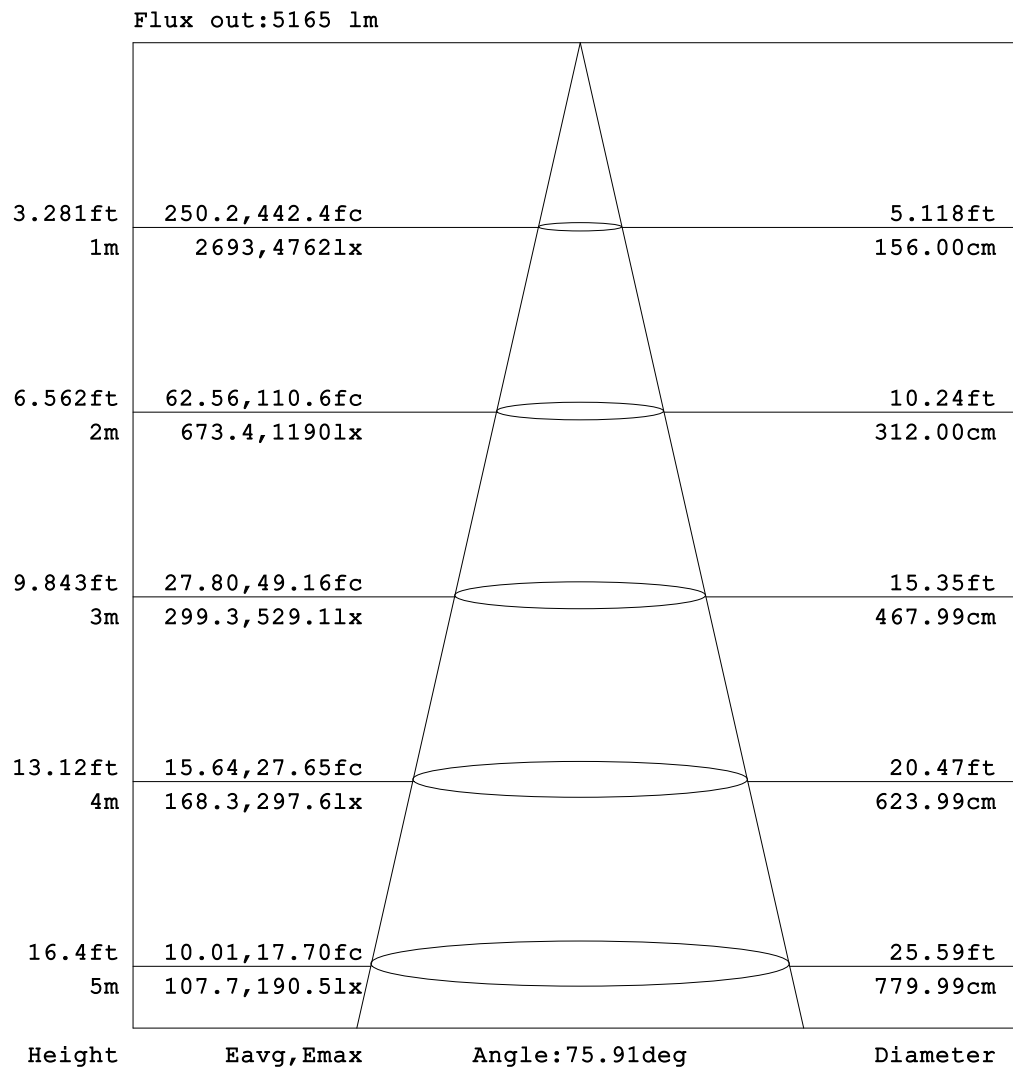


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1170-38-PV
佑明B档
3500K

ISOLUX DIAGRAM


Test:U:119.5V I:0.3670A P:43.70W PF:0.9940 Lamp Flux:6862.69x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*3	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

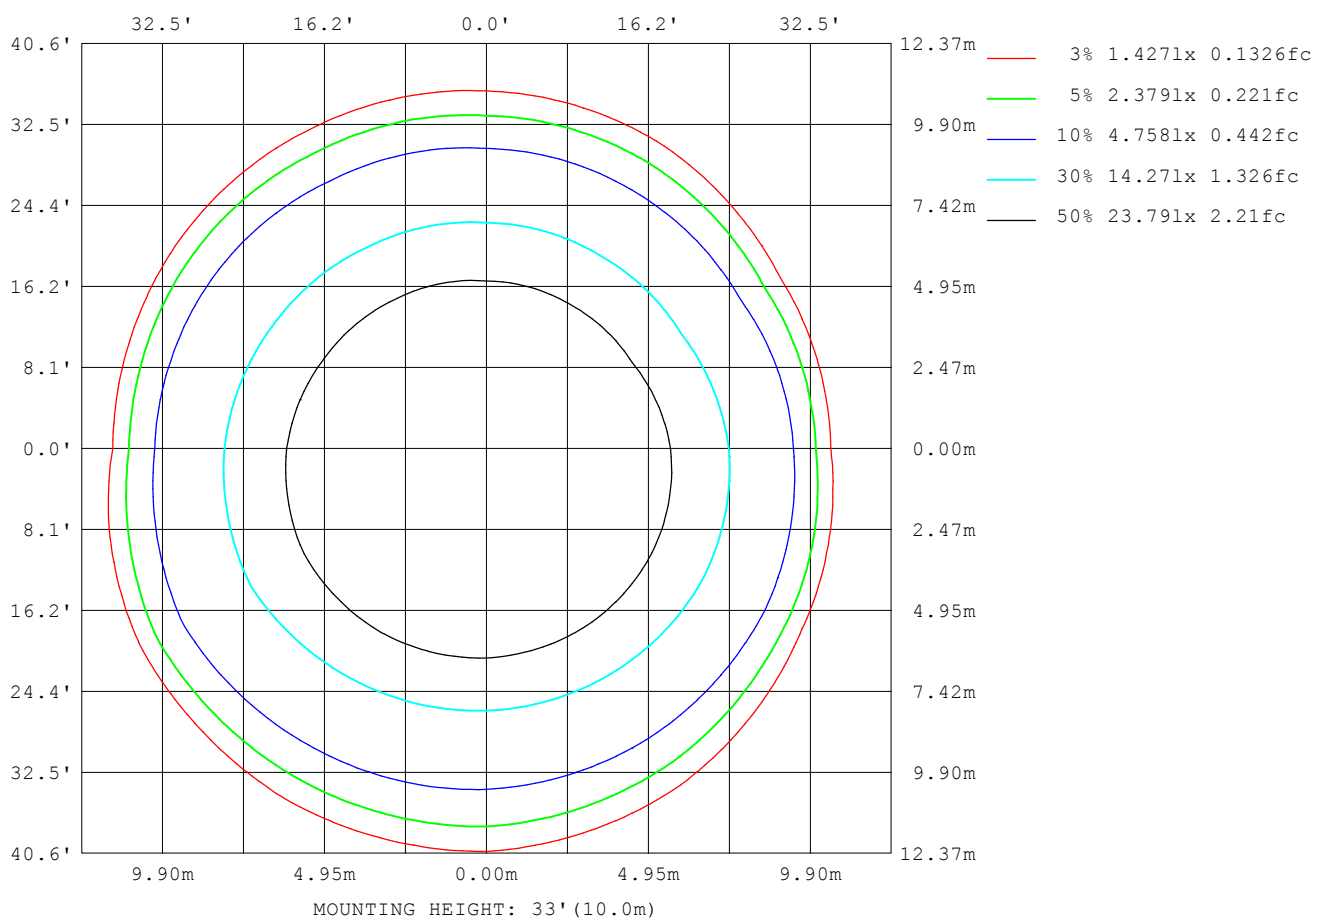

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1170-38-PV
佑明B档
3500K

Planar Illuminance Curve

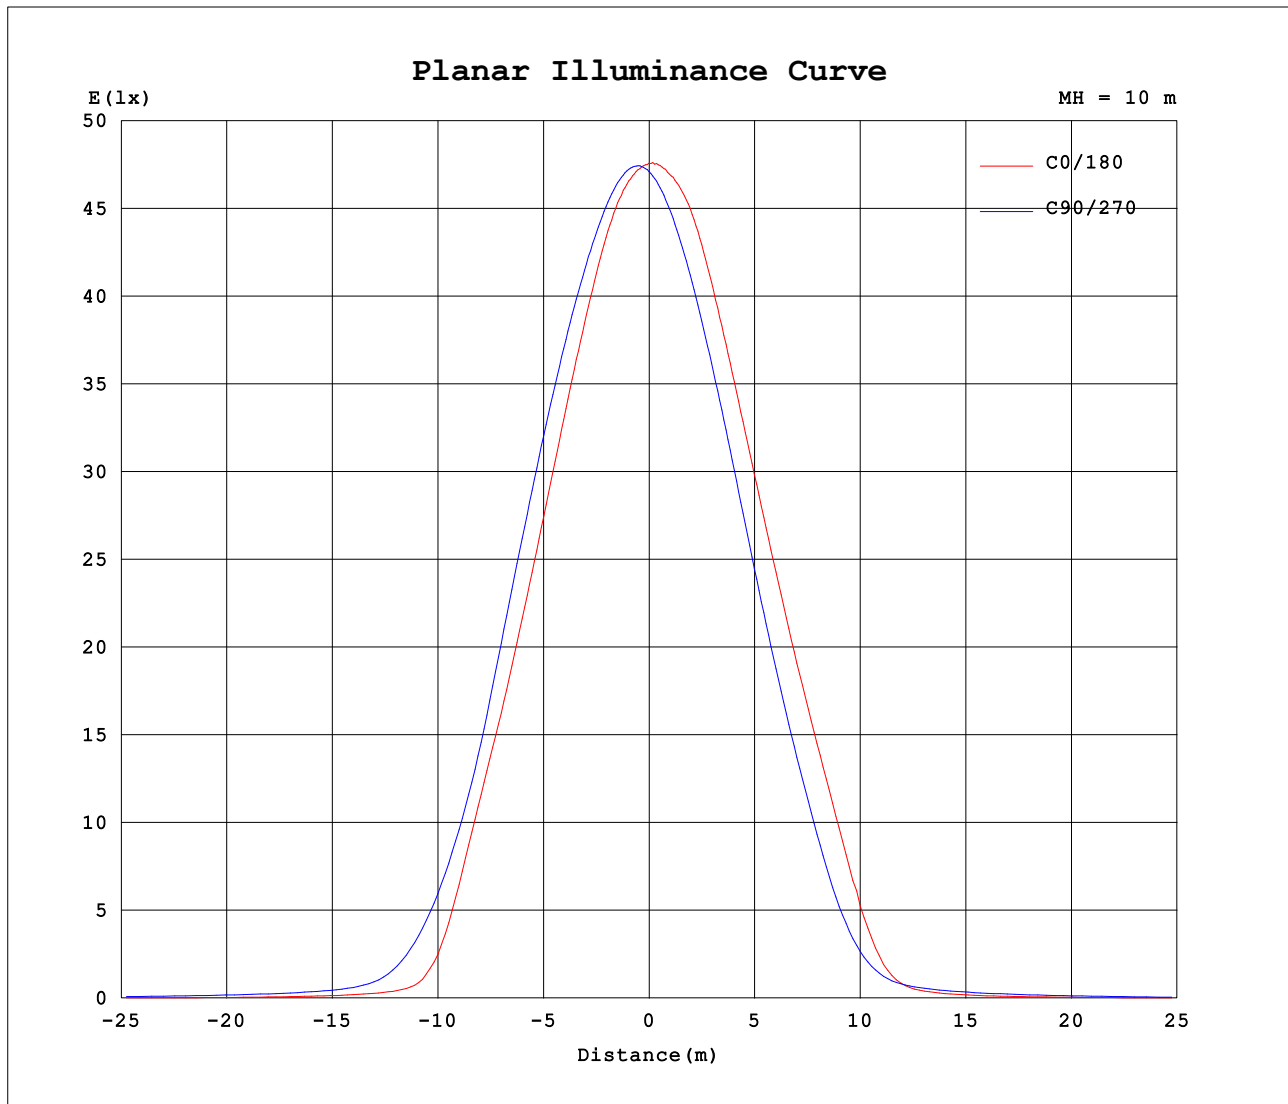

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: BQE46-1170-38-PV
佑明B档
3500K

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.5V I:0.3670A P:43.70W PF:0.9940 Lamp Flux:6862.69x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*3	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	4723	4723	4723	4723	4723	4723	4723	4723	4723	4723	4723	4723							
5	4688	4740	4775	4799	4798	4779	4727	4674	4626	4590	4595	4627							
10	4611	4722	4785	4814	4823	4816	4728	4605	4484	4412	4423	4480							
15	4449	4629	4742	4785	4811	4810	4638	4448	4302	4189	4203	4261							
20	4219	4455	4637	4707	4758	4704	4459	4218	4045	3914	3915	3974							
25	3917	4199	4443	4561	4612	4518	4224	3923	3703	3558	3541	3613							
30	3509	3816	4080	4257	4321	4238	3905	3552	3271	3097	3068	3145							
35	2939	3261	3473	3692	3790	3808	3449	3047	2707	2504	2455	2525							
40	2094	2452	2599	2749	2937	3139	2762	2326	1925	1674	1608	1602							
45	705	1176	1467	1693	1845	2068	1476	1218	925	756	687	566							
50	166	264	522	697	721	683	323	331	335	313	283	203							
55	99.4	136	229	302	277	194	131	129	199	220	198	116							
60	68.7	96.4	167	231	198	123	82.1	77.1	149	180	159	72.9							
65	44.9	66.1	132	198	159	88.9	53.9	51.9	113	146	124	49.4							
70	32.1	38.6	101	169	126	55.3	35.3	35.0	81.7	116	94.3	34.9							
75	23.5	27.2	60.8	135	88.2	31.9	26.6	24.9	45.0	94.8	57.4	24.9							
80	69.8	19.5	29.4	90.9	38.9	21.8	76.4	16.6	25.4	66.6	28.2	15.8							
85	21.8	23.5	14.1	31.3	17.4	14.2	23.5	14.1	12.0	18.6	12.8	13.2							
90	11.7	9.78	4.00	0.48	4.14	14.8	14.3	10.3	2.77	0.19	2.25	14.3							
95	5.84	9.31	2.79	0.28	2.45	10.6	7.80	6.64	2.43	0.28	2.10	6.61							
100	4.71	4.57	3.12	0.49	2.67	6.98	6.11	4.46	2.55	0.46	2.12	4.27							
105	4.37	4.11	4.55	0.63	3.46	4.55	5.02	3.71	3.58	0.61	3.38	3.74							
110	4.43	3.80	2.69	0.47	2.74	4.23	5.26	3.90	2.42	0.74	2.19	3.78							
115	4.27	3.79	2.52	0.48	2.34	4.54	5.02	3.63	2.28	0.73	2.04	3.62							
120	3.90	3.53	2.40	0.53	2.25	3.79	4.79	3.45	2.23	0.83	2.04	3.37							
125	4.01	3.68	2.42	0.54	2.30	3.76	4.69	3.54	2.42	0.95	2.39	3.66							
130	4.51	4.07	2.57	0.61	2.59	3.86	4.73	3.90	2.97	1.04	2.70	4.14							
135	5.67	4.44	2.30	0.77	2.92	4.37	5.57	4.75	3.03	1.19	2.73	4.15							
140	4.79	3.97	2.04	0.96	2.85	4.88	5.73	4.36	3.04	1.36	2.71	3.60							
145	4.44	3.73	2.03	1.15	2.99	4.25	4.81	3.94	3.20	1.52	2.80	3.58							
150	4.55	3.31	2.16	1.41	3.13	3.97	4.07	3.97	3.82	1.69	2.99	4.22							
155	5.87	3.91	2.51	1.58	3.46	4.36	4.52	5.30	5.03	1.83	3.10	5.42							
160	7.20	4.32	2.86	1.74	4.31	6.32	7.18	7.86	5.56	1.97	2.80	4.93							
165	5.46	3.27	2.70	1.90	3.73	7.29	7.78	7.00	4.11	2.09	2.54	3.57							
170	3.63	2.87	2.40	2.04	3.02	6.14	4.49	4.32	3.05	2.17	2.23	2.84							
175	2.54	2.37	2.14	2.14	2.39	3.22	2.53	2.72	2.36	2.19	2.17	2.24							
180	2.29	2.21	2.15	2.18	2.20	2.26	2.31	2.20	2.15	2.18	2.20	2.25							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1170-38-PV
佑明B档
3500K