


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.5V I:0.1250A P:14.90W PF:0.9960 Lamp Flux:2340.53x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*1	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 157.08 lm/W			
MODEL		Imax(cd)	1626	S/MH(C0/180)	1.18
NOMINAL POWER(W)	16	LOR(%)	100.0	S/MH(C90/270)	1.20
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	2340.5	□ UP,DN(C0-180)	0.4,54.4
NOMINAL FLUX(lm)	2340.53	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.4,44.8
LAMPS INSIDE	1	□ up(%)	0.8	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	119.5	□ down(%)	99.2	CIBSE SHR MAX	1.15

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

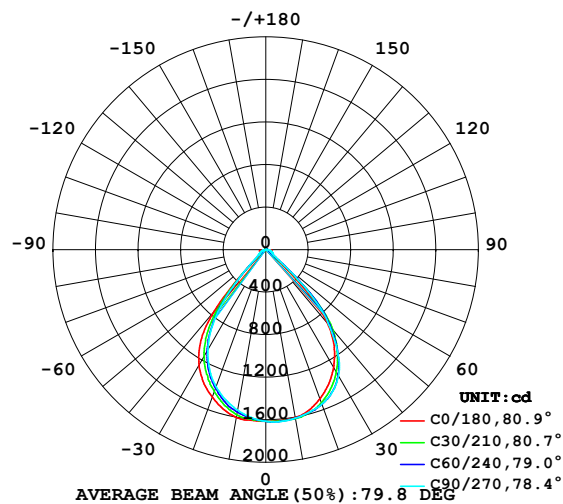

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

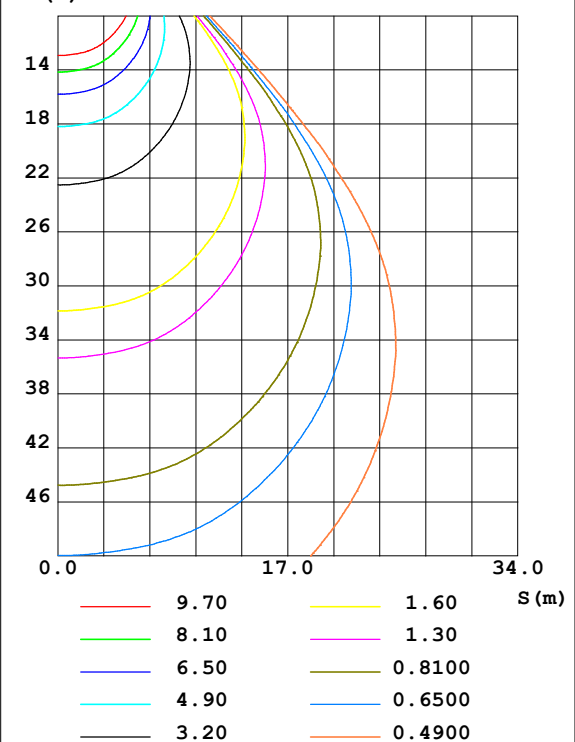


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

□ Range: 0 - 180DEG
 □ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: BQE46-0650-42-PV-S1
 佑明B档
 3500K

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	zone	total	%lum, lamp
5	1612	1619	1622	1621	1610	1594	1584	1594	0- 5	38.51	38.51	1.65,1.65
10	1603	1611	1609	1619	1601	1564	1533	1555	5- 10	114.3	152.8	6.53,6.53
15	1564	1586	1583	1597	1551	1498	1461	1492	10- 15	185.7	338.5	14.5,14.5
20	1492	1539	1545	1549	1475	1401	1370	1407	15- 20	248.6	587.1	25.1,25.1
25	1398	1461	1480	1474	1381	1283	1250	1294	20- 25	299.2	886.3	37.9,37.9
30	1277	1345	1368	1358	1256	1132	1089	1142	25- 30	332.4	1219	52.1,52.1
35	1125	1178	1184	1187	1075	925.4	880.1	950.7	30- 35	340.8	1560	66.6,66.6
40	904.3	964.0	926.2	933.2	756.9	615.4	576.9	679.1	35- 40	312.0	1872	80,80
45	476.3	632.0	598.3	508.4	239.1	245.4	254.6	325.8	40- 45	226.0	2098	89.6,89.6
50	93.65	180.0	207.6	135.8	54.51	81.34	114.1	117.3	45- 50	99.01	2197	93.8,93.8
55	39.98	65.25	89.86	61.66	33.24	50.94	82.82	65.98	50- 55	36.20	2233	95.4,95.4
60	25.89	44.08	69.55	45.68	23.30	37.60	68.02	46.54	55- 60	23.92	2257	96.4,96.4
65	17.77	33.88	60.14	35.40	15.15	27.39	54.42	34.25	60- 65	19.01	2276	97.2,97.2
70	11.61	24.61	51.48	25.17	10.42	17.84	42.53	25.02	65- 70	14.91	2291	97.9,97.9
75	8.462	16.85	41.42	17.07	8.320	10.91	34.05	16.83	70- 75	11.17	2302	98.3,98.3
80	25.16	9.526	28.42	9.074	44.84	7.358	23.25	8.823	75- 80	9.054	2311	98.7,98.7
85	16.19	9.213	9.530	6.396	11.70	8.891	5.836	5.328	80- 85	6.861	2318	99,99
90	9.245	5.915	0.1293	5.032	10.61	5.344	0.0786	9.442	85- 90	3.928	2322	99.2,99.2
95	8.371	5.748	0.1941	6.162	6.610	4.571	0.1398	5.181	90- 95	2.955	2325	99.3,99.3
100	5.798	4.663	0.3238	3.961	5.330	3.694	0.2030	3.531	95-100	2.359	2327	99.4,99.4
105	4.679	4.364	0.3505	3.904	5.093	3.637	0.2183	3.536	100-105	1.837	2329	99.5,99.5
110	4.501	3.305	0.2280	3.131	5.212	2.934	0.1687	2.805	105-110	1.697	2330	99.6,99.6
115	4.214	3.046	0.2451	2.881	5.128	2.656	0.1647	2.577	110-115	1.396	2332	99.6,99.6
120	3.888	2.776	0.2491	2.559	4.444	2.501	0.2105	2.287	115-120	1.235	2333	99.7,99.7
125	3.639	2.644	0.2125	2.504	4.280	2.712	0.2394	2.345	120-125	1.102	2334	99.7,99.7
130	3.756	2.629	0.2165	2.698	4.561	3.375	0.2948	2.655	125-130	1.085	2335	99.8,99.8
135	4.520	2.911	0.2797	3.034	5.721	3.440	0.3619	2.753	130-135	1.123	2336	99.8,99.8
140	5.225	2.637	0.3487	2.760	5.989	2.690	0.4308	2.299	135-140	1.083	2337	99.9,99.9
145	3.902	1.958	0.4119	2.138	3.818	2.155	0.4865	1.840	140-145	0.7969	2338	99.9,99.9
150	3.217	1.713	0.5403	1.850	2.932	1.957	0.5630	1.755	145-150	0.5642	2339	99.9,99.9
155	3.004	1.918	0.5881	1.903	2.799	2.282	0.6225	2.105	150-155	0.4662	2339	99.9,99.9
160	4.045	2.428	0.6380	2.494	4.168	2.806	0.6799	2.230	155-160	0.4617	2340	100,100
165	4.651	2.333	0.6858	2.480	3.905	2.330	0.7259	1.851	160-165	0.4104	2340	100,100
170	2.908	1.537	0.7242	1.528	2.145	1.351	0.7562	1.359	165-170	0.2329	2340	100,100
175	1.161	0.9571	0.7470	0.8980	0.8543	0.7811	0.7589	0.8049	170-175	0.0846	2341	100,100
180	0.7913	0.7578	0.7489	0.7645	0.7894	0.7569	0.7547	0.7636	175-180	0.0191	2341	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

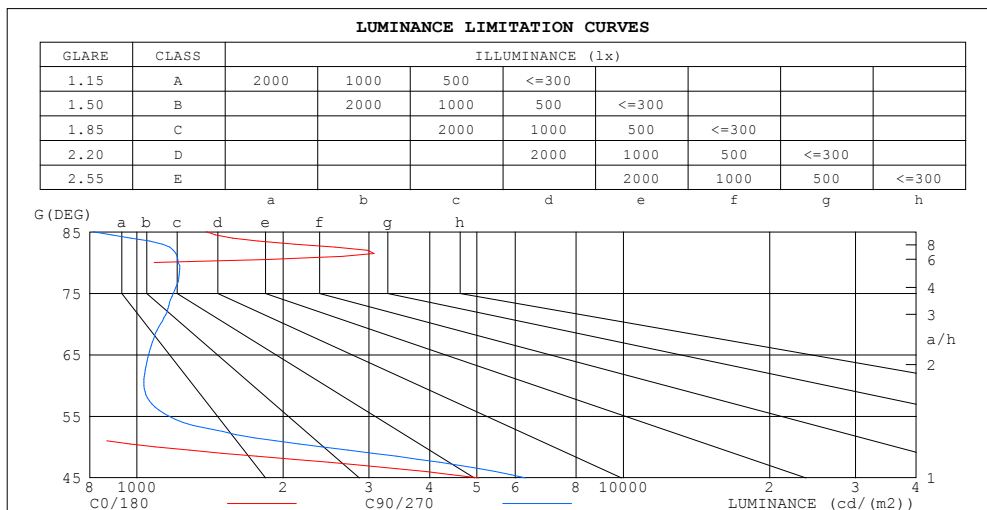

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1391	813
80	1085	1217
75	245	1190
70	254	1119
65	315	1058
60	388	1034
55	522	1165
50	1091	2401
45	5044	6291


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
佑明B档
3500K

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.5V I:0.1250A P:14.90W PF:0.9960 Lamp Flux:2340.53x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*1	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

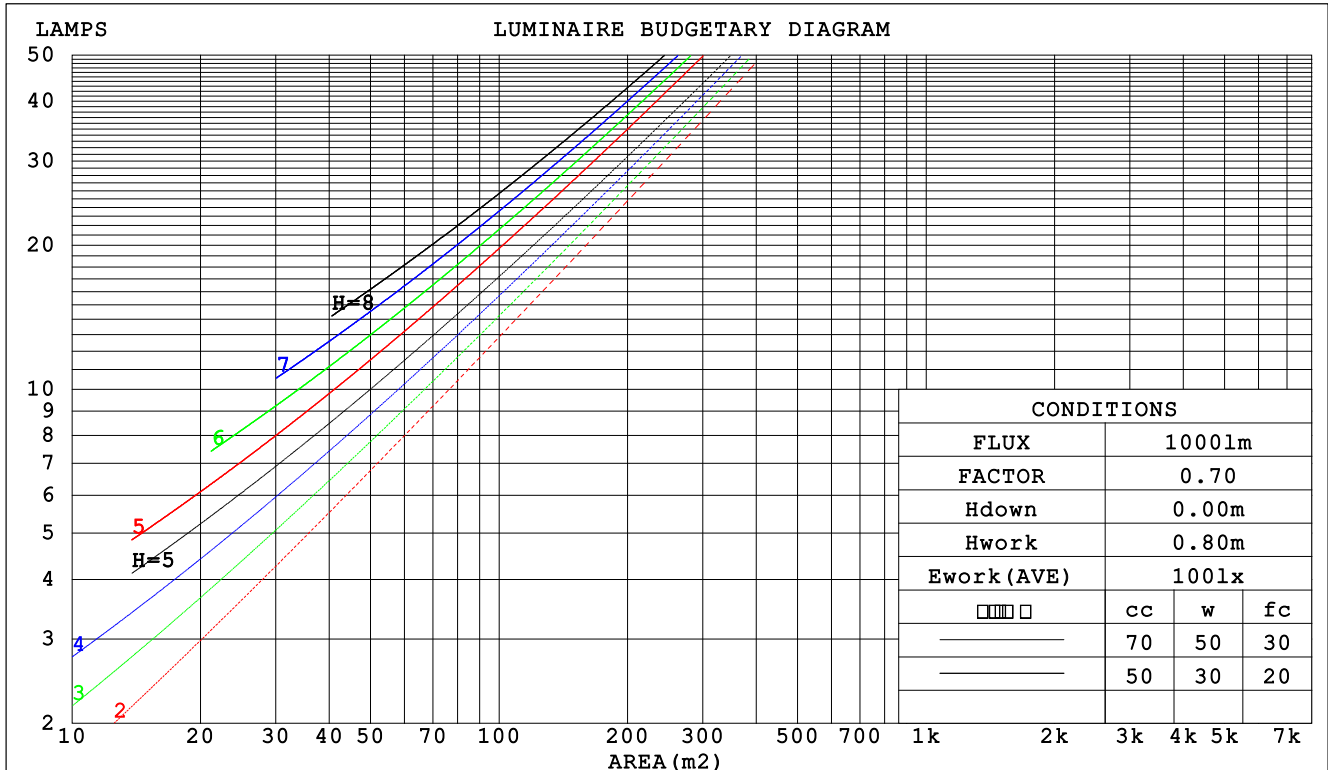

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

□ Range: 0 - 180DEG
 □ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: BQE46-0650-42-PV-S1
 佑明B档
 3500K

WEC AND CCEC

Test:U:119.5V I:0.1250A P:14.90W PF:0.9960 Lamp Flux:2340.53x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*1	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.208 .118 .037	.201 .115 .036	.188 .108 .034	.176 .101 .032	.164 .095 .031	
2.0	.200 .109 .034	.194 .107 .033	.182 .101 .031	.172 .096 .030	.162 .092 .029	
3.0	.190 .101 .030	.185 .099 .030	.175 .095 .029	.166 .091 .028	.158 .087 .027	
4.0	.181 .094 .028	.176 .092 .027	.168 .089 .027	.160 .086 .026	.152 .083 .025	
5.0	.172 .088 .025	.168 .086 .025	.160 .083 .025	.153 .081 .024	.147 .078 .024	
6.0	.163 .082 .023	.160 .081 .023	.153 .078 .023	.147 .076 .022	.141 .074 .022	
7.0	.156 .077 .022	.152 .076 .022	.146 .074 .021	.141 .072 .021	.136 .070 .021	
8.0	.148 .072 .020	.146 .072 .020	.140 .070 .020	.135 .068 .020	.130 .067 .019	
9.0	.142 .068 .019	.139 .068 .019	.134 .066 .019	.130 .065 .019	.125 .064 .018	
10.0	.135 .065 .018	.133 .064 .018	.129 .063 .018	.124 .062 .018	.120 .061 .017	

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.197 .197 .197	.168 .168 .168	.115 .115 .115	.066 .066 .066	.021 .021 .021	
1.0	.179 .163 .149	.154 .140 .128	.105 .096 .088	.060 .056 .051	.019 .018 .017	
2.0	.166 .139 .115	.142 .119 .100	.098 .083 .070	.056 .048 .041	.018 .016 .013	
3.0	.155 .120 .092	.133 .104 .080	.091 .072 .056	.053 .042 .033	.017 .014 .011	
4.0	.146 .106 .075	.126 .091 .065	.086 .064 .046	.050 .037 .027	.016 .012 .009	
5.0	.138 .095 .062	.119 .082 .054	.082 .057 .038	.047 .034 .023	.015 .011 .007	
6.0	.132 .086 .053	.113 .074 .046	.078 .052 .032	.045 .031 .019	.015 .010 .006	
7.0	.125 .078 .045	.108 .068 .040	.075 .048 .028	.043 .028 .017	.014 .009 .006	
8.0	.120 .072 .040	.103 .063 .035	.071 .044 .025	.042 .026 .015	.013 .009 .005	
9.0	.115 .067 .035	.099 .059 .031	.069 .041 .022	.040 .024 .013	.013 .008 .004	
10.0	.110 .063 .032	.095 .055 .028	.066 .039 .020	.038 .023 .012	.012 .007 .004	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
佑明B档
3500K

Uncorrected UGR Table

Test:U:119.5V I:0.1250A P:14.90W PF:0.9960 Lamp Flux:2340.53x1 lm										
NAME: 磁铁灯条					TYPE:T5窄灯条 3500K			WEIGHT:		
DIM.: 4FT*1					SPEC.:透镜款			SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co,ltd					SUR.:1.22*0.11m			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.1	16.2	15.4	16.4	16.6	15.5	16.6	15.8	16.8	17.0
3H	14.9	16.0	15.2	16.2	16.4	15.6	16.6	15.8	16.8	17.0
4H	14.9	15.8	15.2	16.1	16.3	15.6	16.6	15.9	16.8	17.1
6H	14.8	15.7	15.1	16.0	16.3	15.7	16.6	16.0	16.9	17.1
8H	15.3	16.1	15.6	16.4	16.7	15.7	16.6	16.1	16.9	17.2
12H	15.4	16.2	15.7	16.5	16.8	15.7	16.6	16.1	16.9	17.2
4H 2H	14.9	15.8	15.2	16.1	16.3	15.3	16.3	15.6	16.5	16.7
3H	14.7	15.5	15.1	15.8	16.1	15.4	16.2	15.7	16.5	16.8
4H	14.6	15.4	15.0	15.7	16.0	15.5	16.2	15.9	16.6	16.9
6H	14.7	15.3	15.1	15.7	16.0	15.7	16.3	16.1	16.7	17.0
8H	15.3	15.9	15.7	16.3	16.7	15.7	16.3	16.1	16.7	17.1
12H	15.5	16.0	15.9	16.4	16.8	15.8	16.3	16.2	16.7	17.1
8H 4H	14.5	15.1	15.0	15.5	15.9	15.4	16.0	15.8	16.4	16.8
6H	14.6	15.1	15.0	15.5	15.9	15.6	16.1	16.0	16.5	16.9
8H	15.3	15.7	15.8	16.2	16.6	15.7	16.1	16.1	16.5	17.0
12H	15.5	15.9	16.0	16.4	16.9	15.7	16.1	16.2	16.6	17.1
12H 4H	14.5	15.1	14.9	15.4	15.9	15.3	15.9	15.8	16.3	16.7
6H	14.6	15.0	15.0	15.4	15.9	15.5	16.0	16.0	16.4	16.9
8H	15.3	15.6	15.7	16.1	16.6	15.6	16.0	16.1	16.5	17.0
Variations with the observer position at spacings:										
S = 1.0H	+ 2.5 / - 4.8					+ 2.2 / - 4.3				
1.5H	+ 3.2 / - 5.5					+ 2.8 / - 5.0				
2.0H	+ 5.4 / - 2.7					+ 5.4 / - 3.0				

CIE Pub.117 Corrected 2341 lm Total Lamp Luminous Flux.(8log(F/F0) = 3.0)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
佑明B档
3500K

UTILIZATION FACTORS TABLE

Test:U:119.5V I:0.1250A P:14.90W PF:0.9960 Lamp Flux:2340.53x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*1	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	79	71	67	78	71	66	77	71	66	62
0.80	88	80	76	87	80	75	85	79	75	70
1.00	94	87	82	93	86	82	91	86	81	77
1.25	98	92	88	97	91	87	95	90	87	82
1.50	102	96	92	100	95	91	98	93	90	85
2.00	106	100	97	104	99	96	101	97	94	88
2.50	108	103	99	106	102	98	103	99	96	90
3.00	110	105	102	108	104	101	104	101	99	92
4.00	112	108	106	110	107	104	106	103	101	94
5.00	113	110	108	111	108	106	107	105	103	95
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: BQE46-0650-42-PV-S1
 佑明B档
 3500K

ISOCANDELA DIAGRAM

Test:U:119.5V I:0.1250A P:14.90W PF:0.9960 Lamp Flux:2340.53x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*1	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

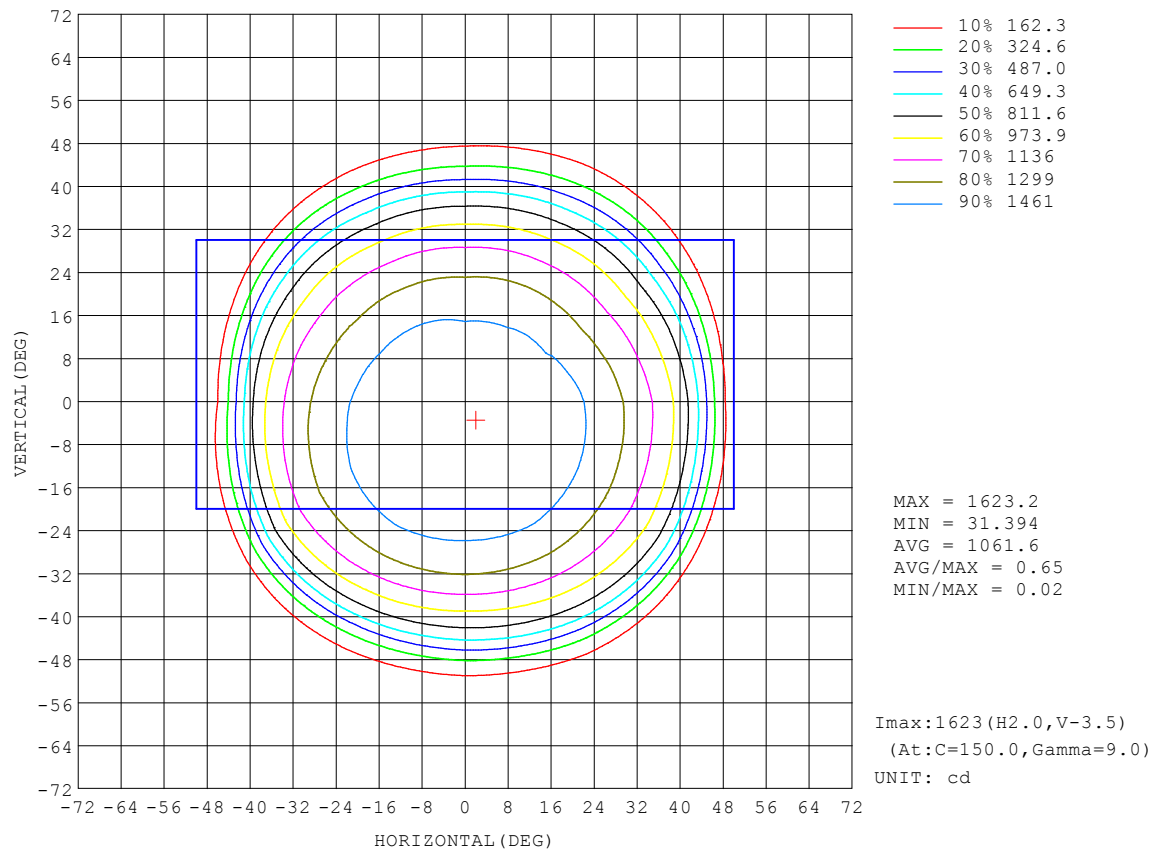


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
佑明B档
3500K

AAI Figure

Test:U:119.5V I:0.1250A P:14.90W PF:0.9960 Lamp Flux:2340.53x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*1	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

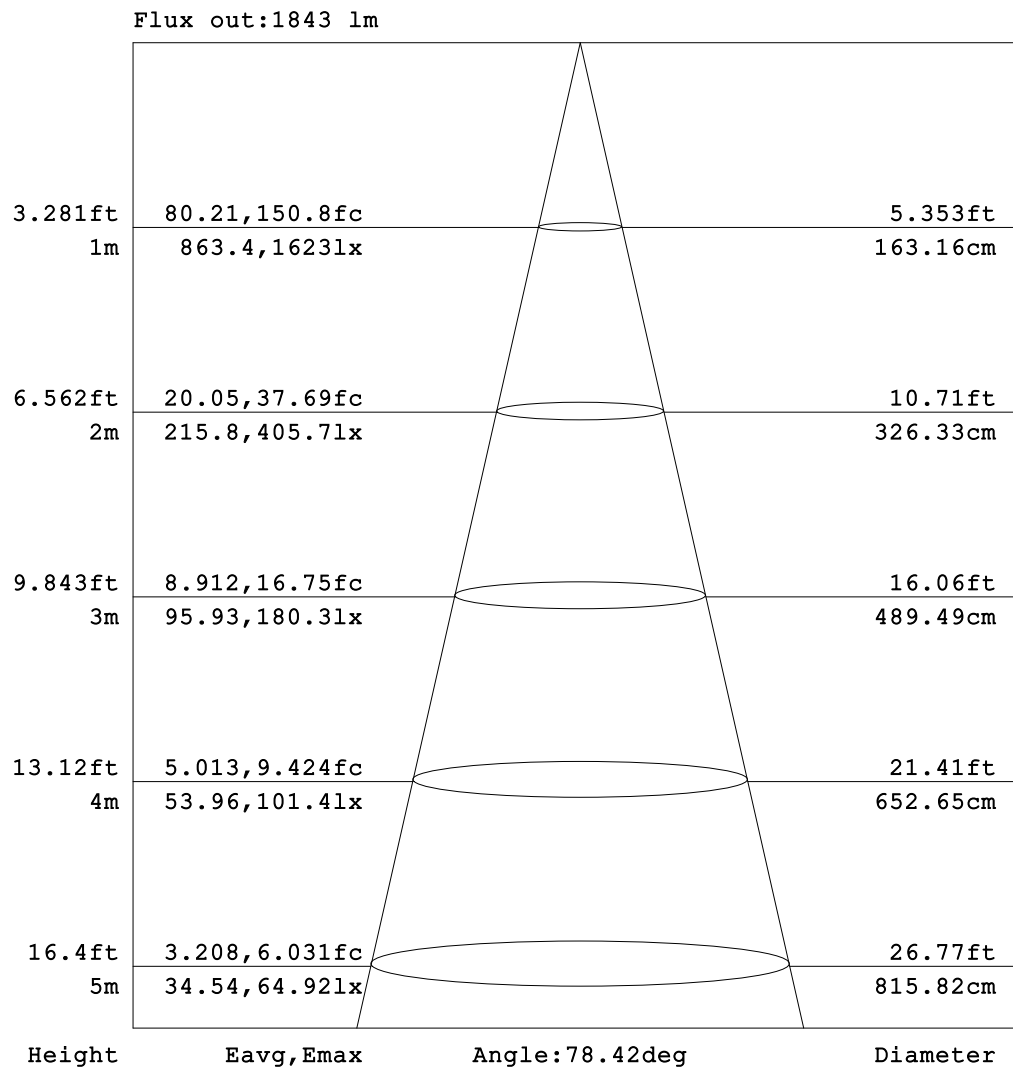


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
佑明B档
3500K

ISOLUX DIAGRAM


Test:U:119.5V I:0.1250A P:14.90W PF:0.9960 Lamp Flux:2340.53x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*1	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

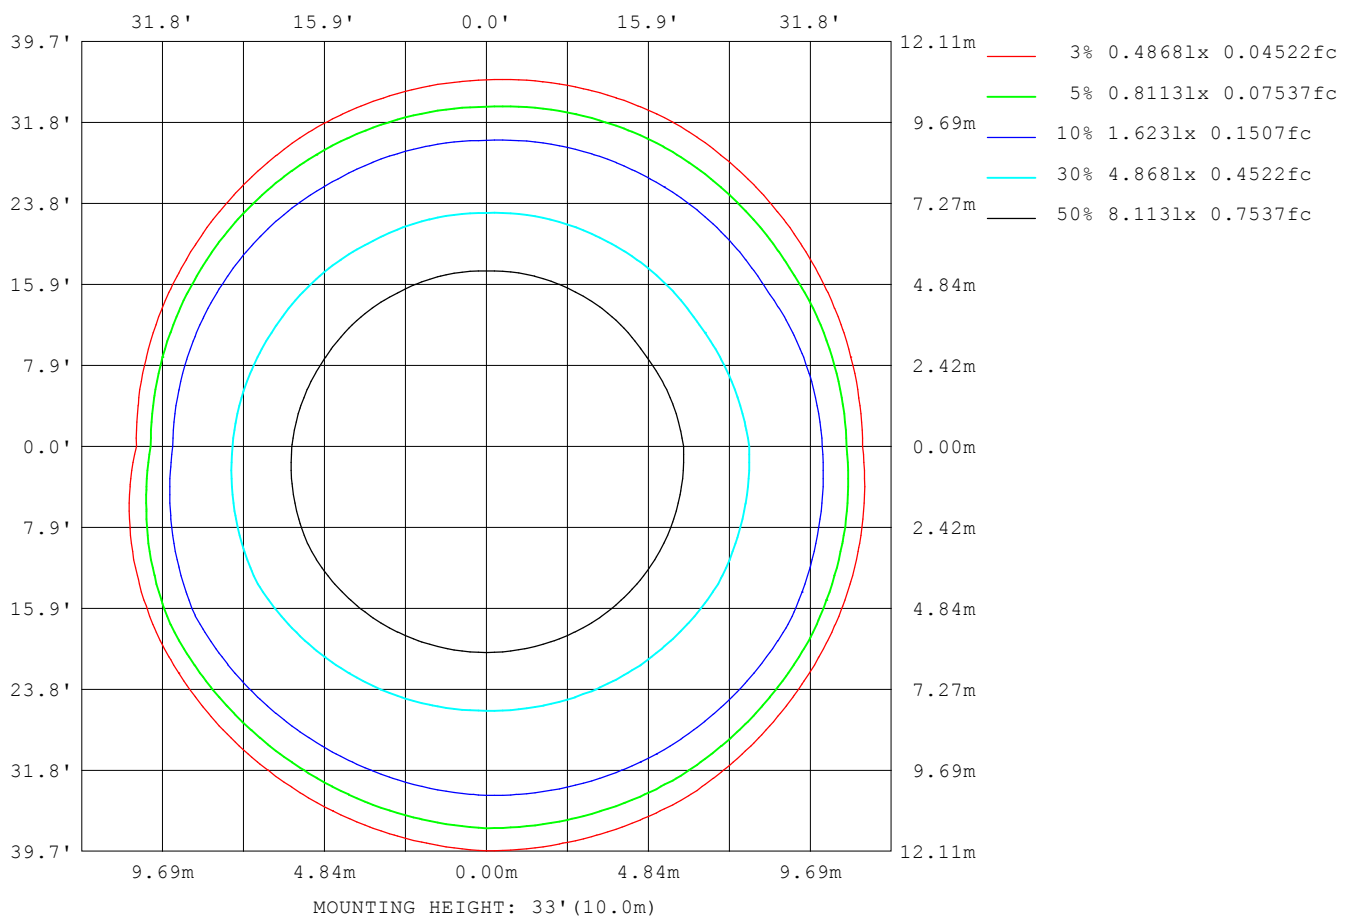

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
佑明B档
3500K

Planar Illuminance Curve

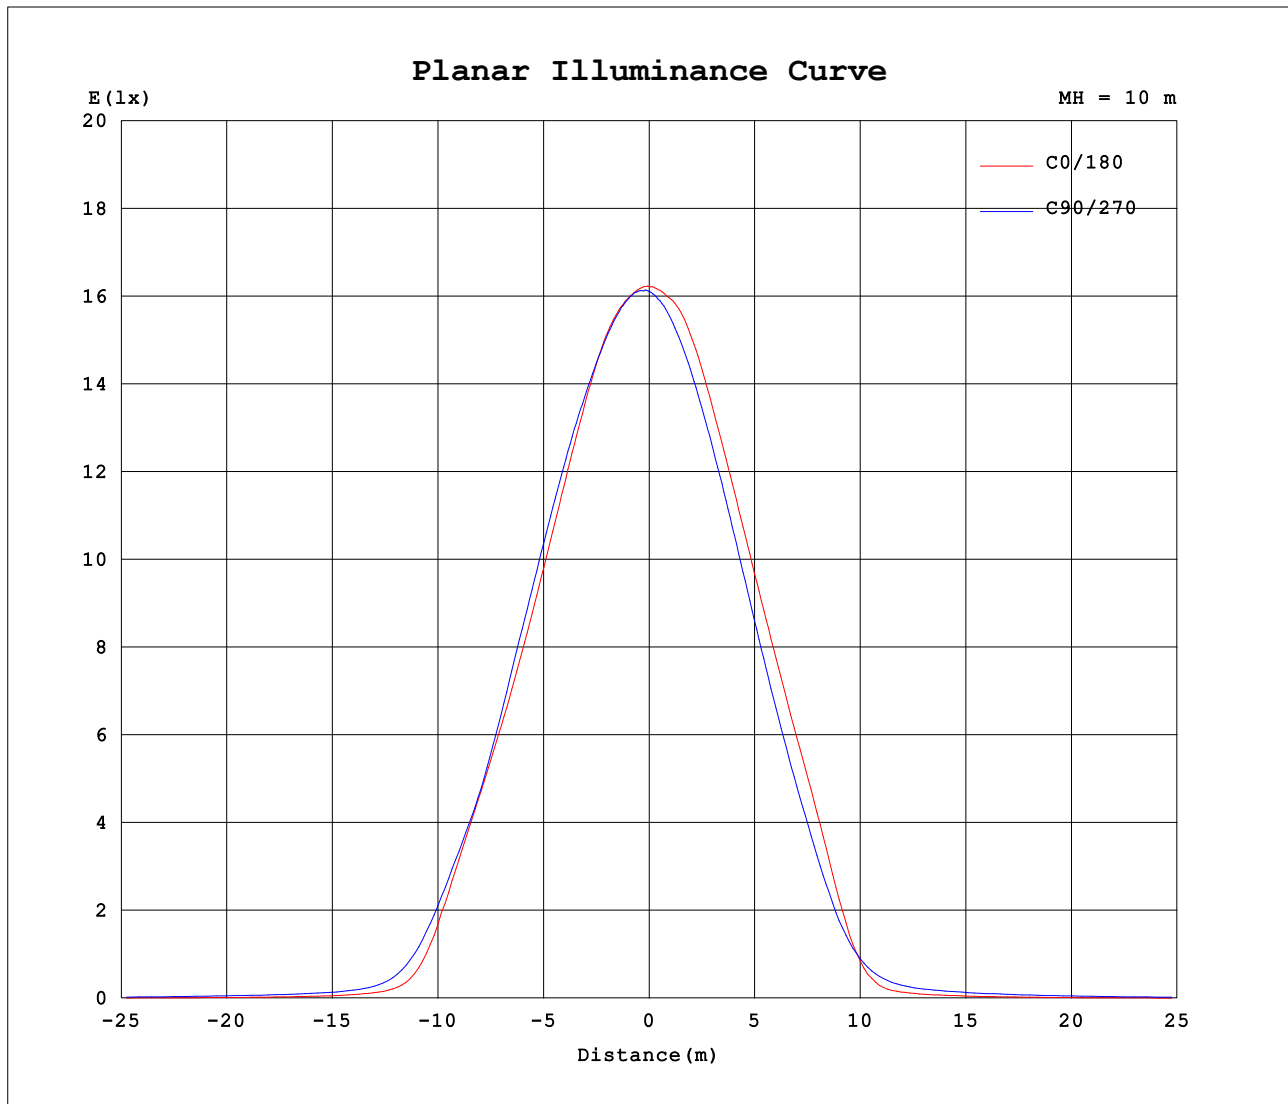

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
佑明B档
3500K

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.5V I:0.1250A P:14.90W PF:0.9960 Lamp Flux:2340.53x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*1	SPEC.:透镜款	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1615	1615	1615	1615	1615	1615	1615	1615	1615	1615	1615	1615						
5	1612	1617	1621	1622	1621	1621	1610	1599	1590	1584	1588	1600						
10	1603	1614	1609	1609	1615	1622	1601	1578	1550	1533	1540	1569						
15	1564	1587	1584	1583	1599	1594	1551	1512	1484	1461	1475	1509						
20	1492	1532	1546	1545	1561	1538	1475	1417	1386	1370	1394	1420						
25	1398	1444	1478	1480	1489	1458	1381	1302	1264	1250	1277	1311						
30	1277	1328	1363	1368	1369	1348	1256	1161	1103	1089	1116	1169						
35	1125	1174	1183	1184	1181	1192	1075	961	890	880	918	983						
40	904	979	949	926	925	942	757	650	581	577	634	725						
45	476	634	630	598	530	487	239	244	247	255	303	348						
50	93.7	151	209	208	161	110	54.5	64.6	98.1	114	124	110						
55	40.0	51.0	79.5	89.9	75.4	47.9	33.2	34.9	67.0	82.8	79.4	52.5						
60	25.9	33.7	54.5	69.5	56.4	34.9	23.3	23.6	51.6	68.0	63.6	29.4						
65	17.8	24.5	43.2	60.1	45.8	25.0	15.1	16.0	38.8	54.4	49.7	18.8						
70	11.6	15.1	34.2	51.5	36.3	14.0	10.4	10.5	25.2	42.5	37.4	12.6						
75	8.46	9.68	24.0	41.4	24.7	9.45	8.32	8.09	13.7	34.0	24.2	9.45						
80	25.2	7.45	11.6	28.4	10.9	7.20	44.8	6.07	8.65	23.3	10.9	6.69						
85	16.2	11.8	6.61	9.53	5.73	7.06	11.7	13.4	4.38	5.84	5.96	4.69						
90	9.24	8.37	3.46	0.13	2.53	7.54	10.6	8.73	1.95	0.08	2.17	16.7						
95	8.37	9.11	2.38	0.19	2.31	10.0	6.61	6.97	2.17	0.14	1.77	8.59						
100	5.80	6.45	2.87	0.32	2.50	5.42	5.33	4.44	2.94	0.20	2.01	5.05						
105	4.68	4.51	4.22	0.35	3.35	4.46	5.09	4.01	3.26	0.22	3.15	3.92						
110	4.50	3.84	2.77	0.23	2.44	3.83	5.21	3.53	2.34	0.17	2.29	3.32						
115	4.21	3.51	2.59	0.25	2.08	3.68	5.13	3.37	1.94	0.16	1.91	3.24						
120	3.89	3.30	2.25	0.25	1.89	3.23	4.44	3.15	1.85	0.21	1.66	2.91						
125	3.64	3.23	2.05	0.21	1.81	3.20	4.28	3.26	2.16	0.24	1.77	2.93						
130	3.76	3.42	1.84	0.22	2.00	3.39	4.56	3.90	2.85	0.29	2.02	3.30						
135	4.52	3.98	1.85	0.28	2.10	3.97	5.72	4.59	2.29	0.36	1.80	3.71						
140	5.22	3.79	1.49	0.35	1.62	3.90	5.99	3.60	1.78	0.43	1.41	3.19						
145	3.90	2.69	1.22	0.41	1.40	2.88	3.82	2.77	1.54	0.49	1.31	2.37						
150	3.22	2.22	1.20	0.54	1.27	2.43	2.93	2.40	1.51	0.56	1.37	2.14						
155	3.00	2.33	1.51	0.59	1.36	2.45	2.80	2.77	1.80	0.62	1.59	2.62						
160	4.05	2.90	1.95	0.64	1.57	3.42	4.17	3.70	1.91	0.68	1.64	2.82						
165	4.65	2.81	1.85	0.69	1.36	3.60	3.91	3.18	1.48	0.73	1.54	2.16						
170	2.91	1.77	1.30	0.72	0.96	2.10	2.14	1.71	1.00	0.76	1.06	1.66						
175	1.16	1.10	0.81	0.75	0.76	1.03	0.85	0.80	0.76	0.76	0.76	0.85						
180	0.79	0.77	0.75	0.75	0.76	0.77	0.79	0.76	0.75	0.75	0.75	0.77						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-0650-42-PV-S1
佑明B档
3500K