


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.5V I:0.1990A P:23.70W PF:0.9960 Lamp Flux:3367.91x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.2*0.11m	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 142.11 lm/W			
MODEL		Imax(cd)	1095	S/MH(C0/180)	1.25
NOMINAL POWER(W)	24	LOR(%)	100.0	S/MH(C90/270)	1.20
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	3367.9	□ UP,DN(C0-180)	2.8,47.2
NOMINAL FLUX(lm)	3367.91	CIE CLASS	DIRECT	□ UP,DN(C180-360)	3.2,46.8
LAMPS INSIDE	1	□ up(%)	6.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	119.5	□ down(%)	94.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

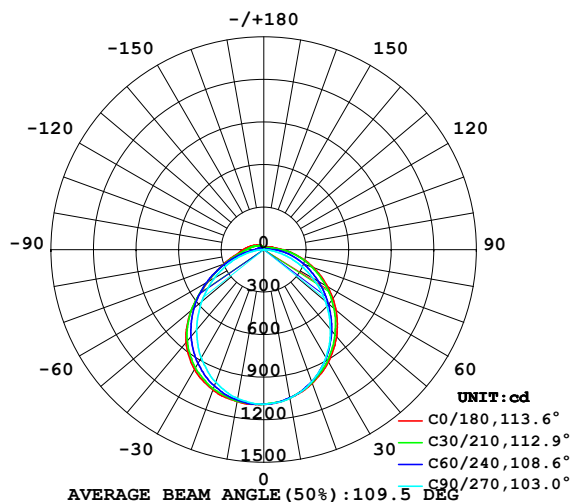

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

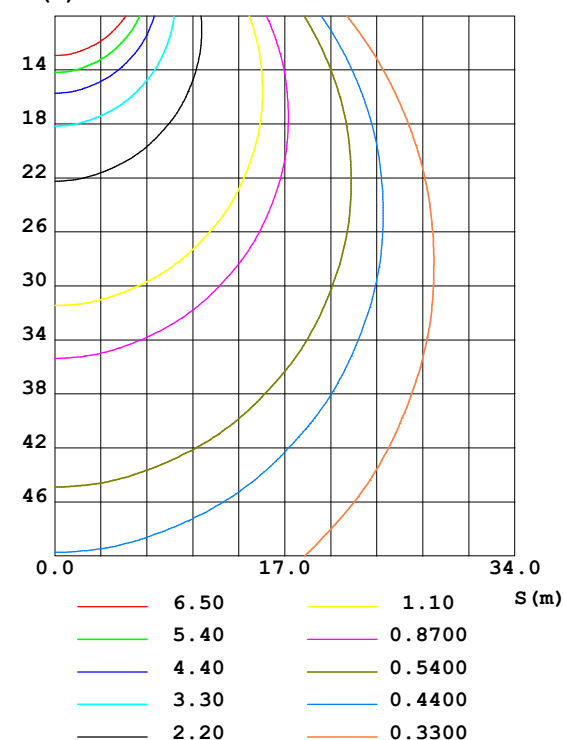


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	zone	total	%lum, lamp
5	1084	1081	1082	1091	1094	1090	1084	1082	0- 5	26.02	26.02	0.77,0.77
10	1063	1062	1064	1079	1088	1080	1066	1061	5- 10	77.14	103.2	3.06,3.06
15	1038	1033	1034	1061	1075	1061	1036	1032	10- 15	125.6	228.7	6.79,6.79
20	1003	993.8	991.2	1030	1053	1033	995.2	992.3	15- 20	169.6	398.3	11.8,11.8
25	961.2	945.2	940.1	989.8	1019	993.7	943.8	943.9	20- 25	207.6	605.9	18,18
30	913.6	891.7	877.1	941.8	976.7	946.4	882.8	888.2	25- 30	238.3	844.2	25.1,25.1
35	857.8	829.8	809.0	881.0	918.7	886.0	812.5	825.2	30- 35	260.5	1105	32.8,32.8
40	800.2	763.9	731.4	816.1	854.2	820.1	738.0	758.3	35- 40	273.6	1378	40.9,40.9
45	734.1	693.0	653.0	738.3	767.9	741.3	656.0	686.2	40- 45	277.2	1656	49.2,49.2
50	667.0	620.4	567.1	655.5	666.2	656.2	573.3	612.1	45- 50	270.9	1926	57.2,57.2
55	593.7	547.0	483.5	562.9	558.0	559.6	487.2	536.5	50- 55	255.3	2182	64.8,64.8
60	519.1	472.8	396.5	468.4	458.0	464.0	402.7	462.2	55- 60	231.7	2413	71.7,71.7
65	446.1	400.8	313.9	376.4	373.3	372.5	317.8	389.3	60- 65	203.1	2617	77.7,77.7
70	373.3	331.6	232.3	293.1	302.4	290.6	237.0	320.2	65- 70	171.5	2788	82.8,82.8
75	304.0	266.3	155.6	219.5	243.7	218.4	158.7	254.1	70- 75	138.9	2927	86.9,86.9
80	237.3	204.5	83.59	156.6	195.6	158.9	88.85	191.7	75- 80	106.7	3034	90.1,90.1
85	182.8	148.6	28.34	112.0	165.4	118.1	32.33	133.5	80- 85	77.67	3111	92.4,92.4
90	136.4	98.61	0.7052	88.91	145.7	95.78	0.9189	83.80	85- 90	55.28	3167	94,94
95	101.3	63.28	1.635	74.20	127.7	82.44	1.258	52.29	90- 95	40.48	3207	95.2,95.2
100	75.44	45.93	2.004	64.59	110.9	70.99	1.966	37.32	95-100	31.54	3239	96.2,96.2
105	63.27	36.22	1.909	56.09	97.65	61.39	1.978	29.91	100-105	25.78	3264	96.9,96.9
110	53.19	29.02	0.8083	47.89	84.82	51.64	1.453	23.60	105-110	21.19	3286	97.6,97.6
115	44.47	22.58	0.8244	41.48	73.97	44.92	1.250	17.86	110-115	17.36	3303	98.1,98.1
120	35.41	18.67	0.9871	37.63	62.53	41.06	1.181	14.38	115-120	14.01	3317	98.5,98.5
125	29.01	15.51	0.8153	35.27	56.13	38.54	1.003	11.73	120-125	11.77	3329	98.8,98.8
130	23.58	11.76	0.5227	32.72	54.05	35.30	0.9117	9.445	125-130	9.890	3339	99.1,99.1
135	18.69	8.701	0.5418	29.77	48.79	31.73	0.9022	8.022	130-135	8.119	3347	99.4,99.4
140	14.62	7.162	0.5646	26.30	42.71	27.37	0.8926	7.214	135-140	6.489	3353	99.6,99.6
145	11.47	5.874	0.5780	22.71	34.21	23.23	0.8755	6.196	140-145	4.985	3358	99.7,99.7
150	9.452	4.528	0.8511	19.13	27.54	19.26	1.108	5.532	145-150	3.665	3362	99.8,99.8
155	8.532	3.865	1.270	15.57	22.40	15.52	1.055	4.882	150-155	2.626	3364	99.9,99.9
160	7.463	3.458	1.161	12.15	16.53	11.83	1.007	3.818	155-160	1.771	3366	100,100
165	5.780	2.920	1.034	7.790	10.44	7.879	0.9518	2.300	160-165	1.043	3367	100,100
170	3.848	2.076	0.9039	4.474	3.520	3.302	0.8757	1.494	165-170	0.4612	3368	100,100
175	1.279	1.063	0.7818	0.9692	0.7233	0.8067	0.7783	0.7647	170-175	0.1208	3368	100,100
180	0.6948	0.7023	0.7057	0.7160	0.6909	0.7004	0.7076	0.7275	175-180	0.0187	3368	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

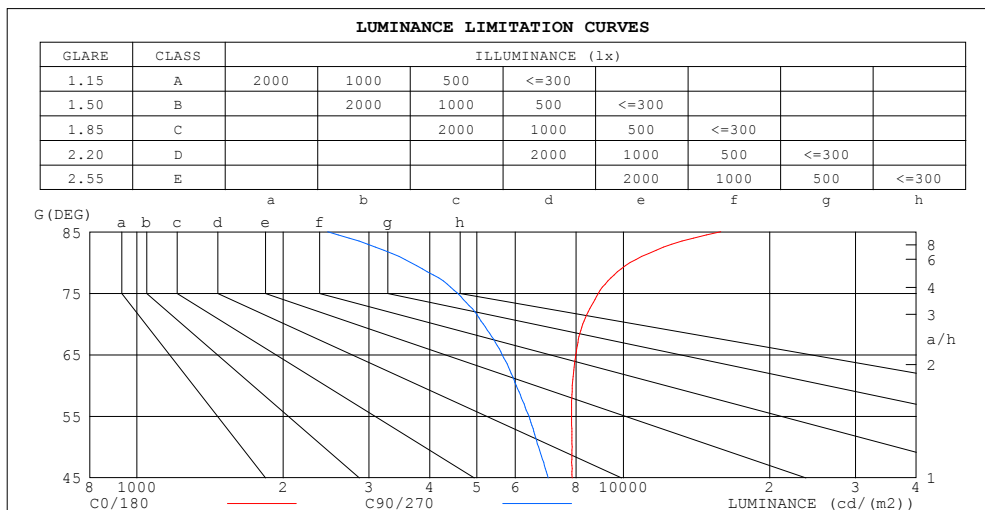

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	15869	2468
80	10338	3654
75	8885	4565
70	8258	5155
65	7986	5638
60	7854	6020
55	7830	6398
50	7850	6698
45	7854	7010


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.5V I:0.1990A P:23.70W PF:0.9960 Lamp Flux:3367.91x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.2*0.11m	PROTECTION ANGLE:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

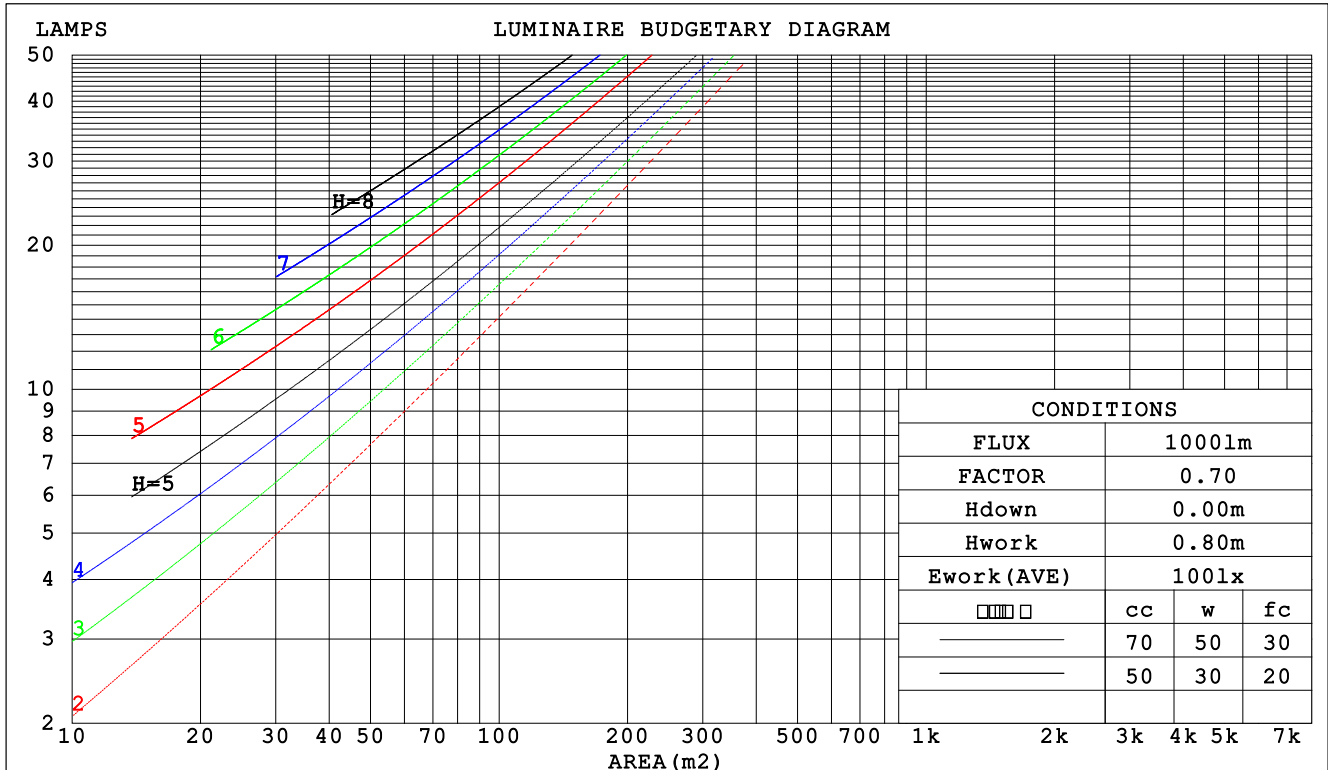

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

□ Range: 0 - 180DEG
 □ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: BQE46-1000-42-PV-S1
 源磊A-档
 3500K

WEC AND CCEC

Test:U:119.5V I:0.1990A P:23.70W PF:0.9960 Lamp Flux:3367.91x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.2*0.11m	PROTECTION ANGLE:

□cc	80%	70%	50%	30%	10%	0
□w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
□fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.331 .188 .060	.322 .184 .058	.305 .175 .056	.290 .167 .054	.276 .160 .052	
2.0	.301 .165 .051	.293 .161 .050	.278 .155 .048	.264 .148 .046	.252 .142 .045	
3.0	.275 .146 .044	.268 .143 .043	.254 .138 .042	.242 .133 .041	.230 .128 .039	
4.0	.251 .131 .038	.245 .128 .038	.233 .124 .037	.222 .119 .036	.212 .115 .035	
5.0	.231 .118 .034	.226 .116 .034	.215 .112 .033	.205 .108 .032	.196 .105 .031	
6.0	.214 .107 .031	.209 .105 .030	.199 .102 .030	.190 .099 .029	.182 .096 .028	
7.0	.199 .098 .028	.194 .097 .028	.185 .094 .027	.177 .091 .026	.170 .088 .026	
8.0	.185 .091 .025	.181 .089 .025	.173 .087 .025	.166 .084 .024	.159 .082 .024	
9.0	.173 .084 .023	.170 .083 .023	.162 .080 .023	.156 .078 .022	.149 .076 .022	
10.0	.163 .078 .022	.160 .077 .021	.153 .075 .021	.147 .073 .021	.141 .071 .020	

□cc	80%	70%	50%	30%	10%	0
□w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
□fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.236 .236 .236	.202 .202 .202	.138 .138 .138	.079 .079 .079	.025 .025 .025	
1.0	.228 .202 .179	.195 .173 .154	.133 .119 .106	.077 .069 .062	.025 .022 .020	
2.0	.220 .178 .143	.188 .153 .124	.129 .106 .086	.074 .062 .051	.024 .020 .016	
3.0	.212 .161 .120	.182 .139 .104	.125 .096 .073	.072 .056 .043	.023 .018 .014	
4.0	.204 .148 .105	.175 .128 .091	.120 .089 .064	.070 .052 .038	.022 .017 .012	
5.0	.197 .137 .094	.169 .119 .082	.116 .083 .058	.067 .049 .034	.022 .016 .011	
6.0	.189 .129 .086	.163 .112 .075	.112 .078 .053	.065 .046 .032	.021 .015 .010	
7.0	.182 .122 .080	.157 .106 .070	.108 .074 .050	.063 .044 .030	.020 .014 .010	
8.0	.176 .117 .076	.151 .101 .066	.105 .071 .047	.061 .042 .028	.020 .014 .009	
9.0	.170 .112 .073	.146 .097 .063	.101 .068 .045	.059 .040 .027	.019 .013 .009	
10.0	.164 .108 .070	.142 .093 .061	.098 .066 .043	.057 .039 .026	.019 .013 .009	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

□ Range: 0 - 180DEG
 □ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: BQE46-1000-42-PV-S1
 源磊A-档
 3500K

Uncorrected UGR Table

Test:U:119.5V I:0.1990A P:23.70W PF:0.9960 Lamp Flux:3367.91x1 lm										
NAME: 磁铁灯条					TYPE:T5窄灯条 3500K			WEIGHT:		
DIM.: 4FT*2					SPEC.:乳白PC罩			SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co,ltd					SUR.:1.2*0.11m			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.7	21.2	20.1	21.5	21.8	18.7	20.2	19.1	20.5	20.8
3H	21.7	23.0	22.1	23.3	23.7	20.1	21.5	20.5	21.8	22.2
4H	22.6	23.9	23.0	24.3	24.6	20.7	21.9	21.1	22.3	22.7
6H	23.6	24.8	24.0	25.1	25.6	21.0	22.2	21.4	22.6	23.0
8H	24.1	25.2	24.5	25.6	26.0	21.1	22.3	21.5	22.7	23.1
12H	24.6	25.7	25.0	26.1	26.5	21.1	22.2	21.6	22.7	23.1
4H 2H	20.3	21.6	20.7	21.9	22.3	19.5	20.8	19.9	21.2	21.6
3H	22.5	23.6	22.9	24.0	24.4	21.2	22.3	21.6	22.7	23.1
4H	23.6	24.6	24.1	25.1	25.5	21.9	22.9	22.4	23.4	23.8
6H	24.8	25.7	25.2	26.1	26.6	22.4	23.3	22.9	23.8	24.3
8H	25.3	26.2	25.8	26.7	27.2	22.6	23.5	23.1	23.9	24.4
12H	26.0	26.8	26.5	27.3	27.8	22.7	23.5	23.2	24.0	24.5
8H 4H	23.9	24.8	24.4	25.3	25.8	22.5	23.3	23.0	23.8	24.3
6H	25.3	26.1	25.9	26.6	27.1	23.3	24.0	23.9	24.6	25.1
8H	26.1	26.8	26.7	27.3	27.9	23.7	24.3	24.2	24.8	25.4
12H	27.0	27.5	27.6	28.1	28.7	23.9	24.5	24.5	25.0	25.6
12H 4H	24.0	24.7	24.5	25.2	25.8	22.6	23.4	23.2	23.9	24.4
6H	25.5	26.1	26.0	26.6	27.2	23.6	24.2	24.2	24.8	25.3
8H	26.3	26.9	26.9	27.4	28.0	24.1	24.6	24.6	25.2	25.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.4				

CIE Pub.117 Corrected 3368 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.2)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K

UTILIZATION FACTORS TABLE

Test:U:119.5V I:0.1990A P:23.70W PF:0.9960 Lamp Flux:3367.91x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.2*0.11m	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	55	43	36	54	43	36	53	42	36	30
0.80	65	53	46	64	52	45	62	51	45	38
1.00	73	62	54	72	61	54	69	62	53	45
1.25	80	69	61	78	68	61	75	66	60	52
1.50	85	74	67	83	73	66	79	71	65	57
2.00	92	83	76	90	81	75	85	78	73	64
2.50	96	87	81	93	86	80	89	82	77	68
3.00	99	92	86	97	90	84	92	86	81	71
4.00	103	97	92	100	95	90	95	91	87	76
5.00	106	100	96	103	98	94	97	93	90	79
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: BQE46-1000-42-PV-S1
 源磊A-档
 3500K

ISOCANDELA DIAGRAM

Test:U:119.5V I:0.1990A P:23.70W PF:0.9960 Lamp Flux:3367.91x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.2*0.11m	PROTECTION ANGLE:

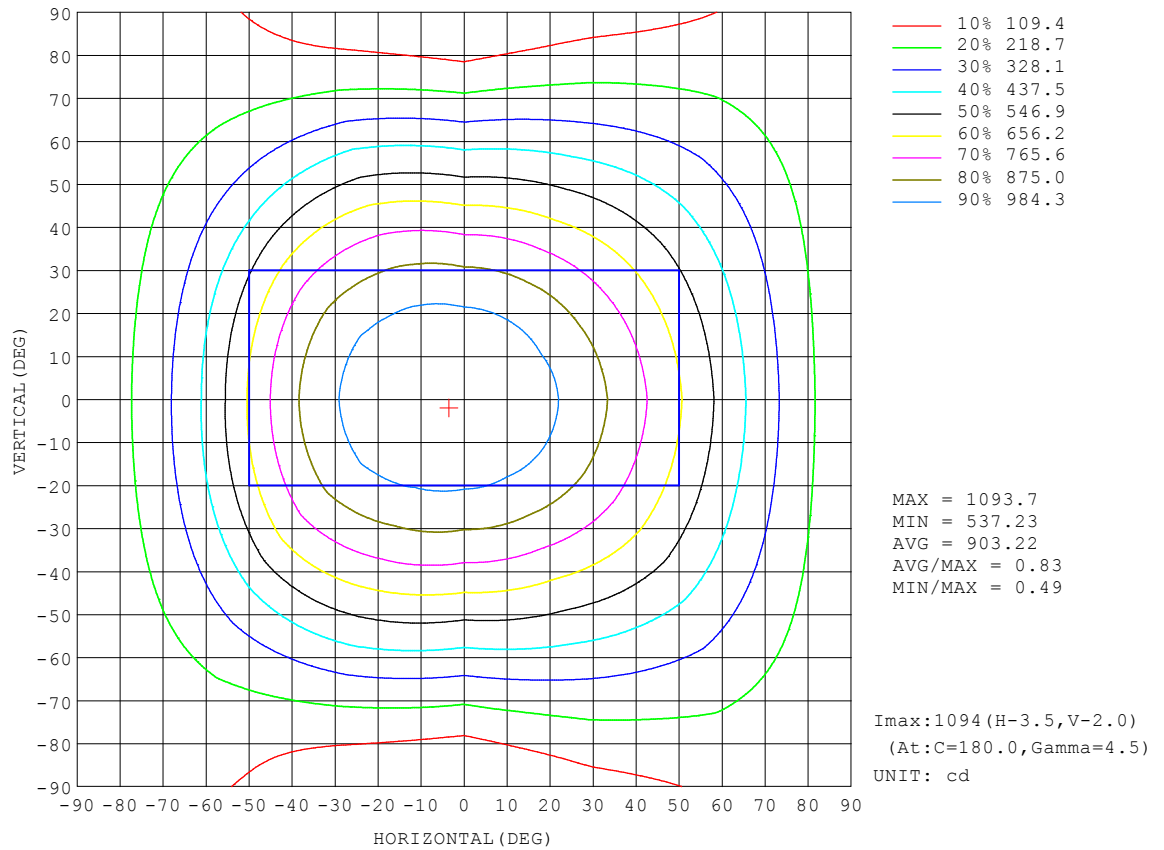


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K

AAI Figure

Test:U:119.5V I:0.1990A P:23.70W PF:0.9960 Lamp Flux:3367.91x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.2*0.11m	PROTECTION ANGLE:

Flux out:2031 lm

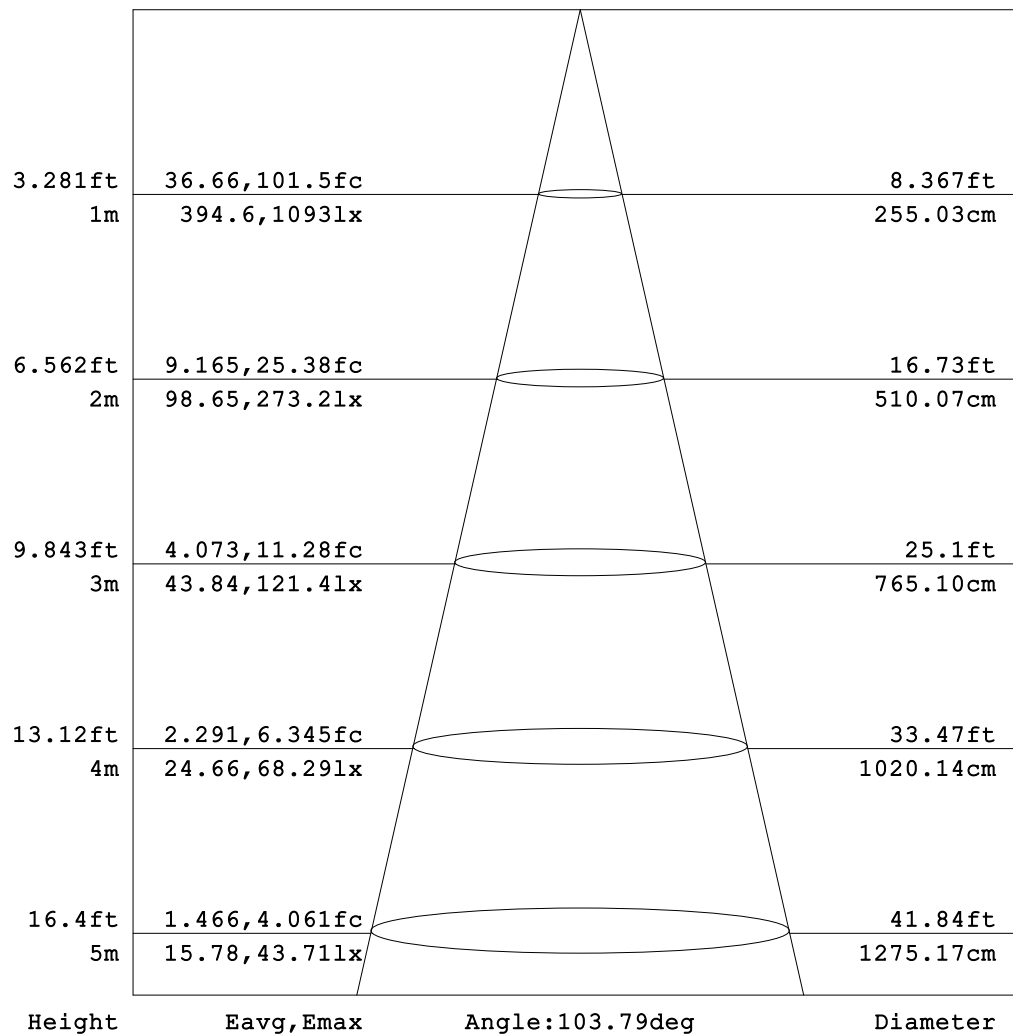


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K

ISOLUX DIAGRAM


Test:U:119.5V I:0.1990A P:23.70W PF:0.9960 Lamp Flux:3367.91x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.2*0.11m	PROTECTION ANGLE:

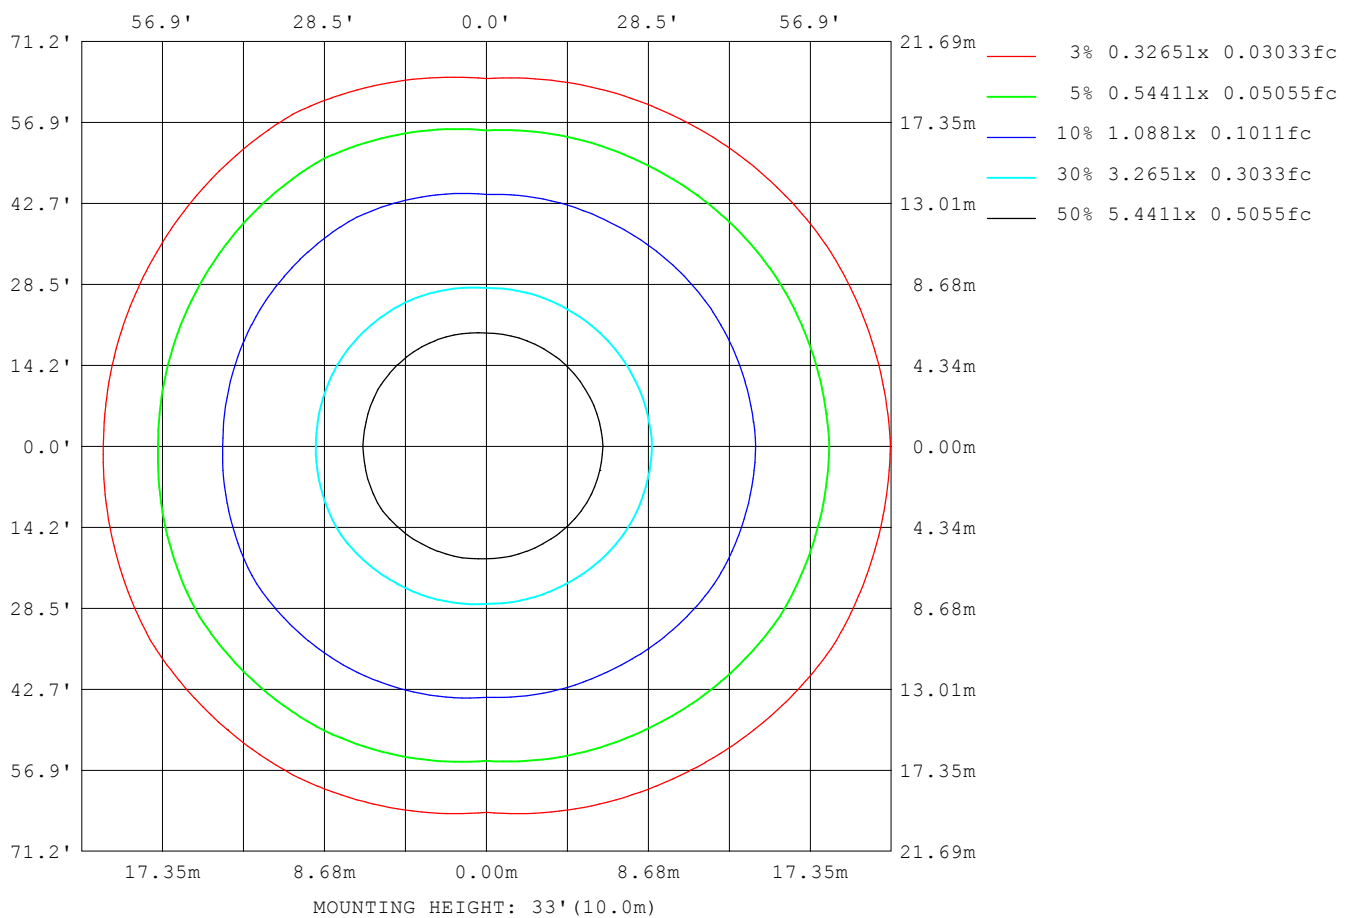

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K

Planar Illuminance Curve

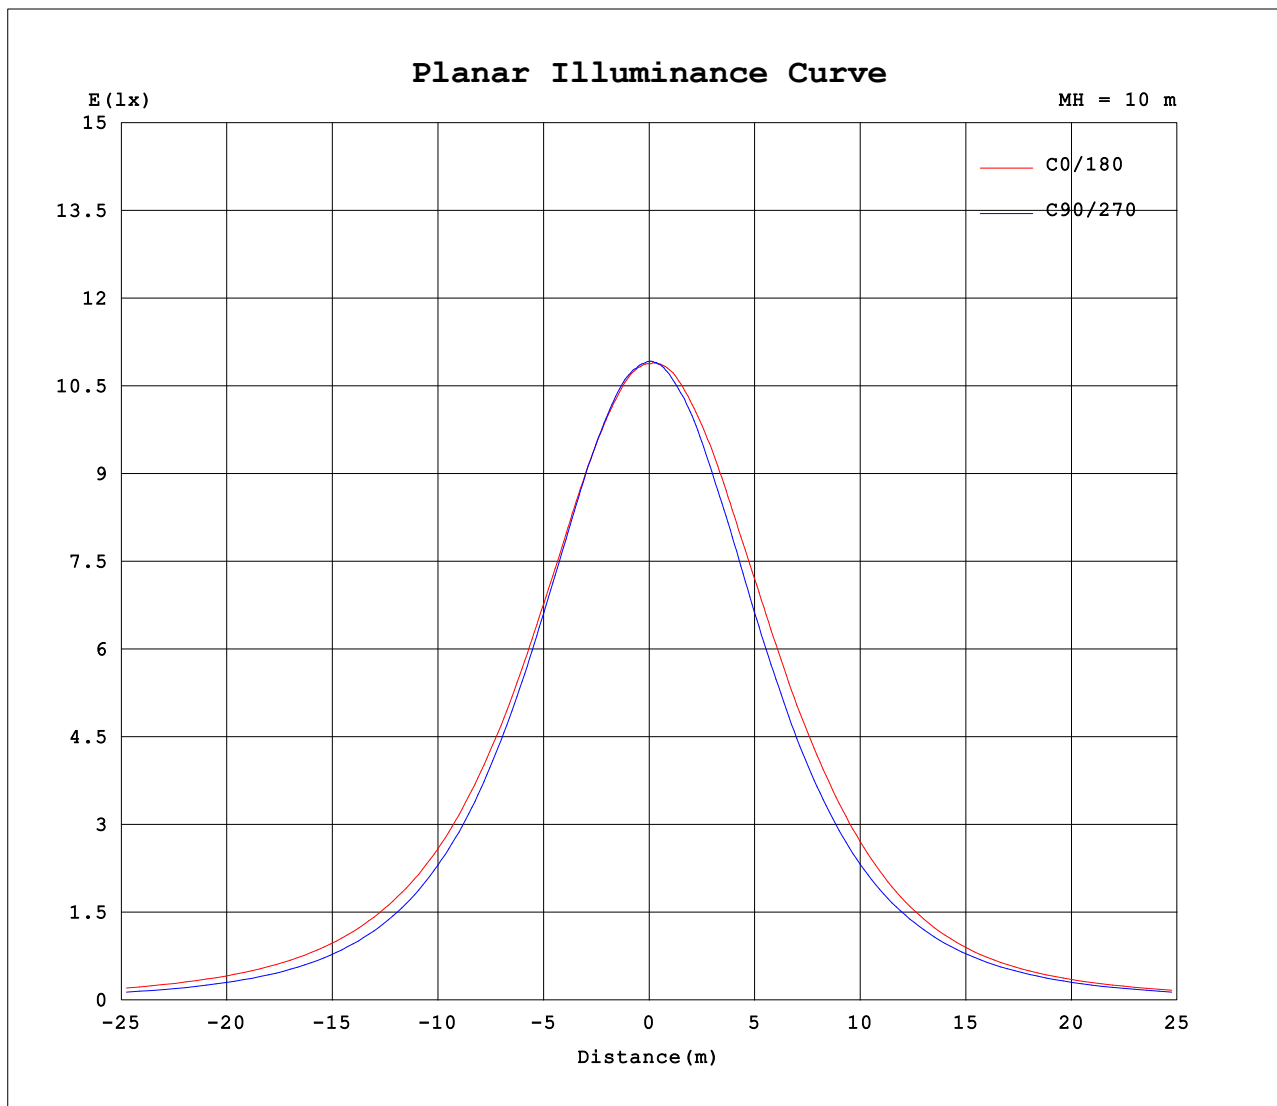

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.5V I:0.1990A P:23.70W PF:0.9960 Lamp Flux:3367.91x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.2*0.11m	PROTECTION ANGLE:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1090	1090	1090	1090	1090	1090	1090	1090	1090	1090	1090	1090							
5	1084	1080	1082	1082	1089	1093	1094	1089	1091	1084	1084	1081							
10	1063	1062	1061	1064	1072	1085	1088	1084	1077	1066	1064	1058							
15	1038	1033	1032	1034	1050	1072	1075	1066	1057	1036	1033	1031							
20	1003	997	990	991	1014	1046	1053	1044	1022	995	994	990							
25	961	952	939	940	969	1010	1019	1006	981	944	941	947							
30	914	902	882	877	915	968	977	964	928	883	884	893							
35	858	844	815	809	851	911	919	906	866	812	816	834							
40	800	782	746	731	784	849	854	841	799	738	746	770							
45	734	716	670	653	705	771	768	759	723	656	669	703							
50	667	646	594	567	625	686	666	669	644	573	592	632							
55	594	576	518	483	540	586	558	563	556	487	514	559							
60	519	502	444	397	453	484	458	460	468	403	437	487							
65	446	431	370	314	364	388	373	370	375	318	363	416							
70	373	361	302	232	278	308	302	294	287	237	293	347							
75	304	296	237	156	199	240	244	230	207	159	227	281							
80	237	233	176	83.6	130	183	196	178	140	88.8	166	217							
85	183	176	121	28.3	77.8	146	165	146	90.5	32.3	108	159							
90	136	128	69.7	0.71	54.8	123	146	125	66.2	0.92	55.9	112							
95	101	88.5	38.0	1.63	43.3	105	128	110	54.8	1.26	27.6	76.9							
100	75.4	64.2	27.6	2.00	36.7	92.6	111	96.1	45.9	1.97	19.3	55.4							
105	63.3	51.6	20.8	1.91	31.6	80.6	97.7	84.2	38.5	1.98	14.1	45.7							
110	53.2	43.7	14.3	0.81	24.5	71.3	84.8	72.7	30.5	1.45	9.63	37.6							
115	44.5	34.5	10.7	0.82	24.9	58.1	74.0	59.4	30.4	1.25	7.52	28.2							
120	35.4	27.9	9.38	0.99	23.9	51.4	62.5	52.7	29.4	1.18	6.04	22.7							
125	29.0	22.9	8.08	0.82	21.9	48.7	56.1	49.9	27.2	1.00	5.42	18.0							
130	23.6	18.0	5.56	0.52	20.2	45.3	54.0	46.7	23.9	0.91	4.81	14.1							
135	18.7	13.4	3.96	0.54	18.4	41.1	48.8	42.6	20.9	0.90	5.19	10.9							
140	14.6	10.7	3.62	0.56	16.4	36.2	42.7	36.3	18.4	0.89	5.38	9.05							
145	11.5	8.32	3.42	0.58	14.4	31.1	34.2	30.4	16.1	0.88	4.97	7.42							
150	9.45	5.79	3.26	0.85	12.2	26.1	27.5	25.0	13.5	1.11	3.95	7.12							
155	8.53	4.46	3.27	1.27	9.97	21.2	22.4	20.1	10.9	1.05	3.20	6.57							
160	7.46	3.59	3.33	1.16	7.98	16.3	16.5	15.2	8.47	1.01	2.75	4.89							
165	5.78	3.04	2.80	1.03	3.84	11.7	10.4	10.5	5.27	0.95	1.65	2.95							
170	3.85	2.45	1.70	0.90	1.20	7.75	3.52	5.41	1.19	0.88	0.93	2.06							
175	1.28	1.37	0.76	0.78	0.82	1.12	0.72	0.81	0.80	0.78	0.76	0.77							
180	0.69	0.70	0.70	0.71	0.71	0.73	0.69	0.70	0.70	0.71	0.71	0.75							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K