


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.5V I:0.3230A P:38.40W PF:0.9930 Lamp Flux:5035.68x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 131.14 lm/W			
MODEL		Imax(cd)	1637	S/MH(C0/180)	1.24
NOMINAL POWER(W)	38	LOR(%)	100.0	S/MH(C90/270)	1.21
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	5035.7	□ UP,DN(C0-180)	2.8,47.0
NOMINAL FLUX(lm)	5035.68	CIE CLASS	DIRECT	□ UP,DN(C180-360)	3.1,47.1
LAMPS INSIDE	1	□ up(%)	5.9	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	119.5	□ down(%)	94.1	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

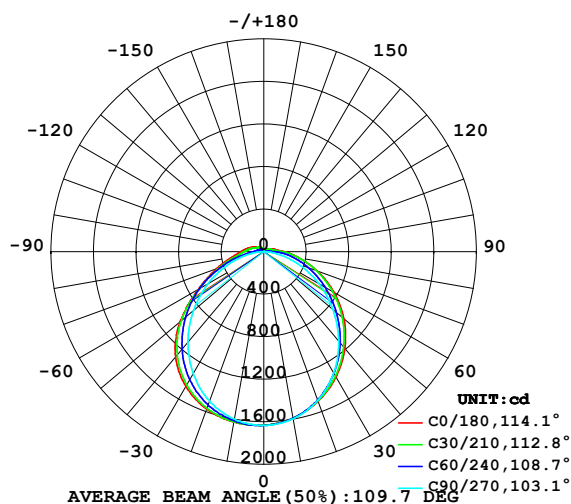

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

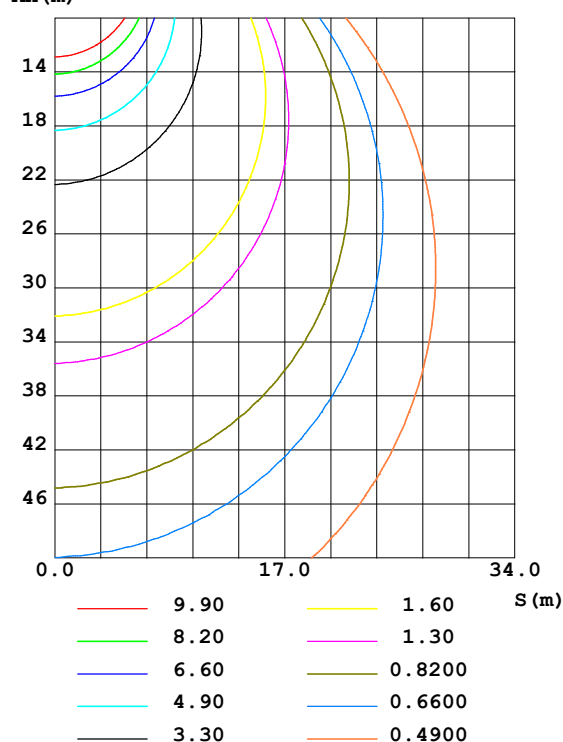


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	zone	total	%lum, lamp
5	1619	1619	1622	1630	1633	1635	1629	1617	0- 5	38.94	38.94	0.77,0.77
10	1590	1591	1596	1614	1627	1620	1598	1588	5- 10	115.5	154.4	3.07,3.07
15	1549	1545	1551	1584	1606	1592	1556	1543	10- 15	188.0	342.4	6.8,6.8
20	1498	1488	1486	1540	1574	1550	1495	1485	15- 20	253.9	596.4	11.8,11.8
25	1432	1416	1411	1479	1527	1492	1419	1414	20- 25	310.9	907.3	18,18
30	1361	1334	1318	1405	1465	1420	1327	1329	25- 30	356.9	1264	25.1,25.1
35	1277	1244	1213	1317	1387	1333	1222	1235	30- 35	390.3	1655	32.9,32.9
40	1187	1144	1095	1216	1288	1229	1110	1134	35- 40	410.0	2064	41,41
45	1088	1038	978.2	1100	1173	1115	988.4	1027	40- 45	415.3	2480	49.2,49.2
50	984.1	926.7	850.0	972.7	1030	986.6	863.8	914.9	45- 50	406.1	2886	57.3,57.3
55	872.9	816.6	723.1	836.4	867.2	844.1	734.3	801.8	50- 55	382.8	3269	64.9,64.9
60	761.3	704.6	595.3	693.6	710.5	697.0	606.8	691.6	55- 60	347.4	3616	71.8,71.8
65	648.9	594.9	470.0	556.2	582.0	564.4	478.6	582.8	60- 65	304.2	3920	77.9,77.9
70	536.2	490.1	348.0	431.8	474.0	439.1	355.6	477.9	65- 70	256.2	4177	82.9,82.9
75	426.2	390.4	233.2	324.2	381.7	330.5	238.9	379.3	70- 75	206.8	4383	87,87
80	334.5	298.2	127.2	231.3	303.6	240.3	133.3	286.0	75- 80	158.6	4542	90.2,90.2
85	258.2	214.3	42.32	166.2	250.6	177.7	48.59	200.9	80- 85	115.1	4657	92.5,92.5
90	193.1	141.5	1.007	132.4	217.5	143.2	1.540	125.7	85- 90	81.64	4739	94.1,94.1
95	142.1	91.18	2.420	110.7	190.1	122.4	1.900	78.91	90- 95	59.74	4798	95.3,95.3
100	112.2	68.33	2.959	96.29	164.9	105.0	2.870	56.11	95-100	46.65	4845	96.2,96.2
105	94.96	54.68	2.884	83.51	143.1	89.97	2.966	44.98	100-105	38.48	4884	97,97
110	79.92	43.01	1.247	71.03	121.8	76.22	2.194	35.38	105-110	31.41	4915	97.6,97.6
115	66.71	34.52	1.256	61.56	104.9	65.40	1.947	26.81	110-115	25.65	4941	98.1,98.1
120	52.89	27.75	1.485	55.60	87.47	60.39	1.771	21.59	115-120	20.62	4961	98.5,98.5
125	43.34	23.24	1.214	52.04	77.35	55.79	1.492	17.53	120-125	17.24	4979	98.9,98.9
130	35.13	18.60	0.7917	48.30	72.73	52.02	1.359	14.06	125-130	14.46	4993	99.2,99.2
135	27.90	13.91	0.8302	43.81	64.88	46.45	1.346	11.76	130-135	11.86	5005	99.4,99.4
140	21.94	10.34	0.8475	38.71	57.52	40.22	1.327	10.54	135-140	9.396	5014	99.6,99.6
145	17.48	8.594	0.8685	33.29	49.38	34.17	1.306	9.024	140-145	7.250	5021	99.7,99.7
150	14.63	6.558	1.273	28.08	38.10	28.44	1.658	8.068	145-150	5.356	5027	99.8,99.8
155	13.00	5.537	1.898	22.90	31.03	22.93	1.580	7.066	150-155	3.842	5031	99.9,99.9
160	10.70	4.991	1.733	17.81	23.99	17.50	1.505	5.669	155-160	2.583	5033	100,100
165	7.696	4.008	1.539	11.61	17.18	11.55	1.421	3.463	160-165	1.534	5035	100,100
170	4.979	2.907	1.349	6.585	6.176	4.803	1.308	2.212	165-170	0.6852	5035	100,100
175	1.703	1.486	1.171	1.440	1.064	1.215	1.156	1.146	170-175	0.1783	5036	100,100
180	1.014	1.045	1.058	1.068	1.015	1.046	1.052	1.082	175-180	0.0276	5036	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

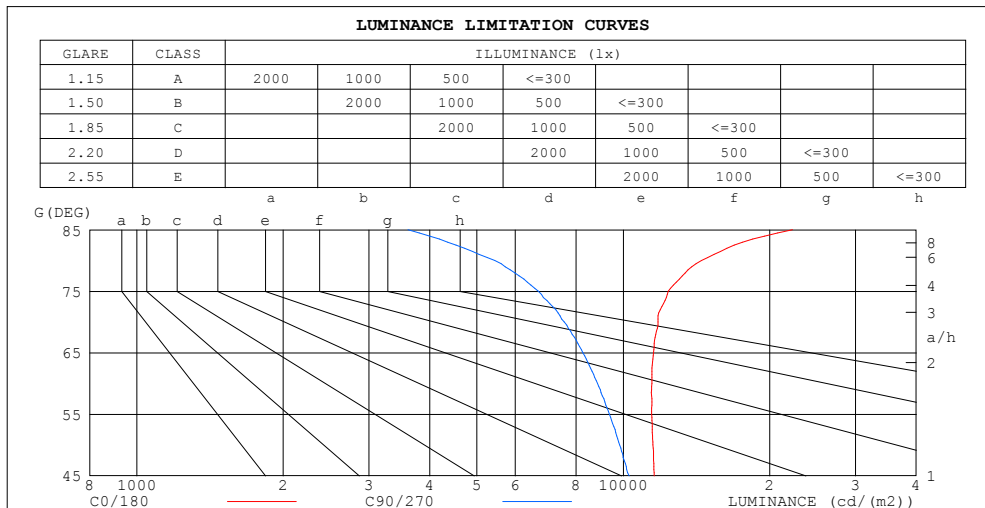

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	22270	3607
80	14483	5440
75	12380	6692
70	11785	7559
65	11543	8262
60	11447	8845
55	11441	9366
50	11510	9824
45	11570	10277


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

Range: 0 - 180DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.5V I:0.3230A P:38.40W PF:0.9930 Lamp Flux:5035.68x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.14	1.14	1.14	1.08	1.08	1.08	1.02	1.02	1.02	.97	.97	.97	.94
1.0	1.01	.97	.93	.99	.94	.91	.93	.90	.87	.88	.85	.83	.84	.81	.79	.77
2.0	.88	.81	.75	.86	.79	.74	.81	.76	.71	.77	.72	.69	.73	.69	.66	.64
3.0	.77	.69	.62	.75	.67	.61	.71	.65	.59	.68	.62	.58	.64	.60	.56	.53
4.0	.68	.59	.53	.67	.58	.52	.63	.56	.51	.60	.54	.49	.57	.52	.48	.46
5.0	.61	.52	.45	.60	.51	.45	.57	.49	.44	.54	.48	.43	.52	.46	.42	.39
6.0	.55	.46	.39	.54	.45	.39	.51	.44	.38	.49	.42	.37	.47	.41	.37	.34
7.0	.50	.41	.35	.49	.40	.34	.47	.39	.34	.45	.38	.33	.43	.37	.33	.30
8.0	.45	.37	.31	.44	.36	.31	.43	.35	.30	.41	.34	.30	.39	.34	.29	.27
9.0	.42	.33	.28	.41	.33	.28	.39	.32	.27	.38	.31	.27	.36	.31	.26	.24
10.0	.38	.31	.25	.38	.30	.25	.36	.29	.25	.35	.29	.24	.34	.28	.24	.22

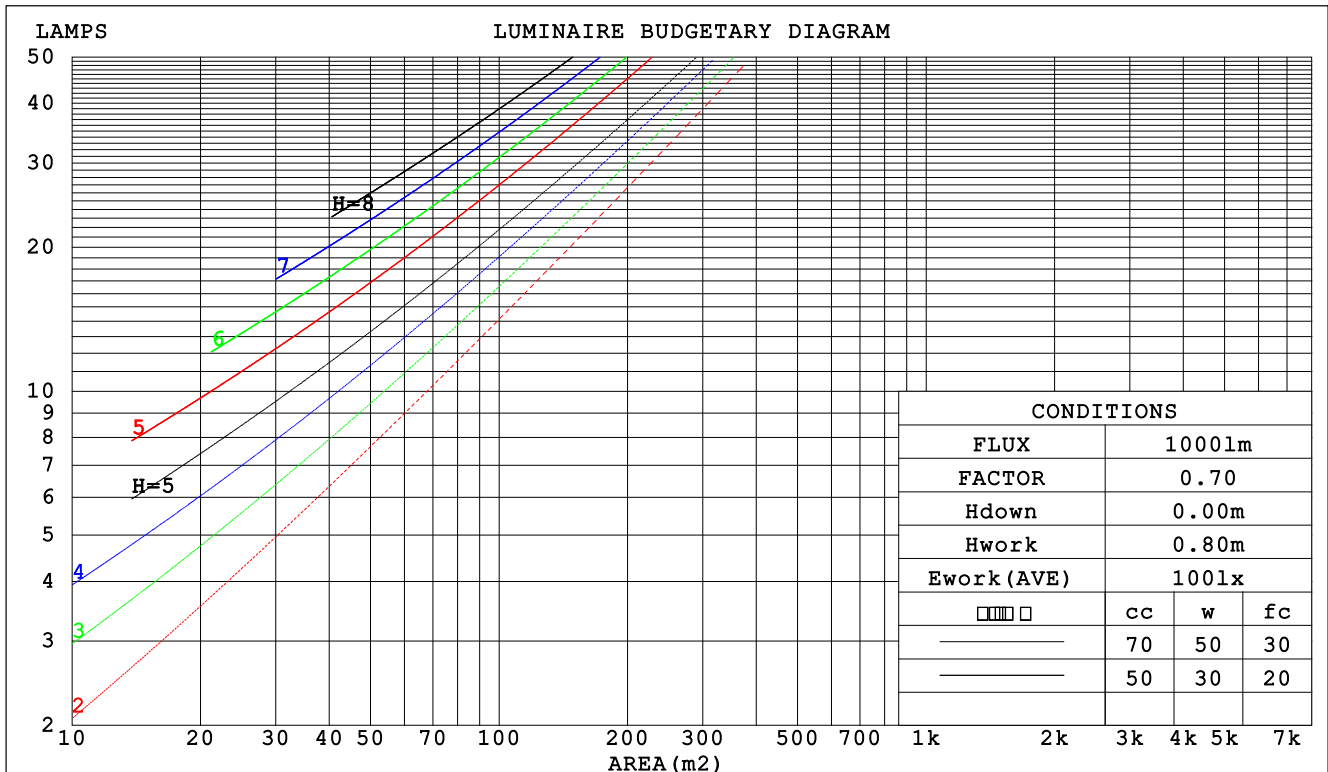

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

□ Range: 0 - 180DEG
 □ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: BQE46-1000-42-PV-S1
 源磊A-档
 3500K

WEC AND CCEC

Test:U:119.5V I:0.3230A P:38.40W PF:0.9930 Lamp Flux:5035.68x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

□cc	80%	70%	50%	30%	10%	0
□w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
□fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.330 .188 .060	.322 .183 .058	.305 .175 .056	.289 .167 .054	.275 .160 .051	
2.0	.301 .165 .051	.293 .161 .050	.278 .155 .048	.264 .148 .046	.252 .142 .045	
3.0	.274 .146 .044	.267 .143 .043	.254 .138 .042	.242 .132 .041	.230 .128 .039	
4.0	.251 .131 .038	.245 .128 .038	.233 .124 .037	.222 .119 .036	.212 .115 .035	
5.0	.231 .118 .034	.226 .116 .034	.215 .112 .033	.205 .108 .032	.196 .105 .031	
6.0	.214 .107 .031	.209 .105 .030	.199 .102 .030	.190 .099 .029	.182 .096 .028	
7.0	.199 .098 .028	.194 .097 .028	.185 .094 .027	.177 .091 .026	.170 .088 .026	
8.0	.185 .091 .025	.181 .089 .025	.173 .087 .025	.166 .084 .024	.159 .082 .024	
9.0	.173 .084 .023	.170 .083 .023	.163 .080 .023	.156 .078 .022	.149 .076 .022	
10.0	.163 .078 .022	.160 .077 .021	.153 .075 .021	.147 .073 .021	.141 .071 .020	

□cc	80%	70%	50%	30%	10%	0
□w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
□fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.235 .235 .235	.201 .201 .201	.137 .137 .137	.079 .079 .079	.025 .025 .025	
1.0	.227 .201 .178	.194 .173 .153	.133 .119 .106	.076 .069 .062	.024 .022 .020	
2.0	.219 .177 .143	.188 .153 .123	.129 .106 .086	.074 .061 .050	.024 .020 .016	
3.0	.211 .160 .120	.181 .138 .104	.124 .096 .073	.072 .056 .043	.023 .018 .014	
4.0	.203 .147 .104	.175 .127 .090	.120 .089 .064	.069 .052 .038	.022 .017 .012	
5.0	.196 .137 .093	.168 .118 .081	.116 .083 .057	.067 .049 .034	.022 .016 .011	
6.0	.189 .129 .085	.162 .111 .074	.112 .078 .053	.065 .046 .031	.021 .015 .010	
7.0	.182 .122 .080	.156 .106 .069	.108 .074 .049	.063 .044 .029	.020 .014 .010	
8.0	.175 .116 .075	.151 .101 .066	.104 .071 .047	.061 .042 .028	.020 .014 .009	
9.0	.169 .111 .072	.146 .096 .063	.101 .068 .045	.059 .040 .027	.019 .013 .009	
10.0	.164 .107 .069	.141 .093 .060	.098 .065 .043	.057 .039 .026	.018 .013 .008	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2022-01-03

□ Range: 0 - 180DEG
 □ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: BQE46-1000-42-PV-S1
 源磊A-档
 3500K

Uncorrected UGR Table

Test:U:119.5V I:0.3230A P:38.40W PF:0.9930 Lamp Flux:5035.68x1 lm										
NAME: 磁铁灯条					TYPE:T5窄灯条 3500K			WEIGHT:		
DIM.: 4FT*2					SPEC.:乳白PC罩			SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co,ltd					SUR.:1.22*0.11m			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.0	22.5	21.4	22.8	23.1	20.1	21.5	20.4	21.8	22.2
3H	22.9	24.3	23.3	24.6	25.0	21.5	22.8	21.8	23.1	23.5
4H	23.8	25.1	24.2	25.4	25.8	22.0	23.3	22.4	23.6	24.0
6H	24.7	25.9	25.1	26.3	26.7	22.4	23.6	22.8	23.9	24.3
8H	25.2	26.3	25.6	26.7	27.1	22.4	23.6	22.9	24.0	24.4
12H	25.7	26.8	26.1	27.2	27.6	22.5	23.6	22.9	24.0	24.4
4H 2H	21.6	22.9	22.0	23.2	23.6	20.9	22.1	21.3	22.5	22.9
3H	23.7	24.8	24.2	25.2	25.7	22.5	23.6	23.0	24.0	24.5
4H	24.8	25.8	25.3	26.3	26.7	23.2	24.2	23.7	24.7	25.1
6H	25.9	26.8	26.4	27.3	27.8	23.8	24.7	24.2	25.1	25.6
8H	26.5	27.3	27.0	27.8	28.3	23.9	24.8	24.4	25.2	25.8
12H	27.1	27.9	27.6	28.4	28.9	24.0	24.8	24.5	25.3	25.8
8H 4H	25.1	26.0	25.6	26.5	27.0	23.8	24.6	24.3	25.1	25.6
6H	26.5	27.2	27.0	27.7	28.3	24.6	25.3	25.2	25.9	26.4
8H	27.2	27.9	27.8	28.4	29.0	25.0	25.6	25.5	26.1	26.7
12H	28.1	28.6	28.7	29.2	29.8	25.2	25.8	25.8	26.3	26.9
12H 4H	25.2	25.9	25.7	26.4	27.0	23.9	24.7	24.4	25.2	25.7
6H	26.6	27.2	27.1	27.8	28.3	24.9	25.5	25.4	26.0	26.6
8H	27.4	28.0	28.0	28.5	29.1	25.3	25.9	25.9	26.4	27.0
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.4				

CIE Pub.117 Corrected 5036 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.6)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K

UTILIZATION FACTORS TABLE

Test:U:119.5V I:0.3230A P:38.40W PF:0.9930 Lamp Flux:5035.68x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	55	43	36	54	43	36	53	43	36	30
0.80	65	53	46	64	53	45	62	52	45	38
1.00	73	62	54	72	61	54	69	62	53	45
1.25	80	69	62	78	68	61	75	66	60	52
1.50	85	75	67	83	73	66	79	71	65	57
2.00	92	83	76	90	81	75	85	78	73	64
2.50	96	87	81	93	86	80	89	82	77	68
3.00	99	92	86	97	90	84	92	86	81	72
4.00	103	97	92	101	95	90	95	91	87	76
5.00	106	100	96	103	98	94	97	94	90	79
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K

ISOCANDELA DIAGRAM

Test:U:119.5V I:0.3230A P:38.40W PF:0.9930 Lamp Flux:5035.68x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

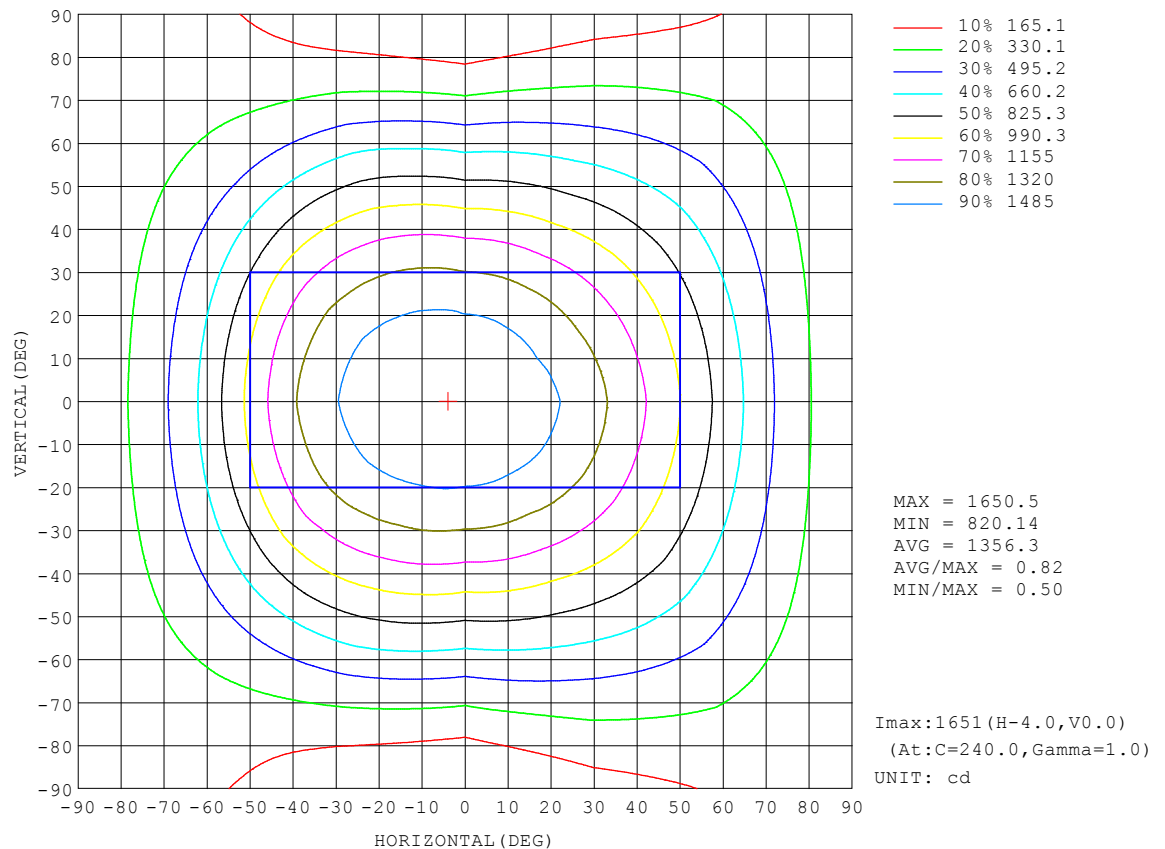


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K

AAI Figure

Test:U:119.5V I:0.3230A P:38.40W PF:0.9930 Lamp Flux:5035.68x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

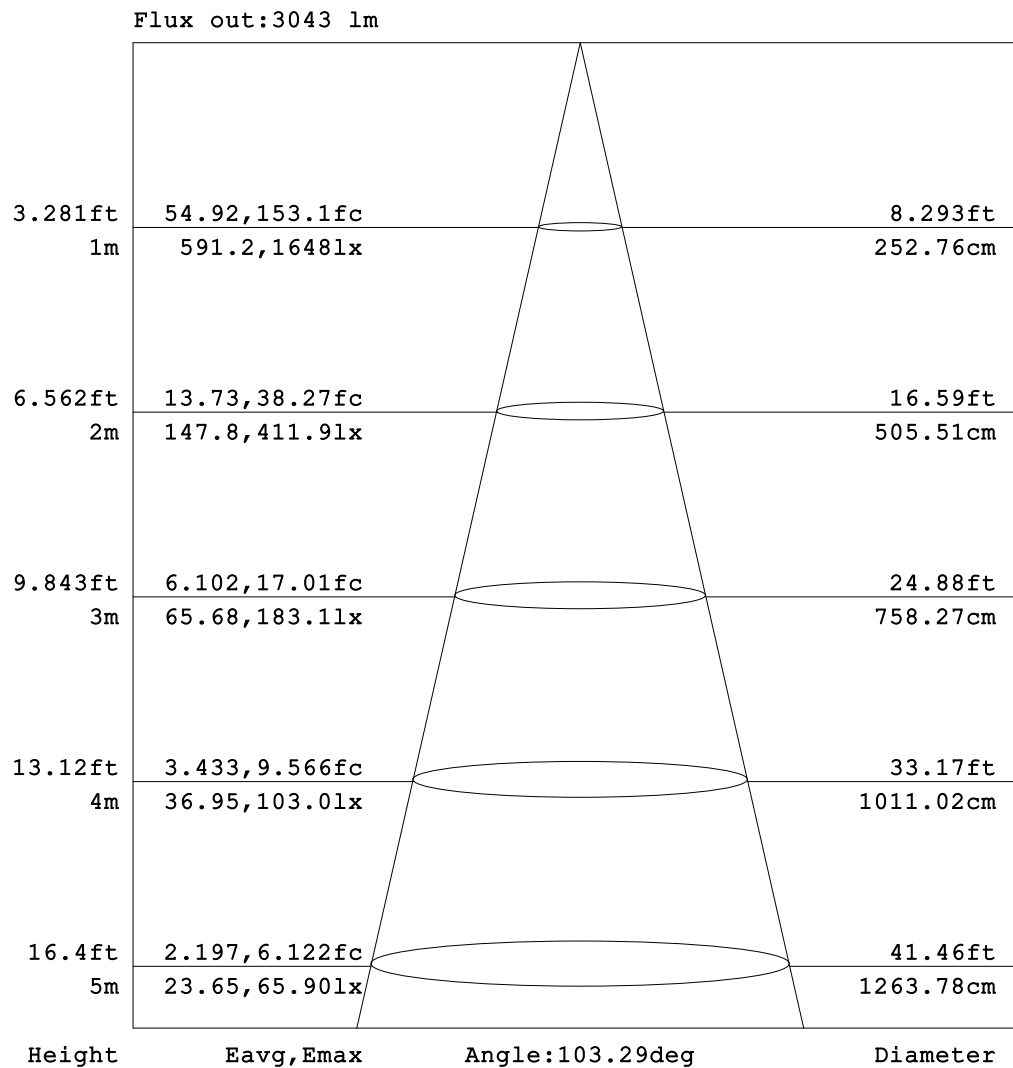


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K

ISOLUX DIAGRAM


Test:U:119.5V I:0.3230A P:38.40W PF:0.9930 Lamp Flux:5035.68x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

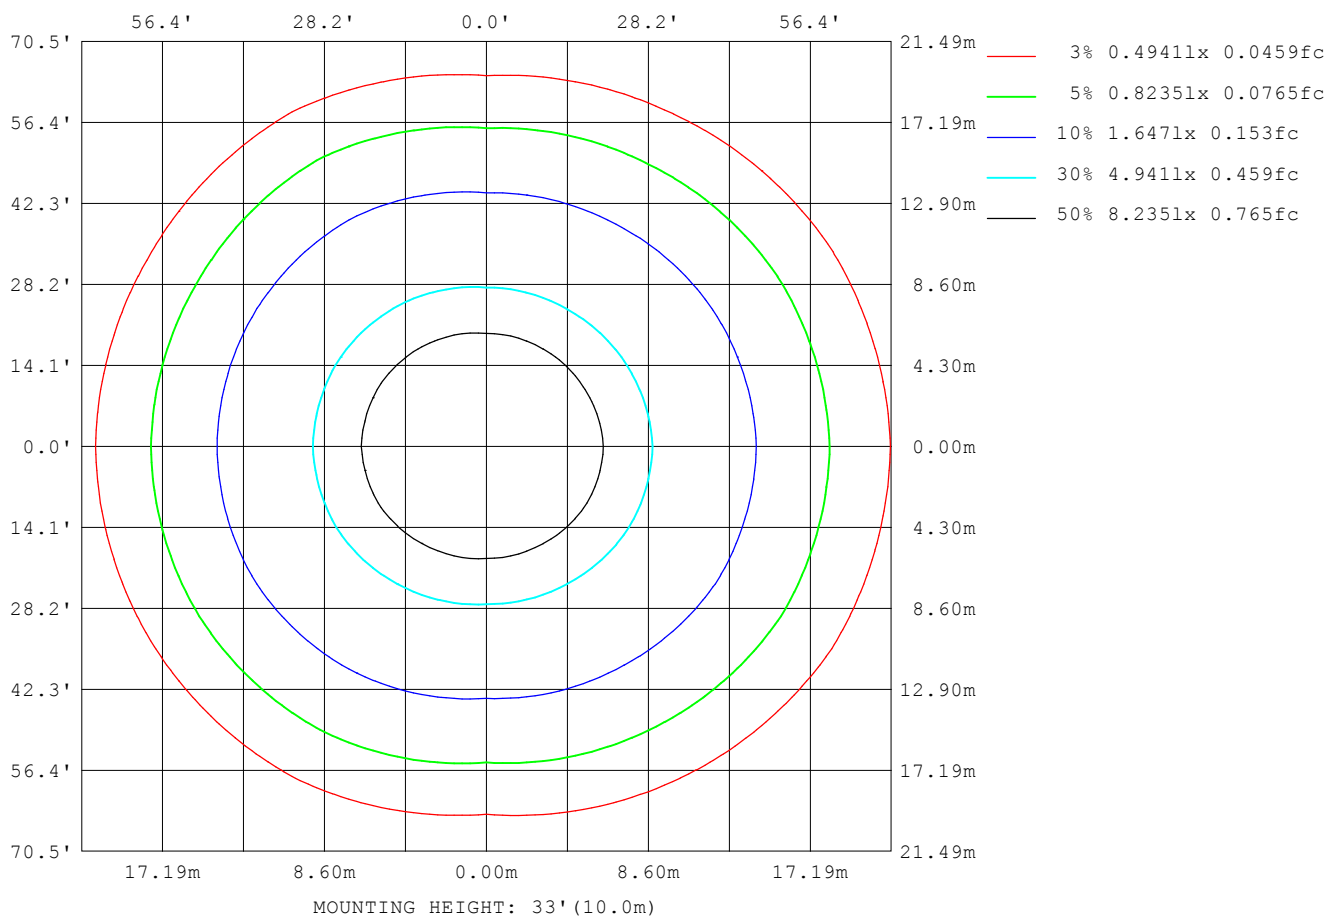

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K

Planar Illuminance Curve

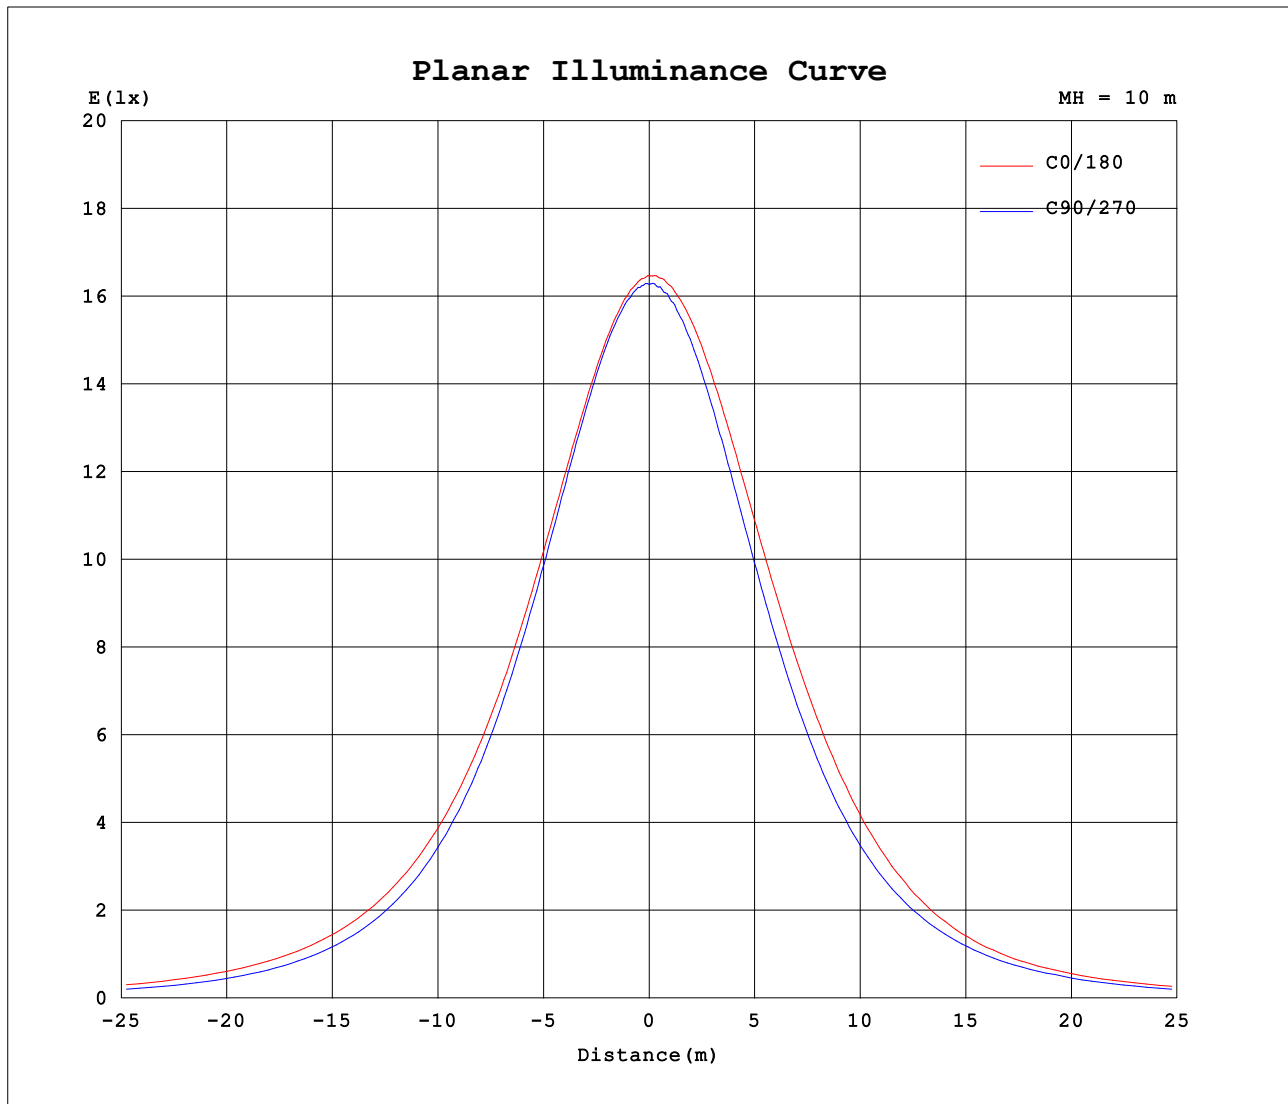

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2022-01-03

☐ Range: 0 - 180DEG
☐ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.5V I:0.3230A P:38.40W PF:0.9930 Lamp Flux:5035.68x1 lm		
NAME: 磁铁灯条	TYPE:T5窄灯条 3500K	WEIGHT:
DIM.: 4FT*2	SPEC.:乳白PC罩	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co,ltd	SUR.:1.22*0.11m	PROTECTION ANGLE:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1632	1632	1632	1632	1632	1632	1632	1632	1632	1632	1632	1632							
5	1619	1617	1621	1622	1626	1633	1633	1635	1634	1629	1618	1616							
10	1590	1592	1589	1596	1606	1623	1627	1625	1614	1598	1589	1587							
15	1549	1547	1543	1551	1569	1599	1606	1602	1582	1556	1545	1542							
20	1498	1494	1482	1486	1516	1563	1574	1567	1534	1495	1485	1484							
25	1432	1425	1407	1411	1448	1511	1527	1515	1469	1419	1410	1418							
30	1361	1350	1318	1318	1366	1445	1465	1449	1392	1327	1321	1338							
35	1277	1264	1224	1213	1273	1361	1387	1365	1300	1222	1222	1249							
40	1187	1168	1119	1095	1168	1265	1288	1265	1194	1110	1112	1155							
45	1088	1068	1007	978	1054	1146	1173	1148	1082	988	1000	1054							
50	984	962	891	850	931	1015	1030	1013	961	864	885	945							
55	873	855	778	723	806	867	867	857	831	734	766	838							
60	761	744	665	595	676	711	710	698	696	607	654	730							
65	649	635	554	470	540	573	582	566	562	479	543	623							
70	536	531	450	348	411	452	474	447	431	356	438	518							
75	426	429	352	233	295	353	382	349	312	239	340	419							
80	335	334	263	127	193	270	304	270	211	133	249	323							
85	258	251	178	42.3	116	217	251	219	137	48.6	164	238							
90	193	181	102	1.01	81.8	183	218	187	99.1	1.54	84.5	167							
95	142	126	56.6	2.42	64.0	157	190	164	81.1	1.90	42.0	116							
100	112	95.5	41.1	2.96	53.6	139	165	142	67.6	2.87	29.0	83.3							
105	95.0	78.4	30.8	2.88	45.8	121	143	123	56.3	2.97	21.2	68.8							
110	79.9	64.4	21.6	1.25	36.1	106	122	107	45.2	2.19	14.5	56.3							
115	66.7	51.7	17.3	1.26	36.1	87.1	105	86.7	44.0	1.95	11.3	42.3							
120	52.9	41.9	13.5	1.49	34.5	76.7	87.5	77.6	43.2	1.77	9.11	34.1							
125	43.3	34.3	12.1	1.21	31.8	72.3	77.3	71.5	40.0	1.49	8.00	27.1							
130	35.1	27.7	9.50	0.79	29.6	67.0	72.7	68.6	35.3	1.36	6.93	21.2							
135	27.9	21.9	5.85	0.83	27.0	60.6	64.9	61.9	30.9	1.35	7.30	16.2							
140	21.9	16.2	4.49	0.85	24.1	53.4	57.5	53.2	27.2	1.33	7.58	13.5							
145	17.5	12.6	4.55	0.87	20.9	45.7	49.4	44.6	23.7	1.31	7.18	10.9							
150	14.6	8.75	4.36	1.27	17.8	38.3	38.1	36.8	20.0	1.66	5.98	10.2							
155	13.0	6.62	4.45	1.90	14.6	31.2	31.0	29.7	16.1	1.58	4.88	9.26							
160	10.7	5.13	4.85	1.73	11.7	24.0	24.0	22.4	12.6	1.51	4.18	7.16							
165	7.70	3.84	4.17	1.54	5.94	17.3	17.2	14.9	8.19	1.42	2.54	4.39							
170	4.98	3.22	2.59	1.35	1.77	11.4	6.18	7.79	1.81	1.31	1.39	3.04							
175	1.70	1.84	1.13	1.17	1.21	1.67	1.06	1.24	1.19	1.16	1.14	1.15							
180	1.01	1.05	1.04	1.06	1.05	1.09	1.02	1.05	1.04	1.05	1.05	1.11							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2022-01-03

□ Range: 0 - 180DEG
□ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: BQE46-1000-42-PV-S1
源磊A-档
3500K