


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.00V I:0.2380A P:28.400W PF:0.9950 Freq:50.00Hz Lamp Flux:4602.59x1 lm		
NAME: WL-2WRTST230D(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.06	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 162.06 lm/W			
MODEL		I _{max} (cd)	3069	S/MH(C0/180)	1.15
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	1.17
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	4602.6	η UP, DN(C0-180)	0.0, 50.5
NOMINAL FLUX(lm)	4602.59	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 49.5
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	219.7	η down(%)	100.0	CIBSE SHR MAX	1.25

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

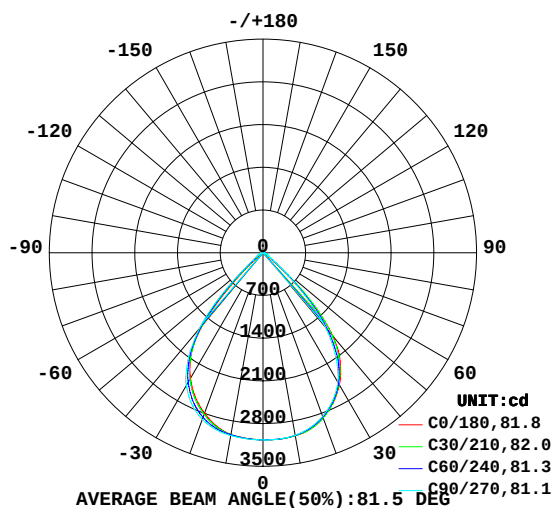

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

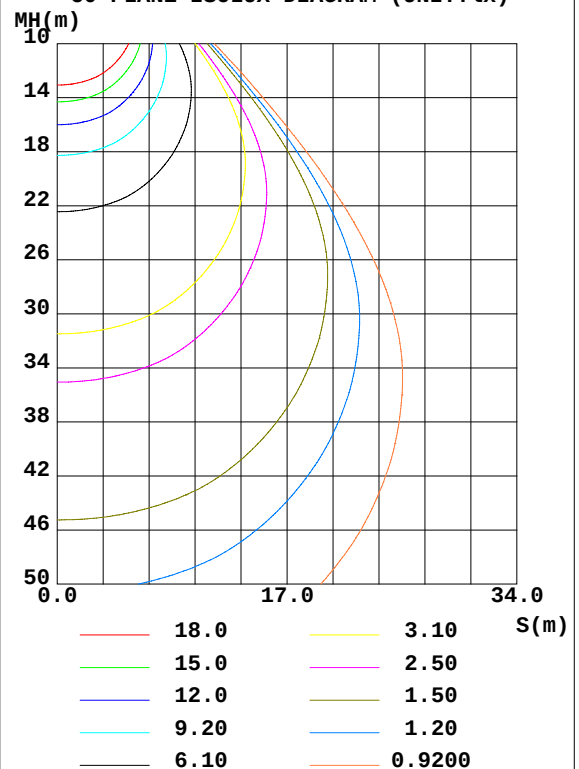

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity: 50.0%
Test Distance: 6.770m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3046	3042	3036	3030	3025	3029	3042	3044	0- 10	291.4	291.4	6.33,6.33
20	2878	2873	2852	2842	2799	2847	2907	2889	10- 20	838.6	1130	24.6,24.6
30	2501	2479	2452	2423	2378	2425	2514	2485	20- 30	1234	2364	51.4,51.4
40	1777	1708	1584	1611	1527	1564	1621	1675	30- 40	1307	3671	79.8,79.8
50	268.4	373.7	348.3	318.5	187.1	267.9	336.7	315.6	40- 50	702.8	4374	95,95
60	47.21	80.75	104.1	85.40	58.75	88.82	121.0	88.12	50- 60	135.3	4510	98,98
70	17.62	33.34	56.63	36.70	18.01	35.86	67.32	36.82	60- 70	57.78	4567	99.2,99.2
80	48.85	11.46	24.76	11.46	25.65	11.28	26.77	11.01	70- 80	26.40	4594	99.8,99.8
90	0.7634	0.6744	0.2641	0.0558	0.0515	0.0641	0.0747	0.0662	80- 90	7.082	4601	100,100
100	0.0362	0.0527	0.0517	0.0648	0.0650	0.0726	0.0726	0.0669	90-100	0.0749	4601	100,100
110	0.0668	0.1190	0.0996	0.1128	0.1258	0.1186	0.1108	0.1167	100-110	0.0889	4601	100,100
120	0.2170	0.2541	0.2047	0.2179	0.2006	0.2321	0.2009	0.2304	110-120	0.1555	4601	100,100
130	0.3911	0.3411	0.3119	0.3326	0.3380	0.3507	0.3079	0.3127	120-130	0.2564	4601	100,100
140	0.4217	0.4309	0.4286	0.4235	0.3933	0.4070	0.4303	0.4026	130-140	0.2904	4602	100,100
150	0.4981	0.5465	0.5395	0.5039	0.4774	0.4950	0.5776	0.5784	140-150	0.2910	4602	100,100
160	0.6868	0.7147	0.6581	0.6291	0.7046	0.6420	0.6370	0.6893	150-160	0.2722	4602	100,100
170	0.8798	0.8570	0.7614	0.7830	0.8877	0.8034	0.7384	0.8136	160-170	0.2113	4603	100,100
180	0.8169	0.7796	0.7326	0.7495	0.8207	0.7806	0.7307	0.7515	170-180	0.0770	4603	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.00V I:0.2380A P:28.400W PF:0.9950 Freq:50.00Hz Lamp Flux:4602.59x1 lm		
NAME: WL-2WRTST230D(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.06	Shielding Angle:

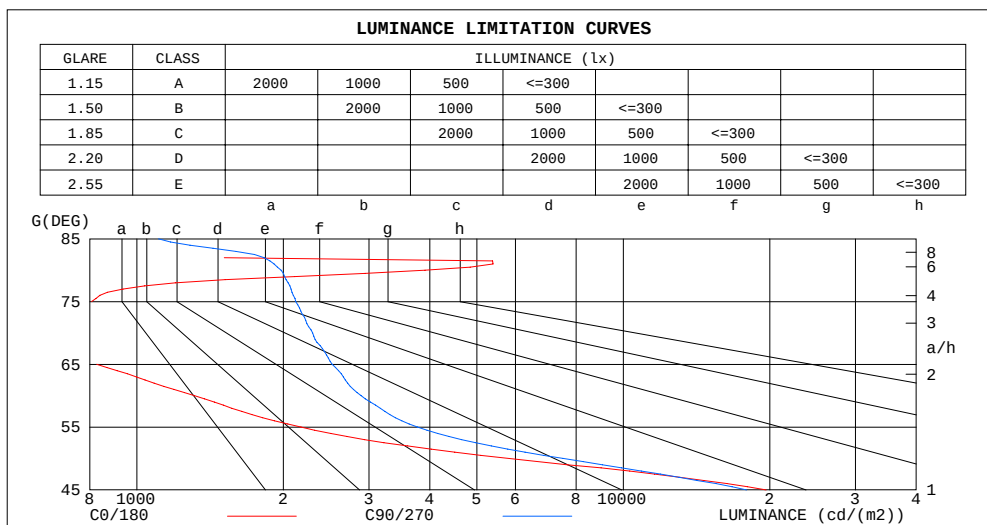

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	676	1108
80	3913	1978
75	807	2121
70	717	2298
65	827	2520
60	1313	2890
55	2174	3775
50	5808	7519
45	19660	17928


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.00V I:0.2380A P:28.400W PF:0.9950 Freq:50.00Hz Lamp Flux:4602.59x1 lm		
NAME: WL-2WRTST230D(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.06	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.09	1.07	1.04	1.07	1.05	1.02	1.03	1.01	.99	.99	.98	.96	.96	.95	.93	.92
2.0	1.00	.96	.92	.98	.94	.91	.95	.92	.89	.92	.89	.87	.89	.87	.85	.83
3.0	.92	.86	.82	.90	.85	.81	.88	.83	.80	.85	.81	.78	.83	.80	.77	.75
4.0	.84	.78	.73	.83	.77	.73	.81	.76	.72	.79	.75	.71	.77	.73	.70	.68
5.0	.78	.71	.66	.77	.71	.66	.75	.69	.65	.73	.68	.65	.72	.67	.64	.62
6.0	.72	.65	.60	.71	.65	.60	.69	.64	.59	.68	.63	.59	.67	.62	.58	.57
7.0	.67	.60	.55	.66	.59	.55	.64	.59	.54	.63	.58	.54	.62	.57	.54	.52
8.0	.62	.55	.50	.61	.55	.50	.60	.54	.50	.59	.54	.50	.58	.53	.49	.48
9.0	.58	.51	.46	.57	.51	.46	.56	.50	.46	.55	.50	.46	.54	.49	.46	.44
10.0	.54	.47	.43	.53	.47	.43	.52	.46	.42	.51	.46	.42	.51	.46	.42	.41

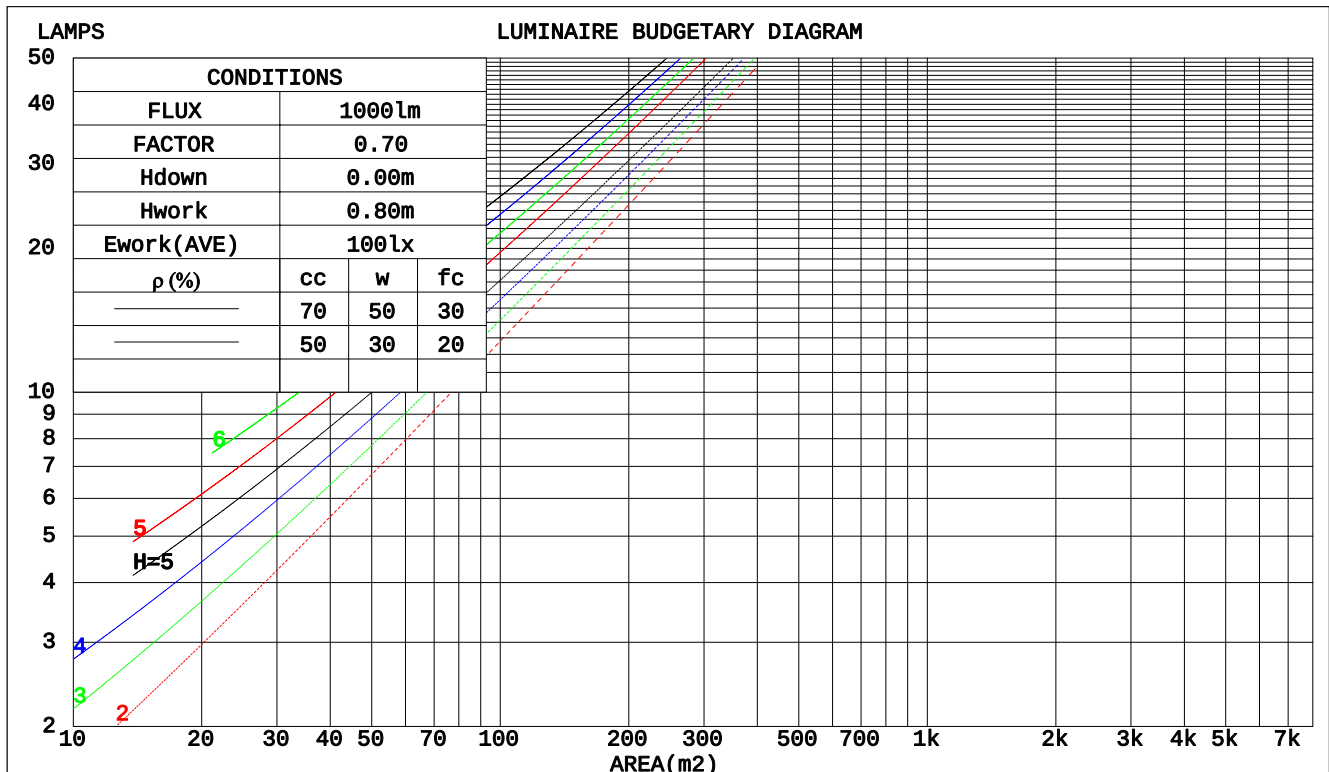

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity: 50.0%
Test Distance: 6.770m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.00V I:0.2380A P:28.400W PF:0.9950 Freq:50.00Hz Lamp Flux:4602.59x1 lm									
NAME: WL-2WRTST230D(5000K)					TYPE:			WEIGHT:	
SPEC.:					DIM.:			SERIAL No.:	
MFR.: Shenzhen Wisdom Light Co., ltd					SUR.:1.2*0.06			Shielding Angle:	

ρcc	80%			70%			50%			30%			10%			0	
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.204	.116	.037	.197	.113	.036	.185	.106	.034	.173	.100	.032	.162	.094	.030		
2.0	.198	.108	.033	.192	.106	.033	.181	.101	.031	.171	.096	.030	.162	.092	.029		
3.0	.189	.101	.030	.184	.099	.030	.175	.095	.029	.166	.091	.028	.158	.088	.027		
4.0	.181	.094	.028	.176	.092	.027	.168	.089	.027	.160	.086	.026	.153	.083	.025		
5.0	.172	.088	.025	.168	.086	.025	.161	.084	.025	.154	.081	.024	.148	.079	.024		
6.0	.164	.082	.024	.161	.081	.023	.154	.079	.023	.148	.077	.023	.143	.075	.022		
7.0	.156	.077	.022	.153	.076	.022	.148	.075	.021	.142	.073	.021	.137	.071	.021		
8.0	.149	.073	.020	.146	.072	.020	.141	.071	.020	.136	.069	.020	.132	.068	.020		
9.0	.142	.069	.019	.140	.068	.019	.135	.067	.019	.131	.066	.019	.127	.064	.019		
10.0	.136	.065	.018	.134	.065	.018	.130	.064	.018	.126	.062	.018	.122	.061	.018		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.173	.157	.143	.148	.135	.123	.101	.093	.085	.058	.054	.050	.019	.017	.016	
2.0	.160	.133	.110	.137	.114	.095	.094	.079	.066	.054	.046	.039	.017	.015	.013	
3.0	.149	.114	.086	.128	.098	.075	.088	.068	.052	.051	.040	.031	.016	.013	.010	
4.0	.140	.100	.069	.120	.086	.060	.083	.060	.042	.048	.035	.025	.015	.011	.008	
5.0	.133	.089	.056	.114	.077	.049	.078	.054	.034	.045	.031	.020	.015	.010	.007	
6.0	.126	.080	.047	.108	.069	.041	.075	.048	.029	.043	.028	.017	.014	.009	.006	
7.0	.120	.072	.039	.103	.063	.034	.071	.044	.024	.041	.026	.014	.013	.008	.005	
8.0	.114	.066	.034	.098	.058	.029	.068	.040	.021	.040	.024	.012	.013	.008	.004	
9.0	.109	.061	.029	.094	.053	.025	.065	.037	.018	.038	.022	.011	.012	.007	.004	
10.0	.105	.057	.026	.090	.050	.022	.063	.035	.016	.036	.021	.010	.012	.007	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.00V I:0.2380A P:28.400W PF:0.9950 Freq:50.00Hz Lamp Flux:4602.59x1 lm											
NAME: WL-2WRTST230D(5000K)						TYPE:			WEIGHT:		
SPEC.:						DIM.:			SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co., ltd						SUR.:1.2*0.06			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		19.3	20.4	19.5	20.6	20.8	19.1	20.2	19.3	20.4	20.6
	3H	19.1	20.2	19.4	20.4	20.6	19.0	20.0	19.3	20.2	20.5
	4H	19.0	20.0	19.3	20.2	20.5	19.0	19.9	19.3	20.2	20.4
	6H	19.0	19.9	19.3	20.2	20.4	18.9	19.8	19.2	20.1	20.3
	8H	19.1	20.0	19.4	20.2	20.5	18.9	19.8	19.2	20.0	20.3
	12H	19.0	19.9	19.4	20.1	20.4	18.9	19.7	19.2	20.0	20.3
4H	2H	19.1	20.0	19.4	20.3	20.5	18.8	19.8	19.1	20.0	20.3
	3H	18.9	19.7	19.2	20.0	20.3	18.8	19.6	19.1	19.9	20.2
	4H	18.8	19.6	19.2	19.9	20.2	18.8	19.5	19.1	19.8	20.2
	6H	18.8	19.5	19.2	19.8	20.2	18.8	19.4	19.2	19.8	20.1
	8H	18.9	19.5	19.3	19.9	20.3	18.8	19.4	19.2	19.7	20.1
	12H	18.9	19.4	19.3	19.8	20.2	18.7	19.3	19.1	19.7	20.1
8H	4H	18.7	19.3	19.1	19.7	20.0	18.7	19.3	19.1	19.6	20.0
	6H	18.7	19.2	19.2	19.6	20.0	18.7	19.2	19.1	19.5	20.0
	8H	18.8	19.3	19.3	19.7	20.1	18.6	19.1	19.1	19.5	19.9
	12H	18.8	19.2	19.3	19.6	20.1	18.6	19.0	19.1	19.4	19.9
12H	4H	18.7	19.2	19.1	19.6	20.0	18.6	19.2	19.0	19.5	19.9
	6H	18.7	19.1	19.1	19.5	20.0	18.6	19.0	19.1	19.5	19.9
	8H	18.8	19.2	19.3	19.6	20.1	18.6	19.0	19.1	19.4	19.9
Variations with the observer position at spacings:											
S = 1.0H	+ 2.4 / - 7.4					+ 2.3 / - 6.3					
1.5H	+ 3.4 / - 7.3					+ 3.3 / - 6.1					
2.0H	+ 6.5 / - 5.3					+ 5.8 / - 4.0					

CIE Pub.117, 4603 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 5.3$)
Area: 0.072 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 γ Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.00V I:0.2380A P:28.400W PF:0.9950 Freq:50.00Hz Lamp Flux:4602.59x1 lm		
NAME: WL-2WRTST230D(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.06	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	79	71	66	78	71	66	77	70	66	62
0.80	88	80	75	87	80	75	85	79	75	70
1.00	94	87	82	93	86	82	91	87	82	77
1.25	99	92	88	98	92	88	96	91	87	82
1.50	102	96	92	101	96	92	98	94	91	86
2.00	106	101	97	104	100	96	102	98	95	89
2.50	108	103	100	106	102	99	103	100	97	91
3.00	110	106	103	108	104	102	105	102	99	93
4.00	112	109	106	110	107	105	106	104	102	95
5.00	114	111	108	111	109	107	107	105	104	96
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.00V I:0.2380A P:28.400W PF:0.9950 Freq:50.00Hz Lamp Flux:4602.59x1 lm		
NAME: WL-2WRTST230D(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.06	Shielding Angle:

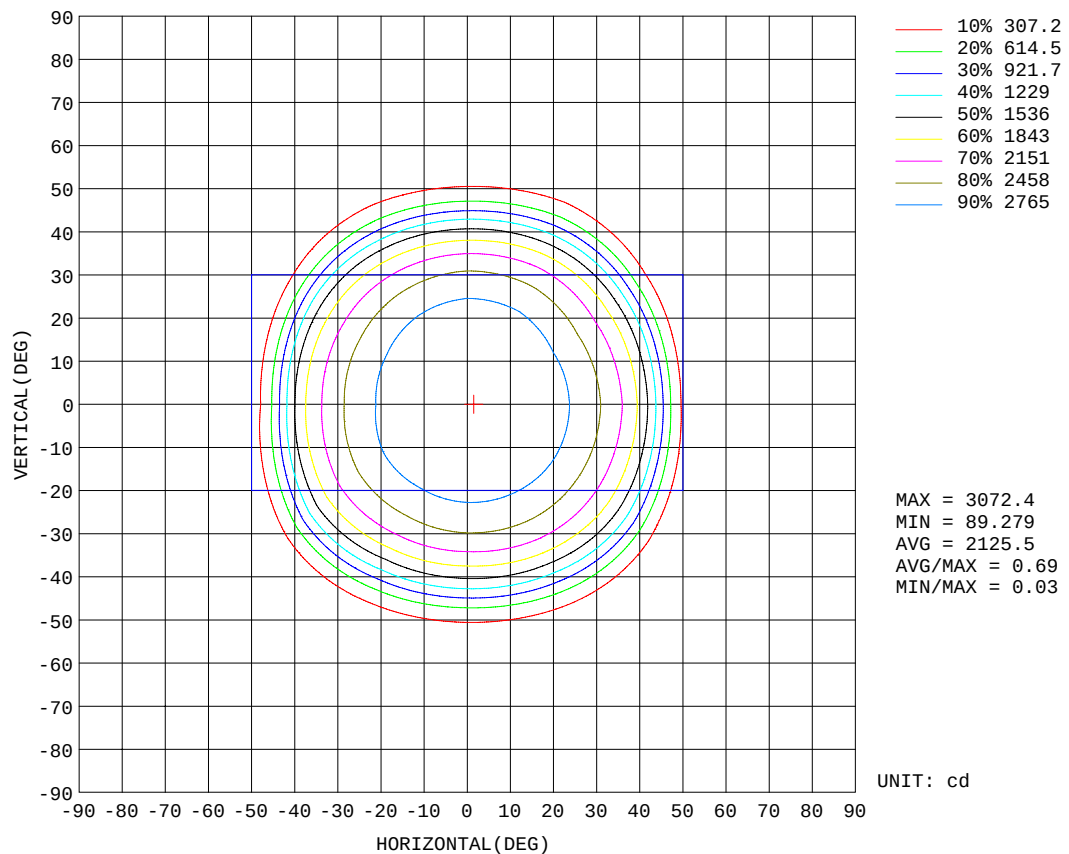


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.00V I:0.2380A P:28.400W PF:0.9950 Freq:50.00Hz Lamp Flux:4602.59x1 lm		
NAME: WL-2WRTST230D(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.06	Shielding Angle:

Flux out:3783 lm

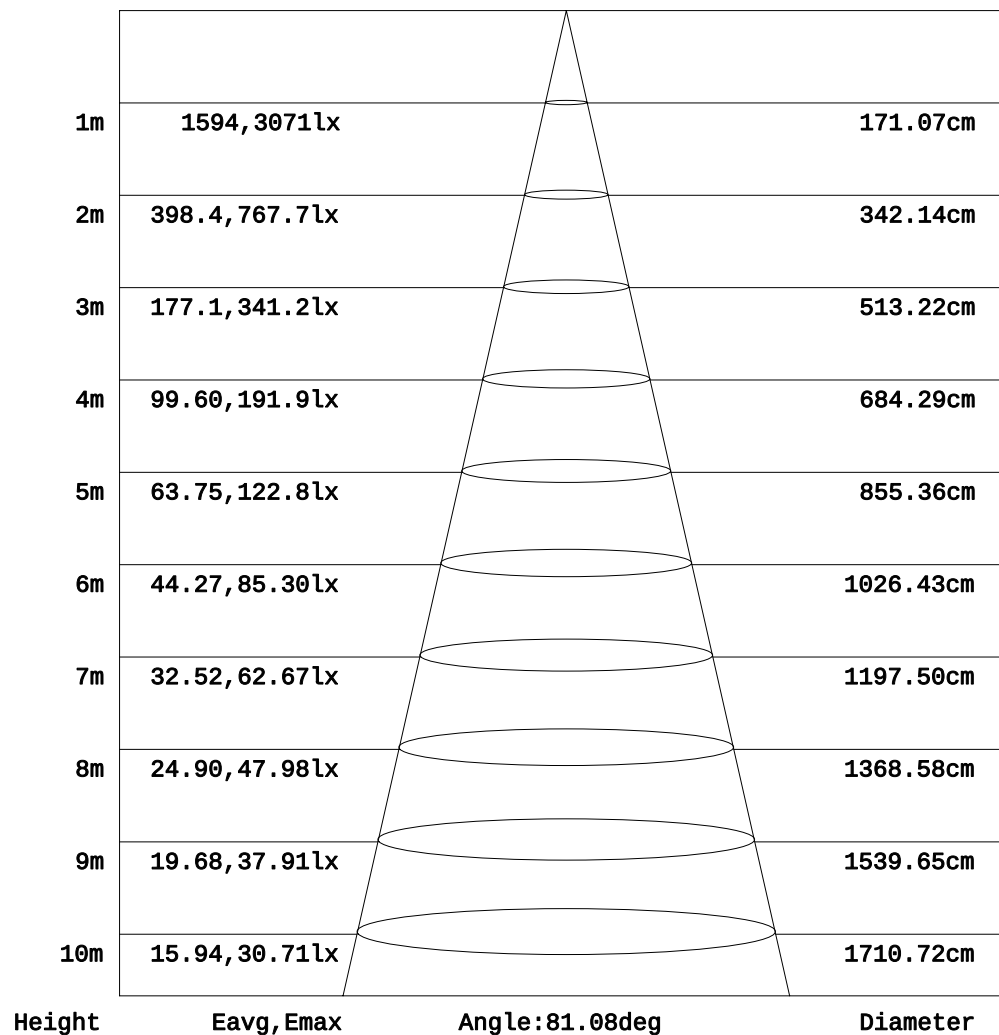


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity: 50.0%
 Test Distance: 6.770m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.00V I:0.2380A P:28.400W PF:0.9950 Freq:50.00Hz Lamp Flux:4602.59x1 lm		
NAME: WL-2WRTST230D(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.06	Shielding Angle:

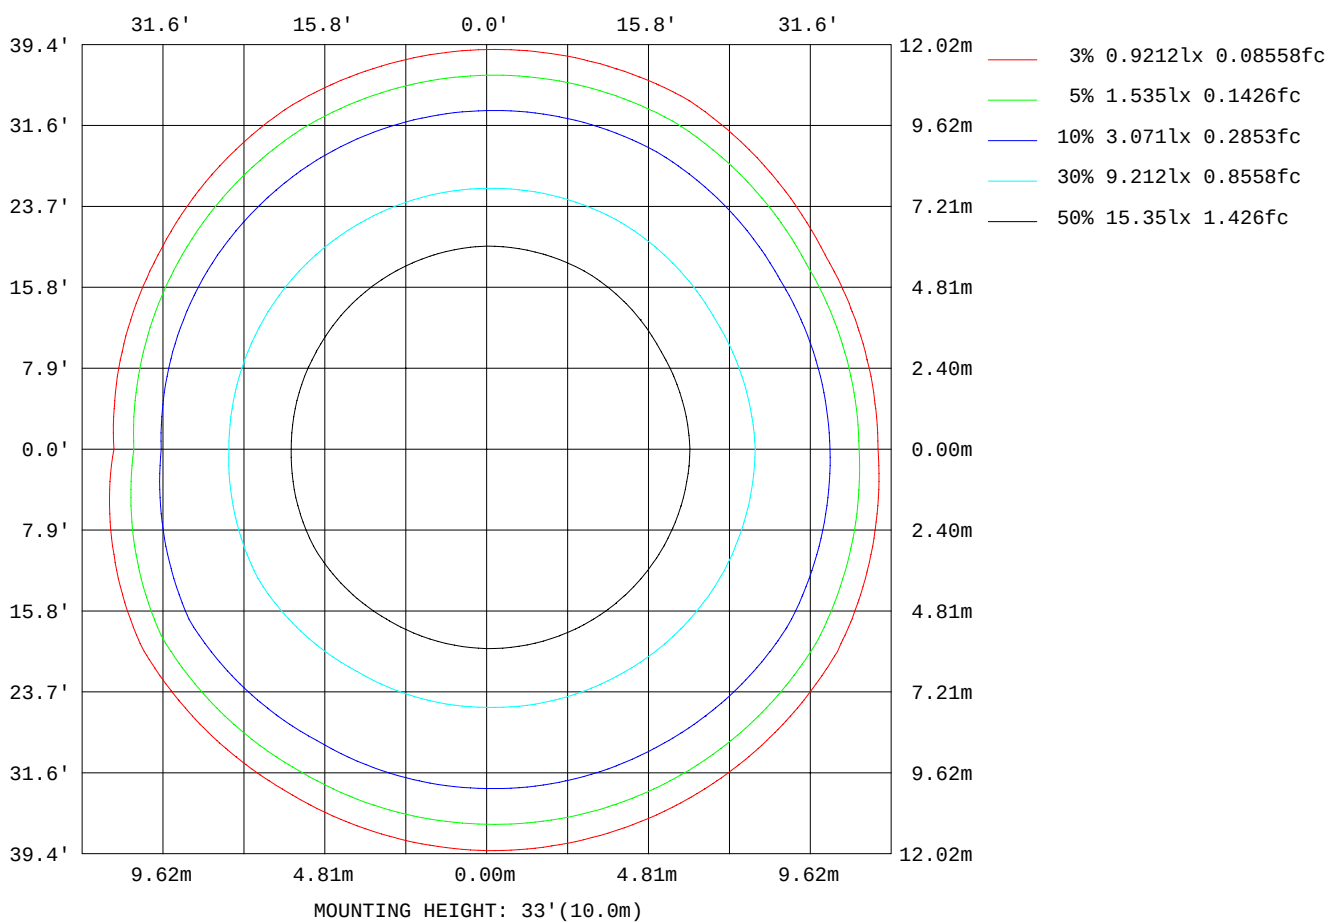

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity: 50.0%
Test Distance: 6.770m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.00V I:0.2380A P:28.400W PF:0.9950 Freq:50.00Hz Lamp Flux:4602.59x1 lm		
NAME: WL-2WRTST230D(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.06	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	886
L_0~180(75)av	845
L_0~180(85)av	643
L_90~270(65)av	2760
L_90~270(75)av	2281
L_90~270(85)av	1055
L_45(65)av	1921
L_45(75)av	1058
L_45(85)av	792

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks:

Planar Illuminance Curve

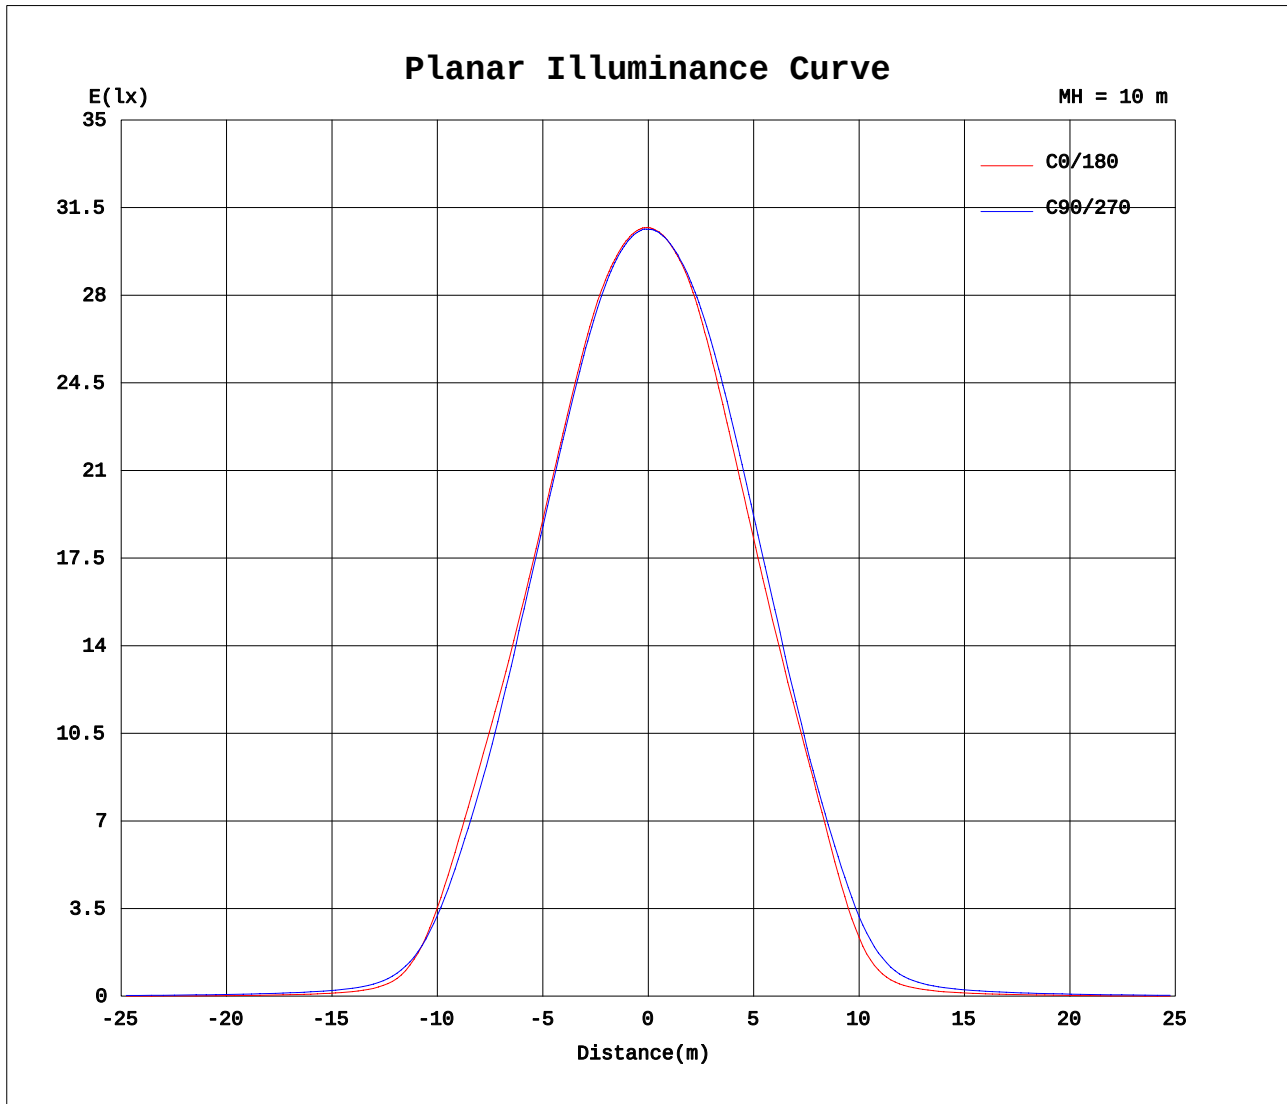

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity: 50.0%
Test Distance: 6.770m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.00V I:0.2380A P:28.400W PF:0.9950 Freq:50.00Hz Lamp Flux:4602.59x1 lm											
NAME: WL-2WRTST230D(5000K)						TYPE:			WEIGHT:		
SPEC.:						DIM.:			SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co., ltd						SUR.:1.2*0.06			Shielding Angle:		

Table--1

UNIT: cd

C(DEC) γ (DEC)	0	30	60	90	120	150	180	210	240	270	300	330							
0	3067	3067	3067	3067	3067	3067	3067	3067	3067	3067	3067	3067							
5	3065	3064	3063	3062	3060	3060	3054	3055	3055	3061	3062	3063							
10	3046	3044	3039	3036	3029	3032	3025	3027	3031	3042	3047	3041							
15	2993	2993	2978	2969	2961	2972	2940	2956	2978	3000	3001	2990							
20	2878	2883	2863	2852	2839	2844	2799	2823	2871	2907	2906	2873							
25	2718	2708	2699	2688	2660	2662	2616	2639	2701	2750	2746	2696							
30	2501	2487	2471	2452	2416	2431	2378	2399	2451	2514	2513	2457							
35	2212	2188	2146	2082	2071	2126	2058	2059	2101	2145	2180	2139							
40	1777	1771	1646	1584	1543	1680	1527	1550	1579	1621	1681	1668							
45	1000	1082	973	914	879	982	665	749	848	901	971	912							
50	268	384	363	348	316	321	187	226	310	337	360	271							
55	89.6	134	156	156	148	123	89.5	108	158	170	172	110							
60	47.2	61.7	99.8	104	99.0	71.8	58.7	70.3	107	121	117	59.4							
65	25.1	33.5	71.6	76.7	71.5	47.6	28.8	45.5	78.0	91.2	85.0	32.1							
70	17.6	18.4	48.3	56.6	50.2	23.2	18.0	18.3	53.4	67.3	56.0	17.7							
75	15.0	14.7	22.5	39.6	29.2	15.1	16.5	15.2	29.9	45.5	25.3	14.3							
80	48.9	11.3	11.6	24.8	11.3	11.6	25.7	11.3	11.3	26.8	11.5	10.6							
85	4.23	4.58	6.47	6.96	6.27	4.76	3.83	4.19	4.79	6.28	5.65	3.37							
90	0.76	0.82	0.52	0.26	0.05	0.06	0.05	0.06	0.07	0.07	0.07	0.06							
95	0.03	0.03	0.05	0.05	0.05	0.04	0.05	0.06	0.07	0.07	0.07	0.06							
100	0.04	0.05	0.06	0.05	0.06	0.07	0.06	0.07	0.07	0.07	0.07	0.07							
105	0.14	0.06	0.06	0.07	0.06	0.07	0.09	0.18	0.08	0.08	0.08	0.08							
110	0.07	0.10	0.14	0.10	0.11	0.12	0.13	0.12	0.11	0.11	0.12	0.12							
115	0.10	0.13	0.17	0.15	0.16	0.14	0.13	0.16	0.16	0.15	0.17	0.15							
120	0.22	0.29	0.22	0.20	0.22	0.22	0.20	0.25	0.22	0.20	0.24	0.22							
125	0.32	0.37	0.27	0.26	0.27	0.33	0.28	0.34	0.26	0.26	0.25	0.29							
130	0.39	0.36	0.32	0.31	0.32	0.34	0.34	0.39	0.31	0.31	0.30	0.33							
135	0.39	0.40	0.38	0.37	0.37	0.39	0.37	0.38	0.36	0.37	0.35	0.37							
140	0.42	0.43	0.43	0.43	0.43	0.42	0.39	0.40	0.41	0.43	0.40	0.40							
145	0.45	0.47	0.49	0.48	0.47	0.45	0.42	0.42	0.46	0.49	0.46	0.45							
150	0.50	0.53	0.56	0.54	0.52	0.49	0.48	0.47	0.52	0.58	0.64	0.51							
155	0.56	0.61	0.63	0.59	0.56	0.55	0.57	0.54	0.57	0.62	0.65	0.61							
160	0.69	0.72	0.71	0.66	0.63	0.63	0.70	0.65	0.63	0.64	0.66	0.71							
165	0.81	0.83	0.78	0.71	0.70	0.73	0.83	0.77	0.71	0.69	0.73	0.81							
170	0.88	0.90	0.82	0.76	0.76	0.81	0.89	0.84	0.77	0.74	0.77	0.86							
175	0.87	0.89	0.80	0.76	0.76	0.82	0.84	0.82	0.75	0.73	0.74	0.80							
180	0.82	0.81	0.75	0.73	0.72	0.78	0.82	0.81	0.75	0.73	0.72	0.78							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks: