


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.70V I:0.5470A P:65.200W PF:0.9950 Freq:50.00Hz Lamp Flux:9024.34x1 lm		
NAME: WL-2WRTST260D(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.6	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 138.41 lm/W			
MODEL		I _{max} (cd)	5997	S/MH(C0/180)	1.12
NOMINAL POWER(W)	60	LOR(%)	100.0	S/MH(C90/270)	1.18
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	9024.3	η UP, DN(C0-180)	0.0, 50.1
NOMINAL FLUX(lm)	9024.34	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 49.8
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	219.7	η down(%)	100.0	CIBSE SHR MAX	1.25

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

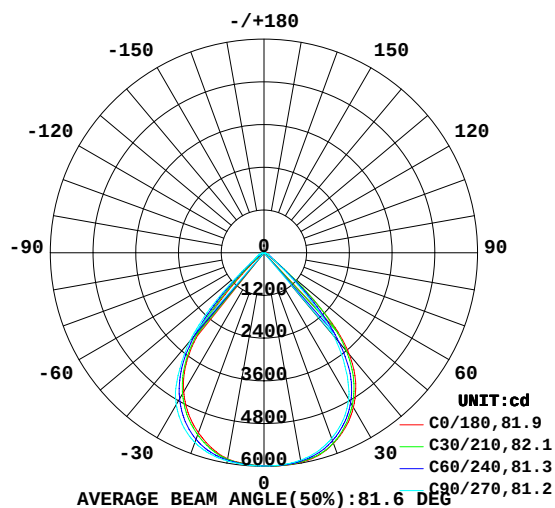

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

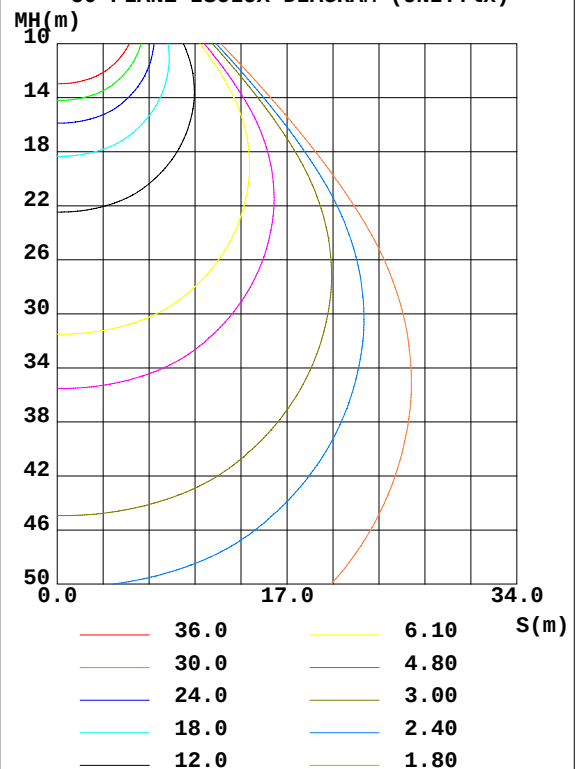

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-05-06

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity: 50.0%
 Test Distance: 6.770m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	5972	5953	5917	5886	5879	5901	5937	5968	0- 10	568.9	568.9	6.3,6.3
20	5700	5656	5549	5440	5383	5510	5673	5736	10- 20	1636	2205	24.4,24.4
30	5021	4912	4755	4554	4509	4660	4930	5038	20- 30	2410	4615	51.1,51.1
40	3725	3441	3047	2814	2634	2924	3227	3604	30- 40	2551	7166	79.4,79.4
50	778.8	856.3	638.6	440.3	295.7	504.7	736.9	908.8	40- 50	1403	8569	95,95
60	144.1	178.0	195.0	146.1	97.86	158.0	232.5	204.5	50- 60	277.6	8847	98,98
70	34.20	67.06	103.9	58.01	30.63	60.43	128.7	82.49	60- 70	111.4	8958	99.3,99.3
80	50.60	21.91	42.65	20.56	8.808	17.17	52.92	23.38	70- 80	48.70	9007	99.8,99.8
90	3.734	2.739	0.1450	0.0865	0.1124	0.1335	0.2705	2.046	80- 90	14.06	9021	100,100
100	0.0754	0.1012	0.1055	0.1221	0.2786	0.2011	0.1400	0.1335	90-100	0.2376	9021	100,100
110	0.1322	0.1831	0.2130	0.2487	0.1986	0.2424	0.2184	0.1933	100-110	0.1799	9021	100,100
120	0.3172	0.4740	0.4182	0.4776	0.4541	0.4730	0.4007	0.4268	110-120	0.3058	9022	100,100
130	0.7352	0.7134	0.6293	0.6958	0.7092	0.7279	0.6058	0.6008	120-130	0.5094	9022	100,100
140	0.7826	0.8344	0.8461	0.8707	0.8112	0.8556	0.8551	0.7583	130-140	0.5787	9023	100,100
150	0.9282	1.053	1.067	1.030	0.9892	1.043	1.191	1.121	140-150	0.5776	9023	100,100
160	1.293	1.392	1.306	1.296	1.413	1.298	1.293	1.324	150-160	0.5405	9024	100,100
170	1.703	1.706	1.538	1.584	1.719	1.604	1.500	1.617	160-170	0.4196	9024	100,100
180	1.583	1.541	1.448	1.479	1.592	1.540	1.448	1.476	170-180	0.1530	9024	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-05-06

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.70V I:0.5470A P:65.200W PF:0.9950 Freq:50.00Hz Lamp Flux:9024.34x1 lm		
NAME: WL-2WRTST260D(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.6	Shielding Angle:

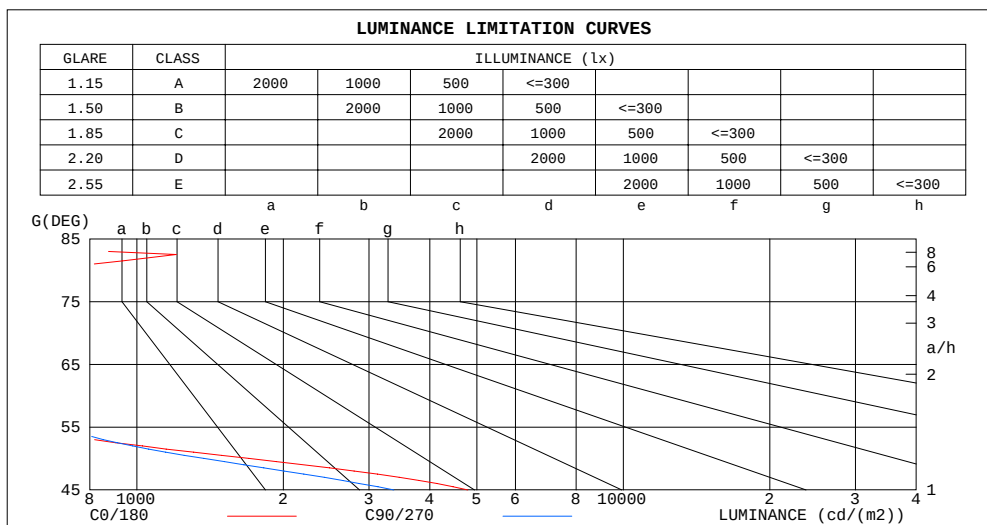


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-06

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.70V I:0.5470A P:65.200W PF:0.9950 Freq:50.00Hz Lamp Flux:9024.34x1 lm		
NAME: WL-2WRTST260D(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.6	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.09	1.07	1.04	1.07	1.05	1.02	1.03	1.01	.99	.99	.98	.96	.96	.95	.93	.92
2.0	1.00	.96	.92	.98	.94	.91	.95	.92	.89	.92	.89	.87	.89	.87	.85	.83
3.0	.92	.86	.82	.90	.85	.81	.88	.83	.79	.85	.81	.78	.83	.80	.77	.75
4.0	.84	.78	.73	.83	.77	.73	.81	.76	.72	.79	.74	.71	.77	.73	.70	.68
5.0	.78	.71	.66	.77	.70	.66	.75	.69	.65	.73	.68	.64	.71	.67	.64	.62
6.0	.72	.65	.60	.71	.64	.60	.69	.64	.59	.68	.63	.59	.66	.62	.58	.57
7.0	.66	.60	.55	.66	.59	.54	.64	.58	.54	.63	.58	.54	.62	.57	.54	.52
8.0	.62	.55	.50	.61	.55	.50	.60	.54	.50	.59	.53	.49	.58	.53	.49	.48
9.0	.57	.51	.46	.57	.50	.46	.56	.50	.46	.55	.49	.46	.54	.49	.45	.44
10.0	.54	.47	.43	.53	.47	.42	.52	.46	.42	.51	.46	.42	.51	.46	.42	.41

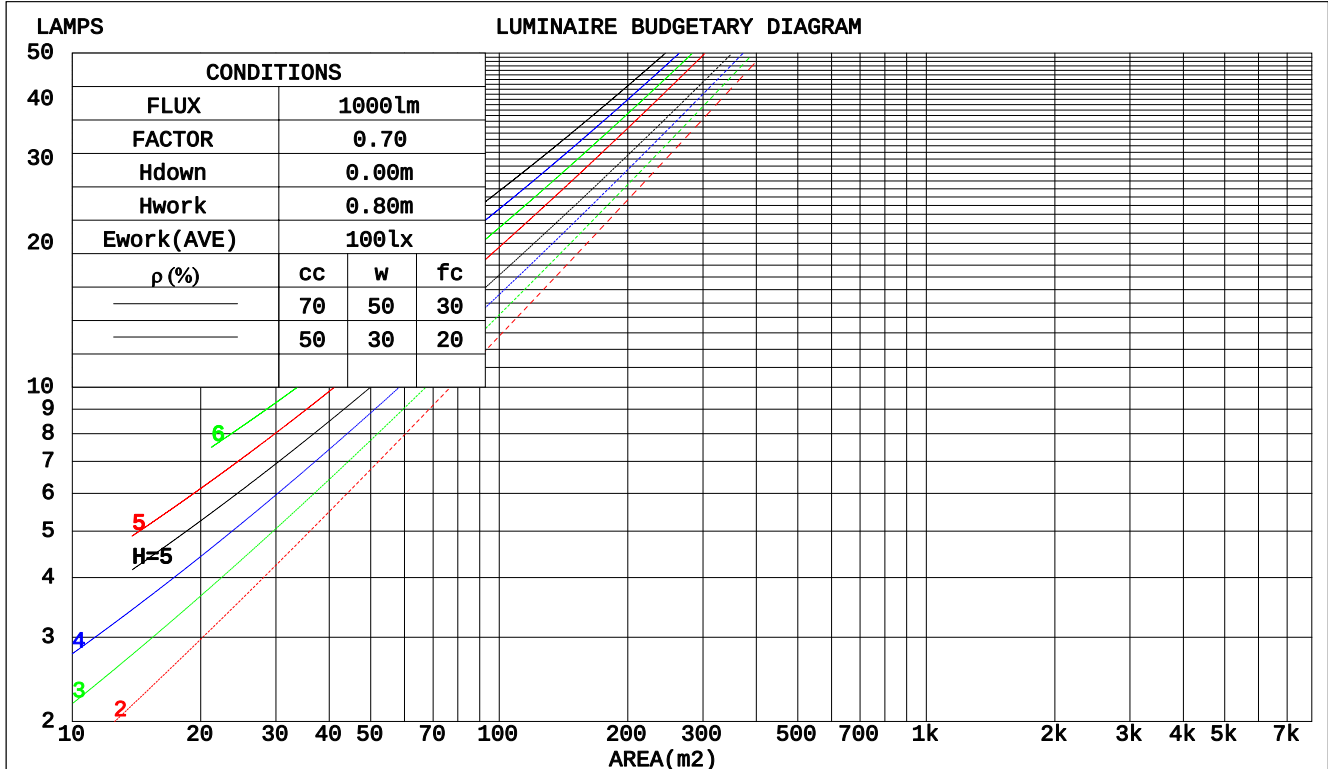

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-06

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 γ Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.70V I:0.5470A P:65.200W PF:0.9950 Freq:50.00Hz Lamp Flux:9024.34x1 lm					
NAME: WL-2WRTST260D(5000K)			TYPE:		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd			SUR.:1.2*0.6		Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.204	.116	.037	.197	.113	.036	.185	.106	.034	.173	.100	.032	.162	.094	.030	
2.0	.198	.109	.033	.192	.106	.033	.181	.101	.031	.171	.096	.030	.162	.092	.029	
3.0	.190	.101	.030	.185	.099	.030	.175	.095	.029	.167	.091	.028	.158	.088	.027	
4.0	.181	.094	.028	.177	.092	.027	.168	.089	.027	.161	.086	.026	.154	.083	.025	
5.0	.172	.088	.025	.169	.087	.025	.161	.084	.025	.155	.082	.024	.148	.079	.024	
6.0	.164	.082	.024	.161	.081	.023	.154	.079	.023	.148	.077	.023	.143	.075	.022	
7.0	.157	.077	.022	.154	.077	.022	.148	.075	.022	.142	.073	.021	.137	.071	.021	
8.0	.149	.073	.021	.147	.072	.020	.142	.071	.020	.137	.069	.020	.132	.068	.020	
9.0	.143	.069	.019	.140	.068	.019	.136	.067	.019	.131	.066	.019	.127	.065	.019	
10.0	.136	.065	.018	.134	.065	.018	.130	.064	.018	.126	.063	.018	.122	.061	.018	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.173	.157	.143	.148	.135	.123	.101	.093	.085	.058	.054	.050	.019	.017	.016	
2.0	.160	.133	.110	.137	.114	.095	.094	.079	.066	.054	.046	.039	.017	.015	.013	
3.0	.149	.114	.086	.128	.098	.075	.088	.068	.052	.051	.040	.031	.016	.013	.010	
4.0	.140	.100	.069	.120	.086	.060	.083	.060	.042	.048	.035	.025	.015	.011	.008	
5.0	.133	.089	.056	.114	.077	.049	.078	.054	.034	.045	.031	.020	.015	.010	.007	
6.0	.126	.080	.047	.108	.069	.041	.075	.048	.029	.043	.028	.017	.014	.009	.006	
7.0	.120	.072	.039	.103	.063	.034	.071	.044	.024	.041	.026	.014	.013	.008	.005	
8.0	.114	.066	.034	.098	.058	.029	.068	.040	.021	.040	.024	.012	.013	.008	.004	
9.0	.109	.061	.029	.094	.053	.025	.065	.038	.018	.038	.022	.011	.012	.007	.004	
10.0	.105	.057	.026	.090	.050	.022	.063	.035	.016	.036	.021	.010	.012	.007	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-06

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.70V I:0.5470A P:65.200W PF:0.9950 Freq:50.00Hz Lamp Flux:9024.34x1 lm											
NAME: WL-2WRTST260D(5000K)					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: Shenzhen Wisdom Light Co., ltd					SUR.:1.2*0.6			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.3	15.4	14.5	15.6	15.8	13.5	14.6	13.7	14.8	15.0	
	3H	14.1	15.1	14.4	15.4	15.6	13.4	14.5	13.7	14.7	14.9
	4H	14.0	15.0	14.3	15.2	15.5	13.4	14.4	13.7	14.6	14.8
	6H	14.0	14.9	14.3	15.1	15.4	13.3	14.2	13.6	14.5	14.8
	8H	14.0	14.9	14.4	15.2	15.4	13.3	14.2	13.6	14.4	14.7
	12H	14.0	14.9	14.4	15.1	15.4	13.3	14.1	13.6	14.4	14.7
4H	2H	14.0	15.0	14.3	15.2	15.5	13.3	14.3	13.6	14.5	14.7
	3H	13.9	14.7	14.2	15.0	15.3	13.2	14.1	13.6	14.4	14.6
	4H	13.8	14.6	14.2	14.9	15.2	13.2	14.0	13.6	14.3	14.6
	6H	13.7	14.4	14.1	14.7	15.1	13.2	13.9	13.6	14.2	14.5
	8H	13.9	14.5	14.3	14.9	15.2	13.2	13.8	13.6	14.1	14.5
	12H	13.9	14.4	14.3	14.8	15.2	13.1	13.7	13.6	14.1	14.5
8H	4H	13.7	14.3	14.1	14.6	15.0	13.1	13.7	13.5	14.1	14.4
	6H	13.6	14.1	14.1	14.5	14.9	13.1	13.6	13.5	14.0	14.4
	8H	13.8	14.2	14.3	14.7	15.1	13.1	13.5	13.5	13.9	14.4
	12H	13.8	14.2	14.3	14.6	15.1	13.0	13.4	13.5	13.9	14.3
12H	4H	13.6	14.2	14.0	14.6	15.0	13.1	13.6	13.5	14.0	14.4
	6H	13.6	14.0	14.0	14.4	14.9	13.0	13.5	13.5	13.9	14.3
	8H	13.8	14.1	14.2	14.6	15.1	13.0	13.4	13.5	13.8	14.3
Variations with the observer position at spacings:											
S = 1.0H	+ 2.4 / - 7.3					+ 2.4 / - 6.6					
1.5H	+ 3.0 / - 6.9					+ 3.3 / - 6.2					
2.0H	+ 6.4 / - 5.6					+ 5.5 / - 4.2					

CIE Pub.117, 9024 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 7.6$)
Area: 0.72 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-06

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.70V I:0.5470A P:65.200W PF:0.9950 Freq:50.00Hz Lamp Flux:9024.34x1 lm		
NAME: WL-2WRTST260D(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.6	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	79	71	66	78	70	66	77	70	66	61
0.80	87	80	75	87	80	75	85	79	75	70
1.00	94	87	82	93	86	82	91	86	81	77
1.25	99	92	88	98	92	88	95	90	87	82
1.50	102	96	92	101	95	92	98	94	91	85
2.00	106	101	97	104	100	96	102	98	95	89
2.50	108	103	100	106	102	99	103	100	97	91
3.00	110	106	103	108	104	101	105	102	99	92
4.00	112	109	106	110	107	105	106	104	102	95
5.00	114	111	108	111	109	107	107	105	104	96
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-06

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:119.70V I:0.5470A P:65.200W PF:0.9950 Freq:50.00Hz Lamp Flux:9024.34x1 lm		
NAME: WL-2WRTST260D(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.6	Shielding Angle:

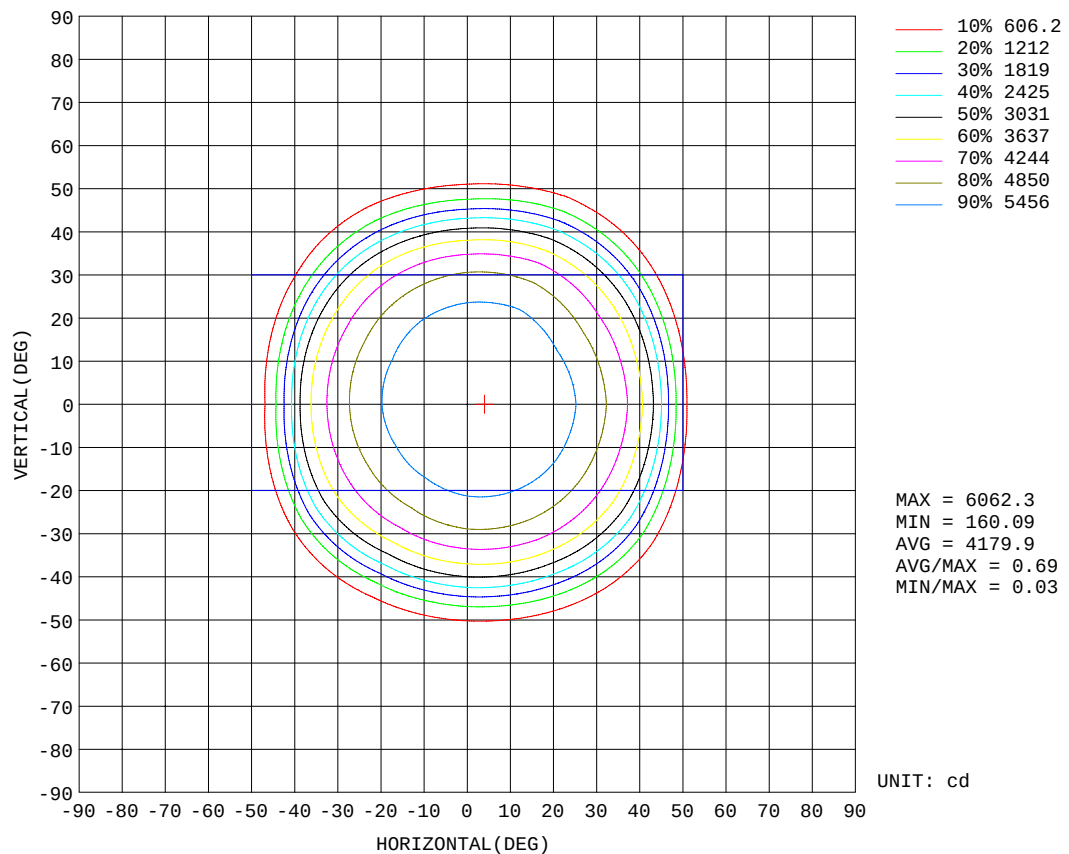


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-05-06

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity: 50.0%
 Test Distance: 6.770m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.70V I:0.5470A P:65.200W PF:0.9950 Freq:50.00Hz Lamp Flux:9024.34x1 lm		
NAME: WL-2WRTST260D(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.6	Shielding Angle:

Flux out:7276 lm

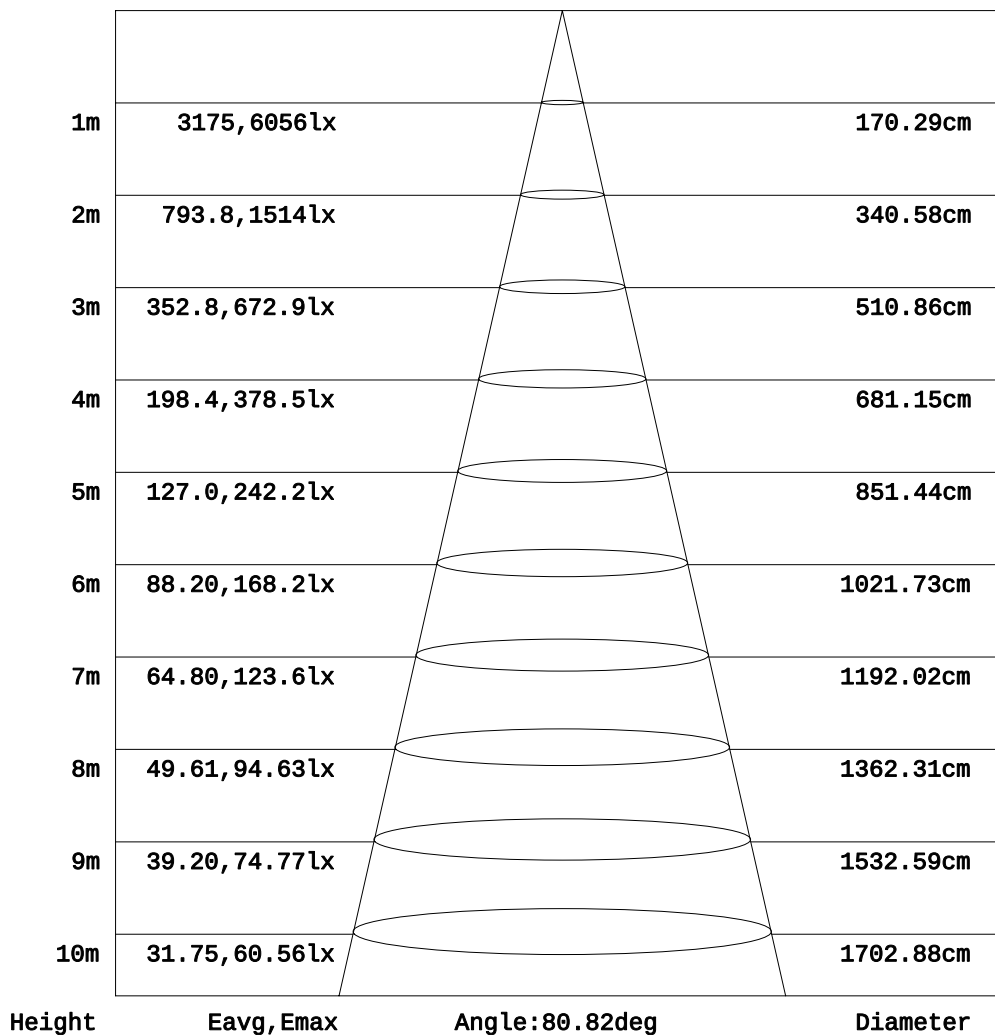


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-05-06

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity: 50.0%
 Test Distance: 6.770m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.70V I:0.5470A P:65.200W PF:0.9950 Freq:50.00Hz Lamp Flux:9024.34x1 lm		
NAME: WL-2WRTST260D(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.6	Shielding Angle:

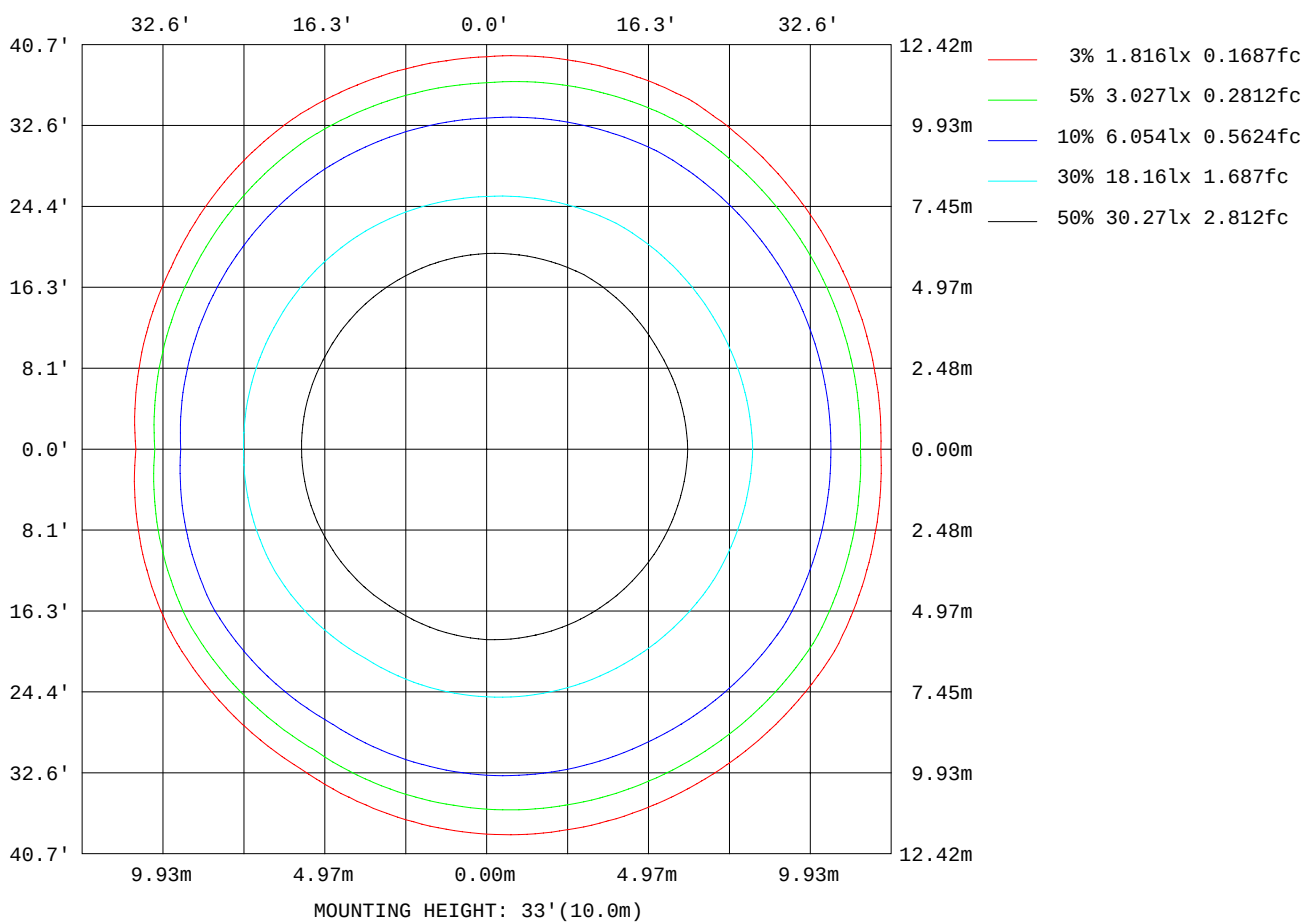

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-05-06

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity: 50.0%
Test Distance: 6.770m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.70V I:0.5470A P:65.200W PF:0.9950 Freq:50.00Hz Lamp Flux:9024.34x1 lm		
NAME: WL-2WRTST260D(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.6	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	167
L_0~180(75)av	170
L_0~180(85)av	101
L_90~270(65)av	523
L_90~270(75)av	430
L_90~270(85)av	200
L_45(65)av	370
L_45(75)av	205
L_45(85)av	146

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-05-06

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks:

Planar Illuminance Curve

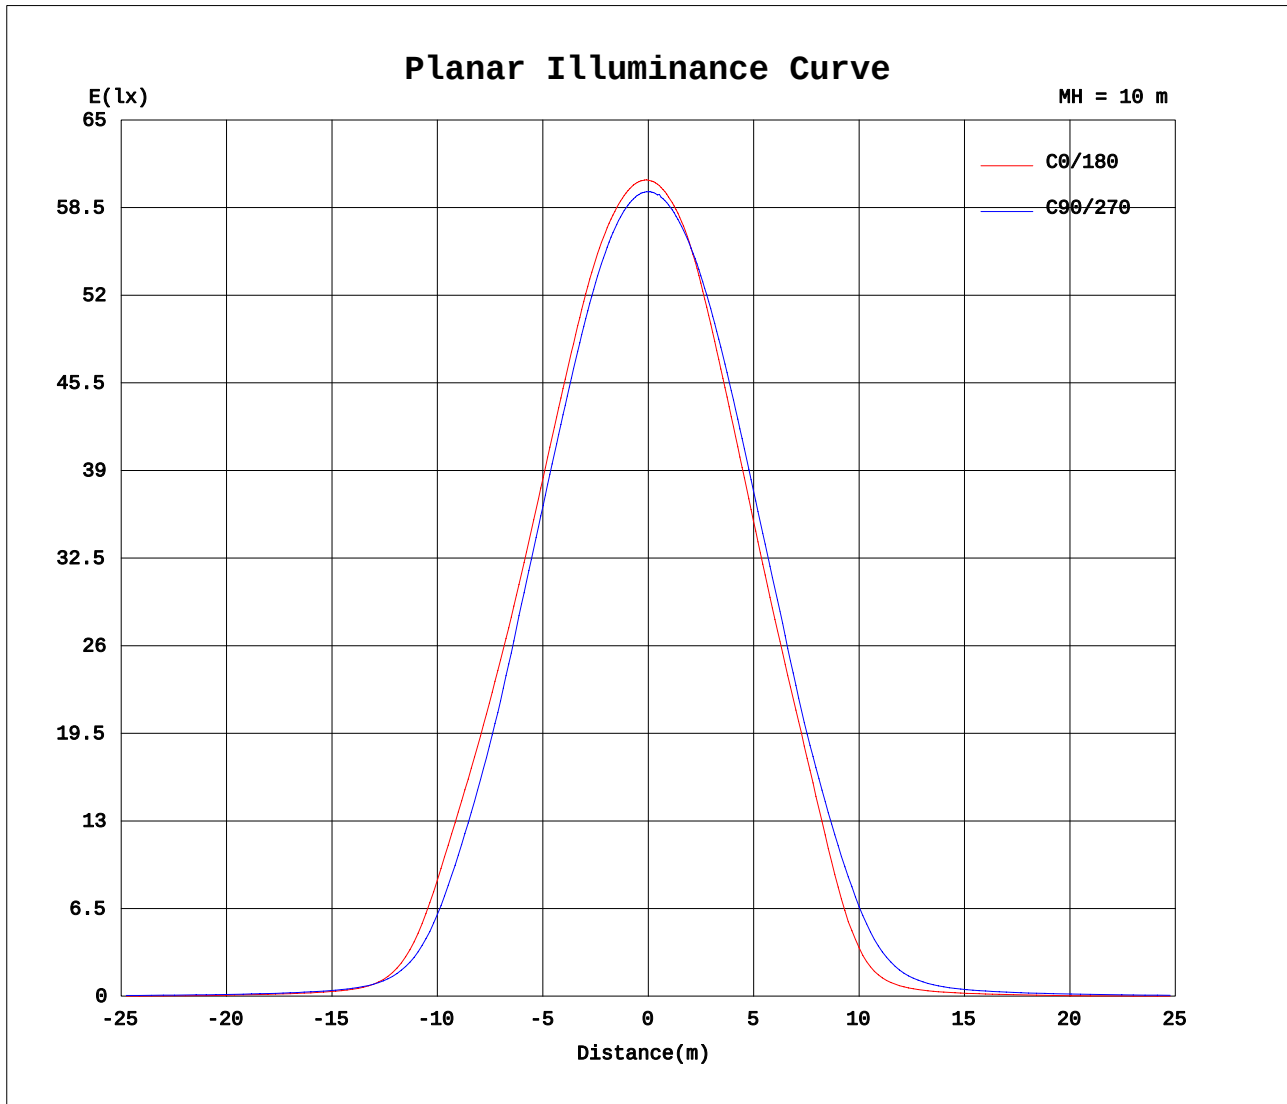

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-05-06

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity: 50.0%
Test Distance: 6.770m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.70V I:0.5470A P:65.200W PF:0.9950 Freq:50.00Hz Lamp Flux:9024.34x1 lm		
NAME: WL-2WRTST260D(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.6	Shielding Angle:

Table--1

UNIT: cd

C(DEC)	0	30	60	90	120	150	180	210	240	270	300	330						
γ (DEC)	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85
0	5989	5989	5989	5989	5989	5989	5989	5989	5989	5989	5989	5989						
5	5995	5993	5986	5975	5962	5958	5954	5957	5966	5977	5989	5992						
10	5972	5964	5943	5917	5883	5888	5879	5891	5912	5937	5966	5971						
15	5896	5880	5833	5784	5728	5719	5679	5720	5800	5847	5899	5898						
20	5700	5690	5621	5549	5453	5428	5383	5441	5579	5673	5749	5723						
25	5414	5375	5305	5222	5074	5046	5009	5075	5234	5374	5483	5434						
30	5021	4956	4867	4755	4554	4554	4509	4578	4742	4930	5063	5013						
35	4493	4396	4245	4002	3831	3891	3823	3891	4063	4212	4476	4442						
40	3725	3603	3279	3047	2744	2885	2634	2823	3026	3227	3544	3664						
45	2411	2390	1994	1723	1371	1383	1007	1292	1635	1887	2315	2434						
50	779	937	775	639	476	404	296	395	615	737	946	872						
55	246	298	309	289	250	188	152	187	298	340	388	294						
60	144	161	196	195	172	120	97.9	119	197	232	243	166						
65	64.7	103	140	144	124	76.6	36.8	73.6	138	175	177	59.9						
70	34.2	37.4	96.9	104	83.1	32.9	30.6	30.7	90.3	129	127	37.5						
75	29.1	28.0	58.5	71.9	46.8	27.5	34.2	24.6	49.7	88.5	57.6	28.5						
80	50.6	22.3	21.6	42.7	20.5	20.7	8.81	15.2	19.2	52.9	24.7	22.1						
85	9.60	10.5	12.7	11.9	8.36	7.57	3.08	4.37	7.01	13.1	14.2	8.67						
90	3.73	3.37	2.10	0.14	0.10	0.08	0.11	0.12	0.14	0.27	2.14	1.95						
95	0.07	0.08	0.16	0.10	0.16	0.08	0.11	0.13	0.15	0.14	0.14	0.11						
100	0.08	0.09	0.11	0.11	0.13	0.12	0.28	0.25	0.15	0.14	0.14	0.12						
105	0.10	0.13	0.13	0.14	0.15	0.17	0.30	0.21	0.21	0.16	0.15	0.16						
110	0.13	0.18	0.19	0.21	0.25	0.25	0.20	0.24	0.24	0.22	0.19	0.19						
115	0.19	0.23	0.29	0.31	0.35	0.33	0.30	0.37	0.35	0.30	0.32	0.28						
120	0.32	0.54	0.41	0.42	0.47	0.49	0.45	0.50	0.44	0.40	0.47	0.38						
125	0.59	0.69	0.52	0.52	0.57	0.64	0.60	0.69	0.54	0.50	0.49	0.52						
130	0.74	0.80	0.62	0.63	0.67	0.72	0.71	0.82	0.64	0.61	0.56	0.64						
135	0.81	0.74	0.74	0.73	0.77	0.80	0.76	0.76	0.74	0.72	0.66	0.69						
140	0.78	0.82	0.85	0.85	0.87	0.87	0.81	0.81	0.90	0.86	0.76	0.76						
145	0.84	0.90	0.96	0.95	0.95	0.93	0.87	0.86	1.03	1.00	0.86	0.83						
150	0.93	1.01	1.09	1.07	1.05	1.01	0.99	0.96	1.13	1.19	1.29	0.95						
155	1.06	1.16	1.22	1.18	1.15	1.13	1.16	1.11	1.16	1.26	1.29	1.12						
160	1.29	1.40	1.39	1.31	1.28	1.31	1.41	1.33	1.26	1.29	1.30	1.35						
165	1.55	1.62	1.54	1.43	1.42	1.50	1.63	1.55	1.41	1.41	1.44	1.57						
170	1.70	1.78	1.63	1.54	1.53	1.63	1.72	1.67	1.54	1.50	1.54	1.69						
175	1.70	1.76	1.59	1.54	1.53	1.63	1.62	1.61	1.51	1.45	1.47	1.59						
180	1.58	1.60	1.48	1.45	1.44	1.52	1.59	1.60	1.48	1.45	1.44	1.51						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-05-06

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks: