


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.6V I:0.2150A P:25.60W PF:0.9950 Freq:60.00Hz Lamp Flux:2300.92x1 lm		
NAME: 2FT	TYPE:3500K 0.10	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.6*0.05	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 89.88 lm/W			
MODEL		I _{max} (cd)	792.7	S/MH(C0/180)	1.27
NOMINAL POWER(W)	25W	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	2300.9	η UP,DN(C0-180)	0.1,50.5
NOMINAL FLUX(lm)	2300.92	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,49.3
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	99.8	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

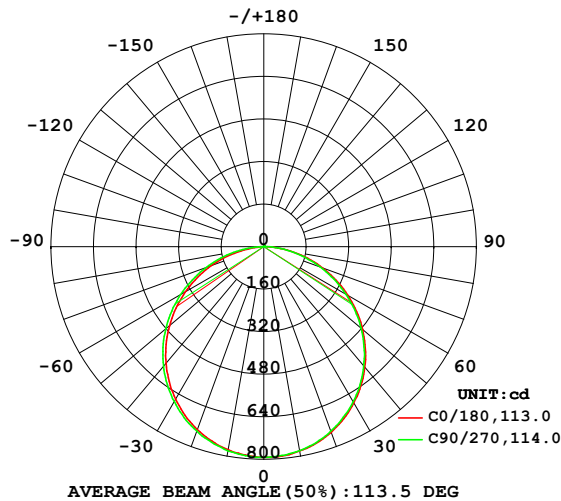

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

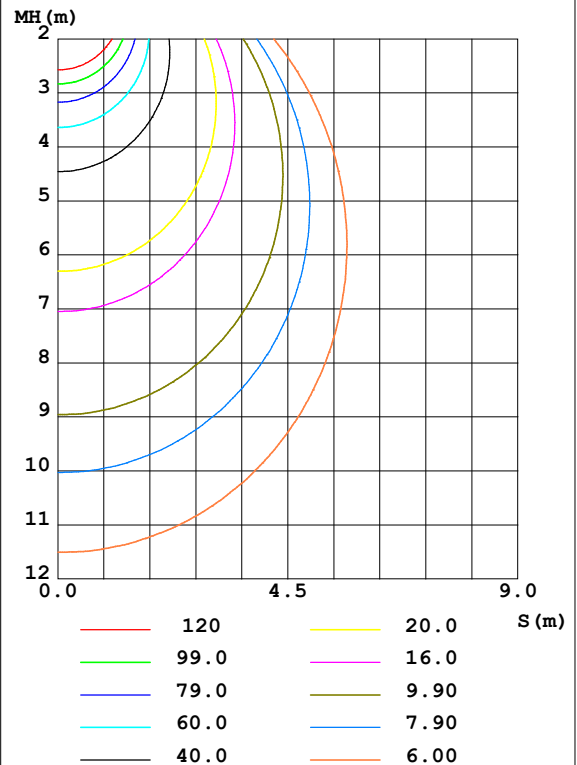

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-04-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	780.5	780.5	779.4	780.1	775.5	776.9	779.5	778.0	0- 10	74.97	74.97	3.26,3.26
20	743.0	742.0	738.2	740.7	731.9	734.9	738.0	735.3	10- 20	215.0	289.9	12.6,12.6
30	678.1	677.7	673.0	676.3	663.2	668.2	673.6	669.6	20- 30	326.4	616.3	26.8,26.8
40	591.3	590.7	585.7	588.8	571.6	579.4	586.7	580.5	30- 40	394.7	1011	43.9,43.9
50	485.9	484.0	478.3	481.7	462.9	471.0	481.0	472.9	40- 50	411.0	1422	61.8,61.8
60	364.8	362.7	356.3	360.0	340.6	349.3	361.5	351.3	50- 60	373.4	1795	78,78
70	236.4	233.2	226.6	229.8	210.9	219.8	232.7	222.3	60- 70	288.4	2084	90.6,90.6
80	103.6	104.0	100.8	99.22	75.16	92.08	105.2	93.76	70- 80	170.4	2254	98,98
90	0.2713	0.2641	0.3149	0.2671	0.0797	0.0751	0.0825	0.0778	80- 90	41.99	2296	99.8,99.8
100	0.4368	0.4580	0.4820	0.4516	0.1594	0.1453	0.1504	0.1480	90-100	0.2528	2296	99.8,99.8
110	0.6638	0.6904	0.7146	0.6919	0.2634	0.2663	0.2812	0.2765	100-110	0.4106	2297	99.8,99.8
120	0.9053	0.9278	0.9618	0.9370	0.4082	0.4092	0.4364	0.4197	110-120	0.5730	2297	99.8,99.8
130	1.120	1.141	1.175	1.158	0.5556	0.5569	0.5892	0.5774	120-130	0.6863	2298	99.9,99.9
140	1.316	1.325	1.376	1.340	0.7294	0.7265	0.7660	0.7521	130-140	0.7377	2299	99.9,99.9
150	1.497	1.509	1.485	1.512	1.208	1.225	1.234	1.203	140-150	0.7242	2300	99.9,99.9
160	1.654	1.657	1.628	1.670	1.483	1.489	1.503	1.454	150-160	0.6798	2300	100,100
170	1.748	1.744	1.711	1.733	1.652	1.649	1.646	1.623	160-170	0.4626	2301	100,100
180	1.700	1.681	1.667	1.665	1.702	1.695	1.677	1.648	170-180	0.1616	2301	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-04-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.6V I:0.2150A P:25.60W PF:0.9950 Freq:60.00Hz Lamp Flux:2300.92x1 lm		
NAME: 2FT	TYPE:3500K 0.10	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.6*0.05	Shielding Angle:

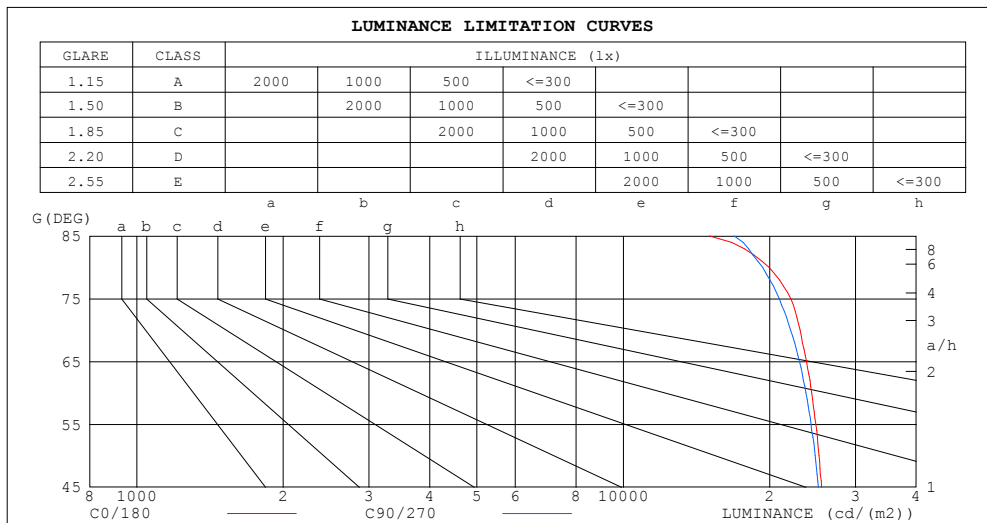

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	15038	16914
80	19953	19342
75	22108	20936
70	23105	22072
65	23789	23033
60	24390	23741
55	24866	24333
50	25268	24788
45	25570	25164


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-04-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.6V I:0.2150A P:25.60W PF:0.9950 Freq:60.00Hz Lamp Flux:2300.92x1 lm		
NAME: 2FT	TYPE:3500K 0.10	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.6*0.05	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.90	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.85	.79	.75	.81	.77	.73	.78	.75	.71	.69
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.72	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.64	.57	.52	.61	.56	.52	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.52	.46	.57	.50	.45	.55	.49	.45	.43
6.0	.56	.47	.41	.55	.47	.40	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.46	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.33	.28	.40	.33	.28	.39	.33	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.24

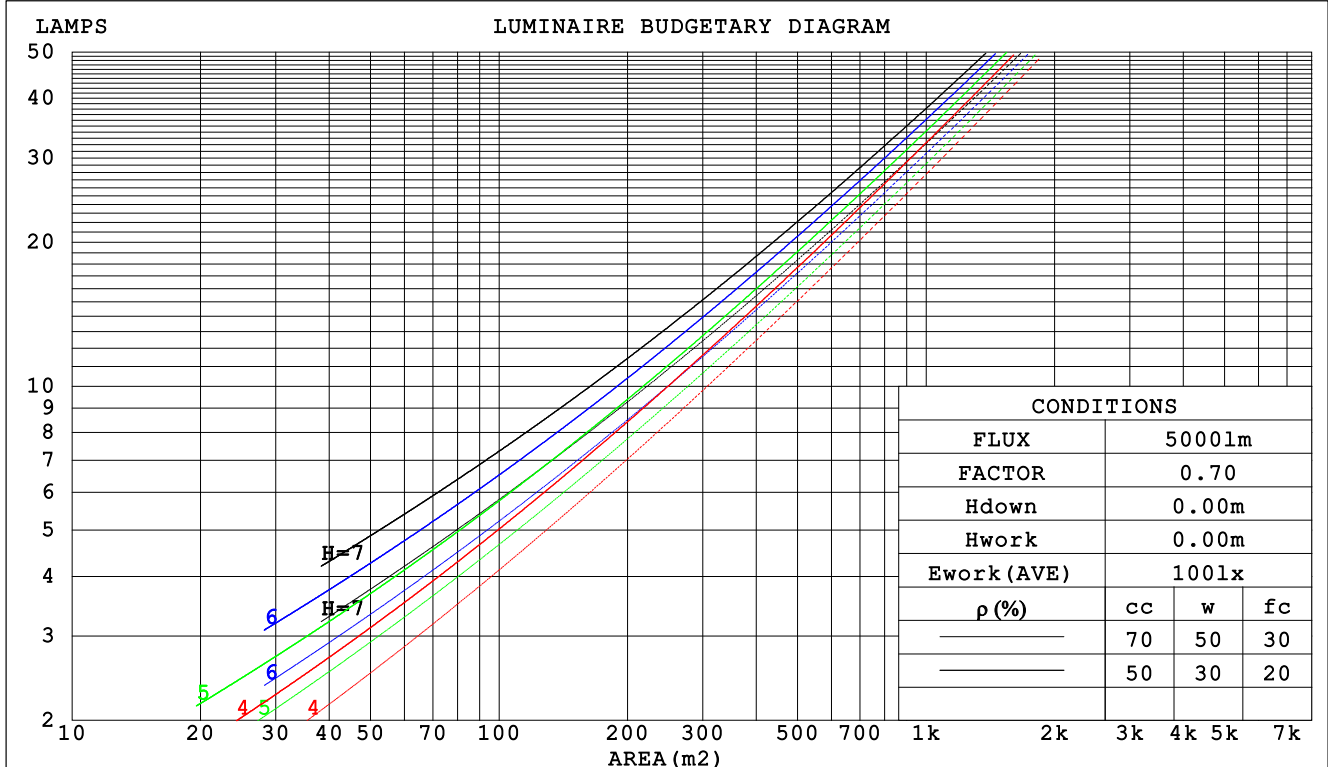

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-04-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.6V I:0.2150A P:25.60W PF:0.9950 Freq:60.00Hz Lamp Flux:2300.92x1 lm					
NAME: 2FT			TYPE:3500K 0.10		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:0.6*0.05		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.312	.177	.056	.305	.174	.055	.291	.167	.053	.279	.161	.052	.268	.155	.050		
2.0	.294	.161	.049	.288	.158	.049	.276	.153	.048	.265	.149	.046	.255	.144	.045		
3.0	.272	.145	.043	.266	.143	.043	.256	.139	.042	.246	.135	.041	.237	.131	.041		
4.0	.251	.130	.038	.246	.129	.038	.236	.125	.037	.228	.122	.037	.220	.119	.036		
5.0	.232	.118	.034	.227	.117	.034	.219	.114	.034	.211	.111	.033	.204	.109	.033		
6.0	.215	.108	.031	.211	.106	.031	.203	.104	.030	.196	.102	.030	.190	.100	.030		
7.0	.200	.099	.028	.196	.098	.028	.190	.096	.028	.183	.094	.027	.178	.092	.027		
8.0	.186	.091	.026	.183	.090	.026	.177	.089	.025	.172	.087	.025	.167	.086	.025		
9.0	.175	.084	.024	.172	.084	.024	.167	.082	.023	.162	.081	.023	.157	.080	.023		
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.152	.076	.022	.148	.074	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.182	.158	.136	.156	.135	.117	.107	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.174	.133	.099	.149	.115	.086	.102	.079	.060	.059	.046	.035	.019	.015	.011	
3.0	.166	.116	.076	.143	.100	.066	.098	.069	.046	.057	.041	.027	.018	.013	.009	
4.0	.159	.103	.060	.136	.089	.052	.094	.062	.037	.054	.036	.022	.017	.012	.007	
5.0	.151	.092	.049	.130	.080	.042	.090	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.144	.084	.041	.124	.073	.035	.085	.051	.025	.050	.030	.015	.016	.010	.005	
7.0	.137	.077	.035	.118	.067	.030	.082	.047	.021	.047	.028	.013	.015	.009	.004	
8.0	.131	.071	.030	.113	.062	.026	.078	.043	.019	.045	.026	.011	.015	.008	.004	
9.0	.125	.066	.027	.107	.057	.023	.074	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.119	.062	.024	.103	.054	.021	.071	.038	.015	.042	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-04-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.6V I:0.2150A P:25.60W PF:0.9950 Freq:60.00Hz Lamp Flux:2300.92x1 lm											
NAME: 2FT					TYPE:3500K 0.10			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: EVERFINE					SUR.:0.6*0.05			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	24.1	25.6	24.4	25.9	26.1	24.0	25.6	24.3	25.8	26.0
	3H	25.7	27.2	26.0	27.4	27.6	25.6	27.0	25.9	27.2	27.5
	4H	26.4	27.8	26.7	28.0	28.3	26.2	27.6	26.6	27.8	28.1
	6H	26.9	28.2	27.2	28.5	28.7	26.7	28.0	27.1	28.3	28.6
	8H	27.1	28.3	27.4	28.6	28.9	26.9	28.1	27.2	28.4	28.7
	12H	27.1	28.3	27.5	28.6	28.9	27.0	28.2	27.3	28.5	28.8
4H	2H	24.7	26.1	25.1	26.3	26.6	24.7	26.0	25.0	26.3	26.5
	3H	26.6	27.7	26.9	28.0	28.3	26.4	27.6	26.8	27.9	28.2
	4H	27.4	28.4	27.7	28.8	29.1	27.2	28.3	27.6	28.6	29.0
	6H	28.0	28.9	28.4	29.3	29.7	27.8	28.8	28.2	29.1	29.5
	8H	28.2	29.1	28.6	29.5	29.8	28.0	28.9	28.5	29.3	29.7
	12H	28.3	29.1	28.7	29.5	29.9	28.2	29.0	28.6	29.4	29.8
8H	4H	27.7	28.5	28.1	28.9	29.3	27.5	28.4	27.9	28.8	29.2
	6H	28.4	29.2	28.9	29.6	30.0	28.3	29.0	28.7	29.4	29.9
	8H	28.7	29.4	29.2	29.8	30.3	28.6	29.3	29.1	29.7	30.1
	12H	28.9	29.5	29.4	29.9	30.4	28.8	29.4	29.3	29.8	30.3
12H	4H	27.7	28.5	28.1	28.9	29.3	27.5	28.4	28.0	28.8	29.2
	6H	28.5	29.2	29.0	29.6	30.0	28.4	29.0	28.8	29.5	29.9
	8H	28.8	29.4	29.3	29.9	30.3	28.7	29.3	29.2	29.7	30.2
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3					

CIE Pub.117 Corrected 2301 lm Total Lamp Luminous Flux.(8log(F/F0) = 2.9)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-04-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.6V I:0.2150A P:25.60W PF:0.9950 Freq:60.00Hz Lamp Flux:2300.92x1 lm		
NAME: 2FT	TYPE:3500K 0.10	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.6*0.05	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	76	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	79	70	64	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	79	93	85	79	89	83	77	69
2.50	99	91	85	97	89	84	93	87	82	73
3.00	102	95	89	100	93	88	96	91	86	78
4.00	106	100	96	104	99	94	99	95	92	83
5.00	109	104	100	106	102	98	101	98	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-04-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:119.6V I:0.2150A P:25.60W PF:0.9950 Freq:60.00Hz Lamp Flux:2300.92x1 lm		
NAME: 2FT	TYPE:3500K 0.10	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.6*0.05	Shielding Angle:

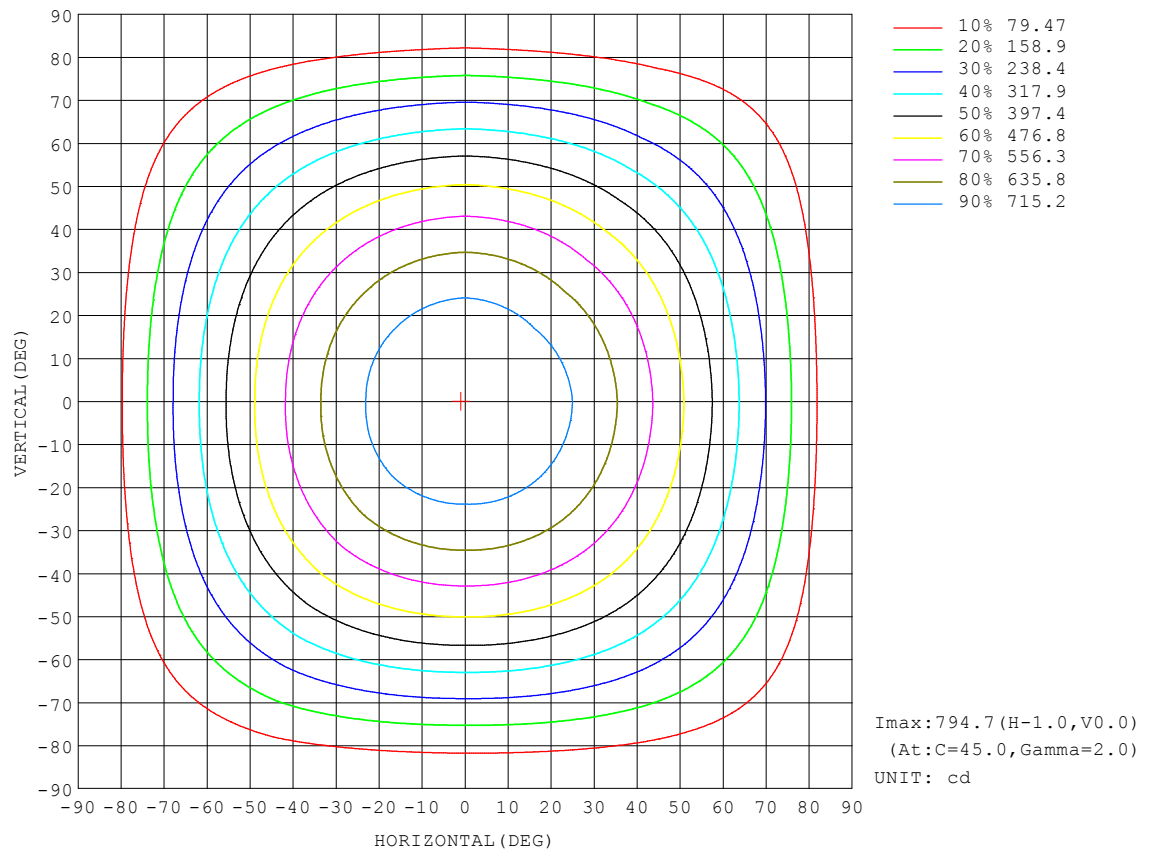


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-04-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:119.6V I:0.2150A P:25.60W PF:0.9950 Freq:60.00Hz Lamp Flux:2300.92x1 lm		
NAME: 2FT	TYPE:3500K 0.10	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.6*0.05	Shielding Angle:

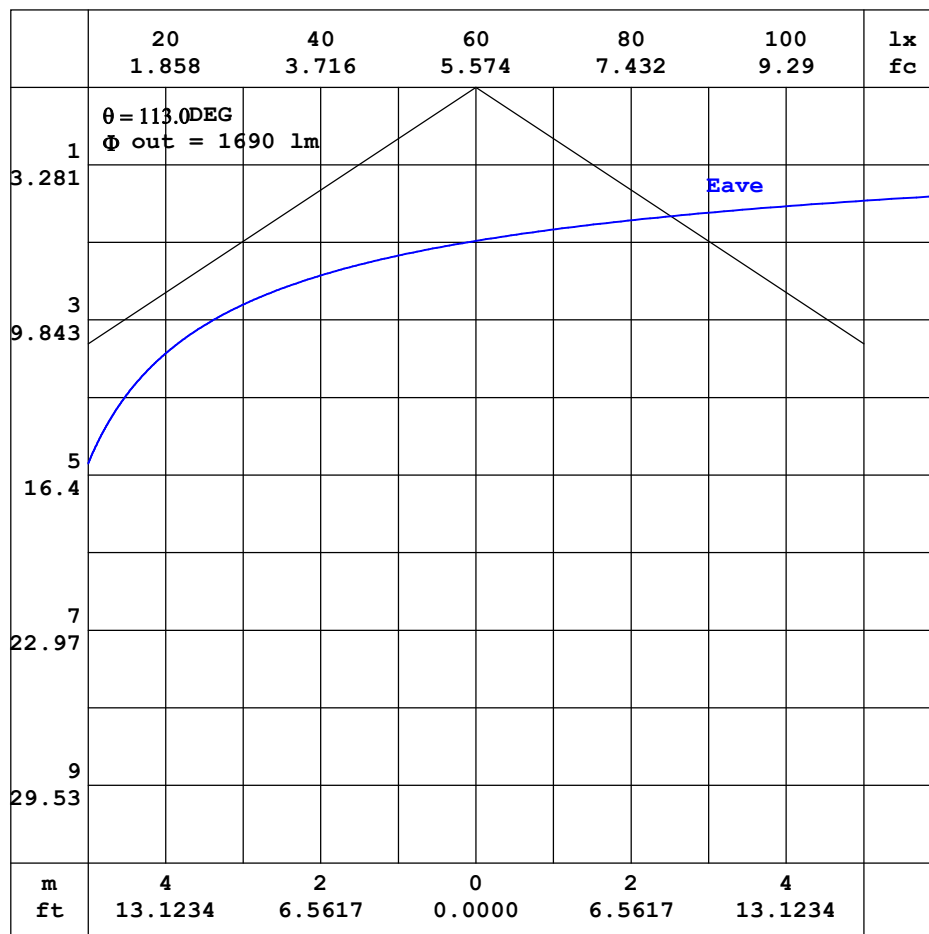


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-04-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.6V I:0.2150A P:25.60W PF:0.9950 Freq:60.00Hz Lamp Flux:2300.92x1 lm		
NAME: 2FT	TYPE:3500K 0.10	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.6*0.05	Shielding Angle:

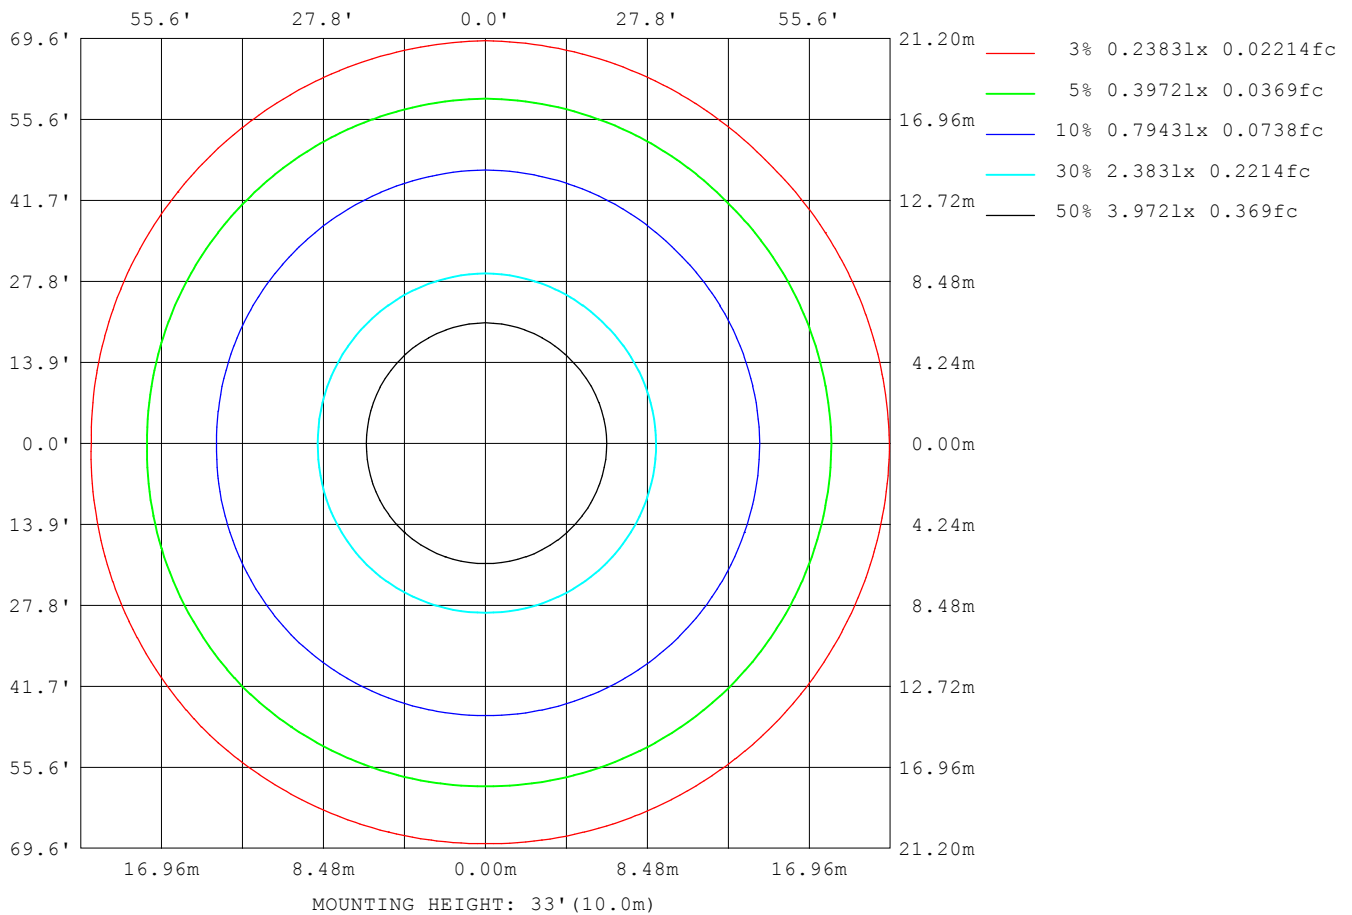

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-04-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.6V I:0.2150A P:25.60W PF:0.9950 Freq:60.00Hz Lamp Flux:2300.92x1 lm		
NAME: 2FT	TYPE:3500K 0.10	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.6*0.05	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	22743
L_0~180 (75) av	20205
L_0~180 (85) av	9665
L_90~270 (65) av	23248
L_90~270 (75) av	21338
L_90~270 (85) av	17383
L_45 (65) av	22992
L_45 (75) av	20885
L_45 (85) av	12971

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-04-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

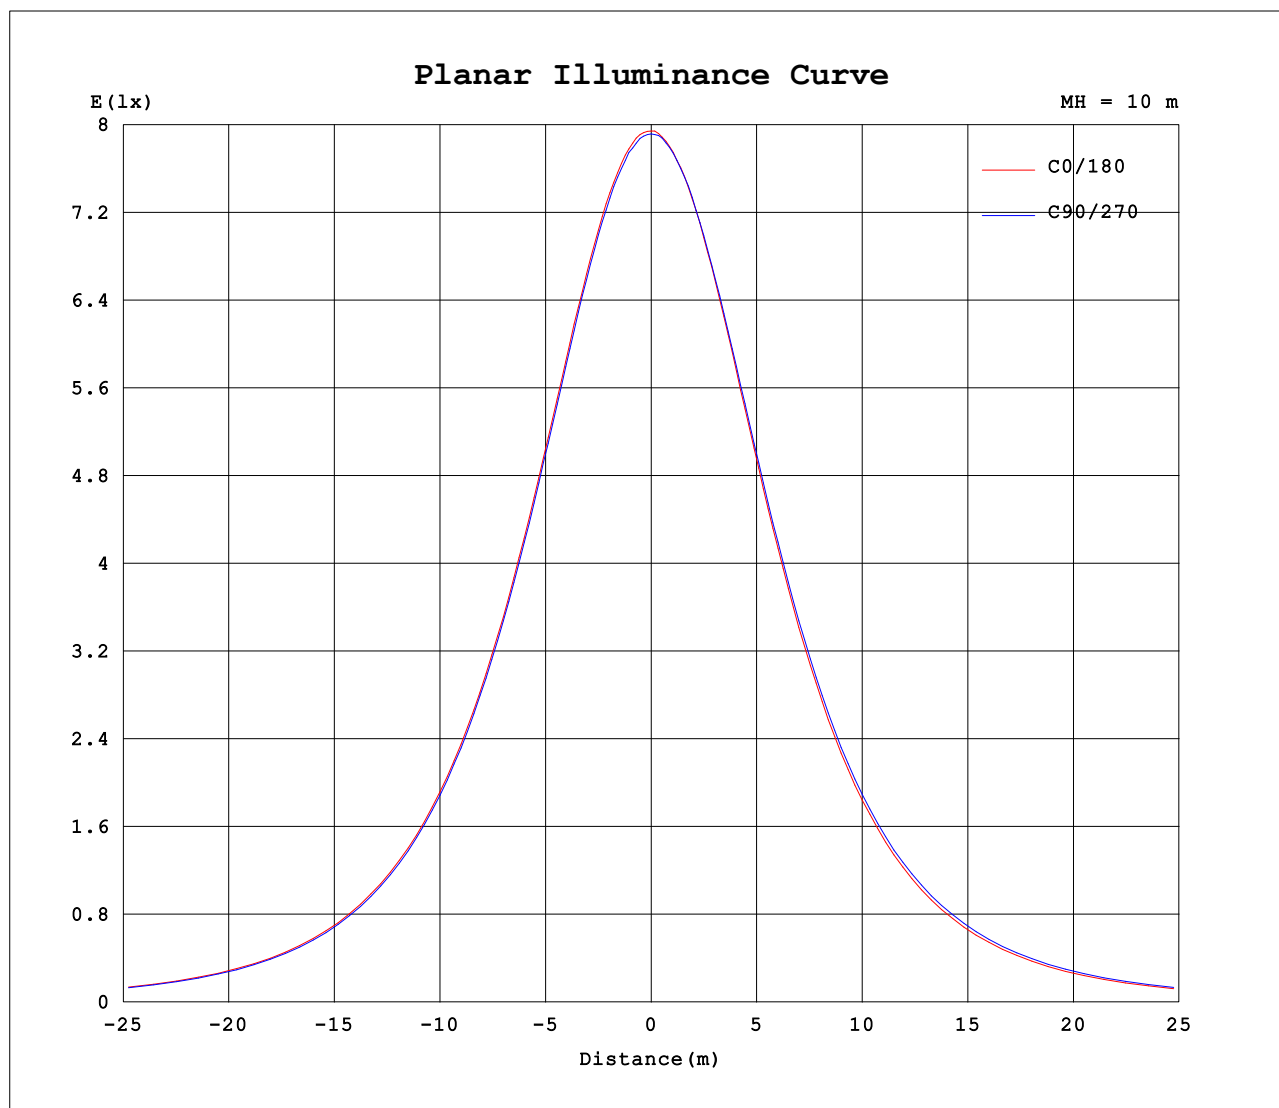

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-04-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.6V I:0.2150A P:25.60W PF:0.9950 Freq:60.00Hz Lamp Flux:2300.92x1 lm		
NAME: 2FT	TYPE:3500K 0.10	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.6*0.05	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	792	792	792	792	792	792	792	792										
5	790	790	788	790	787	788	789	789										
10	780	780	779	780	775	777	779	778										
15	765	764	762	764	757	759	762	760										
20	743	742	738	741	732	735	738	735										
25	713	712	709	711	701	704	709	705										
30	678	678	673	676	663	668	674	670										
35	637	637	633	636	620	627	633	628										
40	591	591	586	589	572	579	587	580										
45	541	539	534	537	520	527	536	529										
50	486	484	478	482	463	471	481	473										
55	427	425	419	423	403	412	423	414										
60	365	363	356	360	341	349	361	351										
65	301	298	292	295	276	285	297	287										
70	236	233	227	230	211	220	233	222										
75	171	169	163	166	143	156	169	158										
80	104	104	101	99.2	75.2	92.1	105	93.8										
85	39.2	40.3	44.3	35.0	11.3	29.8	46.6	30.5										
90	0.27	0.26	0.31	0.27	0.08	0.08	0.08	0.08										
95	0.34	0.35	0.37	0.35	0.10	0.10	0.11	0.10										
100	0.44	0.46	0.48	0.45	0.16	0.15	0.15	0.15										
105	0.56	0.57	0.60	0.57	0.20	0.20	0.21	0.20										
110	0.66	0.69	0.71	0.69	0.26	0.27	0.28	0.28										
115	0.79	0.81	0.84	0.82	0.33	0.33	0.35	0.34										
120	0.91	0.93	0.96	0.94	0.41	0.41	0.44	0.42										
125	1.02	1.04	1.07	1.06	0.48	0.48	0.51	0.49										
130	1.12	1.14	1.18	1.16	0.56	0.56	0.59	0.58										
135	1.22	1.24	1.27	1.25	0.66	0.66	0.70	0.67										
140	1.32	1.33	1.38	1.34	0.73	0.73	0.77	0.75										
145	1.41	1.42	1.45	1.44	0.82	0.83	0.87	0.84										
150	1.50	1.51	1.49	1.51	1.21	1.22	1.23	1.20										
155	1.57	1.58	1.57	1.60	1.36	1.38	1.40	1.34										
160	1.65	1.66	1.63	1.67	1.48	1.49	1.50	1.45										
165	1.72	1.71	1.69	1.73	1.58	1.58	1.58	1.55										
170	1.75	1.74	1.71	1.73	1.65	1.65	1.65	1.62										
175	1.75	1.72	1.72	1.70	1.68	1.67	1.66	1.63										
180	1.70	1.68	1.67	1.66	1.70	1.70	1.68	1.65										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-04-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: