


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.9V I:0.4050A P:48.50W PF:0.9980 Freq:60.00Hz Lamp Flux:4866.32x1 lm		
NAME: 17代 白色	TYPE:50W 3000K 0.10	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.1055*0.03+0.12*0.04	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 100.34 lm/W			
MODEL	上下发光	I _{max} (cd)	1781	S/MH(C0/180)	1.22
NOMINAL POWER(W)	50	LOR(%)	100.0	S/MH(C90/270)	1.23
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	4866.3	η UP, DN(C0-180)	0.2, 49.9
NOMINAL FLUX(lm)	4866.32	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1, 49.9
LAMPS INSIDE	1	η up(%)	0.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	99.7	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

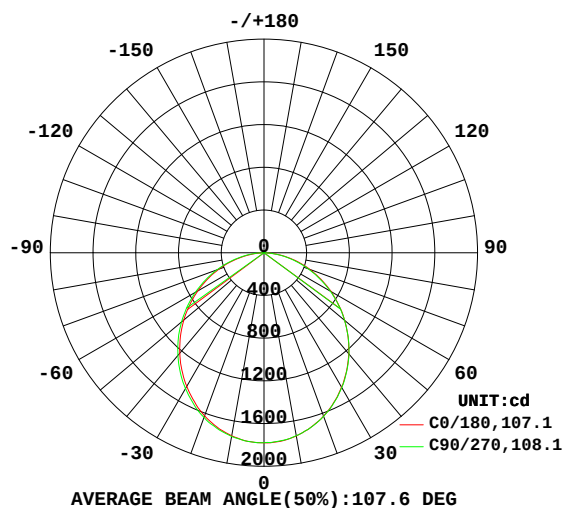

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

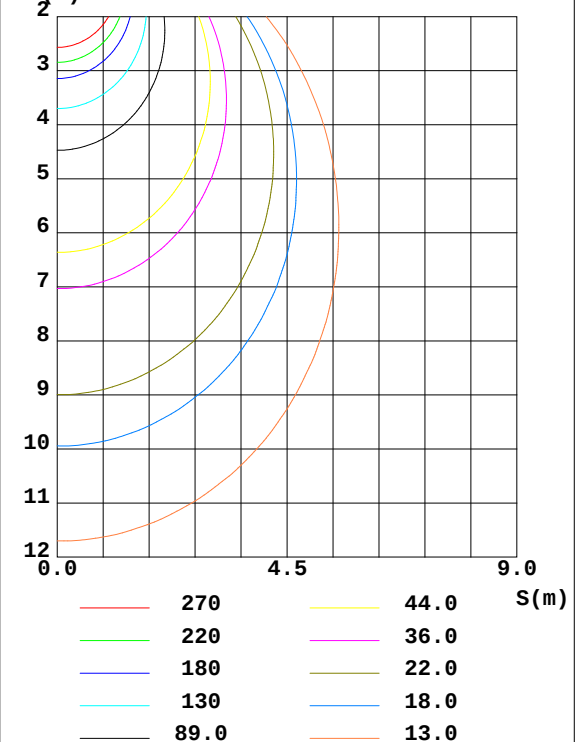

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:何俊伟
Test Date:2025-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1743	1740	1740	1747	1741	1744	1747	1737	0- 10	168.1	168.1	3.45, 3.45
20	1629	1629	1630	1640	1625	1636	1641	1621	10- 20	478.1	646.1	13.3, 13.3
30	1453	1454	1457	1469	1445	1466	1469	1447	20- 30	714.6	1361	28, 28
40	1236	1234	1238	1251	1228	1249	1254	1224	30- 40	846.2	2207	45.4, 45.4
50	985.9	983.9	985.1	1002	980.0	998.6	1008	973.9	40- 50	861.6	3069	63.1, 63.1
60	725.0	717.4	715.7	736.6	715.9	733.5	741.3	706.4	50- 60	767.0	3836	78.8, 78.8
70	456.6	449.0	440.2	472.0	451.0	462.8	469.6	440.6	60- 70	582.3	4418	90.8, 90.8
80	196.6	199.5	184.6	220.0	186.2	212.6	210.8	193.4	70- 80	344.8	4763	97.9, 97.9
90	3.440	4.536	0.6545	5.448	2.014	4.974	0.2730	4.027	80- 90	91.44	4854	99.7, 99.7
100	1.589	2.351	1.047	2.442	0.9420	1.773	0.3777	1.617	90-100	2.325	4856	99.8, 99.8
110	1.681	1.866	1.485	1.810	0.8551	0.9777	0.6197	1.016	100-110	1.414	4858	99.8, 99.8
120	1.979	2.093	1.947	2.006	1.008	1.050	0.9465	1.118	110-120	1.377	4859	99.9, 99.9
130	2.327	2.410	2.368	2.305	1.255	1.263	1.305	1.356	120-130	1.494	4861	99.9, 99.9
140	2.681	2.698	2.688	2.659	1.497	1.541	1.629	1.603	130-140	1.526	4862	99.9, 99.9
150	3.027	3.027	2.763	2.962	2.396	2.463	2.381	2.486	140-150	1.488	4864	99.9, 99.9
160	3.374	3.322	2.872	3.265	2.905	2.884	2.778	2.918	150-160	1.328	4865	100, 100
170	3.575	3.438	3.097	3.423	3.294	3.240	3.076	3.214	160-170	0.8984	4866	100, 100
180	3.415	3.317	3.126	3.301	3.415	3.337	3.131	3.318	170-180	0.3160	4866	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 何俊伟
 Test Date: 2025-04-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.9V I:0.4050A P:48.50W PF:0.9980 Freq:60.00Hz Lamp Flux:4866.32x1 lm		
NAME: 17代 白色	TYPE:50W 3000K 0.10	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.1055*0.03+0.12*0.04	Shielding Angle:

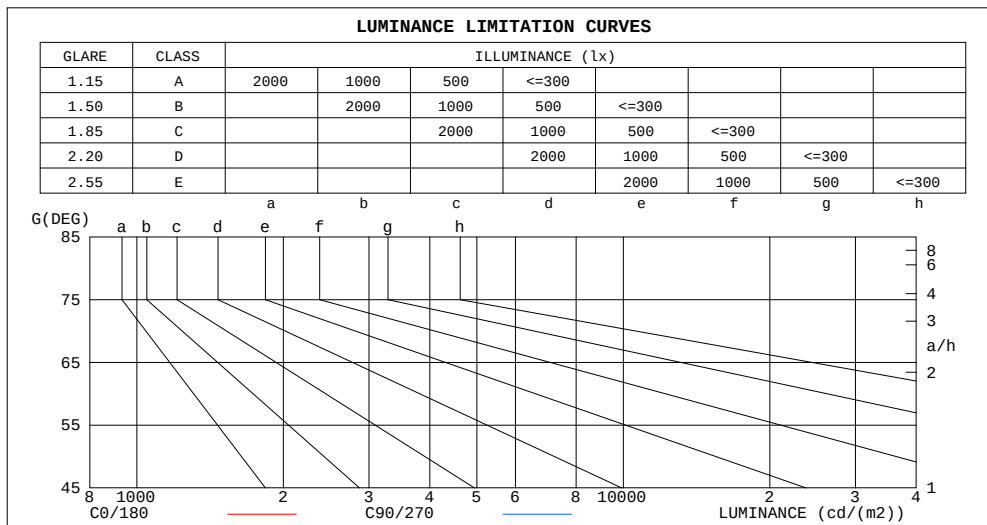

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	116971	109485
80	161715	152032
75	180761	170511
70	190672	184024
65	198635	194549
60	207117	204661
55	213095	212379
50	219079	219132
45	224854	225435


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:何俊伟
Test Date:2025-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.9V I:0.4050A P:48.50W PF:0.9980 Freq:60.00Hz Lamp Flux:4866.32x1 lm		
NAME: 17代 白色	TYPE:50W 3000K 0.10	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.1055*0.03+0.12*0.04	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.83
2.0	.91	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.70
3.0	.80	.71	.65	.78	.70	.64	.75	.68	.63	.72	.67	.62	.70	.65	.61	.59
4.0	.71	.62	.55	.69	.61	.55	.67	.59	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.60	.52	.47	.58	.51	.46	.56	.50	.46	.43
6.0	.57	.48	.41	.56	.47	.41	.54	.46	.41	.52	.46	.40	.51	.45	.40	.38
7.0	.52	.43	.37	.51	.42	.36	.49	.42	.36	.48	.41	.36	.46	.40	.36	.34
8.0	.47	.39	.33	.46	.38	.33	.45	.38	.32	.44	.37	.32	.43	.36	.32	.30
9.0	.43	.35	.29	.43	.35	.29	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.26	.36	.31	.26	.25

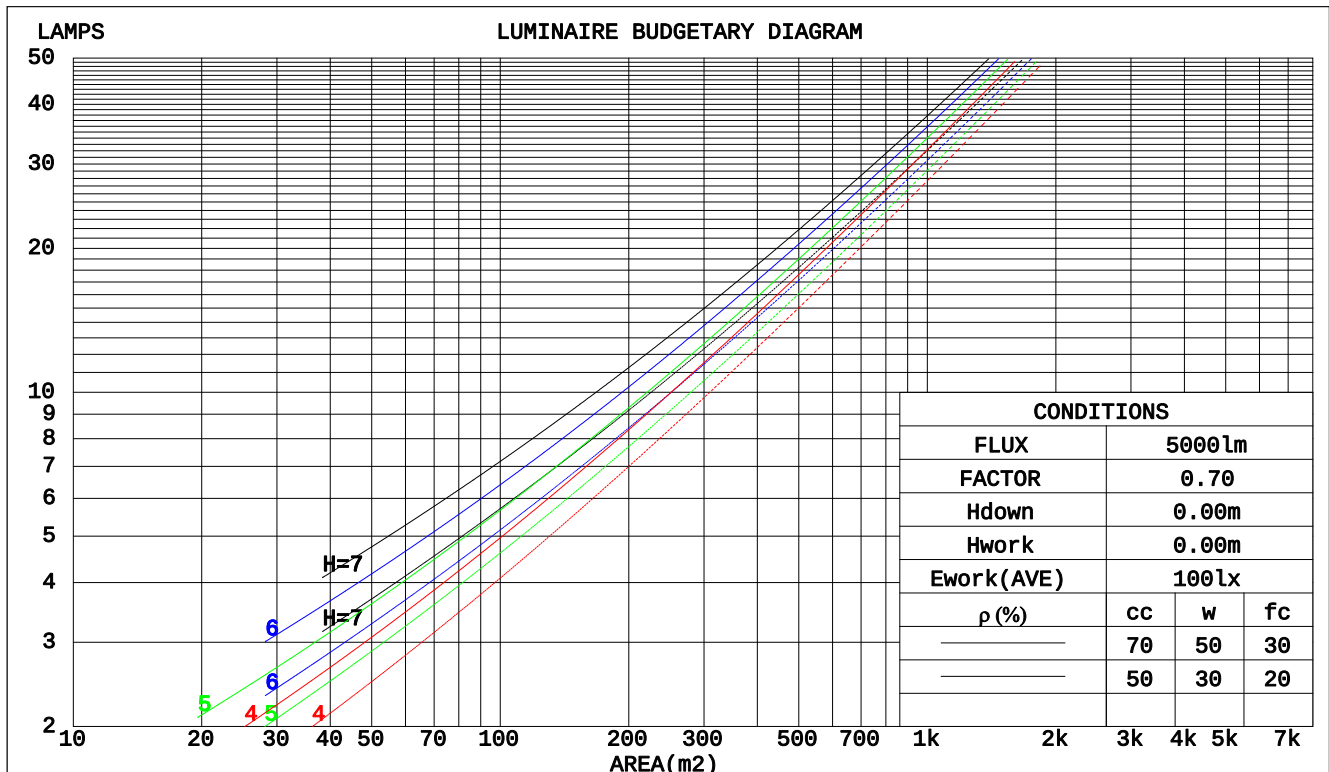

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:何俊伟
Test Date:2025-04-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.9V I:0.4050A P:48.50W PF:0.9980 Freq:60.00Hz Lamp Flux:4866.32x1 lm					
NAME: 17代 白色			TYPE:50W 3000K 0.10		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: WS			SUR.:0.1055*0.03+0.12*0.04		Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.308	.175	.056	.301	.172	.055	.288	.165	.053	.275	.159	.051	.264	.153	.049	
2.0	.290	.159	.049	.284	.156	.048	.272	.151	.047	.261	.146	.046	.251	.142	.045	
3.0	.268	.143	.043	.263	.141	.042	.252	.137	.042	.243	.133	.041	.234	.129	.040	
4.0	.248	.129	.038	.243	.127	.038	.233	.124	.037	.225	.121	.036	.217	.118	.036	
5.0	.229	.117	.034	.225	.115	.034	.216	.113	.033	.209	.110	.033	.202	.108	.032	
6.0	.212	.106	.030	.208	.105	.030	.201	.103	.030	.194	.101	.030	.188	.099	.029	
7.0	.198	.098	.028	.194	.097	.028	.188	.095	.027	.182	.093	.027	.176	.091	.027	
8.0	.185	.090	.025	.182	.089	.025	.176	.088	.025	.170	.086	.025	.165	.085	.025	
9.0	.173	.084	.023	.170	.083	.023	.165	.082	.023	.160	.080	.023	.155	.079	.023	
10.0	.163	.078	.022	.160	.077	.022	.156	.076	.021	.151	.075	.021	.147	.074	.021	

ρ _{CC}	80%			70%			50%			30%			10%			0
ρ _W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.182	.158	.136	.156	.136	.117	.107	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.174	.134	.100	.149	.115	.087	.102	.080	.060	.059	.046	.035	.019	.015	.012	
3.0	.166	.116	.076	.142	.100	.066	.098	.070	.047	.056	.041	.027	.018	.013	.009	
4.0	.158	.103	.060	.136	.089	.053	.093	.062	.037	.054	.036	.022	.017	.012	.007	
5.0	.151	.092	.049	.130	.080	.043	.089	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.144	.084	.041	.124	.073	.036	.085	.051	.025	.049	.030	.015	.016	.010	.005	
7.0	.137	.077	.035	.118	.067	.031	.081	.047	.022	.047	.028	.013	.015	.009	.004	
8.0	.131	.071	.031	.112	.062	.027	.078	.043	.019	.045	.026	.011	.015	.008	.004	
9.0	.124	.066	.027	.107	.058	.024	.074	.041	.017	.043	.024	.010	.014	.008	.003	
10.0	.119	.062	.024	.102	.054	.021	.071	.038	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:何俊伟
 Test Date:2025-04-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.9V I:0.4050A P:48.50W PF:0.9980 Freq:60.00Hz Lamp Flux:4866.32x1 lm											
NAME: 17代 白色						TYPE:50W 3000K 0.10			WEIGHT:		
SPEC.:						DIM.:			SERIAL No.:		
MFR.: WS						SUR.:0.1055*0.03+0.12*0.04			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		31.4	32.9	31.7	33.1	33.3	31.4	32.9	31.6	33.1	33.3
	3H	32.9	34.3	33.2	34.6	34.8	32.8	34.2	33.2	34.5	34.7
	4H	33.6	34.9	33.9	35.1	35.4	33.4	34.8	33.8	35.0	35.3
	6H	34.0	35.3	34.4	35.6	35.8	33.9	35.1	34.2	35.4	35.7
	8H	34.2	35.4	34.5	35.7	36.0	34.0	35.2	34.3	35.5	35.8
	12H	34.2	35.4	34.6	35.7	36.0	34.0	35.2	34.4	35.5	35.8
4H	2H	32.0	33.3	32.3	33.6	33.8	32.0	33.3	32.3	33.6	33.8
	3H	33.7	34.9	34.1	35.2	35.5	33.6	34.8	34.0	35.1	35.4
	4H	34.5	35.5	34.9	35.9	36.2	34.4	35.4	34.7	35.8	36.1
	6H	35.1	36.0	35.5	36.4	36.7	34.9	35.9	35.3	36.2	36.6
	8H	35.3	36.1	35.7	36.5	36.9	35.1	36.0	35.5	36.3	36.7
	12H	35.4	36.2	35.8	36.6	37.0	35.2	36.0	35.6	36.4	36.8
8H	4H	34.8	35.6	35.2	36.0	36.4	34.7	35.5	35.1	35.9	36.3
	6H	35.5	36.2	35.9	36.6	37.1	35.4	36.1	35.8	36.5	36.9
	8H	35.8	36.4	36.2	36.9	37.3	35.6	36.3	36.1	36.7	37.2
	12H	35.9	36.5	36.4	37.0	37.4	35.8	36.3	36.3	36.8	37.3
12H	4H	34.8	35.6	35.2	36.0	36.4	34.7	35.5	35.1	35.9	36.3
	6H	35.6	36.2	36.0	36.6	37.1	35.4	36.1	35.9	36.5	37.0
	8H	35.9	36.4	36.4	36.9	37.4	35.7	36.3	36.2	36.7	37.2
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.3					

CIE Pub.117 Corrected 4866 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.5)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:何俊伟
 Test Date:2025-04-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.9V I:0.4050A P:48.50W PF:0.9980 Freq:60.00Hz Lamp Flux:4866.32x1 lm		
NAME: 17代 白色	TYPE:50W 3000K 0.10	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.1055*0.03+0.12*0.04	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	40	57	46	39	56	46	39	33
0.80	68	56	49	67	56	49	65	55	49	42
1.00	76	65	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	65	79	71	65	57
1.50	88	78	71	87	78	71	84	76	70	62
2.00	95	87	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	95	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:何俊伟
 Test Date:2025-04-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.9V I:0.4050A P:48.50W PF:0.9980 Freq:60.00Hz Lamp Flux:4866.32x1 lm		
NAME: 17代 白色	TYPE:50W 3000K 0.10	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.1055*0.03+0.12*0.04	Shielding Angle:

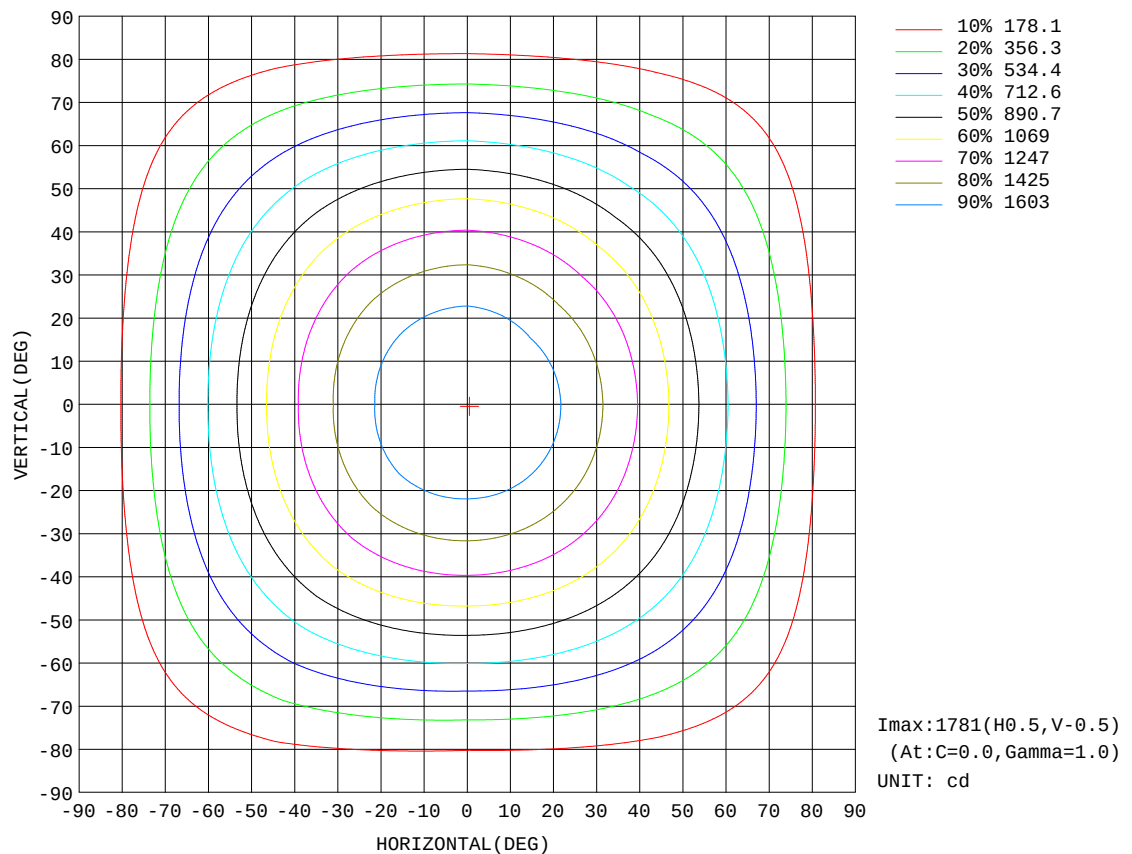


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:何俊伟
Test Date:2025-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:119.9V I:0.4050A P:48.50W PF:0.9980 Freq:60.00Hz Lamp Flux:4866.32x1 lm		
NAME: 17代 白色	TYPE:50W 3000K 0.10	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.1055*0.03+0.12*0.04	Shielding Angle:

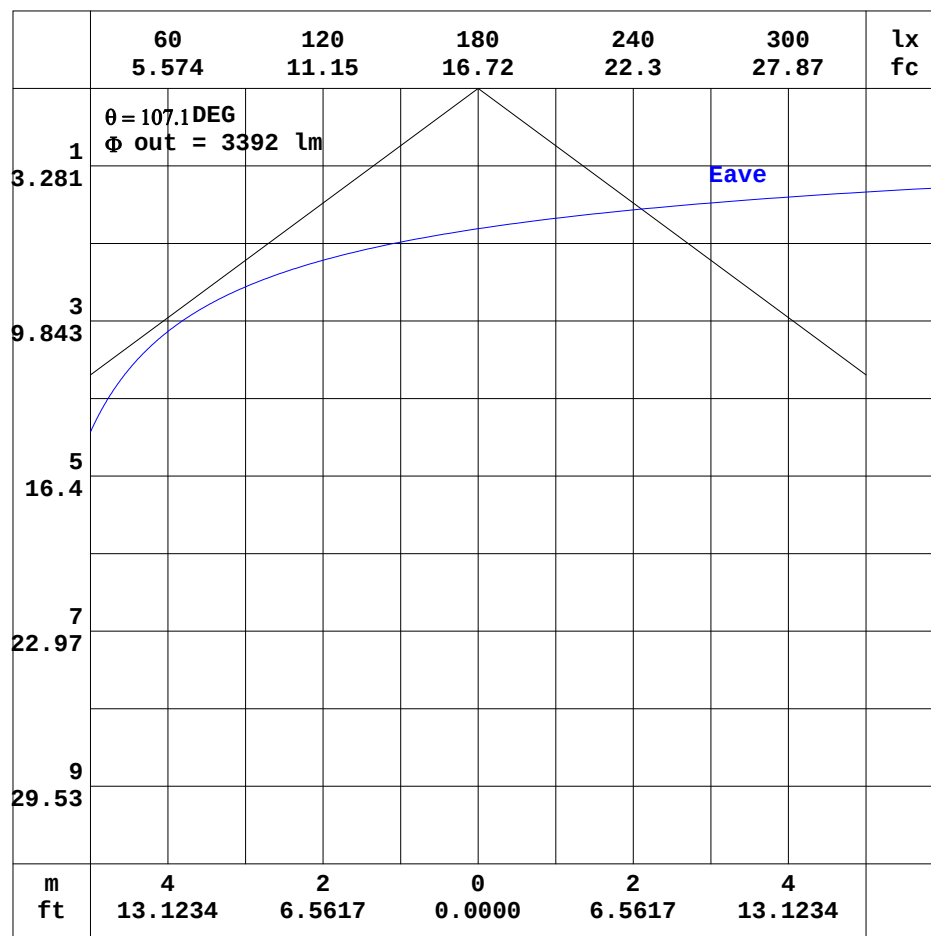


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 何俊伟
Test Date: 2025-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.9V I:0.4050A P:48.50W PF:0.9980 Freq:60.00Hz Lamp Flux:4866.32x1 lm		
NAME: 17代 白色	TYPE:50W 3000K 0.10	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.1055*0.03+0.12*0.04	Shielding Angle:

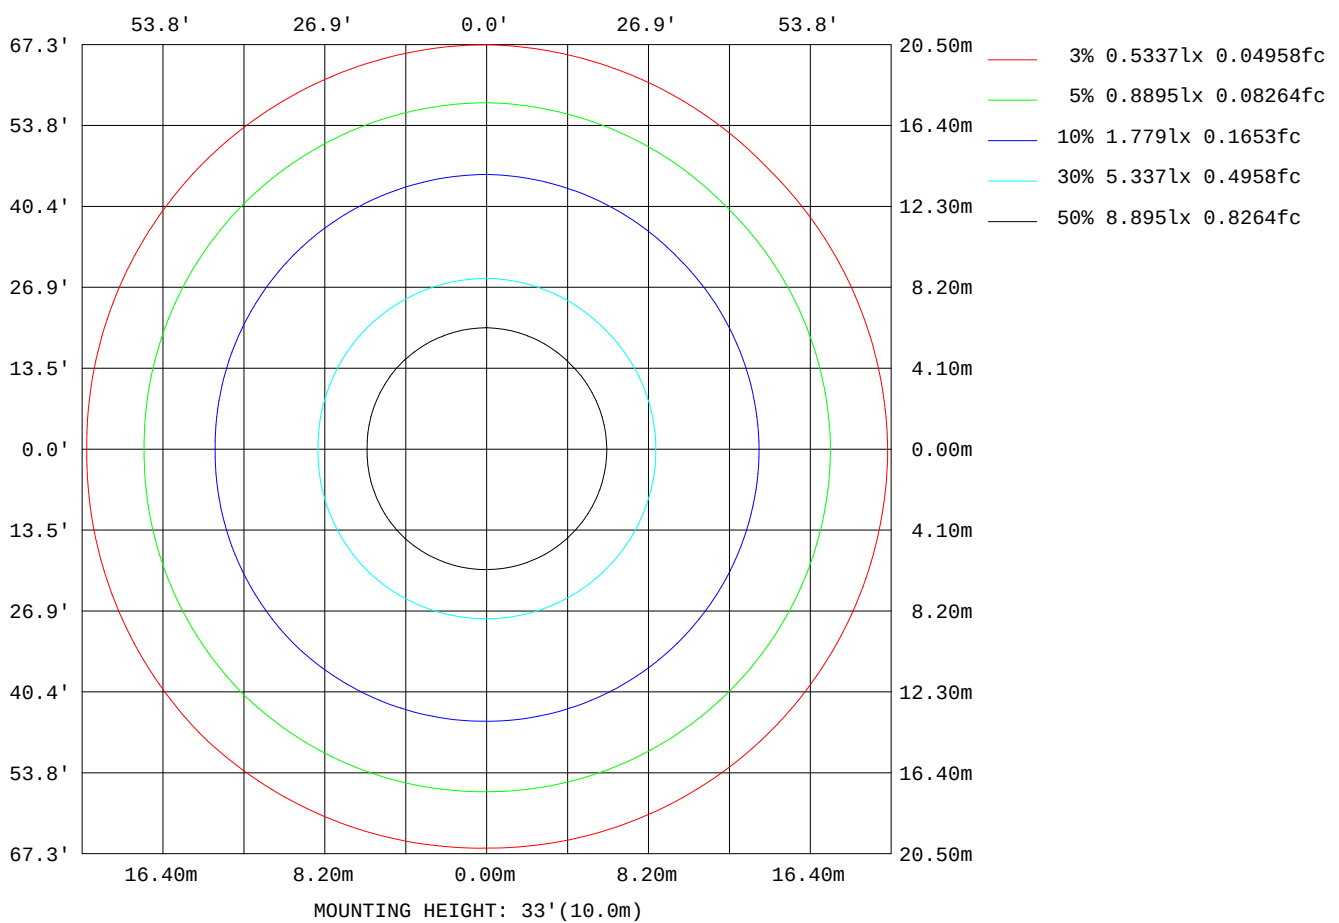

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 何俊伟
Test Date: 2025-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.9V I:0.4050A P:48.50W PF:0.9980 Freq:60.00Hz Lamp Flux:4866.32x1 lm		
NAME: 17代 白色	TYPE:50W 3000K 0.10	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.1055*0.03+0.12*0.04	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	197852
L_0~180(75)av	178396
L_0~180(85)av	107491
L_90~270(65)av	199422
L_90~270(75)av	178113
L_90~270(85)av	124669
L_45(65)av	198690
L_45(75)av	181937
L_45(85)av	135860

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:何俊伟
 Test Date:2025-04-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

Planar Illuminance Curve

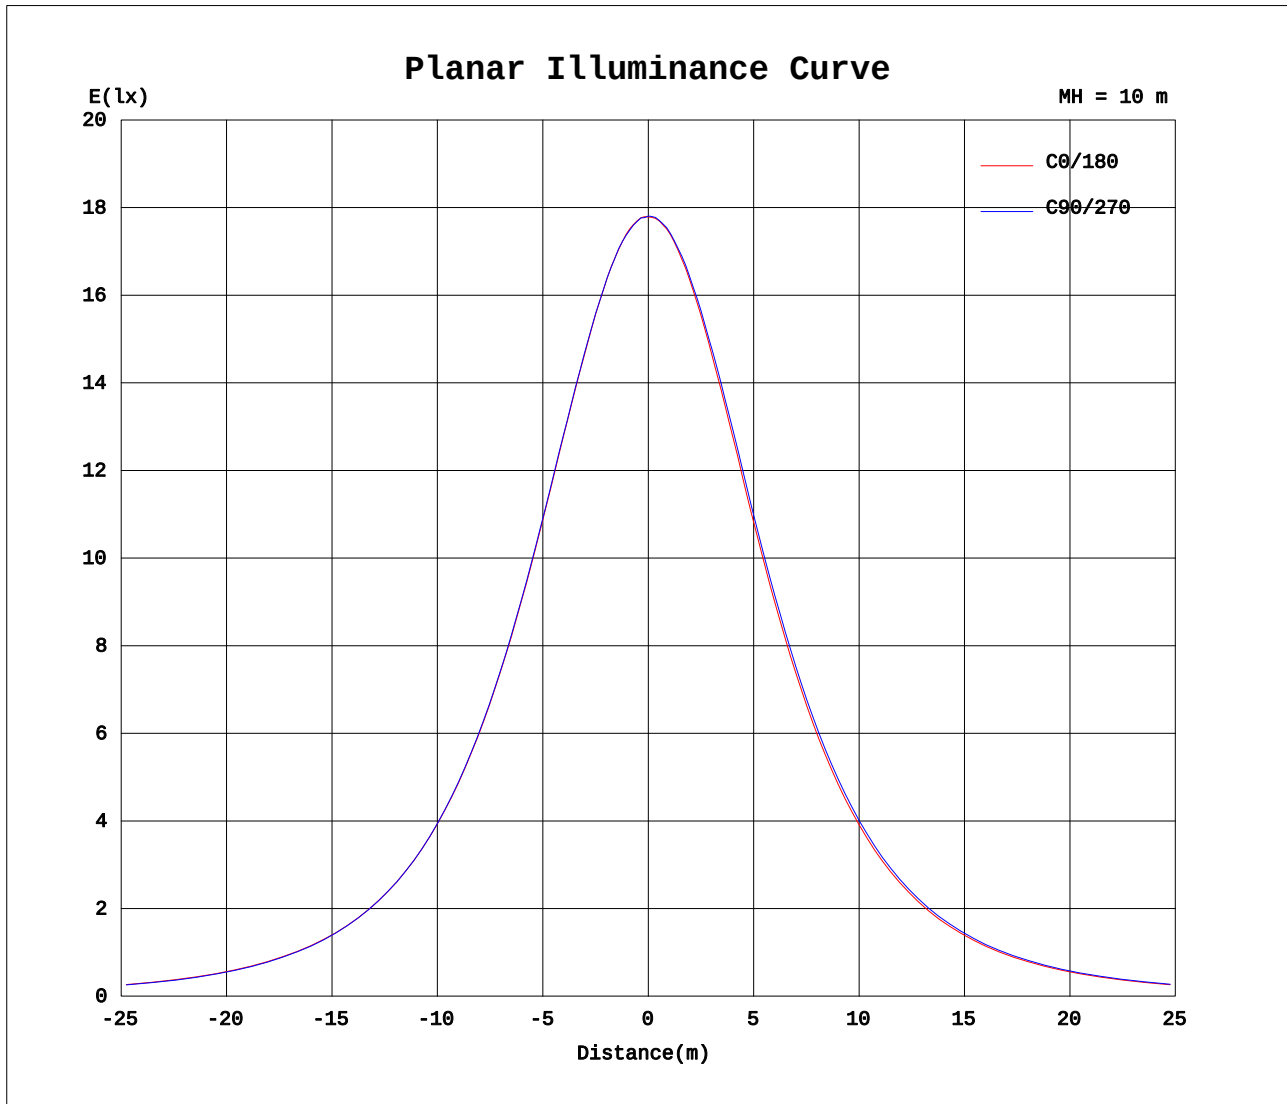

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 何俊伟
Test Date: 2025-04-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.9V I:0.4050A P:48.50W PF:0.9980 Freq:60.00Hz Lamp Flux:4866.32x1 lm		
NAME: 17代 白色	TYPE:50W 3000K 0.10	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.1055*0.03+0.12*0.04	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1779	1779	1779	1779	1779	1779	1779	1779										
5	1772	1769	1767	1771	1772	1771	1773	1767										
10	1743	1740	1740	1747	1741	1744	1747	1737										
15	1693	1693	1694	1702	1692	1698	1702	1688										
20	1629	1629	1630	1640	1625	1636	1641	1621										
25	1547	1549	1550	1563	1540	1557	1562	1541										
30	1453	1454	1457	1469	1445	1466	1469	1447										
35	1350	1348	1352	1366	1342	1363	1367	1341										
40	1236	1234	1238	1251	1228	1249	1254	1224										
45	1113	1111	1115	1130	1107	1127	1134	1100										
50	986	984	985	1002	980	999	1008	974										
55	856	852	852	872	848	868	877	841										
60	725	717	716	737	716	734	741	706										
65	588	582	575	603	583	596	605	570										
70	457	449	440	472	451	463	470	441										
75	328	322	309	345	319	336	337	316										
80	197	200	185	220	186	213	211	193										
85	71.4	77.3	66.7	92.9	59.8	89.2	85.4	72.2										
90	3.44	4.54	0.65	5.45	2.01	4.97	0.27	4.03										
95	1.76	3.47	0.82	3.64	1.15	3.07	0.28	2.81										
100	1.59	2.35	1.05	2.44	0.94	1.77	0.38	1.62										
105	1.59	1.93	1.28	1.94	0.85	1.19	0.49	1.16										
110	1.68	1.87	1.49	1.81	0.86	0.98	0.62	1.02										
115	1.81	1.95	1.73	1.88	0.91	0.98	0.77	1.03										
120	1.98	2.09	1.95	2.01	1.01	1.05	0.95	1.12										
125	2.14	2.25	2.15	2.14	1.12	1.16	1.13	1.22										
130	2.33	2.41	2.37	2.30	1.26	1.26	1.30	1.36										
135	2.50	2.54	2.55	2.47	1.37	1.40	1.47	1.48										
140	2.68	2.70	2.69	2.66	1.50	1.54	1.63	1.60										
145	2.86	2.86	2.63	2.81	1.82	1.91	1.85	1.97										
150	3.03	3.03	2.76	2.96	2.40	2.46	2.38	2.49										
155	3.22	3.19	2.94	3.12	2.63	2.69	2.57	2.72										
160	3.37	3.32	2.87	3.27	2.90	2.88	2.78	2.92										
165	3.53	3.39	2.96	3.39	3.15	3.08	2.95	3.09										
170	3.58	3.44	3.10	3.42	3.29	3.24	3.08	3.21										
175	3.51	3.42	3.16	3.42	3.36	3.29	3.11	3.26										
180	3.42	3.32	3.13	3.30	3.42	3.34	3.13	3.32										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:何俊伟
 Test Date:2025-04-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: