


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.9V I:0.4060A P:48.50W PF:0.9970 Freq:60.00Hz Lamp Flux:5280.39x1 lm		
NAME: 17代 白色	TYPE:50W 4000K 0.10 下	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.1055*0.03+0.12*0.04	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 108.87 lm/W			
MODEL	上下发光	I _{max} (cd)	1924	S/MH(C0/180)	1.23
NOMINAL POWER(W)	50	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	5280.4	η UP, DN(C0-180)	0.2, 50.3
NOMINAL FLUX(lm)	5280.39	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1, 49.4
LAMPS INSIDE	1	η up(%)	0.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	99.7	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

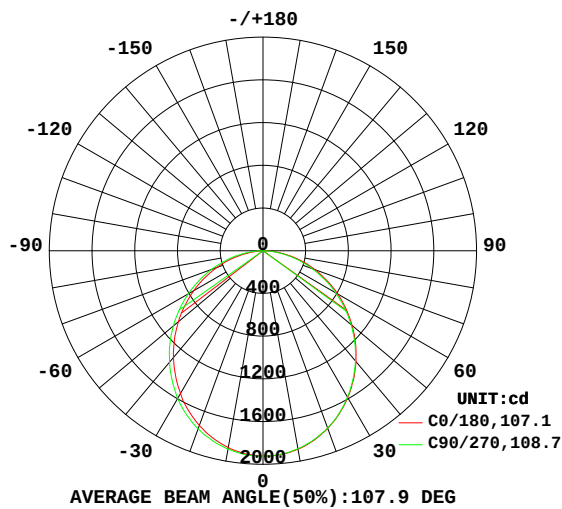

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

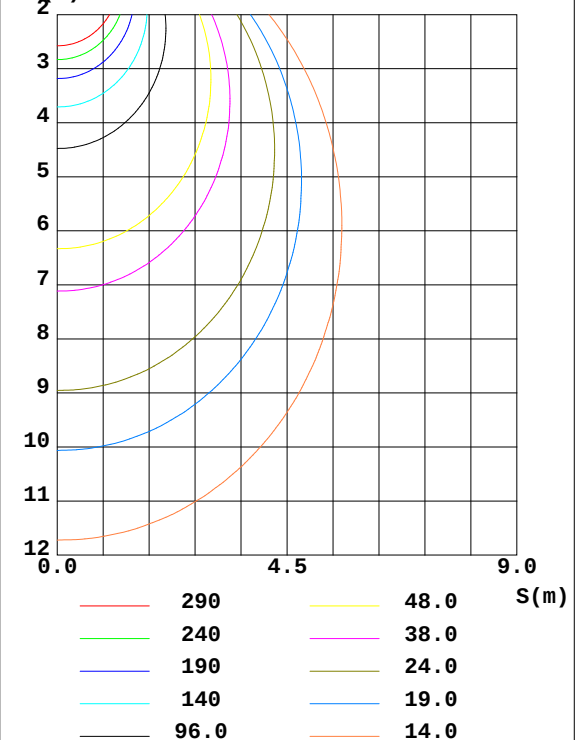

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 何俊伟
Test Date: 2025-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1887	1885	1883	1883	1872	1877	1887	1882	0- 10	181.6	181.6	3.44, 3.44
20	1770	1772	1766	1764	1741	1757	1774	1762	10- 20	516.5	698.1	13.2, 13.2
30	1587	1591	1582	1585	1545	1572	1599	1576	20- 30	773.4	1471	27.9, 27.9
40	1355	1355	1348	1342	1304	1337	1362	1341	30- 40	916.6	2388	45.2, 45.2
50	1088	1087	1076	1073	1034	1066	1096	1072	40- 50	934.6	3323	62.9, 62.9
60	806.8	799.8	785.8	785.8	748.3	778.6	808.2	784.4	50- 60	833.3	4156	78.7, 78.7
70	517.8	509.7	488.1	497.7	462.1	485.0	514.2	491.3	60- 70	634.0	4790	90.7, 90.7
80	235.7	234.9	210.7	225.0	176.5	209.4	233.7	220.9	70- 80	375.6	5165	97.8, 97.8
90	8.266	6.880	0.8464	5.188	1.881	4.421	0.3241	4.878	80- 90	100.6	5266	99.7, 99.7
100	1.847	2.822	1.324	2.741	1.030	1.995	0.4144	2.002	90-100	2.695	5269	99.8, 99.8
110	1.940	2.153	1.845	2.153	0.9003	1.083	0.6858	1.040	100-110	1.627	5270	99.8, 99.8
120	2.325	2.453	2.399	2.386	1.104	1.160	1.069	1.171	110-120	1.582	5272	99.8, 99.8
130	2.763	2.799	2.882	2.854	1.430	1.472	1.497	1.469	120-130	1.749	5274	99.9, 99.9
140	3.223	3.231	3.250	3.268	1.752	1.823	1.882	1.774	130-140	1.805	5276	99.9, 99.9
150	3.651	3.632	3.390	3.658	2.880	3.029	2.972	2.896	140-150	1.784	5277	99.9, 99.9
160	4.048	3.991	3.742	3.981	3.488	3.545	3.406	3.466	150-160	1.612	5279	100, 100
170	4.259	4.184	3.885	4.177	3.918	3.913	3.783	3.847	160-170	1.092	5280	100, 100
180	4.102	4.065	3.873	3.988	4.082	4.053	3.868	3.988	170-180	0.3832	5280	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 何俊伟
 Test Date: 2025-04-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.9V I:0.4060A P:48.50W PF:0.9970 Freq:60.00Hz Lamp Flux:5280.39x1 lm		
NAME: 17代 白色	TYPE:50W 4000K 0.10 下	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.1055*0.03+0.12*0.04	Shielding Angle:

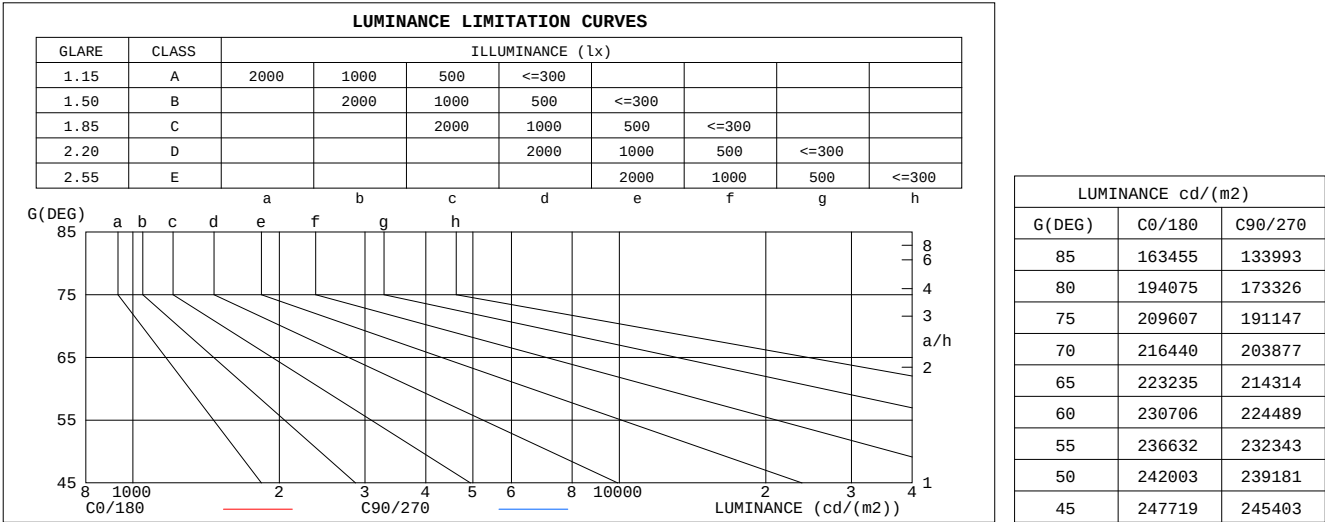


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:何俊伟
Test Date:2025-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.9V I:0.4060A P:48.50W PF:0.9970 Freq:60.00Hz Lamp Flux:5280.39x1 lm		
NAME: 17代 白色	TYPE:50W 4000K 0.10 下	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.1055*0.03+0.12*0.04	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.83
2.0	.91	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.69
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.67	.62	.69	.65	.61	.59
4.0	.70	.62	.55	.69	.61	.55	.67	.59	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.60	.52	.47	.58	.51	.46	.56	.50	.45	.43
6.0	.57	.48	.41	.56	.47	.41	.54	.46	.41	.52	.45	.40	.51	.45	.40	.38
7.0	.51	.43	.37	.51	.42	.36	.49	.42	.36	.48	.41	.36	.46	.40	.36	.34
8.0	.47	.38	.33	.46	.38	.33	.45	.38	.32	.44	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.29	.43	.35	.29	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

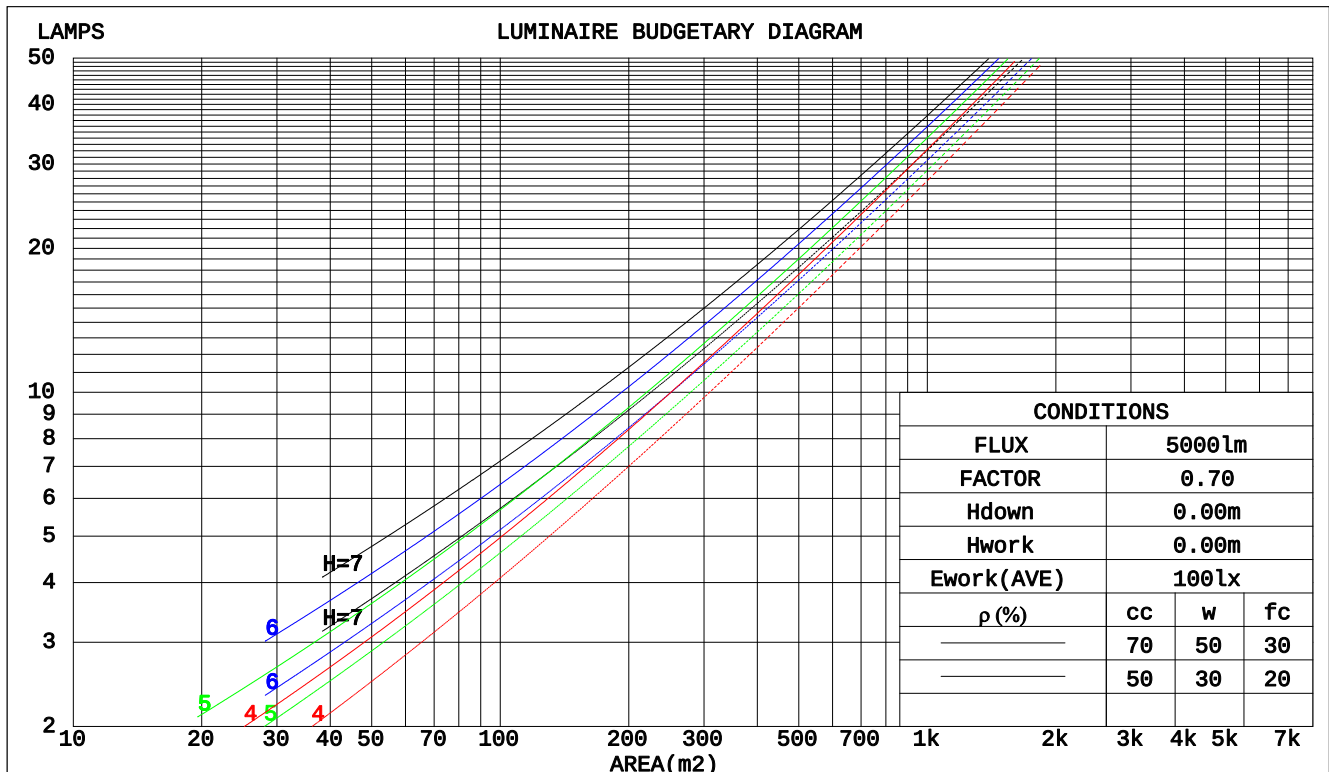

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:何俊伟
Test Date:2025-04-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.9V I:0.4060A P:48.50W PF:0.9970 Freq:60.00Hz Lamp Flux:5280.39x1 lm					
NAME: 17代 白色			TYPE:50W 4000K 0.10 下		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: WS			SUR.:0.1055*0.03+0.12*0.04		Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.309	.176	.056	.302	.172	.055	.288	.165	.053	.276	.159	.051	.265	.153	.049	
2.0	.291	.159	.049	.284	.157	.048	.272	.151	.047	.261	.147	.046	.251	.142	.045	
3.0	.269	.143	.043	.263	.141	.042	.253	.137	.042	.243	.133	.041	.234	.130	.040	
4.0	.248	.129	.038	.243	.127	.038	.234	.124	.037	.225	.121	.036	.217	.118	.036	
5.0	.229	.117	.034	.225	.115	.034	.217	.113	.033	.209	.110	.033	.202	.108	.032	
6.0	.213	.107	.031	.209	.105	.030	.201	.103	.030	.194	.101	.030	.188	.099	.029	
7.0	.198	.098	.028	.194	.097	.028	.188	.095	.027	.182	.093	.027	.176	.091	.027	
8.0	.185	.090	.025	.182	.089	.025	.176	.088	.025	.170	.086	.025	.165	.085	.025	
9.0	.173	.084	.023	.170	.083	.023	.165	.082	.023	.160	.080	.023	.156	.079	.023	
10.0	.163	.078	.022	.160	.077	.022	.156	.076	.021	.151	.075	.021	.147	.074	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.112	.112	.112	.065	.065	.065	.021	.021	.021	
1.0	.182	.158	.137	.156	.136	.117	.107	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.174	.134	.100	.149	.115	.087	.102	.080	.060	.059	.046	.035	.019	.015	.012	
3.0	.166	.116	.077	.143	.100	.066	.098	.070	.047	.057	.041	.027	.018	.013	.009	
4.0	.159	.103	.061	.136	.089	.053	.094	.062	.037	.054	.036	.022	.017	.012	.007	
5.0	.151	.093	.049	.130	.080	.043	.089	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.144	.084	.041	.124	.073	.036	.085	.051	.026	.050	.030	.015	.016	.010	.005	
7.0	.137	.077	.035	.118	.067	.031	.082	.047	.022	.047	.028	.013	.015	.009	.004	
8.0	.131	.072	.031	.113	.062	.027	.078	.044	.019	.045	.026	.011	.015	.008	.004	
9.0	.125	.067	.027	.107	.058	.024	.074	.041	.017	.043	.024	.010	.014	.008	.003	
10.0	.119	.062	.025	.103	.054	.022	.071	.038	.015	.042	.023	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:何俊伟
 Test Date:2025-04-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.9V I:0.4060A P:48.50W PF:0.9970 Freq:60.00Hz Lamp Flux:5280.39x1 lm											
NAME: 17代 白色					TYPE:50W 4000K 0.10 下			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: WS					SUR.:0.1055*0.03+0.12*0.04			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		31.8	33.4	32.1	33.6	33.8	31.8	33.3	32.0	33.5	33.7
	3H	33.4	34.8	33.7	35.1	35.3	33.3	34.7	33.6	34.9	35.1
	4H	34.1	35.4	34.4	35.7	35.9	33.9	35.2	34.2	35.5	35.7
	6H	34.6	35.9	34.9	36.1	36.4	34.3	35.6	34.7	35.8	36.1
	8H	34.8	36.0	35.1	36.3	36.6	34.5	35.7	34.8	36.0	36.3
	12H	34.9	36.0	35.2	36.3	36.6	34.5	35.7	34.9	36.0	36.3
4H	2H	32.5	33.8	32.8	34.0	34.3	32.4	33.7	32.7	34.0	34.2
	3H	34.2	35.4	34.6	35.7	36.0	34.1	35.3	34.4	35.5	35.9
	4H	35.0	36.1	35.4	36.4	36.8	34.8	35.9	35.2	36.2	36.6
	6H	35.7	36.6	36.1	37.0	37.4	35.4	36.4	35.8	36.7	37.1
	8H	35.9	36.8	36.3	37.2	37.6	35.6	36.5	36.0	36.9	37.3
	12H	36.1	36.9	36.5	37.3	37.7	35.7	36.5	36.2	36.9	37.3
8H	4H	35.3	36.2	35.7	36.6	37.0	35.1	36.0	35.6	36.4	36.8
	6H	36.1	36.9	36.6	37.3	37.7	35.9	36.6	36.3	37.0	37.5
	8H	36.5	37.1	36.9	37.5	38.0	36.2	36.8	36.6	37.3	37.7
	12H	36.7	37.2	37.2	37.7	38.2	36.4	36.9	36.8	37.4	37.9
12H	4H	35.3	36.1	35.8	36.5	36.9	35.2	36.0	35.6	36.4	36.8
	6H	36.2	36.9	36.7	37.3	37.7	36.0	36.6	36.4	37.1	37.5
	8H	36.6	37.1	37.1	37.6	38.1	36.3	36.9	36.8	37.3	37.8
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.3					

CIE Pub.117 Corrected 5280 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.8)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:何俊伟
 Test Date:2025-04-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.9V I:0.4060A P:48.50W PF:0.9970 Freq:60.00Hz Lamp Flux:5280.39x1 lm		
NAME: 17代 白色	TYPE:50W 4000K 0.10 下	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.1055*0.03+0.12*0.04	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	56	46	39	33
0.80	68	56	49	67	56	49	65	55	48	42
1.00	76	65	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	65	79	71	64	57
1.50	88	78	71	87	77	71	83	76	70	62
2.00	95	86	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	94	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:何俊伟
 Test Date:2025-04-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.9V I:0.4060A P:48.50W PF:0.9970 Freq:60.00Hz Lamp Flux:5280.39x1 lm		
NAME: 17代 白色	TYPE:50W 4000K 0.10 下	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.1055*0.03+0.12*0.04	Shielding Angle:

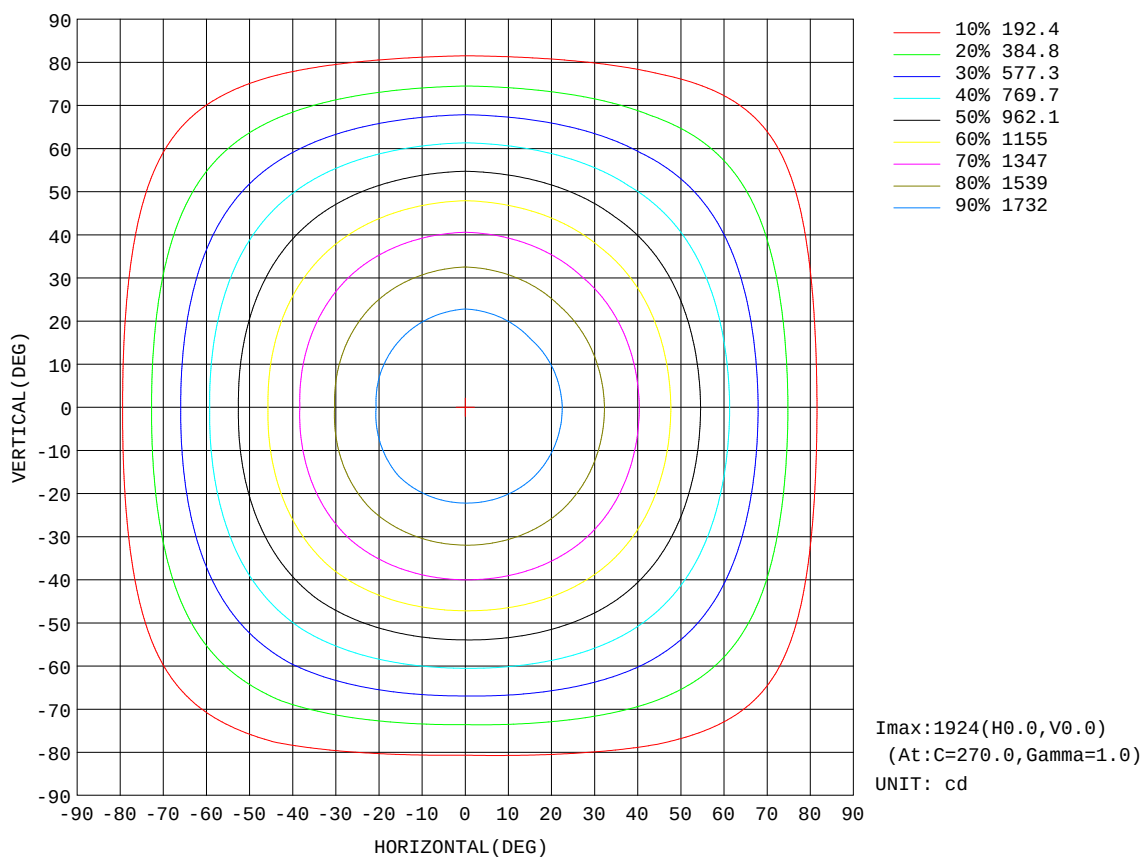


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:何俊伟
Test Date:2025-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:119.9V I:0.4060A P:48.50W PF:0.9970 Freq:60.00Hz Lamp Flux:5280.39x1 lm		
NAME: 17代 白色	TYPE:50W 4000K 0.10 下	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.1055*0.03+0.12*0.04	Shielding Angle:

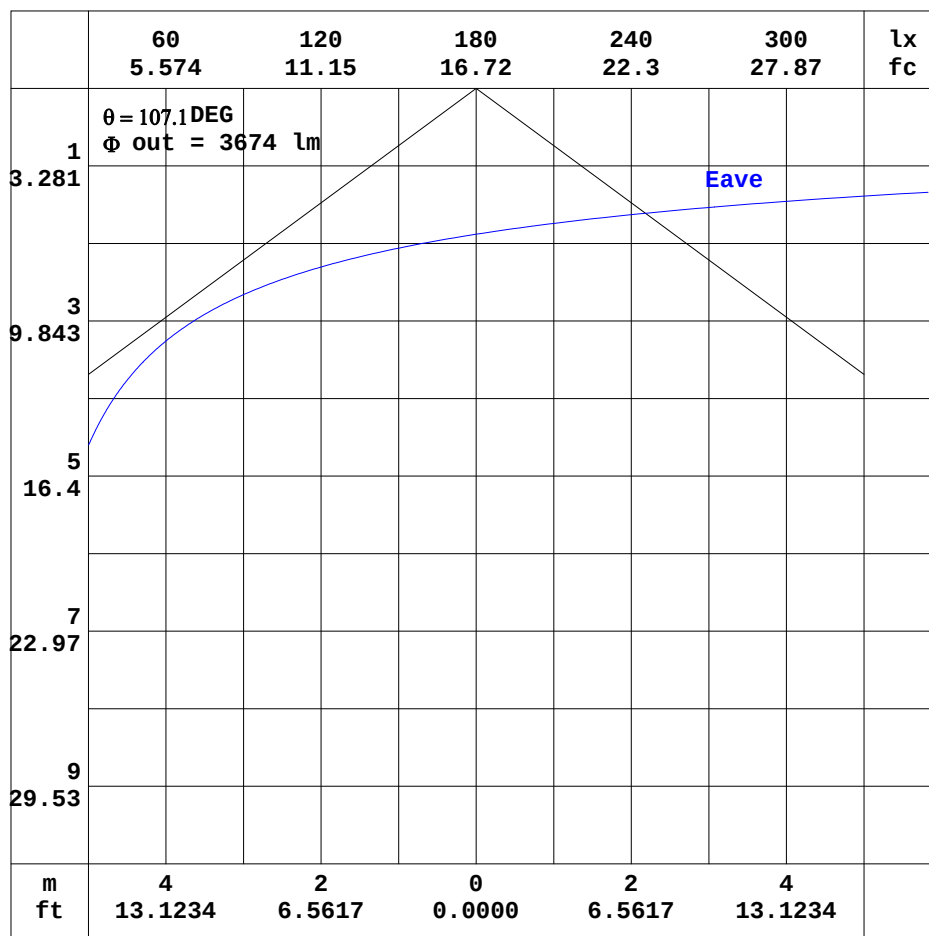


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 何俊伟
 Test Date: 2025-04-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.9V I:0.4060A P:48.50W PF:0.9970 Freq:60.00Hz Lamp Flux:5280.39x1 lm		
NAME: 17代 白色	TYPE:50W 4000K 0.10 下	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.1055*0.03+0.12*0.04	Shielding Angle:

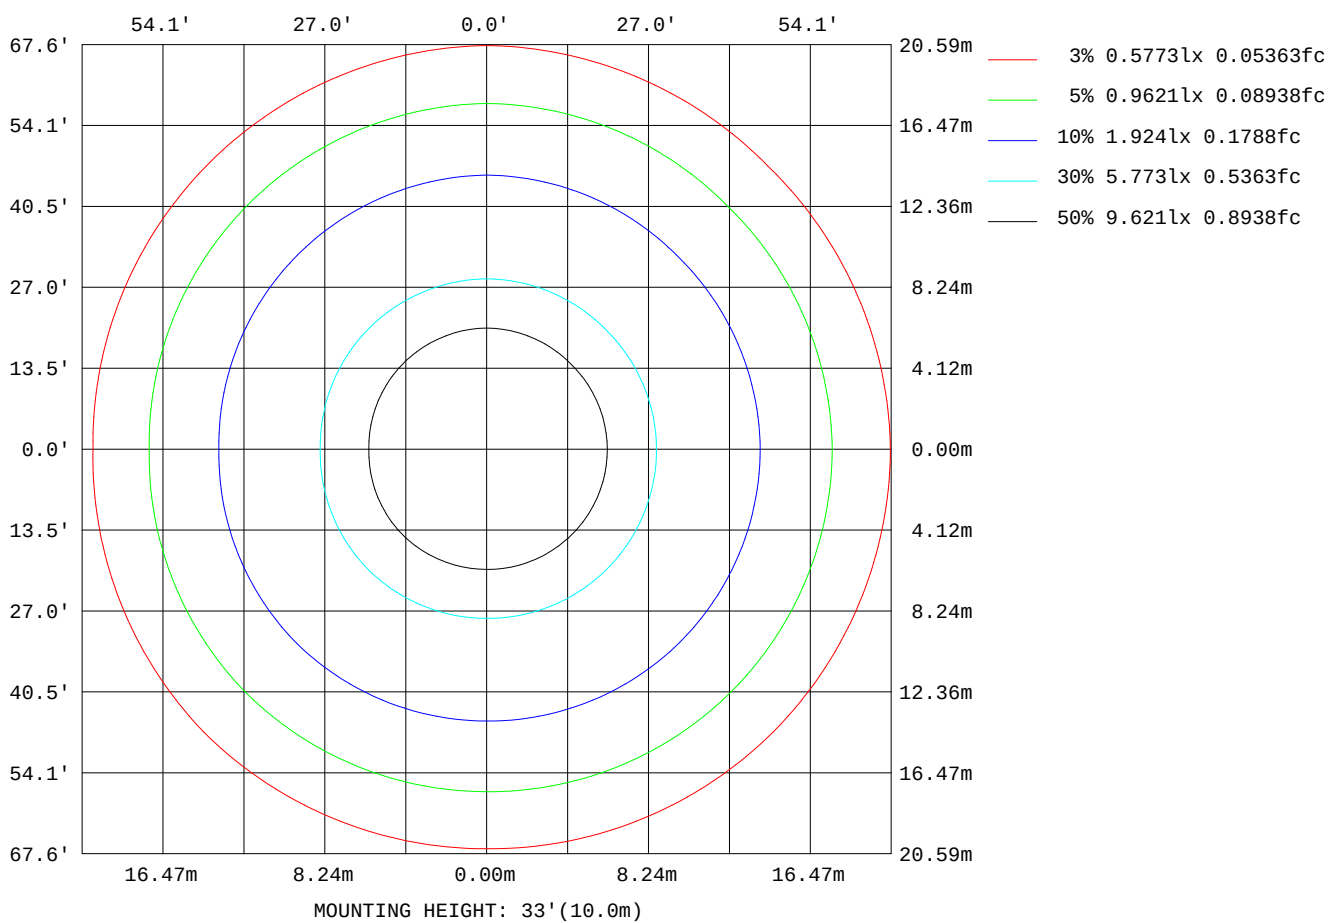

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 何俊伟
Test Date: 2025-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.9V I:0.4060A P:48.50W PF:0.9970 Freq:60.00Hz Lamp Flux:5280.39x1 lm		
NAME: 17代 白色	TYPE:50W 4000K 0.10 下	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.1055*0.03+0.12*0.04	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	213692
L_0~180(75)av	192578
L_0~180(85)av	117449
L_90~270(65)av	218763
L_90~270(75)av	197835
L_90~270(85)av	147061
L_45(65)av	216150
L_45(75)av	197306
L_45(85)av	144590

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:何俊伟
Test Date:2025-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

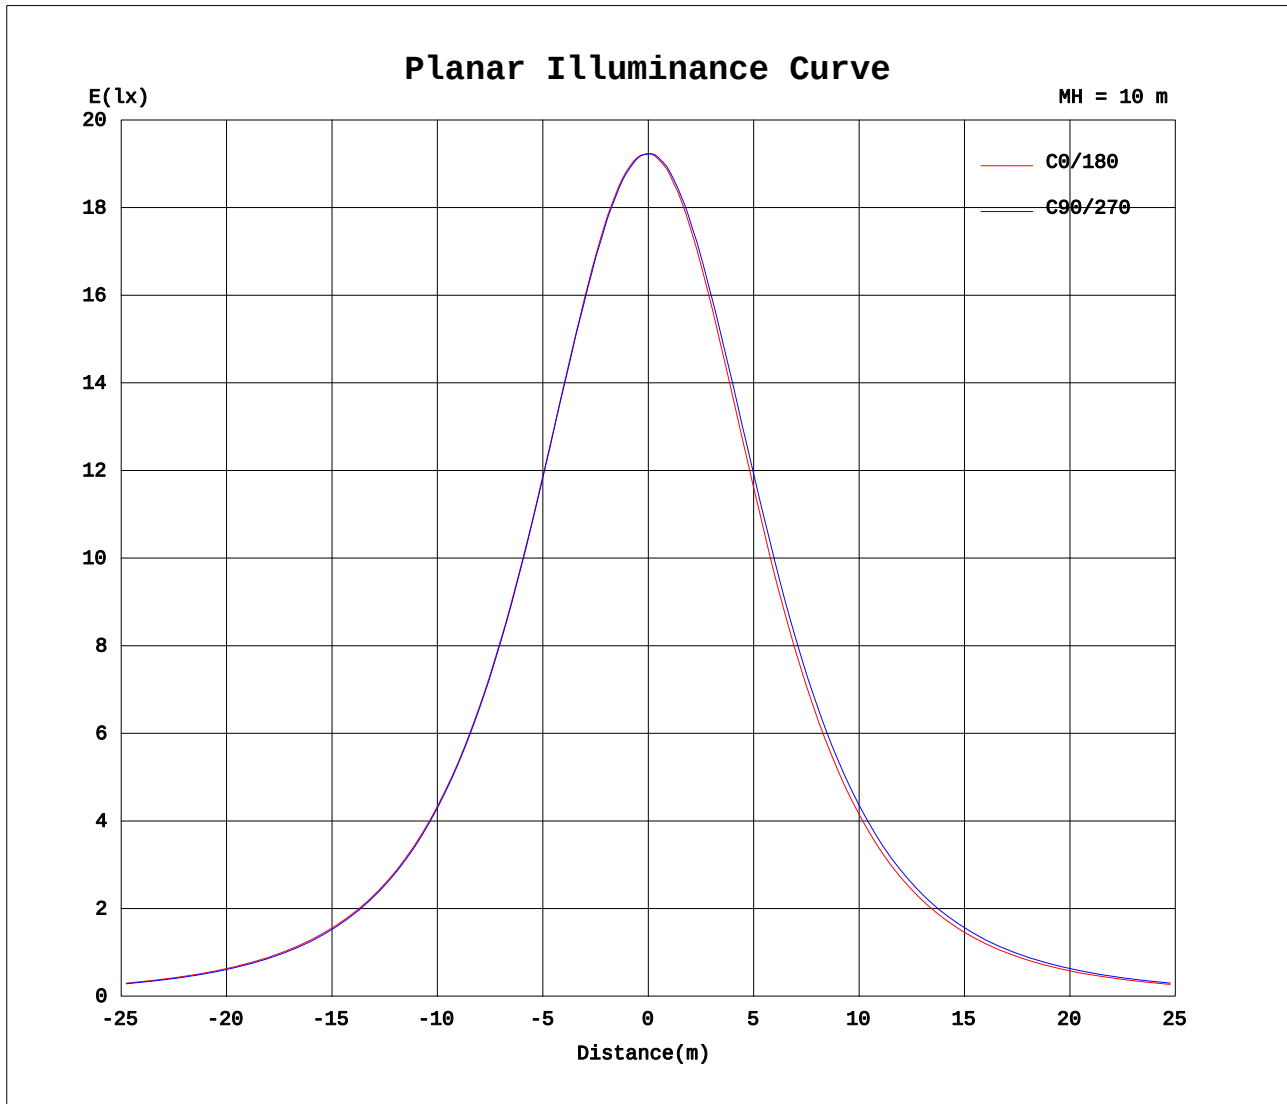

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 何俊伟
Test Date: 2025-04-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.9V I:0.4060A P:48.50W PF:0.9970 Freq:60.00Hz Lamp Flux:5280.39x1 lm									
NAME: 17代 白色					TYPE:50W 4000K 0.10 下				WEIGHT:
SPEC.:					DIM.:				SERIAL No.:
MFR.: WS					SUR.:0.1055*0.03+0.12*0.04				Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1923	1923	1923	1923	1923	1923	1923	1923										
5	1914	1914	1912	1913	1909	1911	1916	1911										
10	1887	1885	1883	1883	1872	1877	1887	1882										
15	1839	1837	1833	1833	1815	1825	1839	1829										
20	1770	1772	1766	1764	1741	1757	1774	1762										
25	1687	1689	1682	1681	1652	1671	1694	1675										
30	1587	1591	1582	1585	1545	1572	1599	1576										
35	1476	1477	1470	1466	1428	1460	1483	1466										
40	1355	1355	1348	1342	1304	1337	1362	1341										
45	1225	1225	1215	1211	1173	1205	1233	1210										
50	1088	1087	1076	1073	1034	1066	1096	1072										
55	949	945	933	932	892	923	954	930										
60	807	800	786	786	748	779	808	784										
65	660	654	634	641	604	629	660	634										
70	518	510	488	498	462	485	514	491										
75	379	370	346	361	318	345	371	354										
80	236	235	211	225	177	209	234	221										
85	99.6	101	81.8	88.0	43.7	76.1	97.7	87.9										
90	8.27	6.88	0.85	5.19	1.88	4.42	0.32	4.88										
95	2.07	4.02	1.06	3.87	1.34	3.33	0.33	3.39										
100	1.85	2.82	1.32	2.74	1.03	1.99	0.41	2.00										
105	1.83	2.25	1.58	2.27	0.90	1.33	0.54	1.31										
110	1.94	2.15	1.84	2.15	0.90	1.08	0.69	1.04										
115	2.11	2.26	2.13	2.17	0.99	1.07	0.88	1.06										
120	2.32	2.45	2.40	2.39	1.10	1.16	1.07	1.17										
125	2.54	2.64	2.65	2.64	1.26	1.32	1.28	1.31										
130	2.76	2.80	2.88	2.85	1.43	1.47	1.50	1.47										
135	2.99	3.01	3.10	3.04	1.59	1.64	1.71	1.61										
140	3.22	3.23	3.25	3.27	1.75	1.82	1.88	1.77										
145	3.45	3.43	3.21	3.47	2.13	2.27	2.19	2.20										
150	3.65	3.63	3.39	3.66	2.88	3.03	2.97	2.90										
155	3.85	3.83	3.62	3.84	3.19	3.30	3.19	3.18										
160	4.05	3.99	3.74	3.98	3.49	3.54	3.41	3.47										
165	4.20	4.12	3.83	4.11	3.75	3.74	3.62	3.67										
170	4.26	4.18	3.88	4.18	3.92	3.91	3.78	3.85										
175	4.22	4.14	3.90	4.13	4.01	4.00	3.84	3.91										
180	4.10	4.07	3.87	3.99	4.08	4.05	3.87	3.99										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:何俊伟
 Test Date:2025-04-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: