



Tense 295

Suspended Tube-Lamp Housing

WISDOM LIGHT

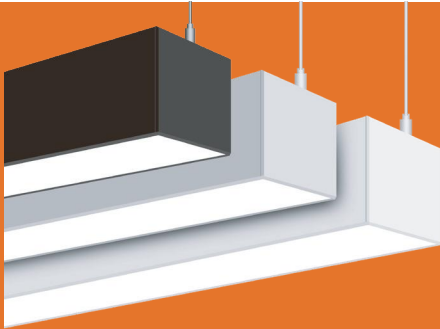

Suspended

The Tense 295 represents a direct lighting fixture enclosure, boasting a confident presence. Its adaptability allows for the use of various T-lamps, including LED T5 or T8 types. Embracing an industrial appearance, it offers a contemporary aesthetic. This fixture comes in a standard finish of galvanized steel, or alternatively, in powder-coated white and black options.



White



Black



2xT5 Tube

Tense 295	Length	TUBE	Output Lumen	Nominal Efficacy	CCT Select	Input Voltage	Dimming	CRI
			Up 0% Down 100%					
WL-6LSD4FT2T5LB	4'	2XT5	/	/	/	/	/	/
WL-6LSD8FT2T8LB	8'	2XT8	/					

Order Guide

Sample Model#: WL-6LSD4FT2T5-SA-SP

Tense 295	WL-6LSD	4FT	2	T5	SA	SP
Luminaire ID	Series	Length	Total Lamps	Lamp Hoder Type	Finish	Installation mode
2.95 Inch width	WL-6LSD=GEN6 LINEAR HOUSING	4FT	2	T5	BK= Black	SP= Suspended air craft cable
		8FT	2	T8	WH= White	
					SA= Silver	

Accessories

Lens	Mounting Options	Canopy Type	Canopy Finish	Other Accessories
PCD = PC Diffuser (Standard)	SCK=Canopy Pendant	SCKD = 2.4" Canopy	Black	1.1M AC CABLE
			White	1.2M AIRCRAFT ROPE
			Silver	D60 1 PAIR CANOPY

Product design and development is an ongoing process at Shenzhen Wisdom Light Co.,Ltd.

We reserve the right to change specifications.

1/ 2

FILE NAME: Tense 295
March 01, 2024

Tel. +86 755 222 16523
Email. sales@wisdomled.net
www.wisdomled.com

Contact us for the latest product information.

Tense 295

Suspended T-Lamp Housing

WISDOM LIGHT

Product Specifications

Construction

- Tube removable fixture, PC diffuser
- Precision cut housing extruded from 6063 aluminum
- Precision cut & welded end-caps ensure a robust and clean construction
- Nominal 4ft & 8ft illuminated sections used in individual fixtures
- Electrostatically applied polyester powder coat paint
- Slide rope, easier to install

Light Engine

- LED source are available in T5 and T8, single or twin double end tubes.

LED Module

- LED source are available in T5 and T8, single or twin double end tubes

Mounting

- Suspended



Lengths

- 4ft & 8ft

Weight

- 1.0 lb per foot

Environment

- Suited for damp location installations.
- Operating temperature range: -25° C to 50° C

Warranty

- Three year warranty standard. Optional five year warranty available.