


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.0V I:0.1300A P:2.900W PF:0.9900 Freq:60.00Hz Lamp Flux:140.724x1 lm		
NAME: 游艇灯	TYPE:3W 3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:3.14*0.001	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 48.53 lm/W			
MODEL	下发光	Imax(cd)	336.5	S/MH(C0/180)	0.68
NOMINAL POWER(W)	3W	LOR(%)	100.0	S/MH(C90/270)	0.69
RATED VOLTAGE(V)	220.0	TOTAL FLUX(lm)	140.72	η UP, DN(C0-180)	0.3, 46.6
NOMINAL FLUX(lm)	140.724	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1, 53.0
LAMPS INSIDE	1	η up(%)	0.4	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	220.0	η down(%)	99.6	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

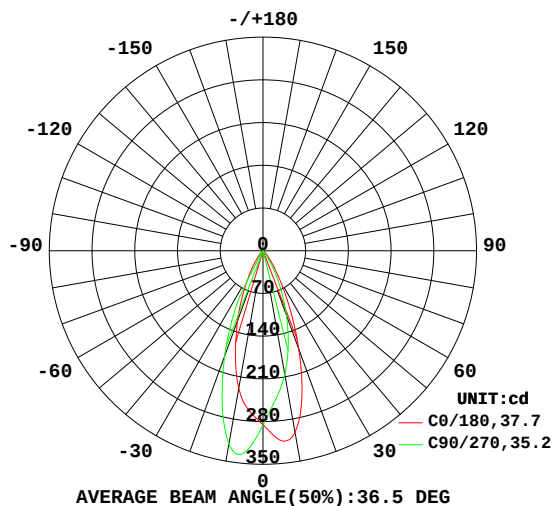

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

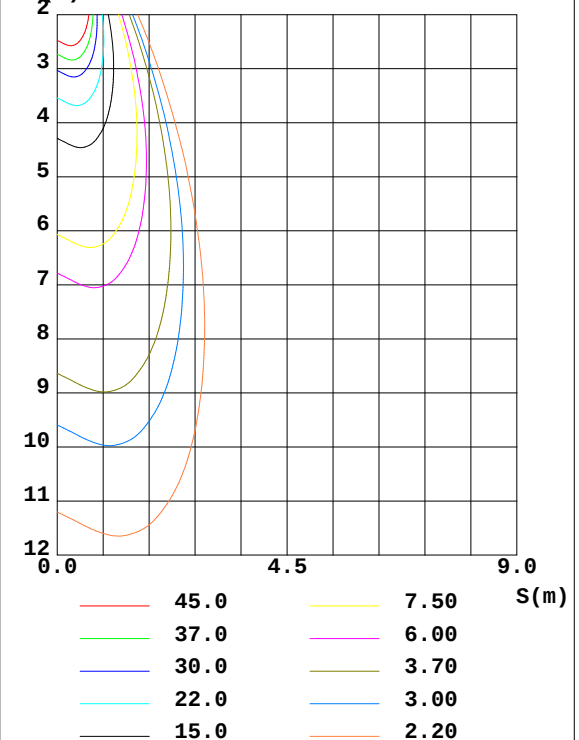

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:何俊伟
Test Date:2025-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	302.2	243.6	206.2	204.0	229.2	271.7	321.8	316.8	0- 10	26.57	26.57	18.9,18.9
20	172.5	131.3	112.6	113.4	122.0	151.1	184.4	172.0	10- 20	56.53	83.10	59.1,59.1
30	55.96	44.12	35.09	41.43	44.10	52.68	4.959	52.89	20- 30	40.35	123.4	87.7,87.7
40	15.07	9.528	0.2298	8.917	11.65	10.46	0.2220	8.983	30- 40	13.32	136.8	97.2,97.2
50	4.884	0.1052	0.1438	0.1240	3.903	0.0786	0.1510	0.1034	40- 50	2.543	139.3	99,99
60	1.603	0.0539	0.1126	0.0702	1.209	0.0466	0.1077	0.0375	50- 60	0.6429	139.9	99.4,99.4
70	0.1008	0.0343	0.0910	0.0327	0.0522	0.0245	0.0646	0.0211	60- 70	0.1725	140.1	99.6,99.6
80	0	0.0147	0.0552	0.0164	0.0025	0.0098	0.0311	0.0094	70- 80	0.0291	140.1	99.6,99.6
90	0	0.0000	0.0384	0.0047	0	0	0.0143	0	80- 90	0.0129	140.2	99.6,99.6
100	0	0	0.0312	0.0023	0	0	0.0096	0.0046	90-100	0.0068	140.2	99.6,99.6
110	0.0001	0	0.0311	0	0	0	0.0095	0	100-110	0.0058	140.2	99.6,99.6
120	0.0150	0.0025	0	0.0071	0	0	0	0	110-120	0.0020	140.2	99.6,99.6
130	0.0650	0.0541	0.0381	0.0633	0.0050	0	0	0.0023	120-130	0.0108	140.2	99.6,99.6
140	0.2127	0.2477	0.2704	0.2508	0.0251	0.0172	0.0121	0.0210	130-140	0.0558	140.2	99.7,99.7
150	0.4632	0.5565	0.5652	0.5436	0.0778	0.0636	0.0456	0.0538	140-150	0.1318	140.4	99.8,99.8
160	0.7237	0.7817	0.7260	0.7047	0.1680	0.1396	0.1127	0.1171	150-160	0.1708	140.5	99.9,99.9
170	0.8393	0.7545	0.6280	0.5830	0.3284	0.2768	0.2541	0.2551	160-170	0.1308	140.7	100,100
180	0.6338	0.5268	0.4433	0.4285	0.6338	0.5268	0.4481	0.4262	170-180	0.0475	140.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:何俊伟
 Test Date:2025-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.0V I:0.1300A P:2.900W PF:0.9900 Freq:60.00Hz Lamp Flux:140.724x1 lm		
NAME: 游艇灯	TYPE:3W 3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:3.14*0.001	Shielding Angle:

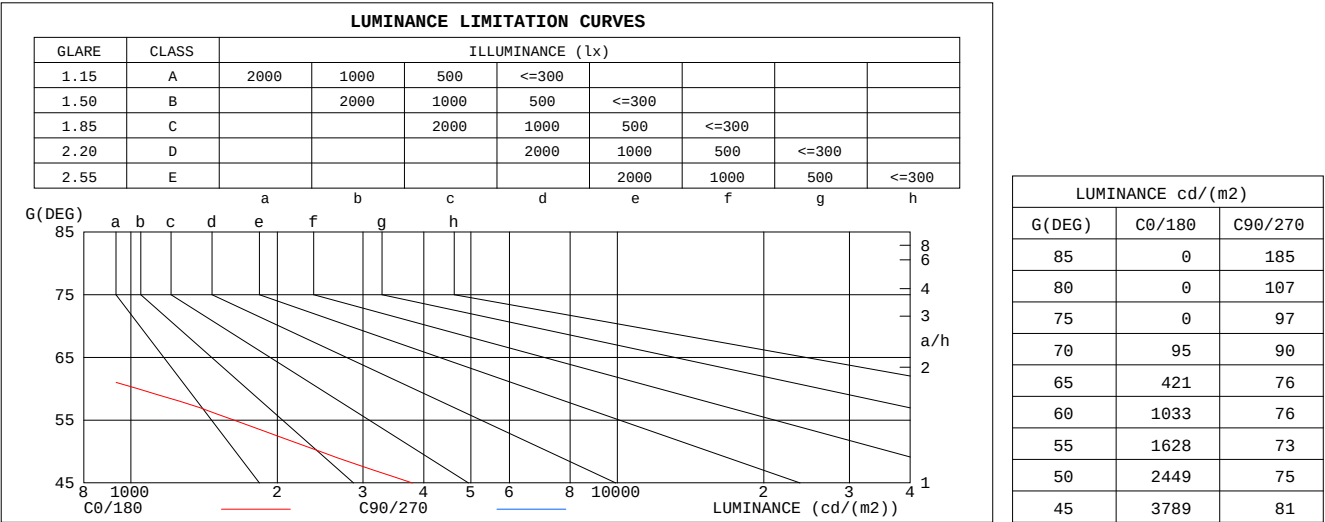


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:何俊伟
Test Date:2025-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.0V I:0.1300A P:2.900W PF:0.9900 Freq:60.00Hz Lamp Flux:140.724x1 lm		
NAME: 游艇灯	TYPE:3W 3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:3.14*0.001	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.99	.98	.97	.97	.95
2.0	1.05	1.02	.99	1.04	1.01	.98	1.00	.98	.96	.97	.95	.94	.95	.93	.92	.90
3.0	.90	.95	.92	.98	.94	.91	.96	.92	.90	.93	.91	.88	.91	.89	.87	.86
4.0	.95	.90	.86	.93	.89	.86	.91	.88	.85	.89	.86	.84	.88	.85	.83	.81
5.0	.90	.85	.81	.89	.84	.81	.87	.83	.80	.86	.82	.79	.84	.81	.79	.77
6.0	.86	.81	.77	.85	.80	.77	.83	.79	.76	.82	.78	.76	.81	.78	.75	.74
7.0	.82	.77	.73	.81	.76	.73	.80	.76	.73	.79	.75	.72	.78	.74	.72	.71
8.0	.78	.73	.70	.78	.73	.69	.77	.72	.69	.76	.72	.69	.75	.71	.69	.67
9.0	.75	.70	.67	.74	.70	.66	.73	.69	.66	.73	.69	.66	.72	.68	.66	.65
10.0	.72	.67	.64	.71	.67	.64	.71	.66	.63	.70	.66	.63	.69	.66	.63	.62

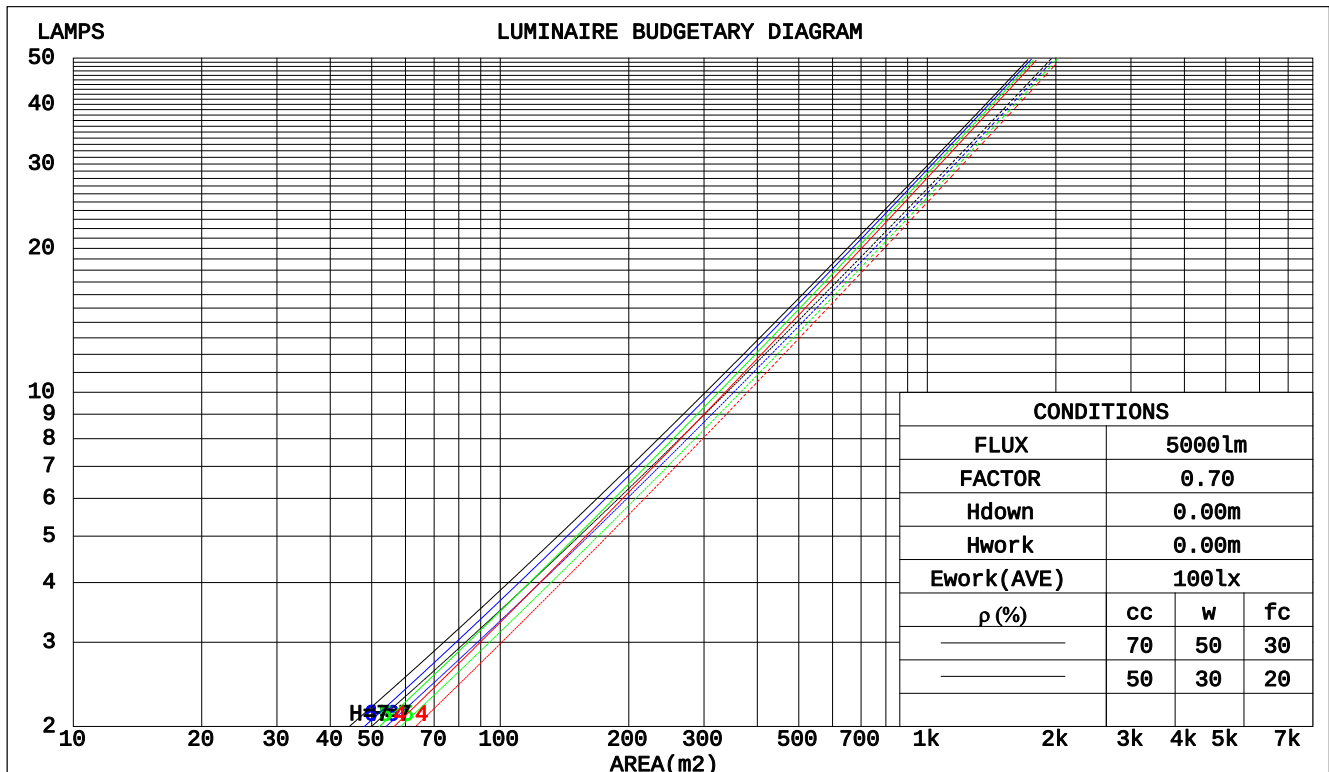

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:何俊伟
Test Date:2025-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.0V I:0.1300A P:2.900W PF:0.9900 Freq:60.00Hz Lamp Flux:140.724x1 lm								
NAME: 游艇灯				TYPE:3W 3000K			WEIGHT:	
SPEC.:				DIM.:			SERIAL No.:	
MFR.: WS				SUR.:3.14*0.001			Shielding Angle:	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.156	.089	.028	.150	.085	.027	.137	.079	.025	.125	.072	.023	.114	.066	.021	
2.0	.147	.081	.025	.142	.078	.024	.131	.073	.023	.121	.068	.021	.112	.064	.020	
3.0	.139	.074	.022	.135	.072	.022	.126	.068	.021	.117	.064	.020	.110	.061	.019	
4.0	.132	.069	.020	.128	.067	.020	.120	.064	.019	.113	.061	.018	.106	.058	.018	
5.0	.125	.064	.019	.122	.063	.018	.115	.060	.018	.109	.058	.017	.103	.055	.017	
6.0	.120	.060	.017	.116	.059	.017	.111	.057	.016	.105	.055	.016	.100	.053	.016	
7.0	.114	.056	.016	.111	.056	.016	.106	.054	.015	.102	.052	.015	.097	.050	.015	
8.0	.109	.053	.015	.107	.053	.015	.102	.051	.015	.098	.050	.014	.094	.048	.014	
9.0	.105	.051	.014	.103	.050	.014	.099	.049	.014	.095	.048	.014	.091	.046	.013	
10.0	.101	.048	.013	.099	.048	.013	.095	.047	.013	.092	.046	.013	.089	.045	.013	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.173	.161	.150	.148	.138	.129	.101	.095	.089	.058	.055	.052	.019	.018	.017	
2.0	.156	.136	.119	.134	.117	.102	.092	.081	.071	.053	.047	.042	.017	.015	.014	
3.0	.142	.117	.096	.122	.101	.083	.084	.070	.058	.048	.041	.034	.016	.013	.011	
4.0	.131	.101	.079	.112	.088	.069	.077	.061	.048	.045	.036	.029	.014	.012	.009	
5.0	.122	.090	.066	.104	.077	.057	.072	.054	.040	.042	.032	.024	.013	.010	.008	
6.0	.114	.080	.056	.098	.069	.049	.067	.048	.034	.039	.029	.020	.013	.009	.007	
7.0	.107	.072	.048	.092	.062	.042	.063	.044	.030	.037	.026	.018	.012	.008	.006	
8.0	.101	.066	.042	.087	.057	.036	.060	.040	.026	.035	.024	.015	.011	.008	.005	
9.0	.095	.060	.037	.082	.052	.032	.057	.037	.023	.033	.022	.013	.011	.007	.004	
10.0	.091	.056	.032	.078	.048	.028	.054	.034	.020	.032	.020	.012	.010	.007	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:何俊伟
 Test Date:2025-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.0V I:0.1300A P:2.900W PF:0.9900 Freq:60.00Hz Lamp Flux:140.724x1 lm											
NAME: 游艇灯					TYPE:3W 3000K			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: WS					SUR.:3.14*0.001			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	3H	10.2	11.0	10.4	11.2	11.3	6.7	7.5	7.0	7.7	7.9
	4H	10.1	10.8	10.3	11.0	11.2	6.6	7.3	6.8	7.5	7.7
	6H	10.0	10.7	10.3	10.9	11.1	6.5	7.2	6.8	7.4	7.6
	8H	9.9	10.6	10.2	10.8	11.0	6.4	7.1	6.7	7.3	7.6
	8H	9.9	10.5	10.2	10.7	11.0	6.4	7.0	6.7	7.3	7.5
	12H	9.8	10.4	10.1	10.7	11.0	6.3	6.9	6.7	7.2	7.5
4H	2H	10.0	10.7	10.2	10.9	11.1	6.5	7.2	6.8	7.4	7.6
	3H	9.8	10.4	10.1	10.7	11.0	6.3	6.9	6.7	7.2	7.5
	4H	9.7	10.3	10.1	10.6	10.9	6.3	6.8	6.6	7.1	7.4
	6H	9.6	10.1	10.0	10.4	10.8	6.2	6.6	6.5	7.0	7.3
	8H	9.6	10.0	10.0	10.4	10.7	6.1	6.6	6.5	6.9	7.3
	12H	9.5	9.9	9.9	10.3	10.7	6.1	6.5	6.5	6.9	7.3
8H	4H	9.6	10.0	10.0	10.4	10.7	6.1	6.5	6.5	6.9	7.3
	6H	9.5	9.8	9.9	10.2	10.6	6.0	6.4	6.4	6.8	7.2
	8H	9.4	9.7	9.8	10.1	10.6	6.0	6.3	6.4	6.7	7.2
	12H	9.3	9.6	9.8	10.1	10.5	5.9	6.2	6.4	6.6	7.1
12H	4H	9.5	9.9	9.9	10.3	10.7	6.0	6.5	6.5	6.8	7.2
	6H	9.4	9.7	9.8	10.1	10.6	5.9	6.3	6.4	6.7	7.1
	8H	9.3	9.6	9.8	10.1	10.5	5.9	6.2	6.4	6.6	7.1
Variations with the observer position at spacings:											
S = 1.0H		+ 3.7 / - 7.6					+ 3.0 / -10.4				
1.5H		+ 5.7 / -13.9					+ 5.3 / -10.2				
2.0H		+ 6.7 / -21.7					+ 3.8 / - 1.5				

CIE Pub.117 Corrected 140.7 lm Total Lamp Luminous Flux.(8log(F/F0) = -6.8)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:何俊伟
 Test Date:2025-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.0V I:0.1300A P:2.900W PF:0.9900 Freq:60.00Hz Lamp Flux:140.724x1 lm		
NAME: 游艇灯	TYPE:3W 3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:3.14*0.001	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	84	80	89	84	80	89	83	80	77
0.80	97	92	88	96	91	88	95	91	88	84
1.00	101	96	92	100	95	92	98	95	92	88
1.25	105	100	97	104	99	96	102	98	95	91
1.50	107	103	100	106	102	99	104	100	98	94
2.00	109	106	103	108	104	102	105	102	100	95
2.50	111	107	105	109	106	104	106	104	102	96
3.00	112	109	107	111	108	105	107	105	103	97
4.00	114	112	110	112	110	108	109	107	105	98
5.00	115	113	112	113	111	110	109	108	107	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:何俊伟
 Test Date:2025-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.0V I:0.1300A P:2.900W PF:0.9900 Freq:60.00Hz Lamp Flux:140.724x1 lm		
NAME: 游艇灯	TYPE:3W 3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:3.14*0.001	Shielding Angle:

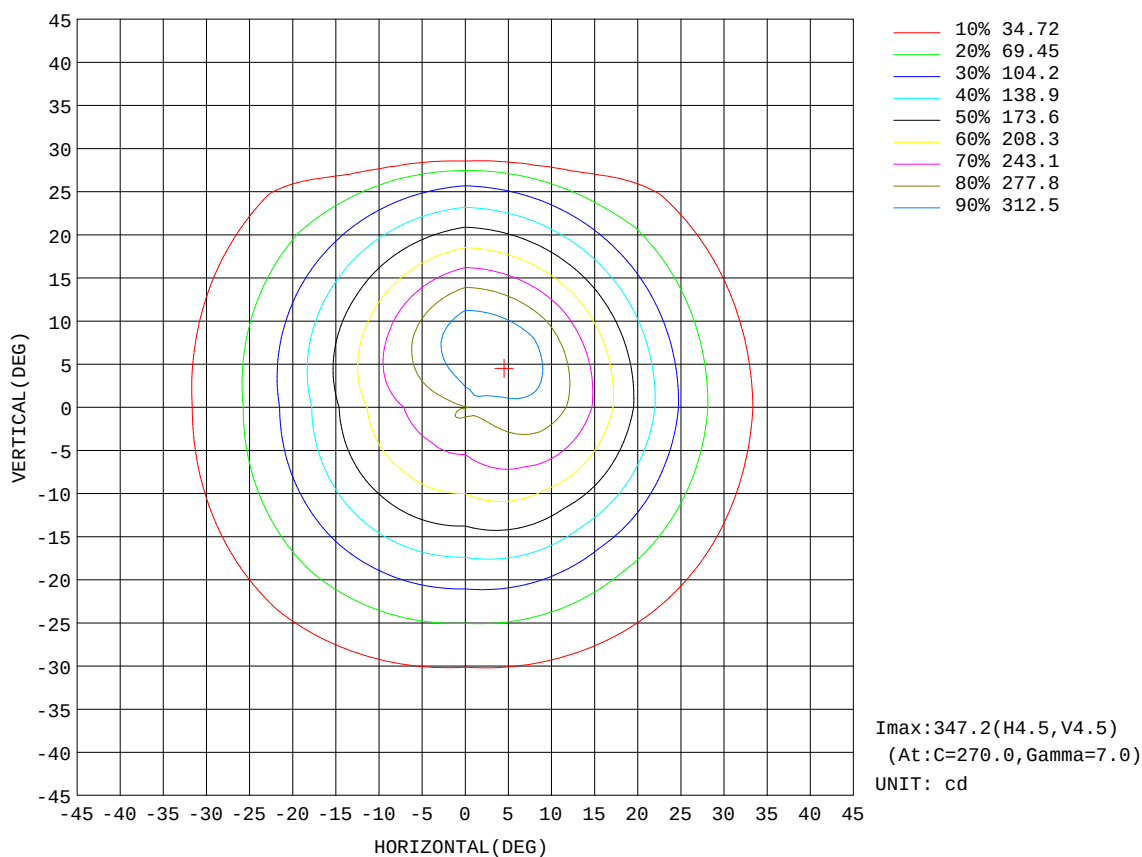


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 何俊伟
Test Date: 2025-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:220.0V I:0.1300A P:2.900W PF:0.9900 Freq:60.00Hz Lamp Flux:140.724x1 lm		
NAME: 游艇灯	TYPE:3W 3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:3.14*0.001	Shielding Angle:

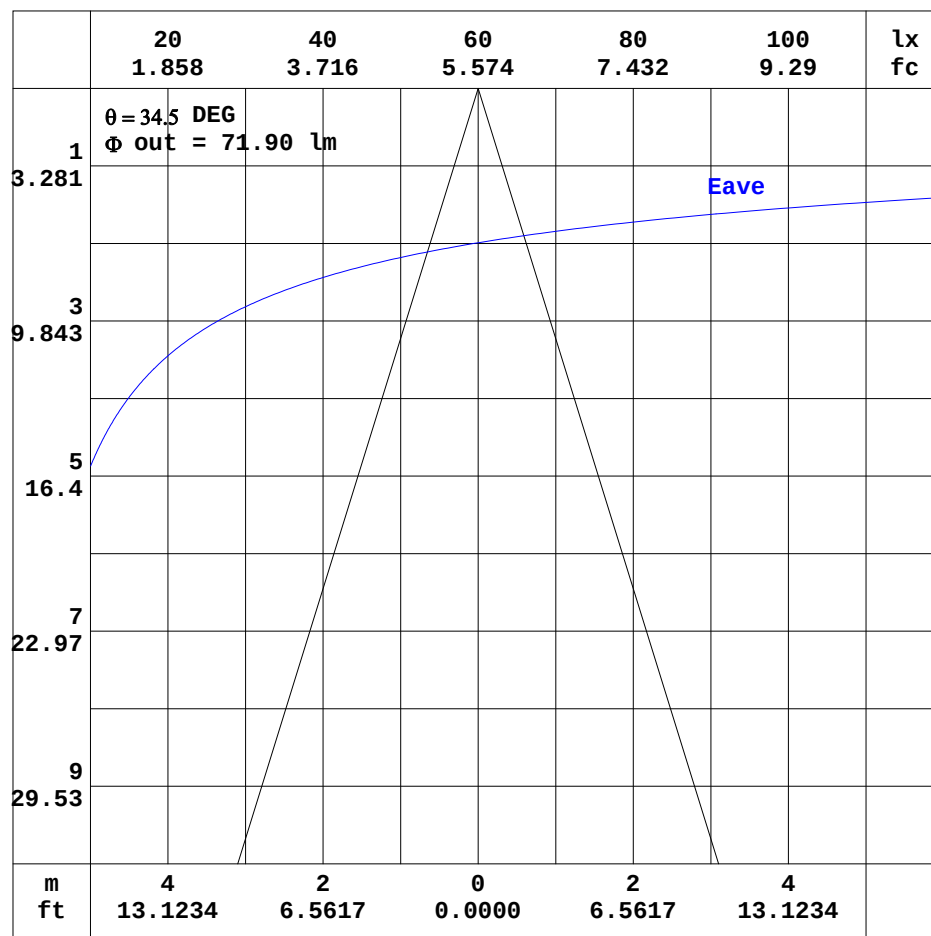


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 何俊伟
Test Date: 2025-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.0V I:0.1300A P:2.900W PF:0.9900 Freq:60.00Hz Lamp Flux:140.724x1 lm		
NAME: 游艇灯	TYPE:3W 3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:3.14*0.001	Shielding Angle:

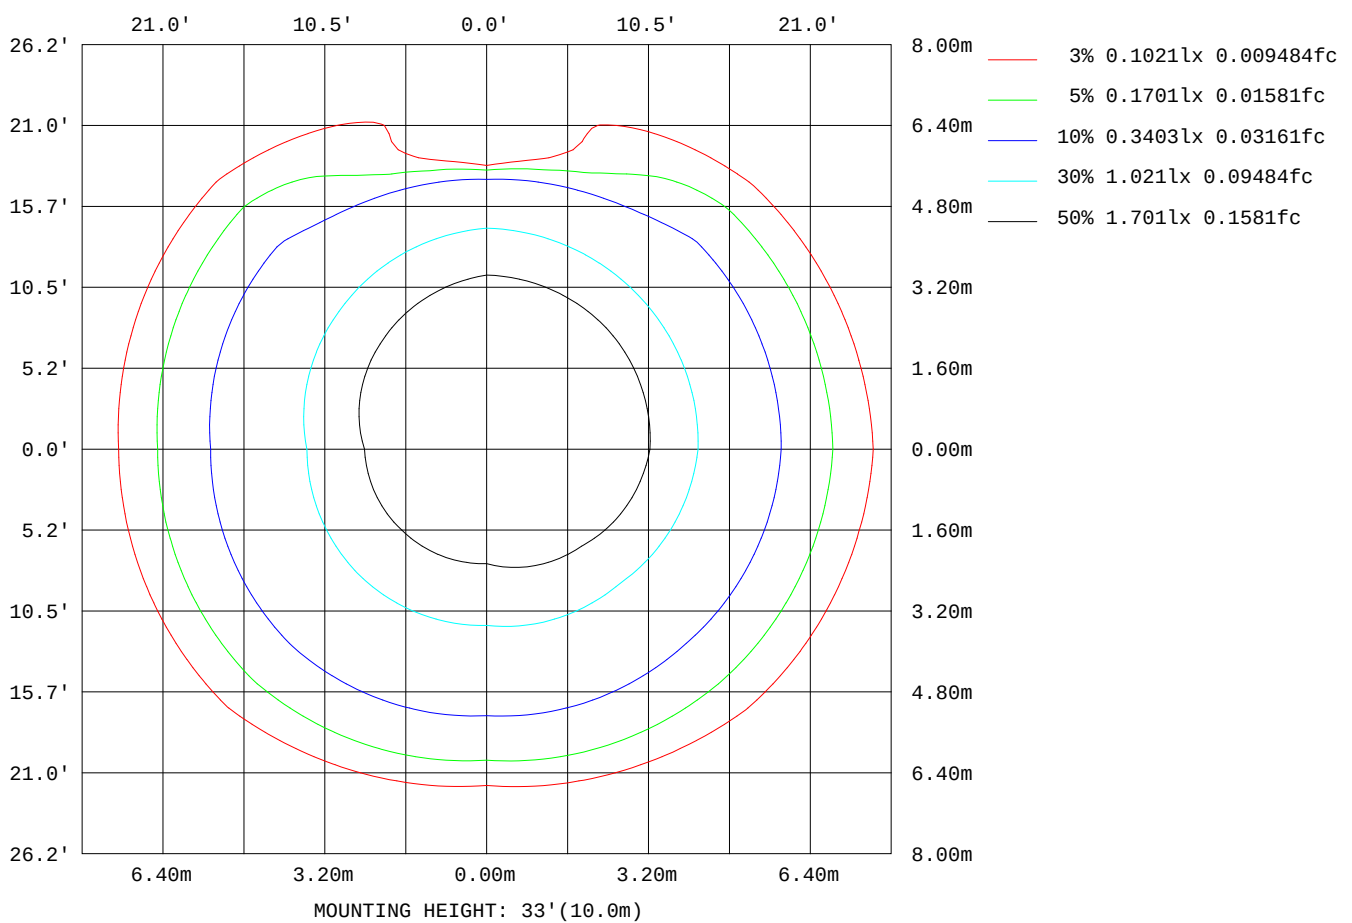

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:何俊伟
Test Date:2025-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.0V I:0.1300A P:2.900W PF:0.9900 Freq:60.00Hz Lamp Flux:140.724x1 lm		
NAME: 游艇灯	TYPE:3W 3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:3.14*0.001	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	356
L_0~180(75)av	2
L_0~180(85)av	0
L_90~270(65)av	71
L_90~270(75)av	74
L_90~270(85)av	124
L_45(65)av	30
L_45(75)av	27
L_45(85)av	18

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:何俊伟
Test Date:2025-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

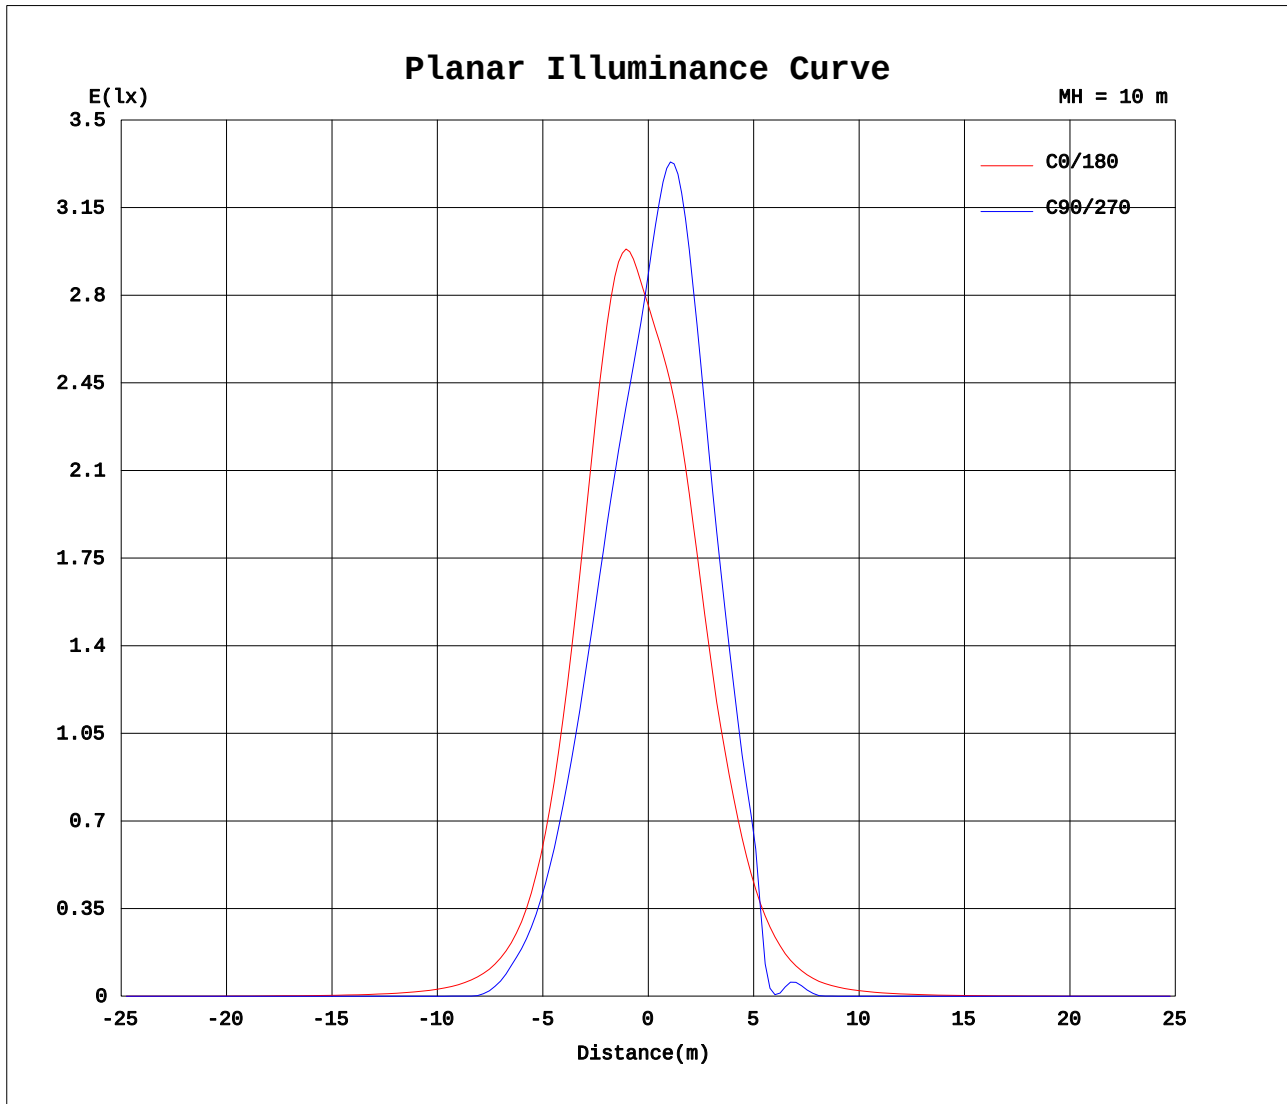

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 何俊伟
Test Date: 2025-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.0V I:0.1300A P:2.900W PF:0.9900 Freq:60.00Hz Lamp Flux:140.724x1 lm		
NAME: 游艇灯	TYPE:3W 3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:3.14*0.001	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	285	285	285	285	285	285	285	285										
5	311	271	244	240	263	295	331	333										
10	302	244	206	204	229	272	322	317										
15	247	192	160	160	175	214	259	249										
20	172	131	113	113	122	151	184	172										
25	104	80.2	69.1	73.5	77.5	94.3	112	102										
30	56.0	44.1	35.1	41.4	44.1	52.7	4.96	52.9										
35	28.8	22.4	11.0	21.0	22.9	27.0	10.1	24.3										
40	15.1	9.53	0.23	8.92	11.7	10.5	0.22	8.98										
45	8.31	2.29	0.17	1.91	6.56	1.25	0.16	1.55										
50	4.88	0.11	0.14	0.12	3.90	0.08	0.15	0.10										
55	2.90	0.08	0.12	0.09	2.34	0.06	0.13	0.06										
60	1.60	0.05	0.11	0.07	1.21	0.05	0.11	0.04										
65	0.55	0.05	0.10	0.05	0.35	0.03	0.08	0.03										
70	0.10	0.03	0.09	0.03	0.05	0.02	0.06	0.02										
75	0.00	0.02	0.07	0.03	0.00	0.02	0.04	0.01										
80	0.00	0.01	0.06	0.02	0.00	0.01	0.03	0.01										
85	0.00	0.00	0.05	0.01	0.00	0.00	0.02	0.00										
90	0.00	0.00	0.04	0.00	0.00	0.00	0.01	0.00										
95	0.00	0.00	0.03	0.00	0.00	0.01	0.01	0.00										
100	0.00	0.00	0.03	0.00	0.00	0.00	0.01	0.00										
105	0.00	0.00	0.04	0.00	0.00	0.00	0.01	0.00										
110	0.00	0.00	0.03	0.00	0.00	0.00	0.01	0.00										
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
120	0.02	0.00	0.00	0.01	0.00	0.00	0.00	0.00										
125	0.03	0.02	0.00	0.03	0.00	0.00	0.00	0.00										
130	0.07	0.05	0.04	0.06	0.01	0.00	0.00	0.00										
135	0.12	0.13	0.12	0.14	0.01	0.01	0.00	0.01										
140	0.21	0.25	0.27	0.25	0.03	0.02	0.01	0.02										
145	0.33	0.39	0.42	0.40	0.05	0.04	0.03	0.03										
150	0.46	0.56	0.57	0.54	0.08	0.06	0.05	0.05										
155	0.60	0.70	0.68	0.67	0.12	0.10	0.06	0.08										
160	0.72	0.78	0.73	0.70	0.17	0.14	0.11	0.12										
165	0.81	0.80	0.69	0.65	0.23	0.19	0.17	0.18										
170	0.84	0.75	0.63	0.58	0.33	0.28	0.25	0.26										
175	0.77	0.66	0.55	0.52	0.48	0.39	0.34	0.34										
180	0.63	0.53	0.44	0.43	0.63	0.53	0.45	0.43										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:何俊伟
 Test Date:2025-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: