


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.0V I:0.1770A P:12.40W PF:0.5870 Freq:60.00Hz Lamp Flux:757.529x1 lm		
NAME: 线条灯	TYPE:12W 3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.3*0.07	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 61.09 lm/W			
MODEL	下发光	I _{max} (cd)	291.7	S/MH(C0/180)	1.25
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	757.53	η UP, DN(C0-180)	0.4, 50.4
NOMINAL FLUX(lm)	757.529	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.2, 49.0
LAMPS INSIDE	1	η up(%)	0.6	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	η down(%)	99.4	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

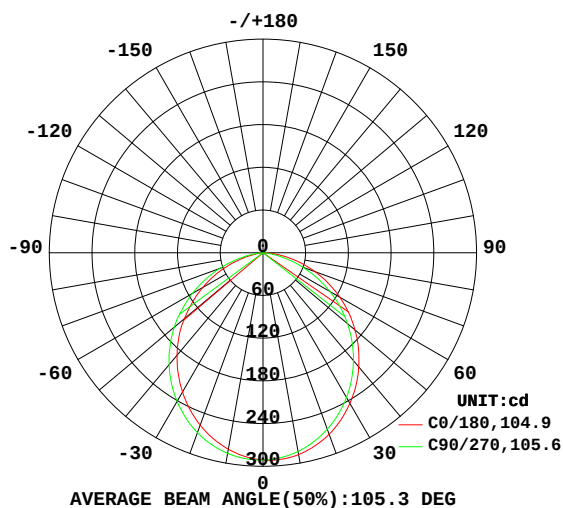

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

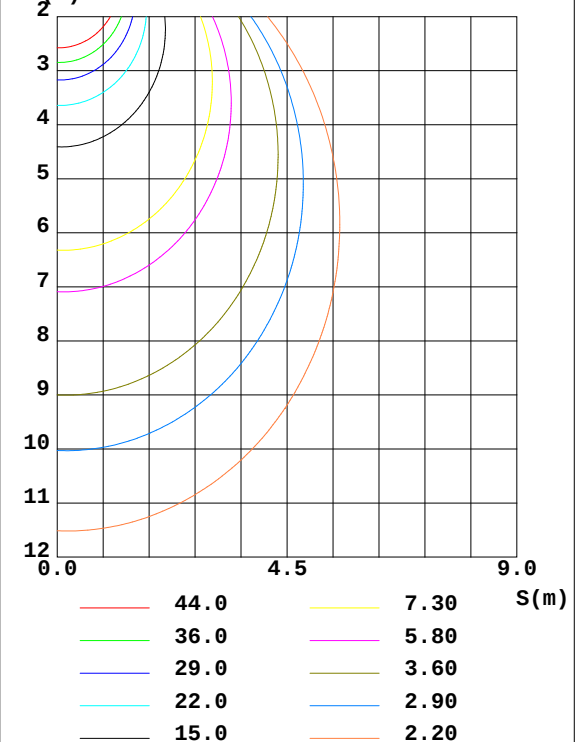

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:何俊伟
Test Date:2025-04-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	287.8	286.1	283.4	282.2	280.3	282.7	286.1	286.4	0- 10	27.47	27.47	3.63, 3.63
20	271.4	268.2	263.8	261.4	257.8	262.2	268.9	269.0	10- 20	77.88	105.3	13.9, 13.9
30	244.1	240.2	234.6	231.1	226.0	232.0	241.3	241.2	20- 30	116.0	221.4	29.2, 29.2
40	209.3	204.3	197.7	193.7	187.9	194.4	205.2	205.3	30- 40	136.8	358.2	47.3, 47.3
50	168.7	162.6	155.0	151.2	144.2	151.4	162.7	163.7	40- 50	138.2	496.4	65.5, 65.5
60	124.3	115.6	108.3	103.5	97.75	104.6	114.5	117.7	50- 60	120.0	616.4	81.4, 81.4
70	77.80	67.89	59.47	56.83	50.81	58.31	65.25	70.16	60- 70	86.05	702.4	92.7, 92.7
80	32.13	24.85	14.81	15.92	9.912	17.27	19.12	27.32	70- 80	43.17	745.6	98.4, 98.4
90	0.6485	0.3558	0.2254	0.3540	0.0581	0.1042	0.0218	0.2247	80- 90	7.516	753.1	99.4, 99.4
100	0.3963	0.4797	0.4505	0.5407	0.0799	0.1066	0.0365	0.1091	90-100	0.2458	753.3	99.4, 99.4
110	0.6186	0.6904	0.7050	0.7298	0.2710	0.1598	0.1042	0.1478	100-110	0.3675	753.7	99.5, 99.5
120	1.010	0.8963	0.9304	0.9165	0.5127	0.2638	0.1794	0.2665	110-120	0.5182	754.2	99.6, 99.6
130	1.390	1.114	1.119	1.127	0.7473	0.3898	0.2498	0.4482	120-130	0.6417	754.9	99.6, 99.6
140	1.731	1.347	1.270	1.338	0.8365	0.5544	0.3588	0.6664	130-140	0.7115	755.6	99.7, 99.7
150	1.842	1.555	1.343	1.527	1.169	1.082	0.7326	1.076	140-150	0.7105	756.3	99.8, 99.8
160	1.865	1.519	1.422	1.578	1.659	1.593	1.149	1.188	150-160	0.6530	756.9	99.9, 99.9
170	1.951	1.579	1.457	1.893	1.989	1.708	1.306	1.260	160-170	0.4430	757.4	100, 100
180	1.468	1.456	1.391	1.353	1.475	1.451	1.401	1.353	170-180	0.1438	757.5	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 何俊伟
 Test Date: 2025-04-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.0V I:0.1770A P:12.40W PF:0.5870 Freq:60.00Hz Lamp Flux:757.529x1 lm		
NAME: 线条灯	TYPE:12W 3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.3*0.07	Shielding Angle:

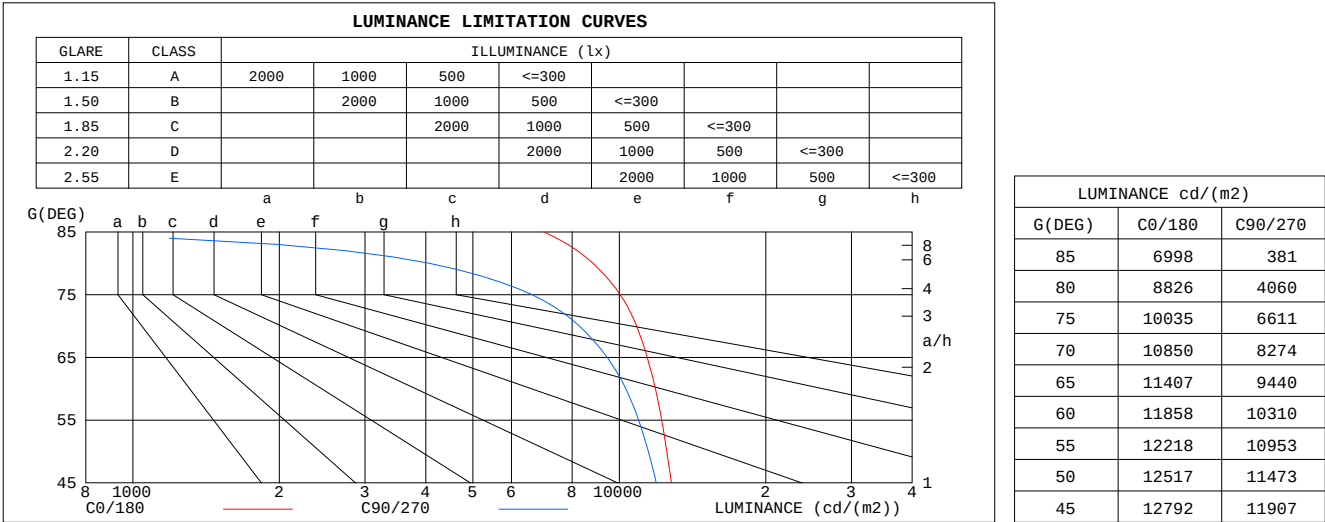


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:何俊伟
Test Date:2025-04-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.0V I:0.1770A P:12.40W PF:0.5870 Freq:60.00Hz Lamp Flux:757.529x1 lm		
NAME: 线条灯	TYPE:12W 3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.3*0.07	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.99
1.0	1.05	1.01	.97	1.02	.99	.95	.98	.95	.92	.94	.92	.89	.90	.88	.87	.85
2.0	.92	.85	.80	.90	.84	.79	.86	.81	.77	.83	.79	.75	.80	.76	.73	.71
3.0	.81	.73	.67	.79	.72	.66	.76	.70	.65	.73	.68	.64	.71	.66	.62	.60
4.0	.72	.63	.57	.70	.62	.56	.68	.61	.55	.66	.60	.55	.63	.58	.54	.52
5.0	.64	.56	.49	.63	.55	.49	.61	.54	.48	.59	.53	.48	.57	.51	.47	.45
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.53	.47	.42	.52	.46	.41	.39
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.38	.49	.42	.37	.47	.41	.37	.35
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.34	.45	.38	.33	.44	.38	.33	.31
9.0	.44	.36	.31	.44	.36	.31	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.28	.39	.32	.28	.38	.32	.27	.37	.31	.27	.26

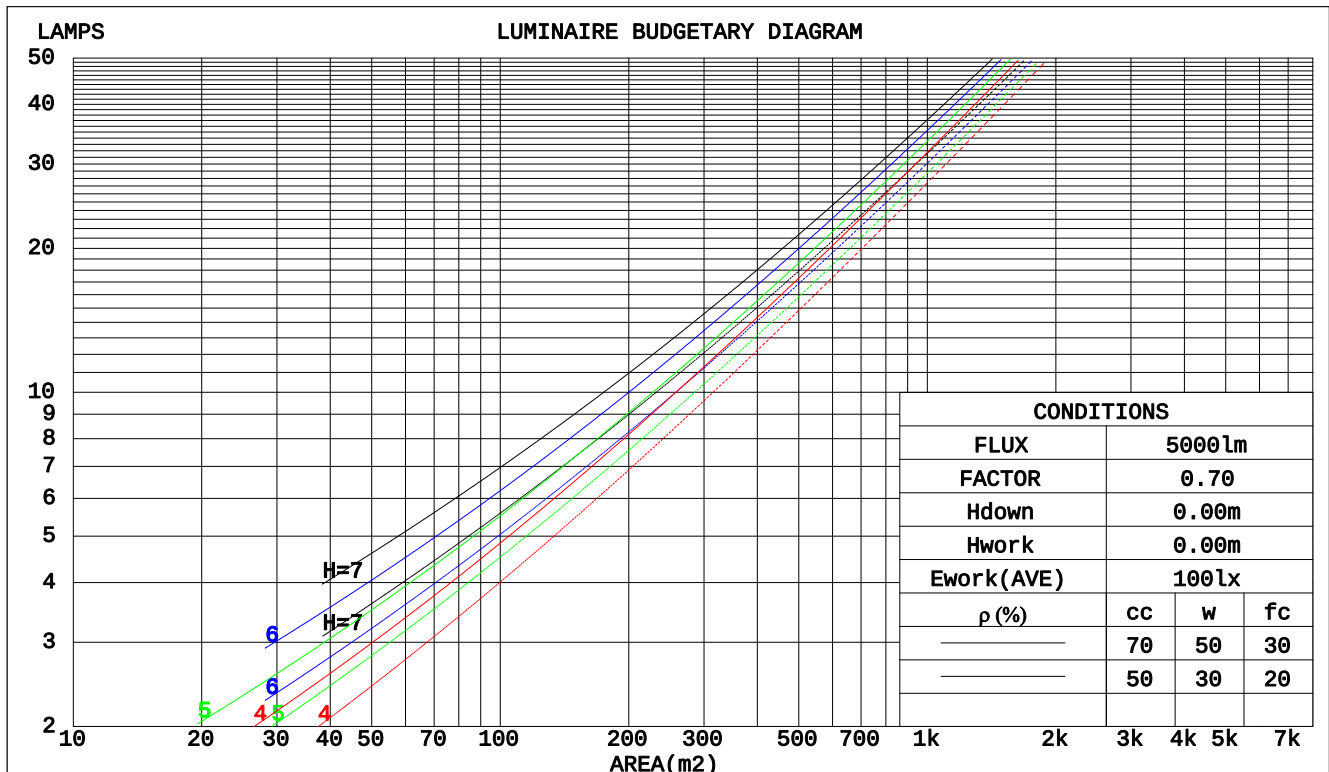

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 何俊伟
Test Date: 2025-04-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.0V I:0.1770A P:12.40W PF:0.5870 Freq:60.00Hz Lamp Flux:757.529x1 lm								
NAME: 线条灯				TYPE:12W 3000K			WEIGHT:	
SPEC.:				DIM.:			SERIAL No.:	
MFR.: WS				SUR.:0.3*0.07			Shielding Angle:	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.290	.165	.052	.283	.162	.051	.270	.155	.049	.257	.148	.048	.246	.143	.046	
2.0	.278	.152	.047	.271	.150	.046	.260	.144	.045	.249	.139	.044	.238	.135	.043	
3.0	.259	.138	.041	.254	.136	.041	.243	.132	.040	.234	.128	.039	.225	.124	.038	
4.0	.241	.125	.037	.236	.124	.037	.227	.120	.036	.218	.117	.035	.210	.114	.035	
5.0	.224	.114	.033	.219	.113	.033	.211	.110	.032	.203	.107	.032	.196	.105	.031	
6.0	.208	.104	.030	.204	.103	.030	.197	.101	.029	.190	.099	.029	.184	.097	.029	
7.0	.194	.096	.027	.191	.095	.027	.184	.093	.027	.178	.091	.027	.172	.089	.026	
8.0	.182	.089	.025	.179	.088	.025	.173	.086	.025	.167	.085	.024	.162	.083	.024	
9.0	.171	.083	.023	.168	.082	.023	.163	.080	.023	.158	.079	.023	.153	.078	.022	
10.0	.161	.077	.021	.158	.076	.021	.154	.075	.021	.149	.074	.021	.145	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.195	.195	.195	.167	.167	.167	.114	.114	.114	.065	.065	.065	.021	.021	.021	
1.0	.183	.161	.140	.157	.138	.121	.107	.095	.084	.062	.055	.049	.020	.018	.016	
2.0	.175	.137	.104	.150	.118	.090	.103	.081	.063	.059	.047	.037	.019	.015	.012	
3.0	.167	.119	.080	.143	.102	.070	.098	.071	.049	.057	.042	.029	.018	.013	.009	
4.0	.159	.105	.064	.137	.091	.056	.094	.063	.039	.054	.037	.023	.018	.012	.008	
5.0	.152	.095	.053	.131	.082	.046	.090	.057	.032	.052	.034	.019	.017	.011	.006	
6.0	.145	.087	.045	.125	.075	.039	.086	.052	.027	.050	.031	.016	.016	.010	.005	
7.0	.138	.080	.038	.119	.069	.033	.082	.048	.024	.048	.028	.014	.015	.009	.005	
8.0	.132	.074	.034	.114	.064	.029	.079	.045	.021	.046	.027	.012	.015	.009	.004	
9.0	.126	.069	.030	.109	.060	.026	.075	.042	.019	.044	.025	.011	.014	.008	.004	
10.0	.121	.065	.027	.104	.056	.024	.072	.039	.017	.042	.023	.010	.014	.008	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:何俊伟
 Test Date:2025-04-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.0V I:0.1770A P:12.40W PF:0.5870 Freq:60.00Hz Lamp Flux:757.529x1 lm										
NAME: 线条灯					TYPE:12W 3000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: WS					SUR.:0.3*0.07			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.7	23.1	21.9	23.3	23.6	21.2	22.7	21.5	22.9	23.1
3H	23.2	24.5	23.5	24.8	25.0	22.4	23.8	22.7	24.0	24.2
4H	23.8	25.1	24.1	25.3	25.6	22.8	24.1	23.1	24.3	24.6
6H	24.2	25.4	24.5	25.7	26.0	22.9	24.1	23.3	24.4	24.7
8H	24.3	25.5	24.7	25.8	26.1	22.9	24.1	23.3	24.4	24.7
12H	24.4	25.5	24.7	25.8	26.1	22.9	24.0	23.2	24.3	24.6
4H 2H	22.2	23.5	22.5	23.7	24.0	21.8	23.1	22.1	23.3	23.6
3H	23.8	25.0	24.2	25.3	25.6	23.2	24.3	23.6	24.6	24.9
4H	24.6	25.6	24.9	25.9	26.3	23.7	24.7	24.1	25.0	25.4
6H	25.1	26.0	25.5	26.4	26.7	23.9	24.8	24.3	25.2	25.6
8H	25.3	26.1	25.7	26.5	26.9	23.9	24.8	24.3	25.1	25.5
12H	25.4	26.1	25.8	26.5	27.0	23.9	24.7	24.3	25.1	25.5
8H 4H	24.7	25.6	25.1	25.9	26.3	23.9	24.8	24.4	25.2	25.5
6H	25.4	26.1	25.8	26.5	26.9	24.3	25.0	24.7	25.4	25.8
8H	25.6	26.2	26.1	26.7	27.1	24.3	24.9	24.8	25.4	25.8
12H	25.8	26.3	26.3	26.8	27.3	24.3	24.8	24.8	25.3	25.8
12H 4H	24.7	25.5	25.1	25.9	26.3	23.9	24.7	24.4	25.1	25.5
6H	25.4	26.0	25.9	26.4	26.9	24.3	24.9	24.8	25.4	25.8
8H	25.7	26.2	26.1	26.6	27.1	24.4	24.9	24.9	25.4	25.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.3 / - 0.4				

CIE Pub.117 Corrected 757.5 lm Total Lamp Luminous Flux.(8log(F/F0) = -1.0)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:何俊伟
 Test Date:2025-04-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.0V I:0.1770A P:12.40W PF:0.5870 Freq:60.00Hz Lamp Flux:757.529x1 lm		
NAME: 线条灯	TYPE:12W 3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.3*0.07	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	48	41	58	47	41	57	47	41	34
0.80	69	58	51	68	57	50	66	57	50	43
1.00	78	67	60	76	66	59	74	67	59	52
1.25	85	74	68	83	74	67	80	72	66	59
1.50	89	80	73	88	79	73	85	77	72	64
2.00	96	88	82	94	87	81	91	85	80	72
2.50	100	93	87	98	91	86	94	88	84	76
3.00	103	97	91	101	95	90	97	92	88	80
4.00	107	102	97	105	100	96	100	96	93	84
5.00	109	105	101	107	103	99	102	99	96	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:何俊伟
 Test Date:2025-04-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.0V I:0.1770A P:12.40W PF:0.5870 Freq:60.00Hz Lamp Flux:757.529x1 lm		
NAME: 线条灯	TYPE:12W 3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.3*0.07	Shielding Angle:

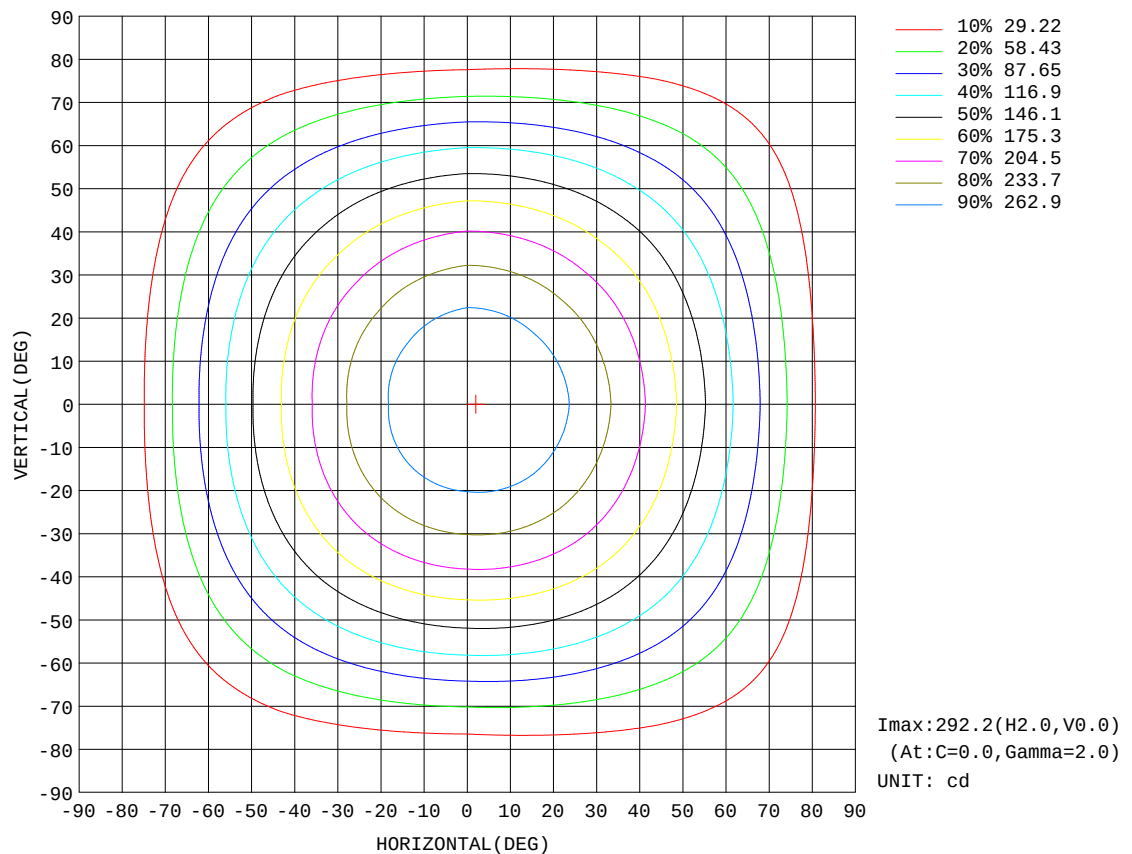


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:何俊伟
Test Date:2025-04-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:119.0V I:0.1770A P:12.40W PF:0.5870 Freq:60.00Hz Lamp Flux:757.529x1 lm		
NAME: 线条灯	TYPE:12W 3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.3*0.07	Shielding Angle:

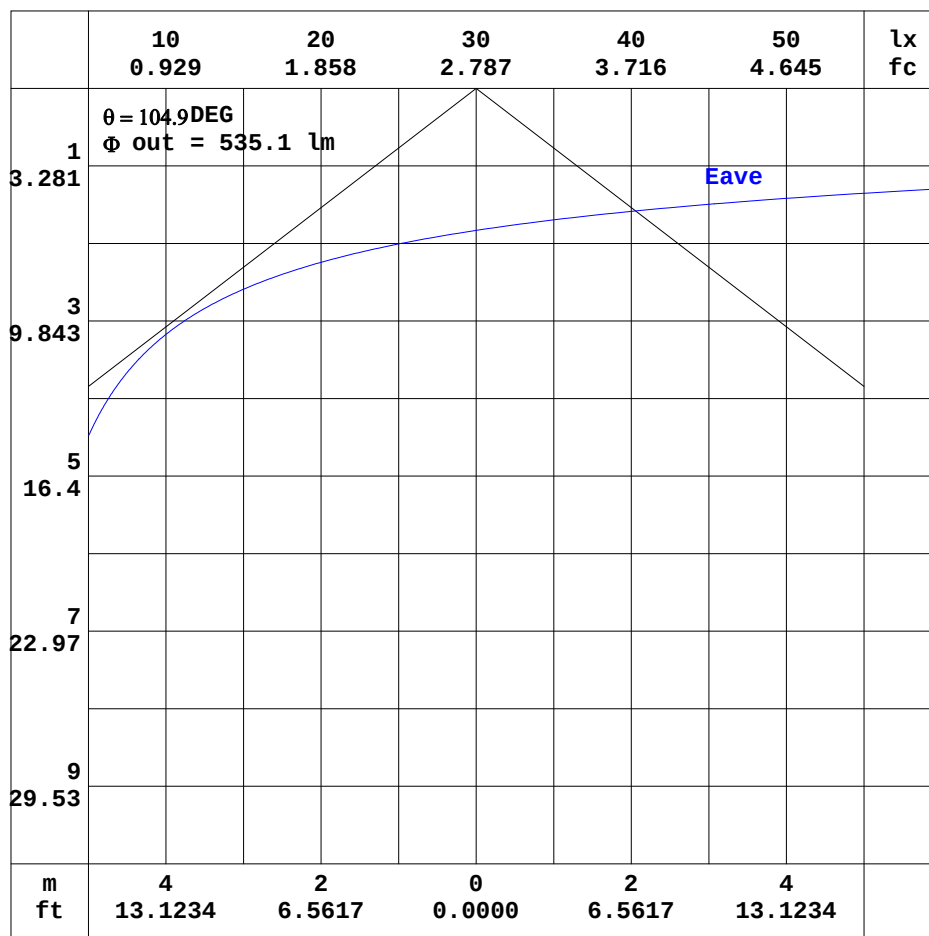


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 何俊伟
Test Date: 2025-04-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.0V I:0.1770A P:12.40W PF:0.5870 Freq:60.00Hz Lamp Flux:757.529x1 lm		
NAME: 线条灯	TYPE:12W 3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.3*0.07	Shielding Angle:

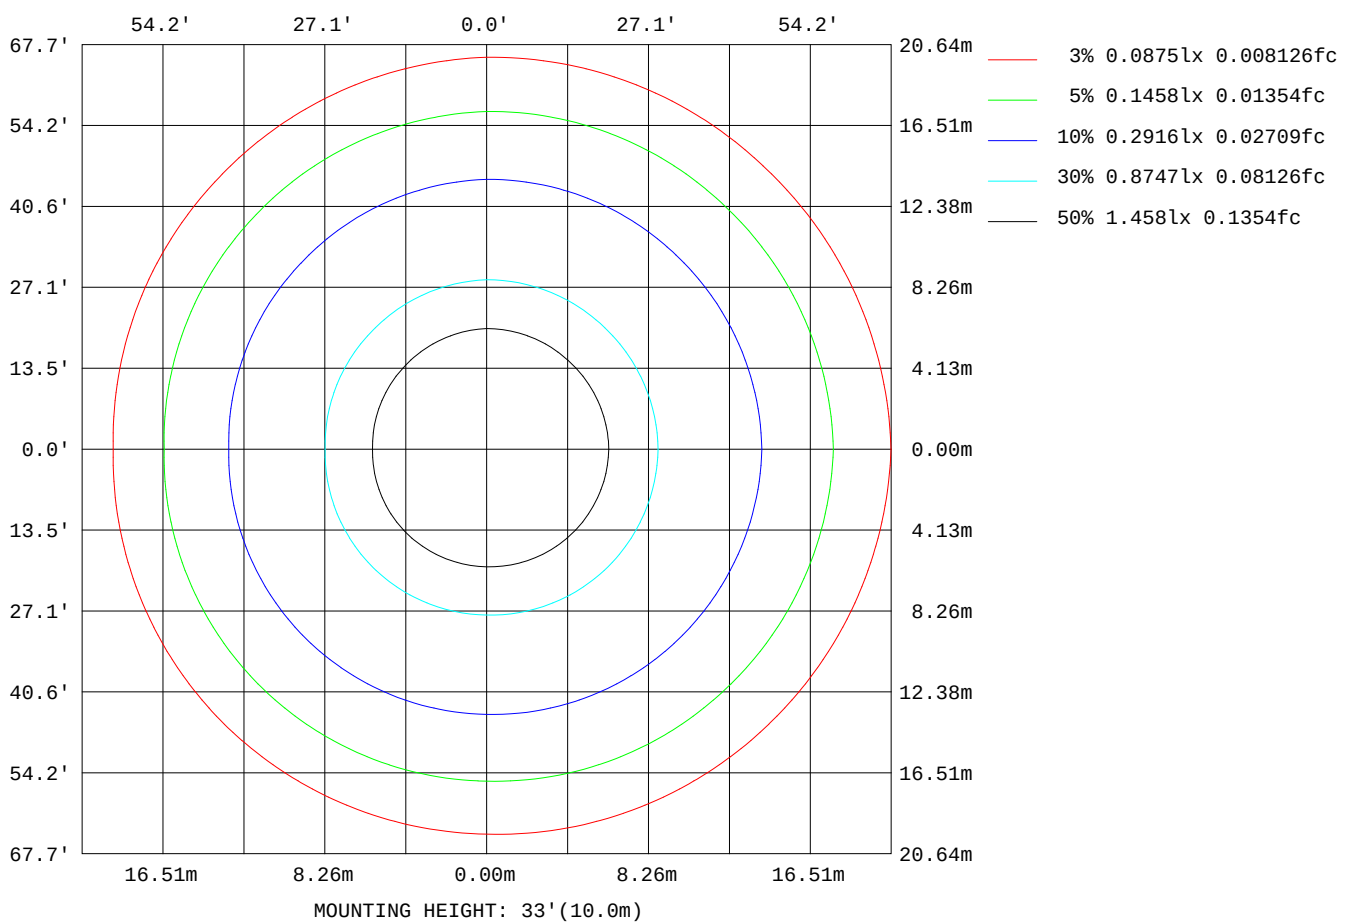

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:何俊伟
Test Date:2025-04-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.0V I:0.1770A P:12.40W PF:0.5870 Freq:60.00Hz Lamp Flux:757.529x1 lm		
NAME: 线条灯	TYPE:12W 3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.3*0.07	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	9874
L_0~180(75)av	7646
L_0~180(85)av	3541
L_90~270(65)av	9792
L_90~270(75)av	7091
L_90~270(85)av	935
L_45(65)av	9772
L_45(75)av	7579
L_45(85)av	3209

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:何俊伟
Test Date:2025-04-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

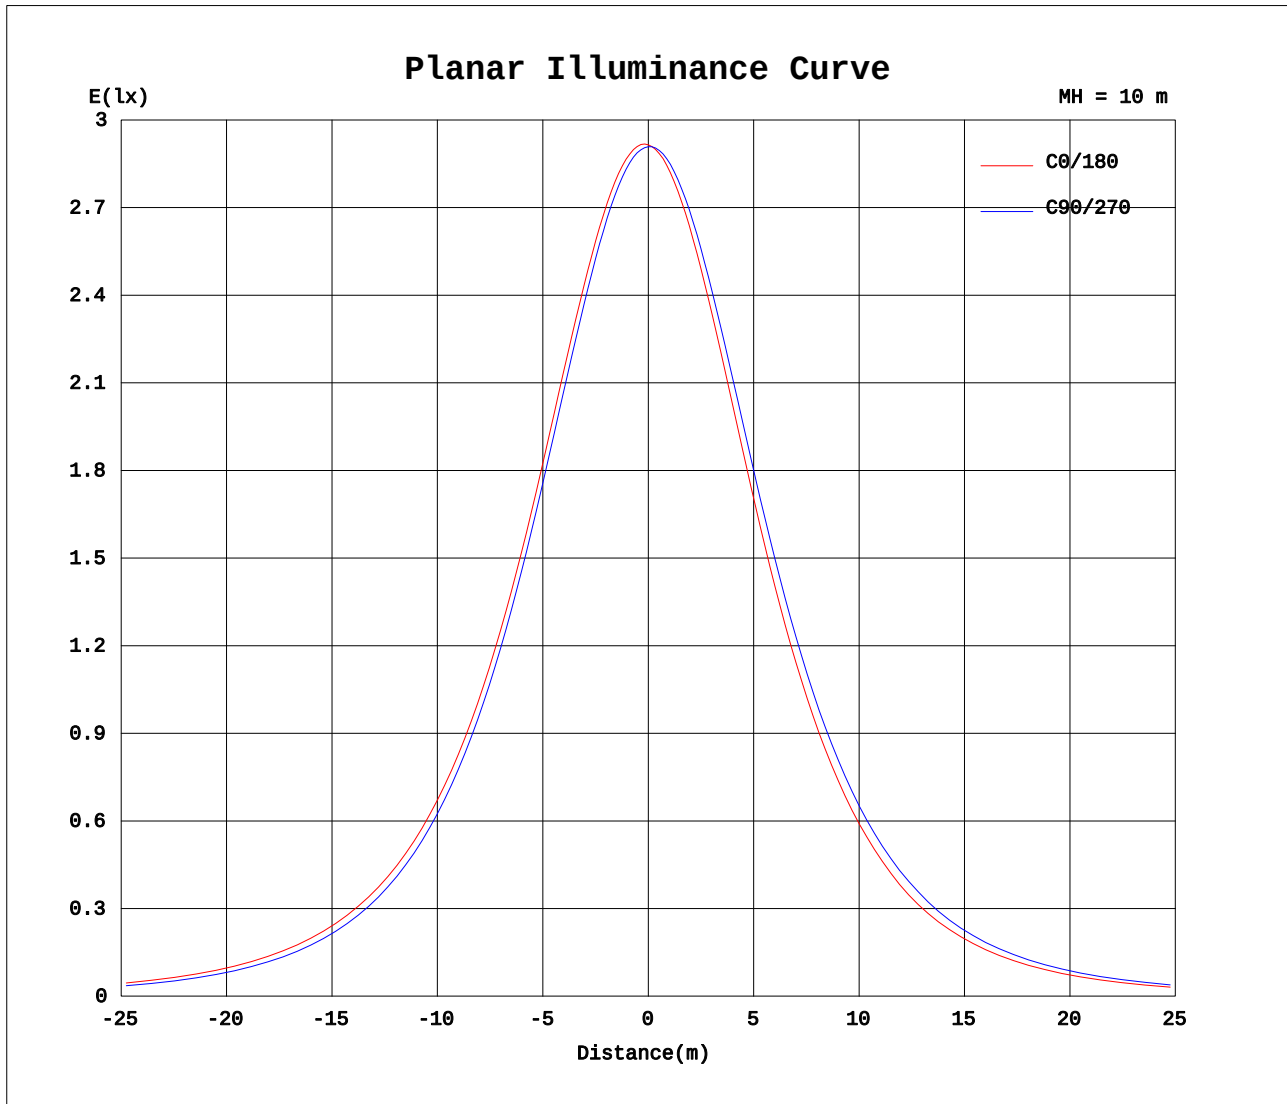

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 何俊伟
Test Date: 2025-04-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.0V I:0.1770A P:12.40W PF:0.5870 Freq:60.00Hz Lamp Flux:757.529x1 lm		
NAME: 线条灯	TYPE:12W 3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WS	SUR.:0.3*0.07	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	291	291	291	291	291	291	291	291										
5	291	290	289	288	287	289	290	290										
10	288	286	283	282	280	283	286	286										
15	281	279	275	273	270	274	279	279										
20	271	268	264	261	258	262	269	269										
25	259	255	250	247	243	248	256	256										
30	244	240	235	231	226	232	241	241										
35	228	223	217	213	208	214	224	224										
40	209	204	198	194	188	194	205	205										
45	190	184	177	173	167	173	185	185										
50	169	163	155	151	144	151	163	164										
55	147	139	132	127	121	128	138	141										
60	124	116	108	104	97.7	105	114	118										
65	101	91.9	83.8	80.0	74.2	81.2	90.0	93.8										
70	77.8	67.9	59.5	56.8	50.8	58.3	65.2	70.2										
75	54.4	45.2	36.0	35.2	28.7	36.7	41.1	47.7										
80	32.1	24.9	14.8	15.9	9.91	17.3	19.1	27.3										
85	12.8	8.29	0.70	2.43	0.18	2.89	2.72	9.89										
90	0.65	0.36	0.23	0.35	0.06	0.10	0.02	0.22										
95	0.29	0.39	0.33	0.43	0.07	0.10	0.02	0.10										
100	0.40	0.48	0.45	0.54	0.08	0.11	0.04	0.11										
105	0.51	0.59	0.58	0.64	0.14	0.12	0.07	0.13										
110	0.62	0.69	0.70	0.73	0.27	0.16	0.10	0.15										
115	0.83	0.79	0.82	0.83	0.38	0.22	0.14	0.19										
120	1.01	0.90	0.93	0.92	0.51	0.26	0.18	0.27										
125	1.19	1.00	1.04	1.02	0.64	0.28	0.22	0.36										
130	1.39	1.11	1.12	1.13	0.75	0.39	0.25	0.45										
135	1.59	1.24	1.20	1.25	0.84	0.46	0.30	0.53										
140	1.73	1.35	1.27	1.34	0.84	0.55	0.36	0.67										
145	1.83	1.46	1.32	1.46	0.88	0.80	0.45	0.77										
150	1.84	1.56	1.34	1.53	1.17	1.08	0.73	1.08										
155	1.88	1.60	1.39	1.53	1.53	1.37	1.01	1.15										
160	1.86	1.52	1.42	1.58	1.66	1.59	1.15	1.19										
165	1.90	1.55	1.44	1.70	1.78	1.78	1.23	1.18										
170	1.95	1.58	1.46	1.89	1.99	1.71	1.31	1.26										
175	1.54	1.50	1.44	1.47	1.45	1.41	1.36	1.31										
180	1.47	1.46	1.39	1.35	1.47	1.45	1.40	1.35										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:何俊伟
 Test Date:2025-04-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: