


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.8V I:0.1560A P:18.90W PF:0.9980 Freq:50.00Hz Lamp Flux:2761.22x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 146.10 lm/W			
MODEL	DLC6.0	I _{max} (cd)	800.5	S/MH(C0/180)	1.30
NOMINAL POWER(W)	20W	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	2761.2	η UP,DN(C0-180)	4.5,46.2
NOMINAL FLUX(lm)	2761.22	CIE CLASS	DIRECT	η UP,DN(C180-360)	4.2,45.2
LAMPS INSIDE	1	η up(%)	8.6	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	120	η down(%)	91.4	CIBSE SHR MAX	1.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

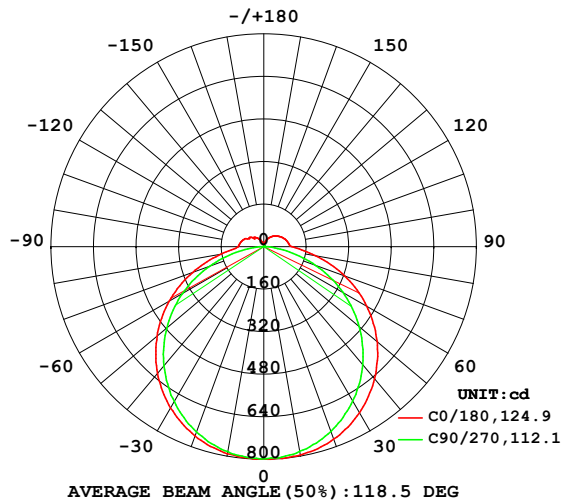

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

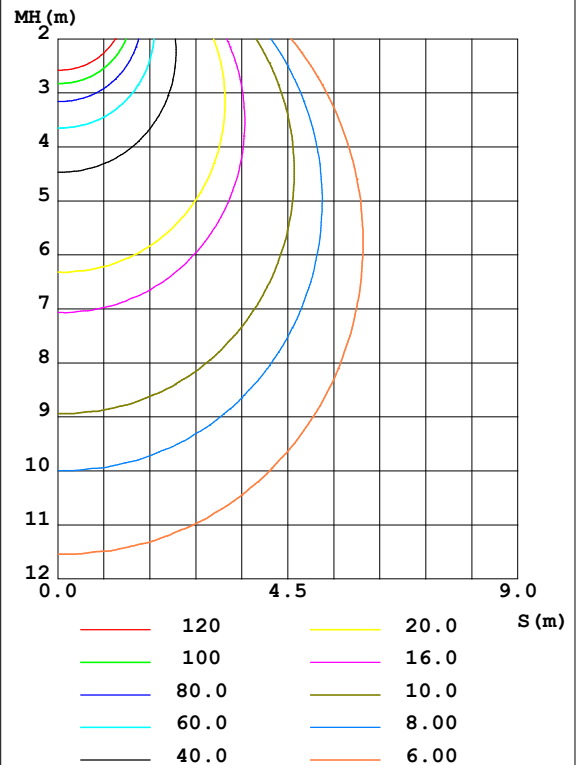

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	795.4	788.9	781.7	791.2	790.5	787.5	782.3	791.0	0- 10	75.79	75.79	2.74,2.74
20	770.1	759.3	739.2	754.9	756.8	752.4	741.3	756.9	10- 20	218.7	294.5	10.7,10.7
30	721.3	703.5	669.5	696.5	701.7	692.0	672.4	699.4	20- 30	335.3	629.8	22.8,22.8
40	647.6	627.1	579.1	613.8	621.4	610.3	584.7	618.5	30- 40	410.7	1040	37.7,37.7
50	557.7	528.7	468.8	515.2	524.1	509.7	475.4	519.9	40- 50	435.6	1476	53.5,53.5
60	447.3	415.1	343.7	397.5	411.7	393.6	354.1	402.9	50- 60	407.3	1883	68.2,68.2
70	324.7	288.4	208.3	269.2	285.3	264.1	218.8	275.7	60- 70	328.5	2212	80.1,80.1
80	197.4	159.6	74.94	140.5	162.9	138.6	83.72	147.0	70- 80	212.2	2424	87.8,87.8
90	106.5	71.14	0.3455	63.86	96.76	67.25	1.153	64.45	80- 90	98.77	2523	91.4,91.4
100	93.15	60.53	0.5435	58.67	89.43	61.58	1.034	58.06	90-100	60.41	2583	93.6,93.6
110	85.03	56.96	0.6641	50.87	80.39	53.02	0.7726	52.31	100-110	53.53	2637	95.5,95.5
120	74.78	49.43	0.7270	44.21	62.14	44.96	0.7632	45.17	110-120	43.34	2680	97.1,97.1
130	62.97	41.11	0.8334	38.14	47.16	37.74	0.7224	36.35	120-130	33.48	2714	98.3,98.3
140	51.10	31.07	0.9736	30.67	44.95	30.14	0.8215	24.98	130-140	23.64	2737	99.1,99.1
150	37.83	20.50	1.142	22.67	32.45	21.16	1.124	14.80	140-150	14.48	2752	99.7,99.7
160	23.07	10.58	1.280	12.99	18.67	11.37	1.297	7.413	150-160	6.998	2759	99.9,99.9
170	8.704	4.714	1.350	5.104	5.964	3.812	1.362	2.768	160-170	2.170	2761	100,100
180	1.317	1.405	1.350	1.357	1.317	1.425	1.379	1.357	170-180	0.2595	2761	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.8V I:0.1560A P:18.90W PF:0.9980 Freq:50.00Hz Lamp Flux:2761.22x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

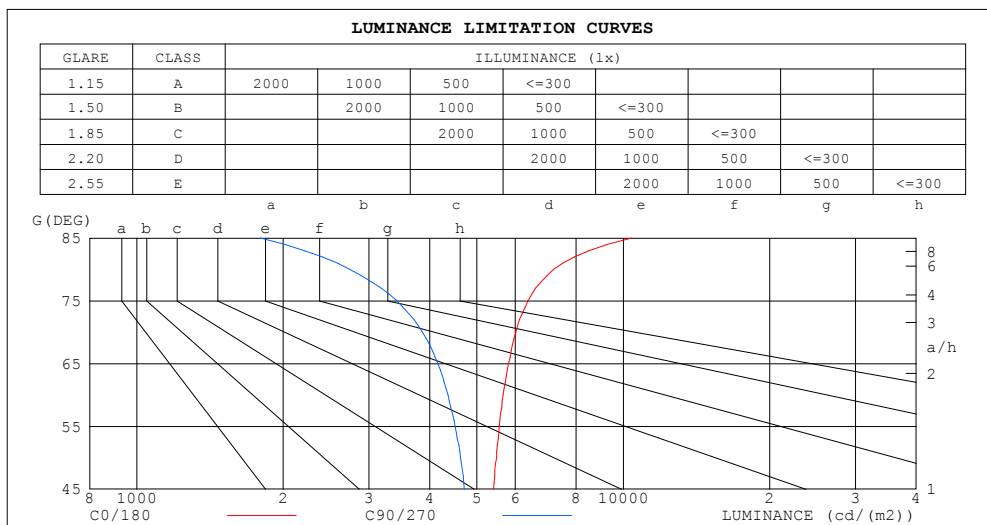

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	10413	1795
80	7197	2738
75	6370	3421
70	6011	3865
65	5811	4159
60	5664	4362
55	5558	4510
50	5494	4627
45	5413	4716


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.8V I:0.1560A P:18.90W PF:0.9980 Freq:50.00Hz Lamp Flux:2761.22x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.17	1.17	1.17	1.13	1.13	1.13	1.06	1.06	1.06	.00	.00	.00	.94	.94	.94	.91
1.0	1.01	.96	.92	.97	.93	.89	.92	.88	.85	.86	.83	.81	.81	.79	.77	.74
2.0	.87	.80	.74	.84	.78	.72	.79	.74	.69	.75	.70	.66	.71	.67	.64	.61
3.0	.76	.68	.61	.74	.66	.60	.70	.63	.58	.66	.60	.55	.62	.57	.53	.51
4.0	.67	.58	.51	.65	.57	.50	.61	.54	.49	.58	.52	.47	.55	.50	.46	.43
5.0	.60	.51	.44	.58	.49	.43	.55	.48	.42	.52	.46	.41	.49	.44	.39	.37
6.0	.54	.44	.38	.52	.44	.37	.49	.42	.36	.47	.40	.35	.45	.39	.34	.32
7.0	.48	.40	.33	.47	.39	.33	.45	.37	.32	.43	.36	.31	.41	.35	.30	.28
8.0	.44	.36	.30	.43	.35	.29	.41	.34	.29	.39	.33	.28	.37	.32	.27	.25
9.0	.40	.32	.27	.39	.32	.26	.38	.31	.26	.36	.30	.25	.34	.29	.24	.23
10.0	.37	.29	.24	.36	.29	.24	.35	.28	.23	.33	.27	.23	.32	.26	.22	.20

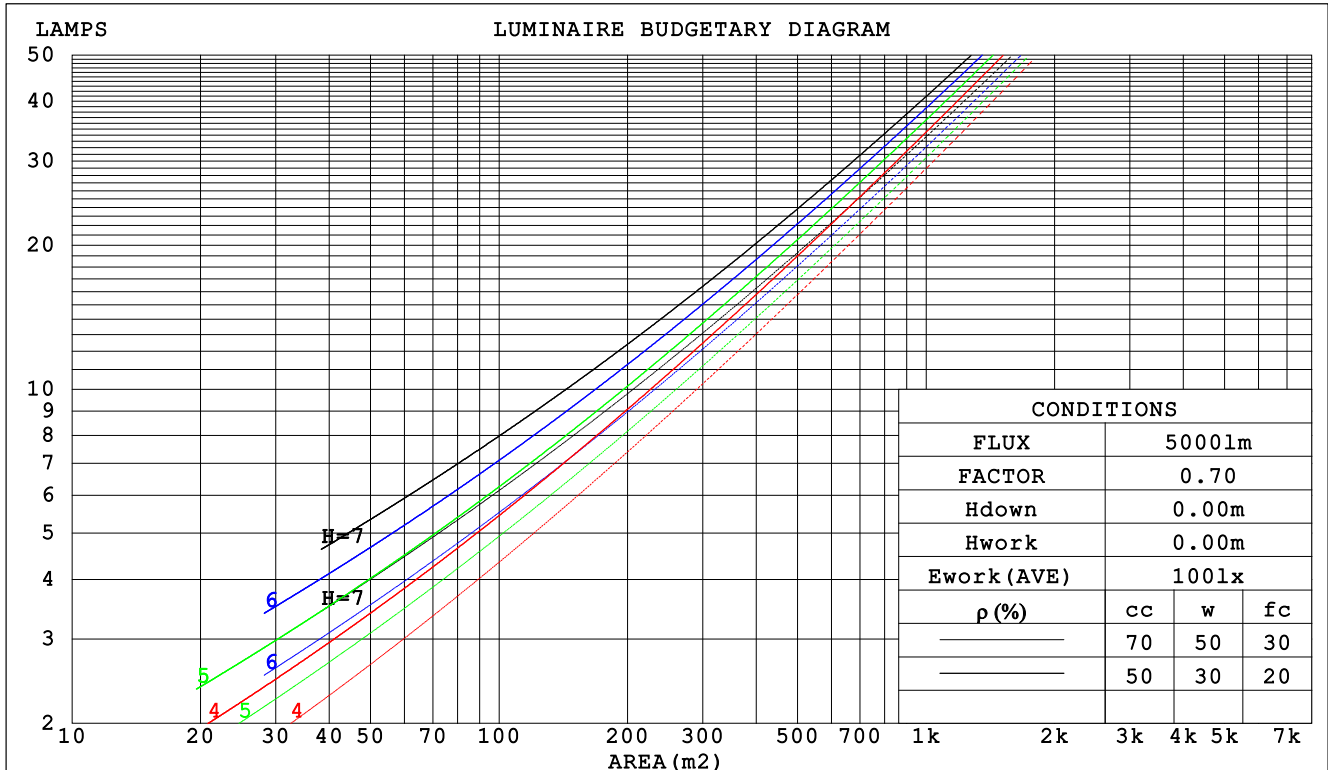

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.8V I:0.1560A P:18.90W PF:0.9980 Freq:50.00Hz Lamp Flux:2761.22x1 lm					
NAME: 24代			TYPE:4000K		WEIGHT:
SPEC.:			DIM.: 4FT		SERIAL No.:
MFR.: WS			SUR.:0.0505*3.14715		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.334	.190	.060	.324	.185	.059	.305	.175	.056	.289	.167	.053	.273	.158	.051		
2.0	.305	.167	.051	.296	.163	.050	.280	.156	.048	.265	.148	.046	.251	.142	.045		
3.0	.278	.148	.044	.270	.145	.044	.256	.139	.042	.242	.133	.041	.229	.127	.039		
4.0	.254	.132	.039	.248	.130	.038	.234	.124	.037	.222	.119	.036	.211	.114	.035		
5.0	.234	.119	.035	.228	.117	.034	.216	.112	.033	.205	.108	.032	.194	.104	.031		
6.0	.216	.108	.031	.210	.106	.031	.200	.102	.030	.190	.099	.029	.180	.095	.028		
7.0	.200	.099	.028	.195	.097	.028	.186	.094	.027	.176	.090	.026	.168	.087	.026		
8.0	.187	.091	.026	.182	.090	.025	.173	.087	.025	.165	.084	.024	.157	.081	.023		
9.0	.175	.085	.024	.170	.083	.023	.162	.080	.023	.155	.078	.022	.147	.075	.022		
10.0	.164	.079	.022	.160	.077	.022	.153	.075	.021	.146	.072	.021	.139	.070	.020		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.256	.256	.256	.219	.219	.219	.149	.149	.149	.086	.086	.086	.027	.027	.027	
1.0	.248	.222	.199	.212	.191	.171	.145	.131	.118	.084	.076	.069	.027	.024	.022	
2.0	.241	.199	.163	.206	.171	.141	.141	.118	.098	.081	.069	.058	.026	.022	.019	
3.0	.233	.181	.140	.200	.157	.122	.137	.109	.085	.079	.064	.050	.025	.021	.016	
4.0	.226	.169	.125	.194	.146	.109	.133	.101	.076	.077	.059	.045	.025	.019	.015	
5.0	.218	.158	.114	.187	.137	.099	.129	.096	.070	.075	.056	.042	.024	.018	.014	
6.0	.211	.150	.107	.181	.130	.093	.125	.091	.066	.073	.054	.039	.023	.018	.013	
7.0	.204	.143	.101	.176	.124	.088	.121	.087	.062	.070	.051	.037	.023	.017	.012	
8.0	.198	.138	.097	.170	.119	.084	.118	.084	.060	.068	.049	.036	.022	.016	.012	
9.0	.191	.133	.093	.165	.115	.081	.114	.081	.058	.067	.048	.034	.022	.016	.011	
10.0	.186	.129	.091	.160	.112	.079	.111	.079	.056	.065	.046	.034	.021	.015	.011	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.8V I:0.1560A P:18.90W PF:0.9980 Freq:50.00Hz Lamp Flux:2761.22x1 lm										
NAME: 24代					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.: 4FT			SERIAL No.:		
MFR.: WS					SUR.:0.0505*3.14715			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.6	20.0	19.0	20.4	20.8	17.7	19.1	18.1	19.5	19.9
3H	20.6	21.9	21.0	22.3	22.7	19.2	20.5	19.6	20.9	21.3
4H	21.5	22.7	21.9	23.2	23.6	19.7	21.0	20.1	21.4	21.8
6H	22.4	23.6	22.8	24.0	24.4	20.0	21.2	20.5	21.6	22.1
8H	22.8	24.0	23.3	24.4	24.9	20.1	21.2	20.6	21.7	22.2
12H	23.3	24.4	23.8	24.8	25.3	20.1	21.2	20.6	21.7	22.1
4H 2H	19.2	20.4	19.6	20.8	21.3	18.5	19.8	18.9	20.2	20.6
3H	21.3	22.4	21.8	22.9	23.4	20.2	21.3	20.7	21.7	22.2
4H	22.4	23.4	22.9	23.9	24.4	20.9	21.9	21.4	22.4	22.9
6H	23.5	24.4	24.0	24.9	25.4	21.4	22.3	21.9	22.8	23.3
8H	24.0	24.8	24.5	25.3	25.9	21.5	22.3	22.0	22.8	23.4
12H	24.6	25.3	25.1	25.9	26.5	21.6	22.3	22.1	22.9	23.4
8H 4H	22.7	23.5	23.2	24.1	24.6	21.4	22.2	21.9	22.7	23.3
6H	24.0	24.7	24.5	25.2	25.8	22.1	22.8	22.7	23.3	24.0
8H	24.6	25.3	25.2	25.8	26.5	22.4	23.0	22.9	23.5	24.2
12H	25.4	25.9	26.0	26.5	27.2	22.5	23.1	23.1	23.6	24.3
12H 4H	22.7	23.5	23.3	24.0	24.6	21.5	22.2	22.0	22.8	23.4
6H	24.0	24.7	24.6	25.2	25.9	22.3	22.9	22.9	23.5	24.1
8H	24.8	25.3	25.4	25.9	26.6	22.6	23.2	23.2	23.8	24.4
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.5				

CIE Pub.117 Corrected 2761 lm Total Lamp Luminous Flux.(8log(F/F0) = 3.5)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.8V I:0.1560A P:18.90W PF:0.9980 Freq:50.00Hz Lamp Flux:2761.22x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	53	41	34	52	41	34	51	40	34	27
0.80	63	51	43	62	50	43	59	49	42	35
1.00	71	59	52	70	58	51	67	59	50	42
1.25	78	67	59	76	66	59	73	64	57	49
1.50	83	73	65	81	71	64	77	69	63	54
2.00	90	81	74	88	79	73	83	76	70	61
2.50	95	86	79	92	84	78	87	80	75	65
3.00	98	90	84	95	88	82	90	84	79	69
4.00	102	96	90	99	93	89	94	89	85	73
5.00	105	99	95	102	97	92	96	92	88	76
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.8V I:0.1560A P:18.90W PF:0.9980 Freq:50.00Hz Lamp Flux:2761.22x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

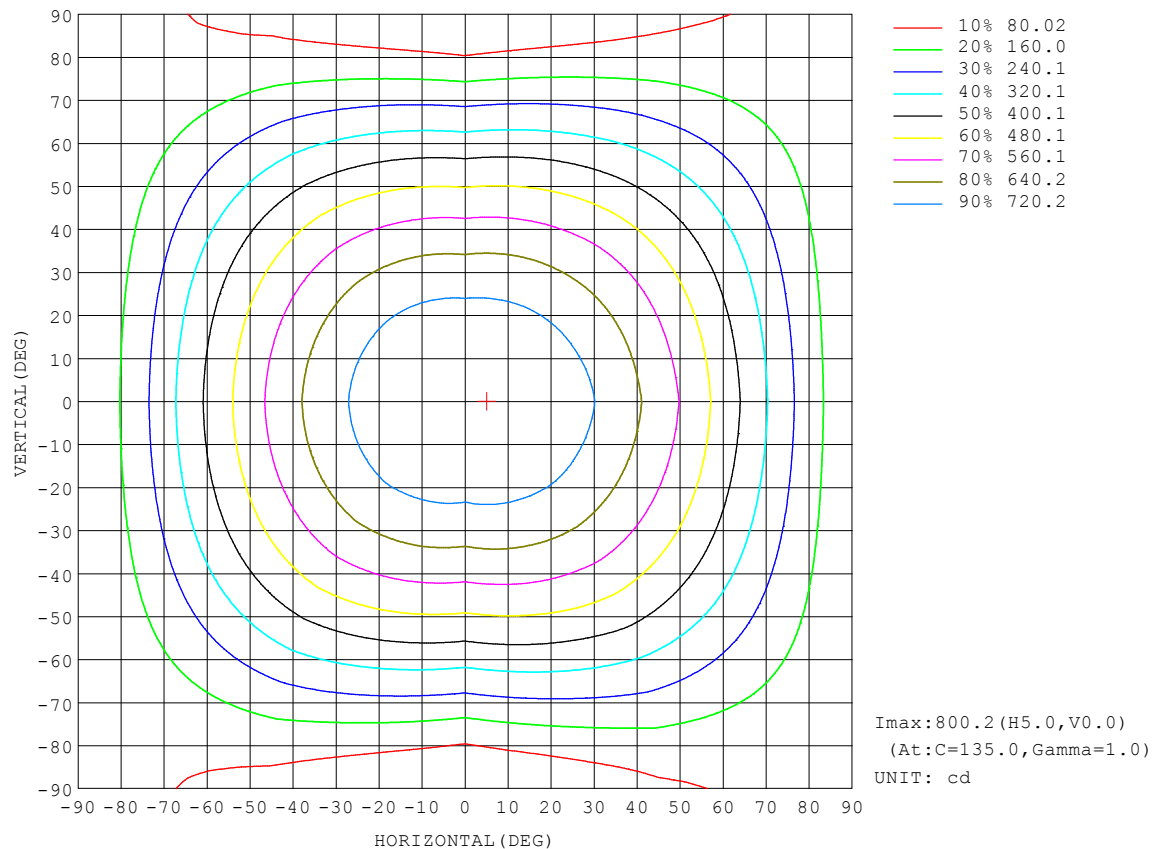


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.8V I:0.1560A P:18.90W PF:0.9980 Freq:50.00Hz Lamp Flux:2761.22x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

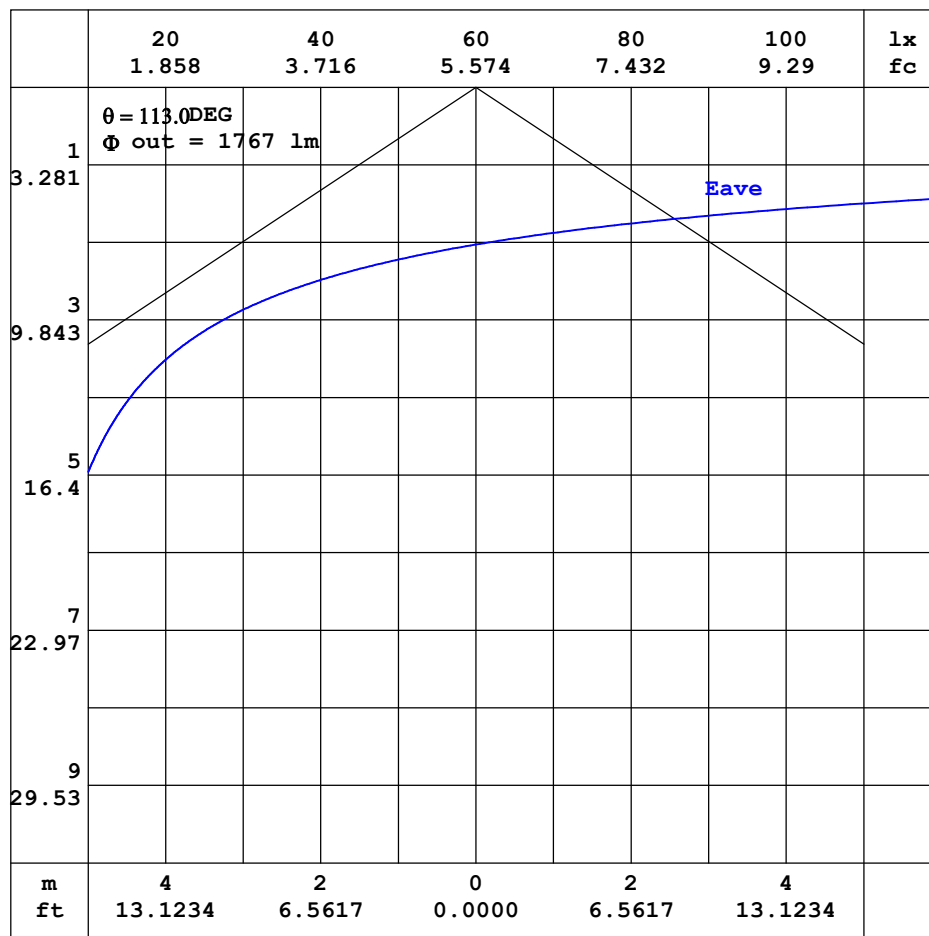


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.8V I:0.1560A P:18.90W PF:0.9980 Freq:50.00Hz Lamp Flux:2761.22x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

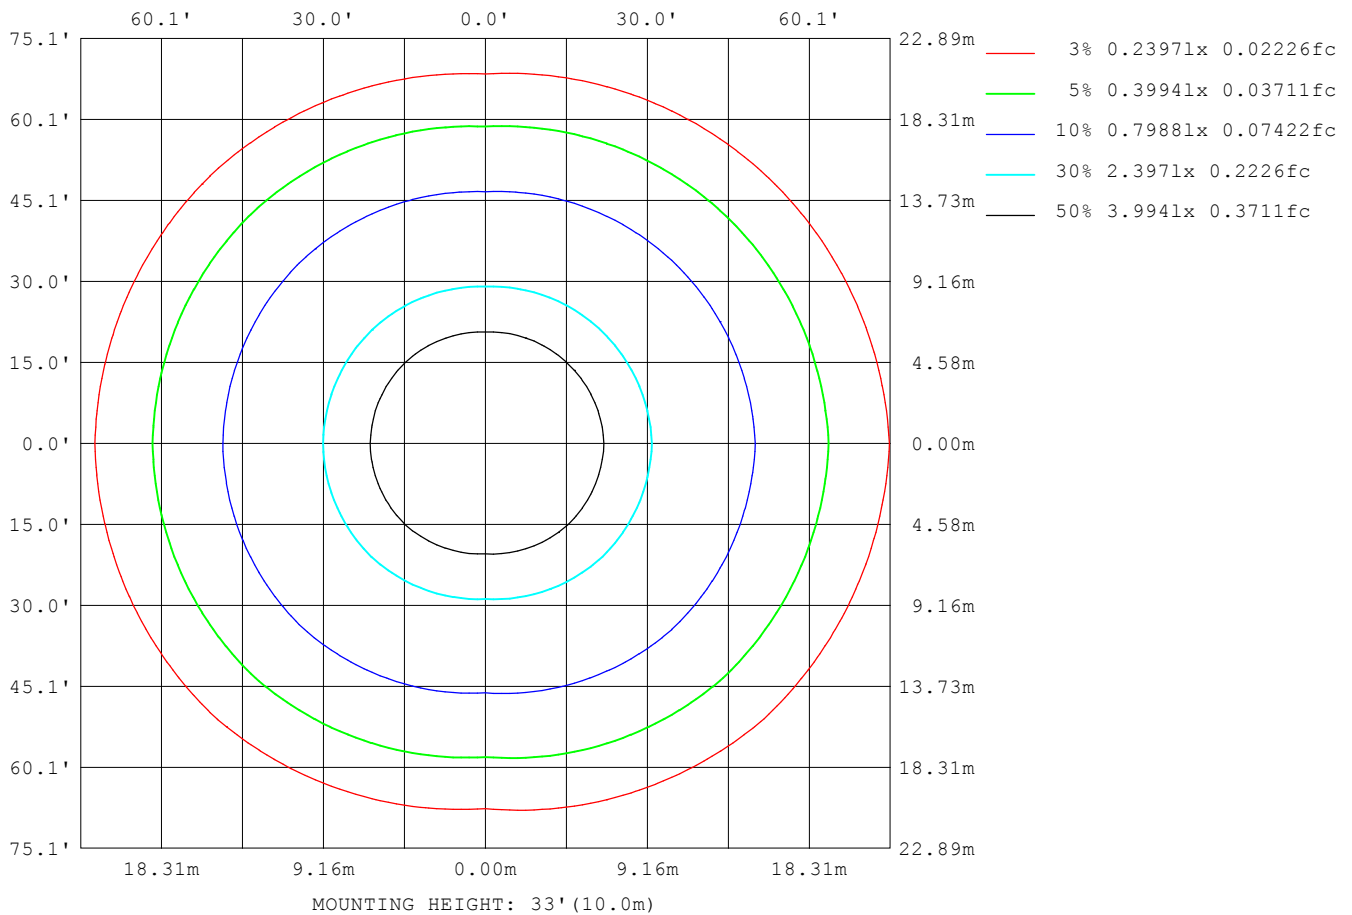

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.8V I:0.1560A P:18.90W PF:0.9980 Freq:50.00Hz Lamp Flux:2761.22x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	5516
L_0~180 (75) av	5889
L_0~180 (85) av	9396
L_90~270 (65) av	4228
L_90~270 (75) av	3529
L_90~270 (85) av	2016
L_45 (65) av	5084
L_45 (75) av	5103
L_45 (85) av	6899

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

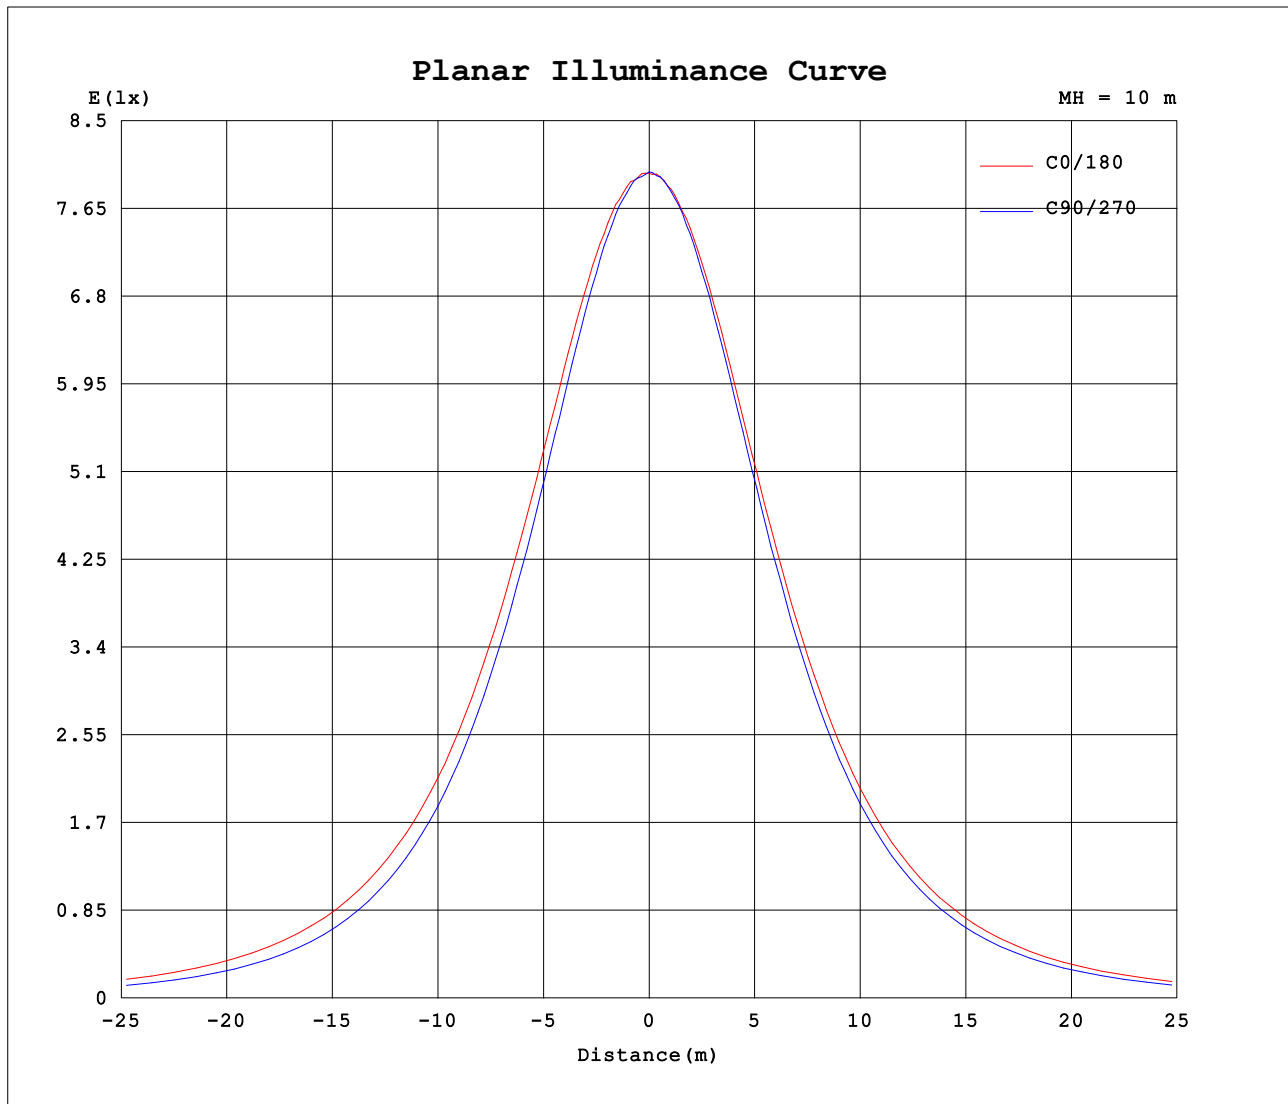

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.8V I:0.1560A P:18.90W PF:0.9980 Freq:50.00Hz Lamp Flux:2761.22x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	799	799	799	799	799	799	799	799										
5	800	796	794	798	796	796	794	798										
10	795	789	782	791	790	788	782	791										
15	787	777	765	776	777	774	766	777										
20	770	759	739	755	757	752	741	757										
25	749	736	708	728	731	726	710	731										
30	721	703	669	696	702	692	672	699										
35	687	669	628	658	664	654	631	661										
40	648	627	579	614	621	610	585	619										
45	605	581	526	567	575	562	532	570										
50	558	529	469	515	524	510	475	520										
55	504	473	408	458	470	453	417	463										
60	447	415	344	398	412	394	354	403										
65	388	353	277	334	349	330	288	340										
70	325	288	208	269	285	264	219	276										
75	260	223	140	203	221	199	149	210										
80	197	160	74.9	141	163	139	83.7	147										
85	143	105	24.7	90.1	115	90.2	30.9	95.1										
90	106	71.1	0.35	63.9	96.8	67.3	1.15	64.4										
95	96.8	64.3	0.38	61.0	93.1	64.3	0.97	60.6										
100	93.1	60.5	0.54	58.7	89.4	61.6	1.03	58.1										
105	89.2	60.1	0.61	56.1	85.1	58.6	1.00	55.3										
110	85.0	57.0	0.66	50.9	80.4	53.0	0.77	52.3										
115	80.0	53.5	0.64	46.6	72.6	46.1	0.67	49.2										
120	74.8	49.4	0.73	44.2	62.1	45.0	0.76	45.2										
125	68.7	44.4	0.77	41.3	61.9	41.0	0.68	39.9										
130	63.0	41.1	0.83	38.1	47.2	37.7	0.72	36.3										
135	57.0	37.4	0.93	34.4	50.4	34.0	0.77	32.0										
140	51.1	31.1	0.97	30.7	44.9	30.1	0.82	25.0										
145	44.7	25.3	1.01	27.0	38.9	25.8	0.94	19.7										
150	37.8	20.5	1.14	22.7	32.5	21.2	1.12	14.8										
155	30.8	15.4	1.23	17.9	25.7	16.3	1.24	10.3										
160	23.1	10.6	1.28	13.0	18.7	11.4	1.30	7.41										
165	15.5	7.36	1.32	8.68	11.4	7.25	1.33	4.97										
170	8.70	4.71	1.35	5.10	5.96	3.81	1.36	2.77										
175	3.33	2.21	1.37	2.15	1.69	1.69	1.35	1.53										
180	1.32	1.41	1.35	1.36	1.32	1.42	1.38	1.36										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: