


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.8V I:0.2290A P:27.70W PF:0.9980 Freq:50.00Hz Lamp Flux:3956.25x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 142.83 lm/W			
MODEL	DLC6.0	I _{max} (cd)	1147	S/MH(C0/180)	1.30
NOMINAL POWER(W)	30W	LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	3956.3	η UP,DN(C0-180)	4.5,46.2
NOMINAL FLUX(lm)	3956.25	CIE CLASS	DIRECT	η UP,DN(C180-360)	4.2,45.1
LAMPS INSIDE	1	η up(%)	8.6	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	120	η down(%)	91.4	CIBSE SHR MAX	1.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

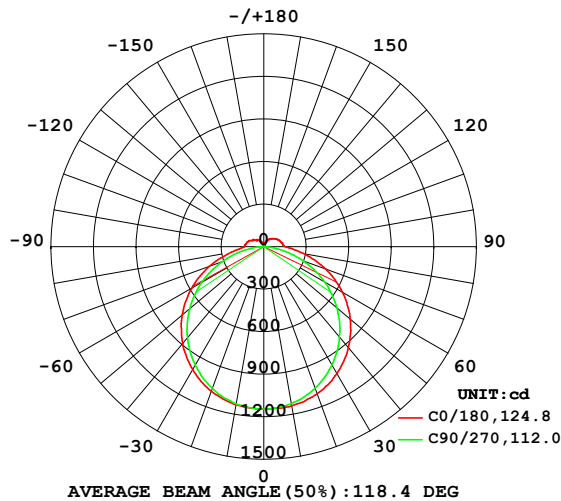

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

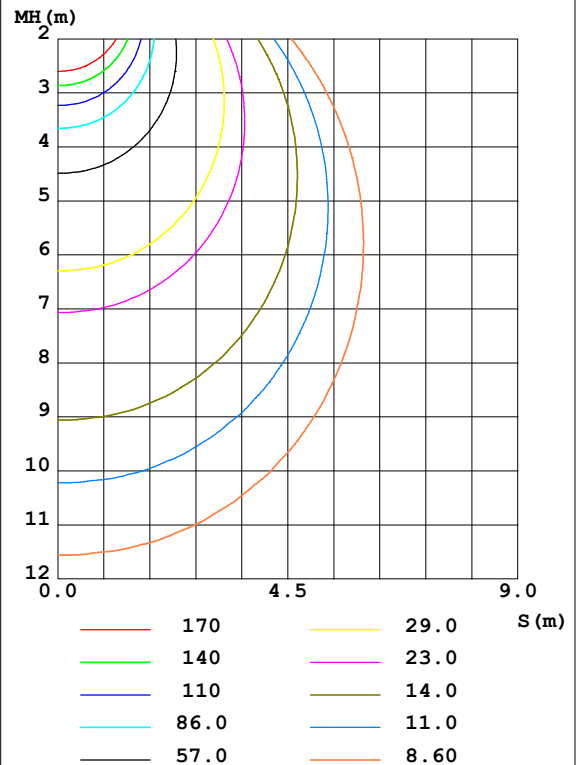

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1140	1127	1125	1128	1131	1127	1126	1129	0- 10	108.5	108.5	2.74,2.74
20	1102	1086	1061	1080	1083	1078	1063	1082	10- 20	313.1	421.7	10.7,10.7
30	1033	1004	962.7	995.3	1003	989.4	967.0	998.1	20- 30	480.0	901.7	22.8,22.8
40	927.9	901.2	831.1	879.3	890.8	874.1	837.5	881.8	30- 40	588.3	1490	37.7,37.7
50	797.8	759.6	674.6	734.9	751.3	729.1	682.7	740.5	40- 50	624.2	2114	53.4,53.4
60	639.5	596.5	493.5	570.1	588.4	562.5	505.8	575.1	50- 60	583.5	2698	68.2,68.2
70	466.3	414.1	299.7	384.9	408.8	377.4	313.6	393.1	60- 70	470.6	3168	80.1,80.1
80	283.8	229.7	108.1	202.6	233.1	197.9	120.0	209.5	70- 80	304.3	3473	87.8,87.8
90	151.9	102.1	0.4375	91.37	138.8	96.68	1.673	92.33	80- 90	142.0	3615	91.4,91.4
100	133.3	87.07	0.7030	84.10	128.2	88.80	1.484	83.39	90-100	86.75	3701	93.6,93.6
110	121.2	81.74	0.8460	72.74	115.4	76.08	1.098	75.37	100-110	76.89	3778	95.5,95.5
120	107.0	70.85	0.9164	63.32	88.67	64.21	1.081	64.01	110-120	62.13	3840	97.1,97.1
130	90.65	58.96	1.054	54.48	67.44	53.98	1.006	51.87	120-130	47.96	3888	98.3,98.3
140	73.40	44.61	1.256	43.75	63.17	43.05	1.135	35.64	130-140	33.84	3922	99.1,99.1
150	54.91	29.51	1.505	32.29	44.34	30.20	1.523	20.84	140-150	20.64	3943	99.7,99.7
160	33.50	15.22	1.682	18.46	25.97	16.10	1.724	10.41	150-160	9.947	3953	99.9,99.9
170	12.48	6.644	1.784	7.138	8.244	5.256	1.789	3.824	160-170	3.085	3956	100,100
180	1.711	1.855	1.770	1.772	1.716	1.826	1.789	1.760	170-180	0.3567	3956	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.8V I:0.2290A P:27.70W PF:0.9980 Freq:50.00Hz Lamp Flux:3956.25x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

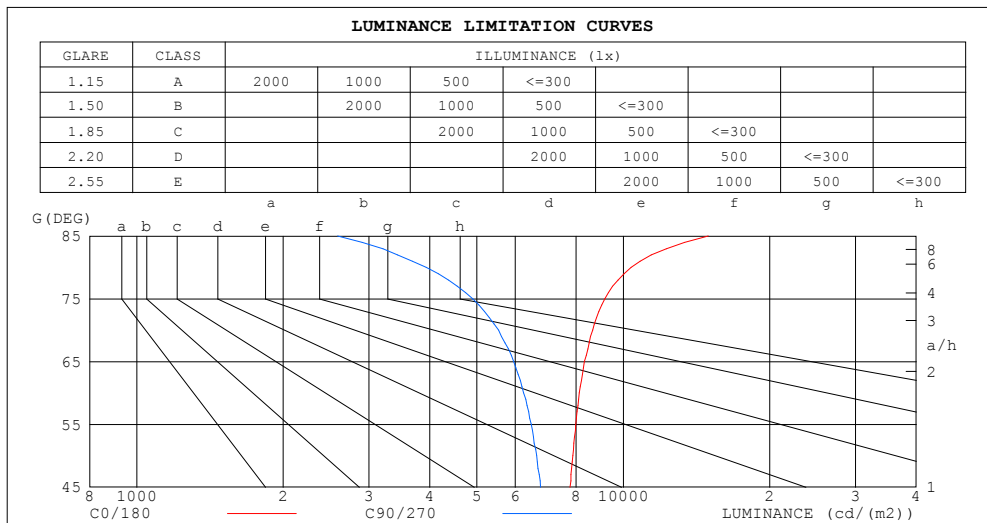


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.8V I:0.2290A P:27.70W PF:0.9980 Freq:50.00Hz Lamp Flux:3956.25x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.17	1.17	1.17	1.13	1.13	1.13	1.06	1.06	1.06	.00	.00	.00	.94	.94	.94	.91
1.0	1.01	.96	.92	.97	.93	.89	.92	.88	.85	.86	.83	.81	.81	.79	.77	.74
2.0	.87	.80	.74	.84	.78	.72	.79	.74	.69	.75	.70	.66	.71	.67	.64	.61
3.0	.76	.68	.61	.74	.66	.60	.69	.63	.57	.66	.60	.55	.62	.57	.53	.51
4.0	.67	.58	.51	.65	.57	.50	.61	.54	.49	.58	.52	.47	.55	.50	.46	.43
5.0	.60	.50	.44	.58	.49	.43	.55	.47	.42	.52	.46	.41	.49	.44	.39	.37
6.0	.54	.44	.38	.52	.44	.37	.49	.42	.36	.47	.40	.35	.45	.39	.34	.32
7.0	.48	.40	.33	.47	.39	.33	.45	.37	.32	.43	.36	.31	.41	.35	.30	.28
8.0	.44	.36	.30	.43	.35	.29	.41	.34	.29	.39	.33	.28	.37	.31	.27	.25
9.0	.40	.32	.27	.39	.32	.26	.38	.31	.26	.36	.30	.25	.34	.29	.24	.23
10.0	.37	.29	.24	.36	.29	.24	.35	.28	.23	.33	.27	.23	.32	.26	.22	.20

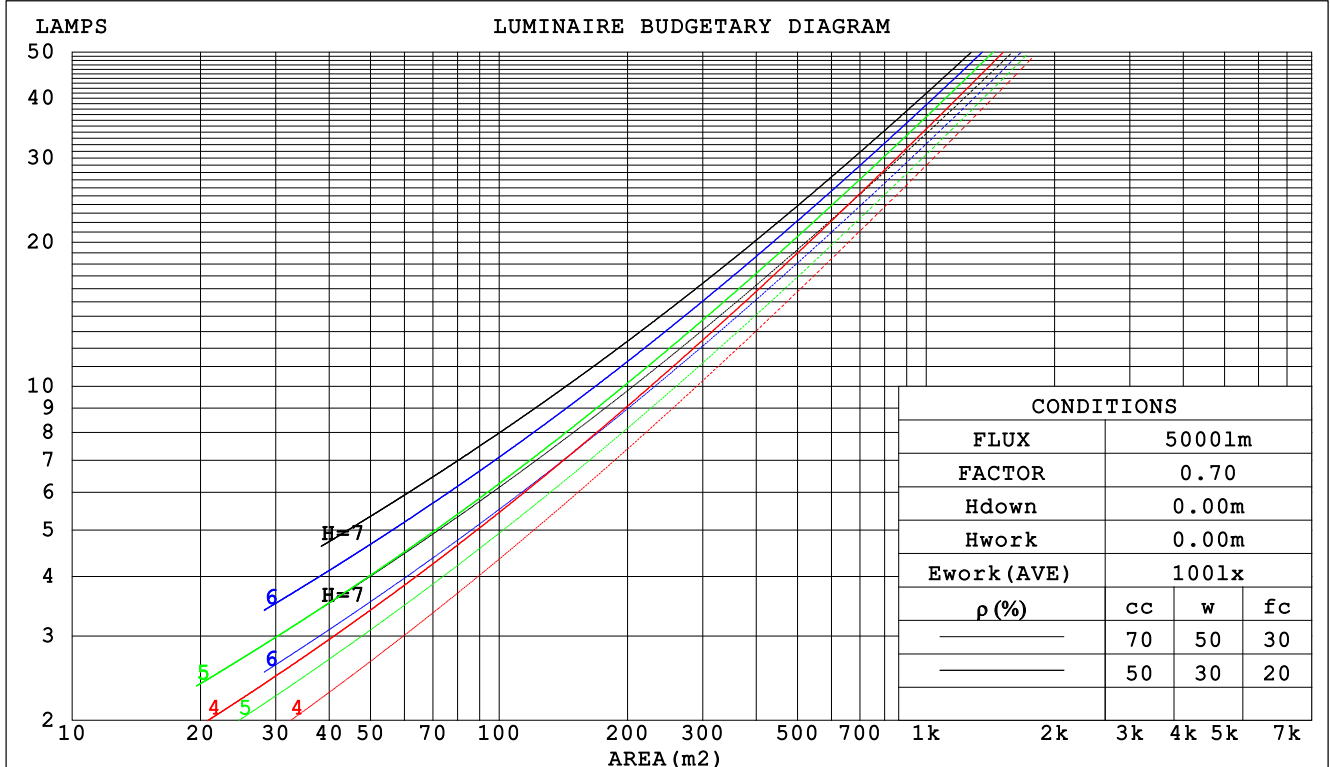

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.8V I:0.2290A P:27.70W PF:0.9980 Freq:50.00Hz Lamp Flux:3956.25x1 lm					
NAME: 24代			TYPE:4000K		WEIGHT:
SPEC.:			DIM.: 4FT		SERIAL No.:
MFR.: WS			SUR.:0.0505*3.14715		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.334	.190	.060	.324	.185	.059	.306	.175	.056	.289	.167	.053	.273	.158	.051		
2.0	.305	.167	.051	.296	.163	.050	.280	.156	.048	.265	.148	.046	.251	.142	.045		
3.0	.278	.148	.044	.270	.145	.044	.256	.139	.042	.242	.133	.041	.230	.127	.039		
4.0	.255	.132	.039	.248	.130	.038	.234	.124	.037	.222	.119	.036	.211	.114	.035		
5.0	.234	.119	.035	.228	.117	.034	.216	.112	.033	.205	.108	.032	.194	.104	.031		
6.0	.216	.108	.031	.210	.106	.031	.200	.102	.030	.190	.099	.029	.180	.095	.028		
7.0	.200	.099	.028	.195	.097	.028	.186	.094	.027	.176	.090	.026	.168	.087	.026		
8.0	.187	.091	.026	.182	.090	.025	.173	.087	.025	.165	.084	.024	.157	.081	.023		
9.0	.175	.085	.024	.170	.083	.023	.162	.080	.023	.155	.078	.022	.147	.075	.022		
10.0	.164	.079	.022	.160	.077	.022	.153	.075	.021	.146	.072	.021	.139	.070	.020		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.256	.256	.256	.219	.219	.219	.149	.149	.149	.086	.086	.086	.027	.027	.027	
1.0	.248	.222	.199	.212	.191	.171	.145	.131	.118	.084	.076	.069	.027	.024	.022	
2.0	.241	.199	.163	.206	.171	.141	.141	.118	.098	.081	.069	.058	.026	.022	.019	
3.0	.233	.181	.140	.200	.157	.122	.137	.109	.085	.079	.064	.050	.025	.021	.016	
4.0	.226	.169	.125	.194	.146	.109	.133	.101	.076	.077	.059	.045	.025	.019	.015	
5.0	.218	.158	.114	.187	.137	.099	.129	.096	.070	.075	.056	.042	.024	.018	.014	
6.0	.211	.150	.107	.181	.130	.093	.125	.091	.066	.073	.054	.039	.023	.018	.013	
7.0	.204	.143	.101	.176	.124	.088	.121	.087	.062	.070	.051	.037	.023	.017	.012	
8.0	.198	.138	.097	.170	.120	.084	.118	.084	.060	.068	.050	.036	.022	.016	.012	
9.0	.191	.133	.093	.165	.115	.081	.114	.081	.058	.067	.048	.034	.022	.016	.011	
10.0	.186	.129	.091	.160	.112	.079	.111	.079	.056	.065	.046	.034	.021	.015	.011	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.8V I:0.2290A P:27.70W PF:0.9980 Freq:50.00Hz Lamp Flux:3956.25x1 lm										
NAME: 24代					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.: 4FT			SERIAL No.:		
MFR.: WS					SUR.:0.0505*3.14715			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.9	21.3	20.2	21.6	22.0	19.0	20.4	19.3	20.7	21.1
3H	21.8	23.1	22.2	23.5	23.9	20.4	21.7	20.8	22.1	22.5
4H	22.8	24.0	23.2	24.4	24.9	21.0	22.2	21.4	22.6	23.1
6H	23.7	24.8	24.1	25.3	25.7	21.3	22.5	21.7	22.9	23.4
8H	24.1	25.2	24.6	25.7	26.1	21.4	22.5	21.8	22.9	23.4
12H	24.6	25.7	25.0	26.1	26.6	21.4	22.5	21.9	22.9	23.4
4H 2H	20.4	21.7	20.9	22.1	22.5	19.8	21.0	20.2	21.4	21.9
3H	22.6	23.7	23.1	24.2	24.6	21.4	22.5	21.9	23.0	23.5
4H	23.7	24.7	24.2	25.2	25.7	22.1	23.1	22.6	23.6	24.1
6H	24.7	25.6	25.3	26.1	26.7	22.6	23.5	23.1	24.0	24.6
8H	25.3	26.1	25.8	26.6	27.2	22.8	23.6	23.3	24.1	24.7
12H	25.8	26.6	26.4	27.1	27.7	22.8	23.6	23.4	24.1	24.7
8H 4H	24.0	24.8	24.5	25.3	25.9	22.7	23.5	23.2	24.0	24.6
6H	25.2	25.9	25.8	26.5	27.1	23.4	24.1	23.9	24.6	25.2
8H	25.9	26.5	26.5	27.1	27.7	23.6	24.2	24.2	24.8	25.4
12H	26.7	27.2	27.3	27.8	28.5	23.8	24.3	24.4	24.9	25.6
12H 4H	24.0	24.7	24.5	25.3	25.9	22.7	23.5	23.3	24.0	24.6
6H	25.3	25.9	25.9	26.5	27.1	23.6	24.2	24.2	24.8	25.4
8H	26.1	26.6	26.7	27.2	27.9	23.9	24.4	24.5	25.0	25.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.5				

CIE Pub.117 Corrected 3956 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.8)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.8V I:0.2290A P:27.70W PF:0.9980 Freq:50.00Hz Lamp Flux:3956.25x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	53	41	34	52	41	34	51	40	34	27
0.80	63	51	43	62	50	43	59	49	42	35
1.00	71	59	52	70	58	51	67	59	50	42
1.25	78	67	59	76	66	59	73	64	57	49
1.50	83	72	65	81	71	64	77	69	63	54
2.00	90	81	74	88	79	73	83	76	70	61
2.50	95	86	79	92	84	78	87	80	75	65
3.00	98	90	84	95	88	82	90	84	79	69
4.00	102	96	90	99	93	89	94	89	85	73
5.00	105	99	95	102	97	92	96	92	88	76
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.8V I:0.2290A P:27.70W PF:0.9980 Freq:50.00Hz Lamp Flux:3956.25x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

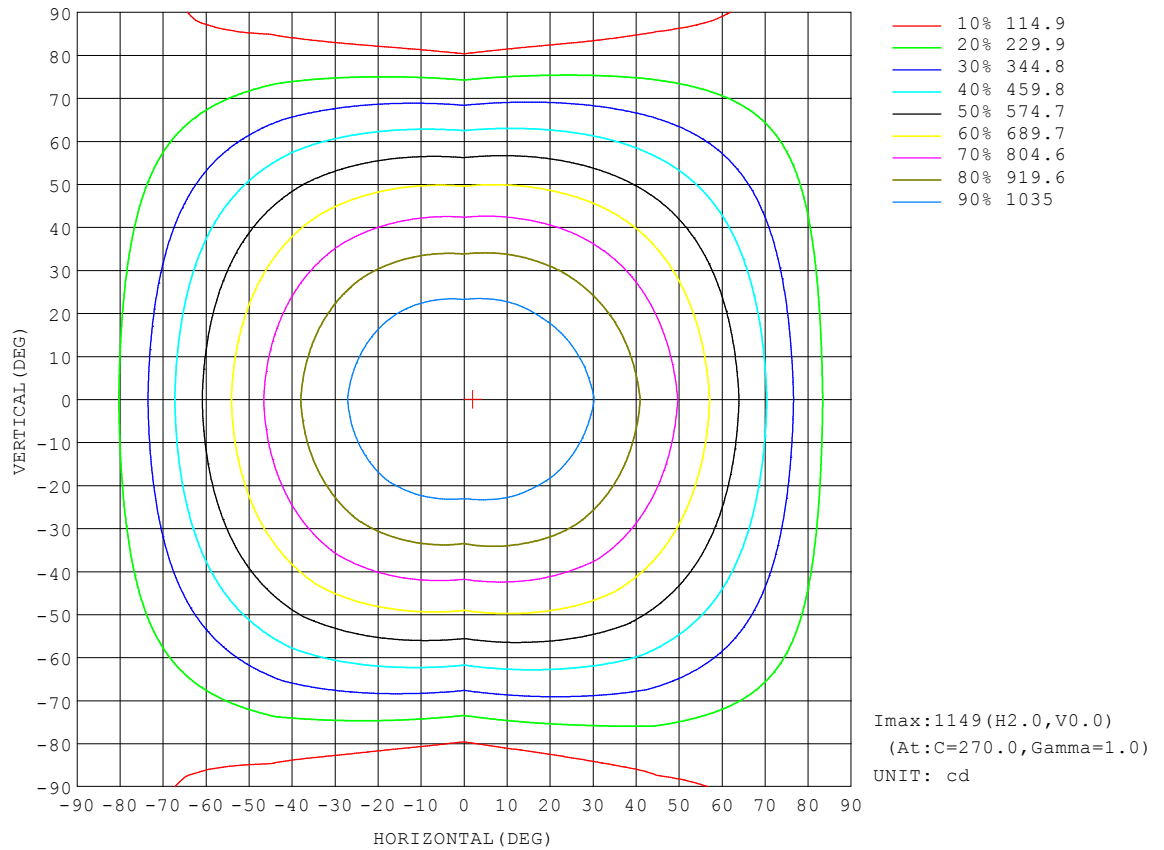


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.8V I:0.2290A P:27.70W PF:0.9980 Freq:50.00Hz Lamp Flux:3956.25x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

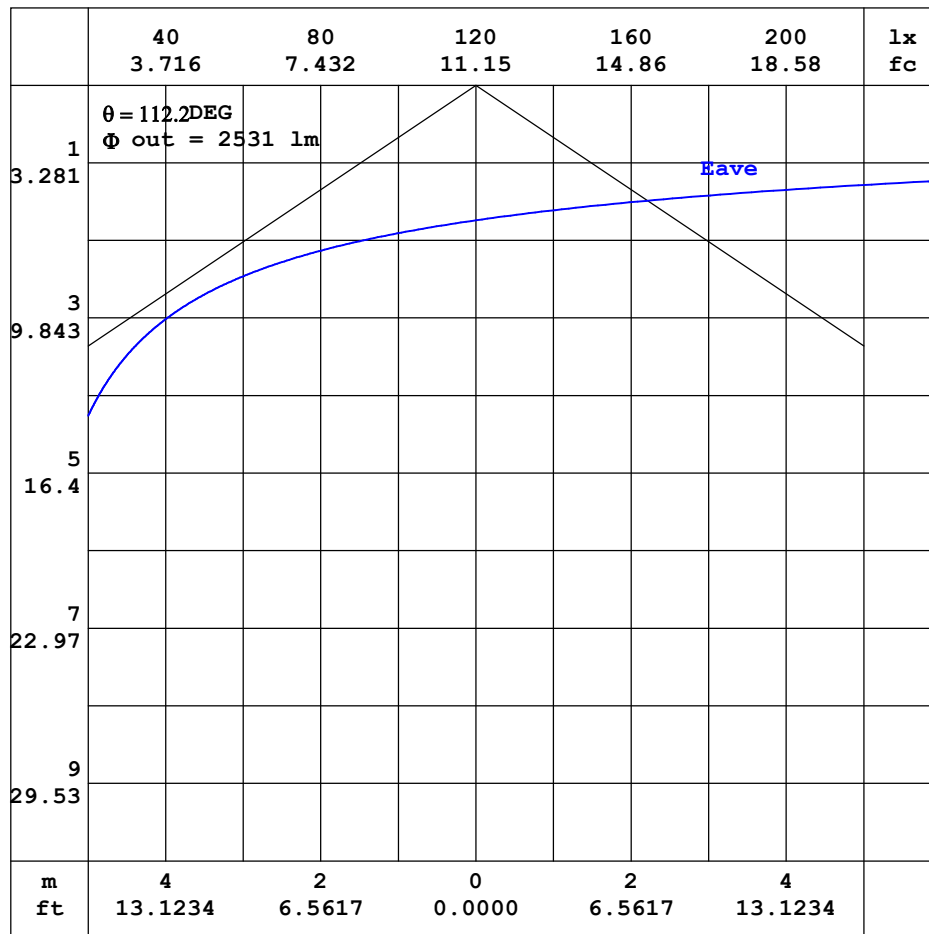


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.8V I:0.2290A P:27.70W PF:0.9980 Freq:50.00Hz Lamp Flux:3956.25x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

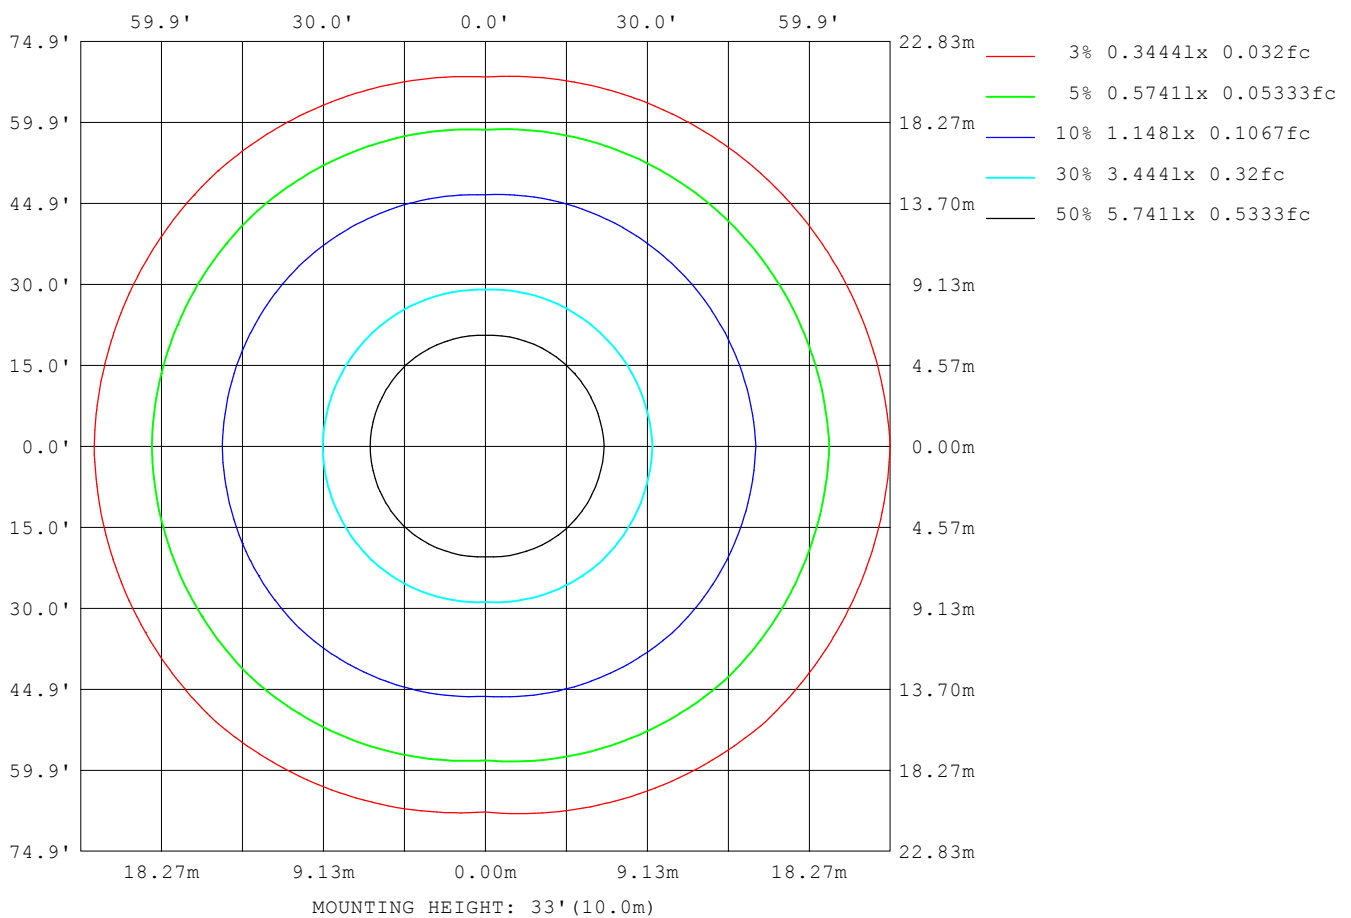

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.8V I:0.2290A P:27.70W PF:0.9980 Freq:50.00Hz Lamp Flux:3956.25x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	7890
L_0~180 (75) av	8442
L_0~180 (85) av	13542
L_90~270 (65) av	6063
L_90~270 (75) av	5081
L_90~270 (85) av	2904
L_45 (65) av	7280
L_45 (75) av	7304
L_45 (85) av	9921

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

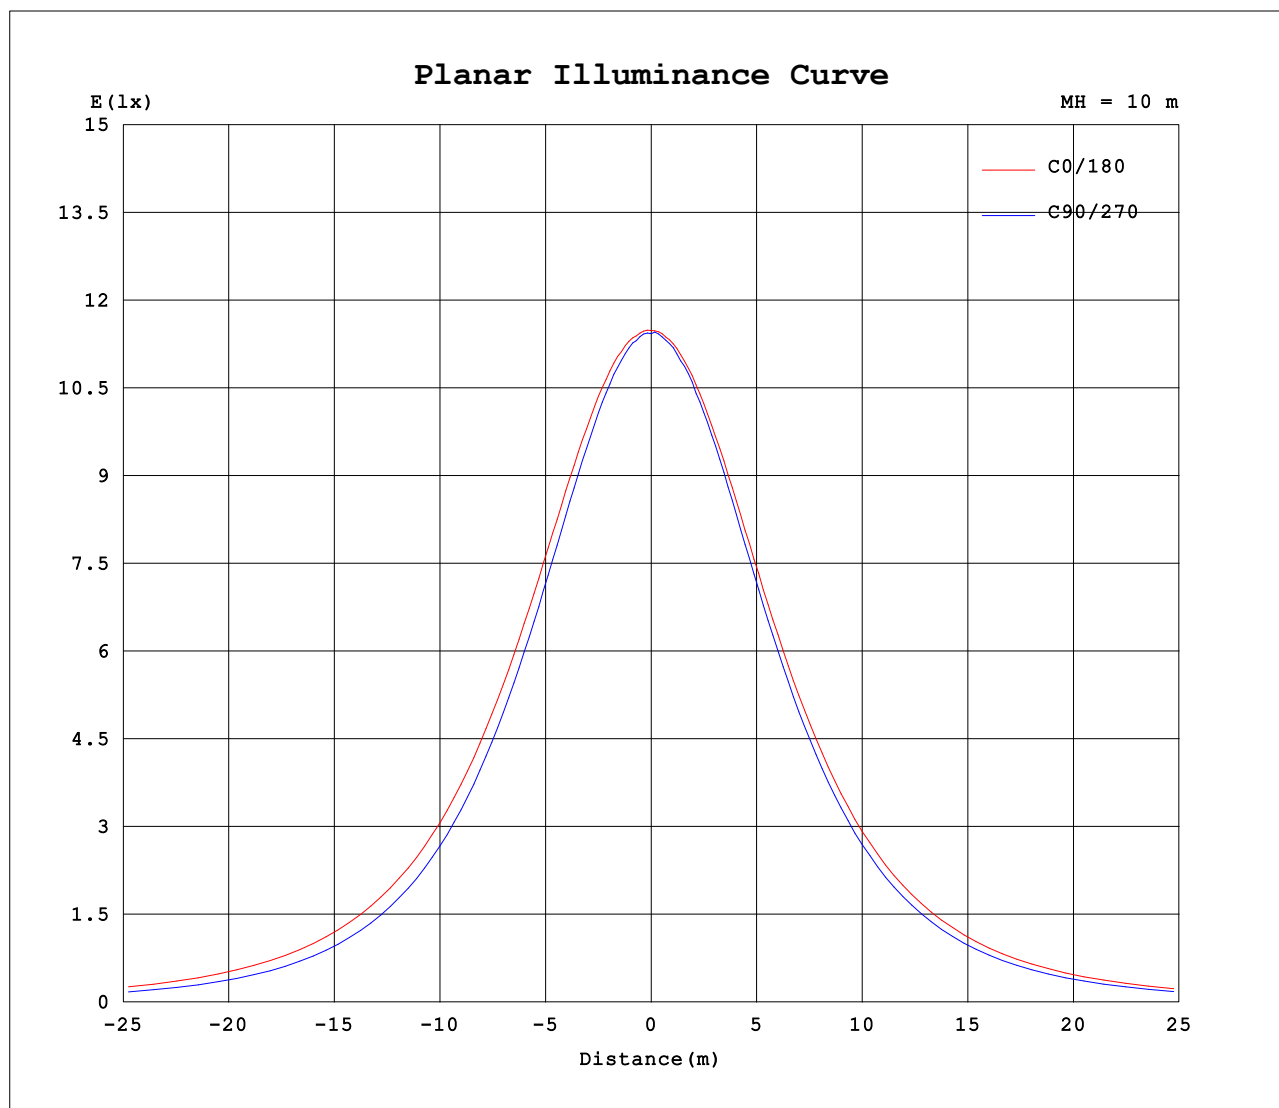

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.8V I:0.2290A P:27.70W PF:0.9980 Freq:50.00Hz Lamp Flux:3956.25x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1144	1144	1144	1144	1144	1144	1144	1144										
5	1145	1136	1141	1140	1142	1139	1140	1141										
10	1140	1127	1125	1128	1131	1127	1126	1129										
15	1126	1108	1098	1110	1112	1107	1100	1108										
20	1102	1086	1061	1080	1083	1078	1063	1082										
25	1073	1049	1018	1041	1049	1039	1020	1044										
30	1033	1004	963	995	1003	989	967	998										
35	986	961	902	942	951	935	905	944										
40	928	901	831	879	891	874	838	882										
45	865	834	756	811	822	804	763	815										
50	798	760	675	735	751	729	683	740										
55	721	682	587	655	673	649	596	661										
60	640	597	494	570	588	562	506	575										
65	554	507	398	478	500	472	412	486										
70	466	414	300	385	409	377	314	393										
75	374	320	201	291	317	285	215	299										
80	284	230	108	203	233	198	120	209										
85	205	153	35.7	129	168	129	44.3	136										
90	152	102	0.44	91.4	139	96.7	1.67	92.3										
95	138	92.4	0.49	87.4	134	92.6	1.40	86.9										
100	133	87.1	0.70	84.1	128	88.8	1.48	83.4										
105	128	86.4	0.80	80.2	122	84.4	1.46	79.3										
110	121	81.7	0.85	72.7	115	76.1	1.10	75.4										
115	114	76.7	0.85	66.3	106	65.4	0.98	70.2										
120	107	70.8	0.92	63.3	88.7	64.2	1.08	64.0										
125	99.1	63.7	0.98	59.2	88.1	58.7	0.94	56.9										
130	90.7	59.0	1.05	54.5	67.4	54.0	1.01	51.9										
135	82.2	53.7	1.17	49.4	70.9	48.8	1.07	45.4										
140	73.4	44.6	1.26	43.8	63.2	43.1	1.13	35.6										
145	64.4	36.5	1.33	38.4	54.6	37.0	1.24	27.9										
150	54.9	29.5	1.51	32.3	44.3	30.2	1.52	20.8										
155	45.0	22.2	1.62	25.5	35.3	23.3	1.67	14.5										
160	33.5	15.2	1.68	18.5	26.0	16.1	1.72	10.4										
165	22.4	10.5	1.75	12.3	15.9	10.3	1.75	6.97										
170	12.5	6.64	1.78	7.14	8.24	5.26	1.79	3.82										
175	4.65	3.01	1.79	2.91	2.28	2.23	1.77	2.01										
180	1.71	1.86	1.77	1.77	1.72	1.83	1.79	1.76										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: