


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.7V I:0.3310A P:39.90W PF:0.9950 Freq:50.00Hz Lamp Flux:5328.81x1 lm		
NAME: 24代	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 133.55 lm/W			
MODEL	DLC6.0	I _{max} (cd)	1551	S/MH(C0/180)	1.30
NOMINAL POWER(W)	40W	LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	5328.8	η UP,DN(C0-180)	4.4,46.3
NOMINAL FLUX(lm)	5328.81	CIE CLASS	DIRECT	η UP,DN(C180-360)	4.2,45.1
LAMPS INSIDE	1	η up(%)	8.6	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	120	η down(%)	91.4	CIBSE SHR MAX	1.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

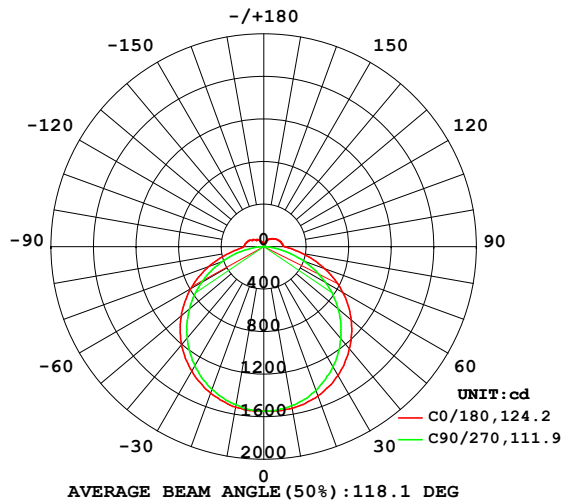

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

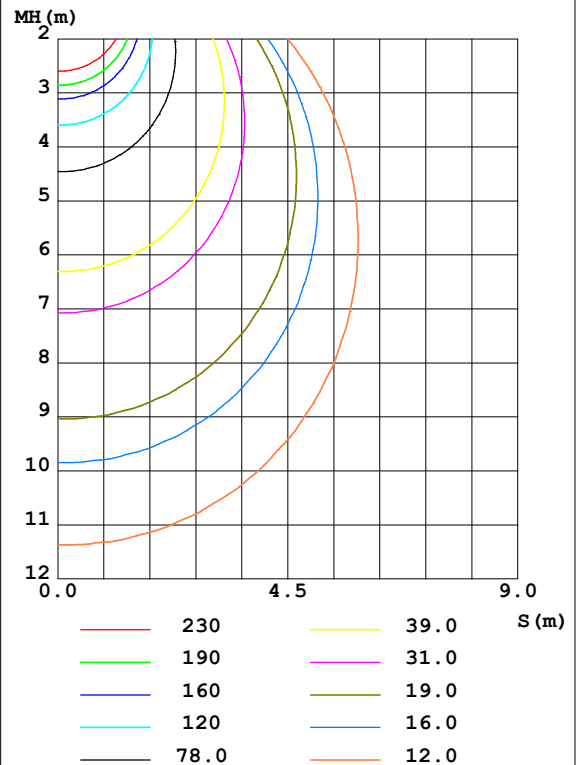

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1543	1532	1516	1529	1533	1524	1509	1525	0- 10	146.8	146.8	2.75,2.75
20	1493	1472	1438	1459	1466	1456	1429	1463	10- 20	423.1	569.9	10.7,10.7
30	1397	1361	1303	1344	1353	1339	1295	1346	20- 30	648.5	1218	22.9,22.9
40	1253	1213	1128	1190	1204	1179	1123	1193	30- 40	794.1	2012	37.8,37.8
50	1074	1025	913.9	994.4	1012	985.4	914.6	999.2	40- 50	842.3	2855	53.6,53.6
60	857.2	804.4	668.4	769.3	796.1	759.7	675.7	777.8	50- 60	787.0	3642	68.3,68.3
70	610.5	558.6	403.7	519.4	551.3	507.7	419.6	526.3	60- 70	632.7	4275	80.2,80.2
80	363.2	307.7	144.9	273.4	316.9	266.0	163.3	281.0	70- 80	407.0	4681	87.9,87.9
90	198.0	136.7	0.6100	123.8	189.3	130.3	2.409	123.2	80- 90	189.7	4871	91.4,91.4
100	174.0	116.9	0.9289	113.7	174.5	119.0	2.118	111.2	90-100	116.1	4987	93.6,93.6
110	159.1	109.5	1.113	98.87	156.8	101.9	1.528	100.3	100-110	102.9	5090	95.5,95.5
120	139.7	94.18	1.212	86.14	123.6	86.89	1.509	85.57	110-120	83.42	5174	97.1,97.1
130	117.1	78.17	1.413	74.15	91.79	72.71	1.369	68.86	120-130	64.03	5238	98.3,98.3
140	97.04	59.98	1.691	59.35	86.59	58.10	1.532	46.67	130-140	45.16	5283	99.1,99.1
150	73.47	40.21	2.013	43.94	62.52	40.82	2.084	27.10	140-150	27.83	5311	99.7,99.7
160	45.26	21.00	2.269	25.17	36.43	21.86	2.340	13.71	150-160	13.53	5324	99.9,99.9
170	17.50	8.998	2.412	9.753	11.51	7.233	2.429	5.154	160-170	4.220	5328	100,100
180	2.589	2.488	2.405	2.408	2.584	2.498	2.444	2.384	170-180	0.4956	5329	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.7V I:0.3310A P:39.90W PF:0.9950 Freq:50.00Hz Lamp Flux:5328.81x1 lm		
NAME: 24代	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

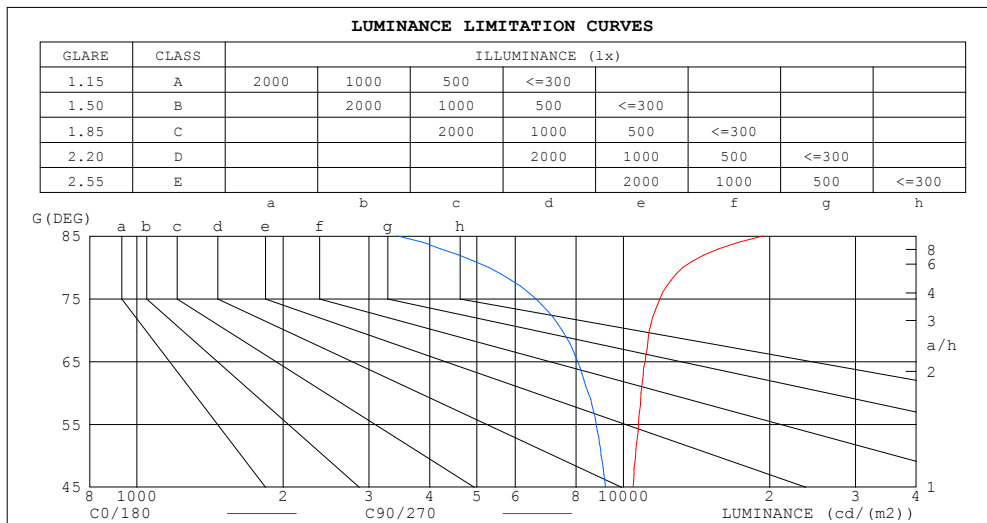

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	19383	3439
80	13265	5284
75	11887	6610
70	11319	7478
65	11093	8063
60	10872	8468
55	10742	8804
50	10600	9006
45	10475	9186


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.7V I:0.3310A P:39.90W PF:0.9950 Freq:50.00Hz Lamp Flux:5328.81x1 lm		
NAME: 24代	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.17	1.17	1.17	1.13	1.13	1.13	1.06	1.06	1.06	.00	.00	.00	.94	.94	.94	.91
1.0	1.01	.96	.92	.97	.93	.89	.92	.88	.85	.86	.83	.81	.81	.79	.77	.74
2.0	.87	.80	.74	.84	.78	.72	.79	.74	.69	.75	.70	.66	.71	.67	.64	.61
3.0	.76	.68	.61	.74	.66	.60	.70	.63	.58	.66	.60	.55	.62	.57	.53	.51
4.0	.67	.58	.51	.65	.57	.50	.62	.54	.49	.58	.52	.47	.55	.50	.46	.43
5.0	.60	.51	.44	.58	.50	.43	.55	.48	.42	.52	.46	.41	.49	.44	.39	.37
6.0	.54	.45	.38	.52	.44	.37	.50	.42	.36	.47	.40	.35	.45	.39	.35	.32
7.0	.49	.40	.33	.47	.39	.33	.45	.38	.32	.43	.36	.31	.41	.35	.31	.28
8.0	.44	.36	.30	.43	.35	.29	.41	.34	.29	.39	.33	.28	.37	.32	.27	.25
9.0	.40	.32	.27	.40	.32	.26	.38	.31	.26	.36	.30	.25	.34	.29	.25	.23
10.0	.37	.29	.24	.36	.29	.24	.35	.28	.23	.33	.27	.23	.32	.26	.22	.20

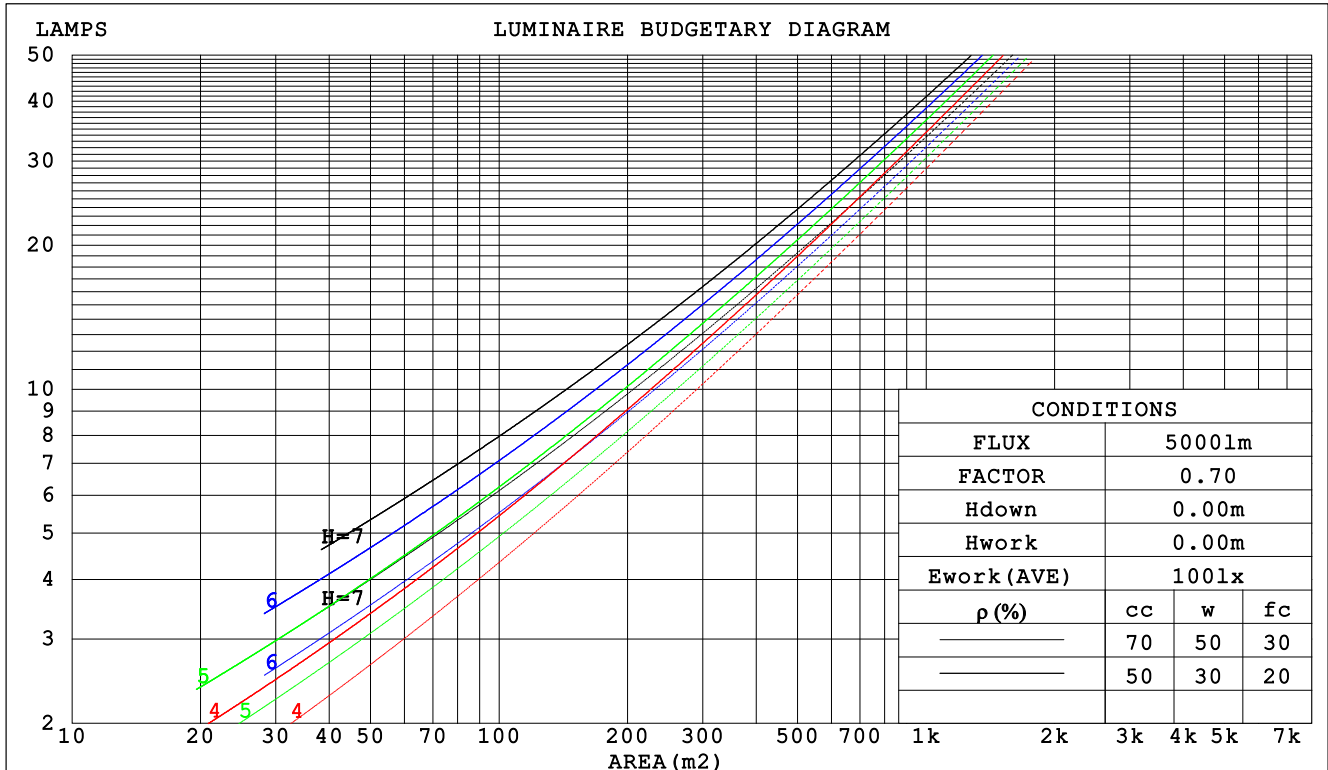

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.7V I:0.3310A P:39.90W PF:0.9950 Freq:50.00Hz Lamp Flux:5328.81x1 lm					
NAME: 24代			TYPE:3000K		WEIGHT:
SPEC.:			DIM.: 4FT		SERIAL No.:
MFR.: WS			SUR.:0.0505*3.14715		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.333	.189	.060	.323	.184	.059	.305	.175	.056	.288	.166	.053	.273	.158	.051		
2.0	.304	.167	.051	.296	.163	.050	.279	.155	.048	.264	.148	.046	.250	.142	.045		
3.0	.278	.148	.044	.270	.145	.044	.255	.138	.042	.242	.133	.041	.229	.127	.039		
4.0	.254	.132	.039	.247	.129	.038	.234	.124	.037	.222	.119	.036	.211	.114	.035		
5.0	.234	.119	.035	.228	.117	.034	.216	.112	.033	.205	.108	.032	.194	.104	.031		
6.0	.216	.108	.031	.210	.106	.031	.200	.102	.030	.190	.098	.029	.180	.095	.028		
7.0	.200	.099	.028	.195	.097	.028	.186	.094	.027	.176	.090	.026	.168	.087	.026		
8.0	.187	.091	.026	.182	.090	.025	.173	.087	.025	.165	.084	.024	.157	.081	.023		
9.0	.175	.084	.024	.170	.083	.023	.162	.080	.023	.155	.078	.022	.147	.075	.022		
10.0	.164	.079	.022	.160	.077	.022	.153	.075	.021	.146	.072	.021	.139	.070	.020		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.256	.256	.256	.219	.219	.219	.149	.149	.149	.086	.086	.086	.027	.027	.027	
1.0	.248	.222	.198	.212	.190	.171	.145	.131	.118	.084	.076	.069	.027	.024	.022	
2.0	.240	.198	.163	.206	.171	.141	.141	.118	.098	.081	.069	.058	.026	.022	.019	
3.0	.233	.181	.140	.200	.156	.121	.137	.109	.085	.079	.063	.050	.025	.021	.016	
4.0	.225	.168	.125	.193	.145	.108	.133	.101	.076	.077	.059	.045	.025	.019	.015	
5.0	.218	.158	.114	.187	.137	.099	.129	.096	.070	.075	.056	.042	.024	.018	.014	
6.0	.211	.150	.106	.181	.130	.093	.125	.091	.065	.072	.053	.039	.023	.017	.013	
7.0	.204	.143	.101	.175	.124	.088	.121	.087	.062	.070	.051	.037	.023	.017	.012	
8.0	.197	.137	.096	.170	.119	.084	.117	.084	.060	.068	.049	.036	.022	.016	.012	
9.0	.191	.133	.093	.165	.115	.081	.114	.081	.058	.066	.048	.034	.022	.016	.011	
10.0	.185	.128	.090	.160	.111	.079	.111	.078	.056	.065	.046	.033	.021	.015	.011	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.7V I:0.3310A P:39.90W PF:0.9950 Freq:50.00Hz Lamp Flux:5328.81x1 lm										
NAME: 24代					TYPE:3000K			WEIGHT:		
SPEC.:					DIM.: 4FT			SERIAL No.:		
MFR.: WS					SUR.:0.0505*3.14715			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.9	22.3	21.3	22.7	23.0	20.0	21.5	20.4	21.8	22.2
3H	22.8	24.1	23.2	24.5	24.9	21.5	22.8	21.9	23.2	23.6
4H	23.7	25.0	24.1	25.4	25.8	22.0	23.3	22.5	23.7	24.1
6H	24.5	25.7	25.0	26.1	26.6	22.3	23.5	22.8	23.9	24.4
8H	24.9	26.1	25.4	26.5	27.0	22.4	23.6	22.9	24.0	24.5
12H	25.4	26.5	25.9	26.9	27.4	22.4	23.5	22.9	24.0	24.5
4H 2H	21.5	22.7	21.9	23.1	23.6	20.8	22.1	21.3	22.5	22.9
3H	23.6	24.7	24.1	25.1	25.6	22.5	23.6	23.0	24.1	24.5
4H	24.6	25.6	25.1	26.1	26.6	23.2	24.2	23.7	24.7	25.2
6H	25.6	26.5	26.2	27.0	27.6	23.7	24.6	24.2	25.1	25.6
8H	26.1	27.0	26.7	27.5	28.1	23.8	24.6	24.3	25.1	25.7
12H	26.7	27.5	27.3	28.0	28.6	23.9	24.6	24.4	25.2	25.7
8H 4H	24.9	25.8	25.5	26.3	26.8	23.7	24.5	24.2	25.0	25.6
6H	26.1	26.8	26.7	27.4	28.0	24.4	25.1	25.0	25.6	26.3
8H	26.8	27.4	27.4	28.0	28.6	24.7	25.3	25.2	25.8	26.5
12H	27.5	28.1	28.1	28.7	29.3	24.8	25.4	25.4	25.9	26.6
12H 4H	24.9	25.7	25.5	26.2	26.8	23.8	24.5	24.3	25.1	25.7
6H	26.2	26.8	26.8	27.4	28.0	24.6	25.2	25.2	25.8	26.4
8H	26.9	27.5	27.6	28.1	28.7	24.9	25.5	25.5	26.1	26.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.5				

CIE Pub.117 Corrected 5329 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.8)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.7V I:0.3310A P:39.90W PF:0.9950 Freq:50.00Hz Lamp Flux:5328.81x1 lm		
NAME: 24代	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	53	41	34	52	41	34	51	40	34	27
0.80	63	51	43	62	50	43	59	49	42	35
1.00	71	59	52	70	59	51	67	59	50	42
1.25	78	67	59	76	66	59	73	64	57	49
1.50	83	73	65	81	71	64	77	69	63	54
2.00	90	81	74	88	79	73	83	76	70	61
2.50	95	86	79	92	84	78	87	80	75	65
3.00	98	90	84	95	88	83	90	84	79	69
4.00	102	96	91	99	93	89	94	89	85	73
5.00	105	99	95	102	97	93	96	92	88	76
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.7V I:0.3310A P:39.90W PF:0.9950 Freq:50.00Hz Lamp Flux:5328.81x1 lm		
NAME: 24代	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

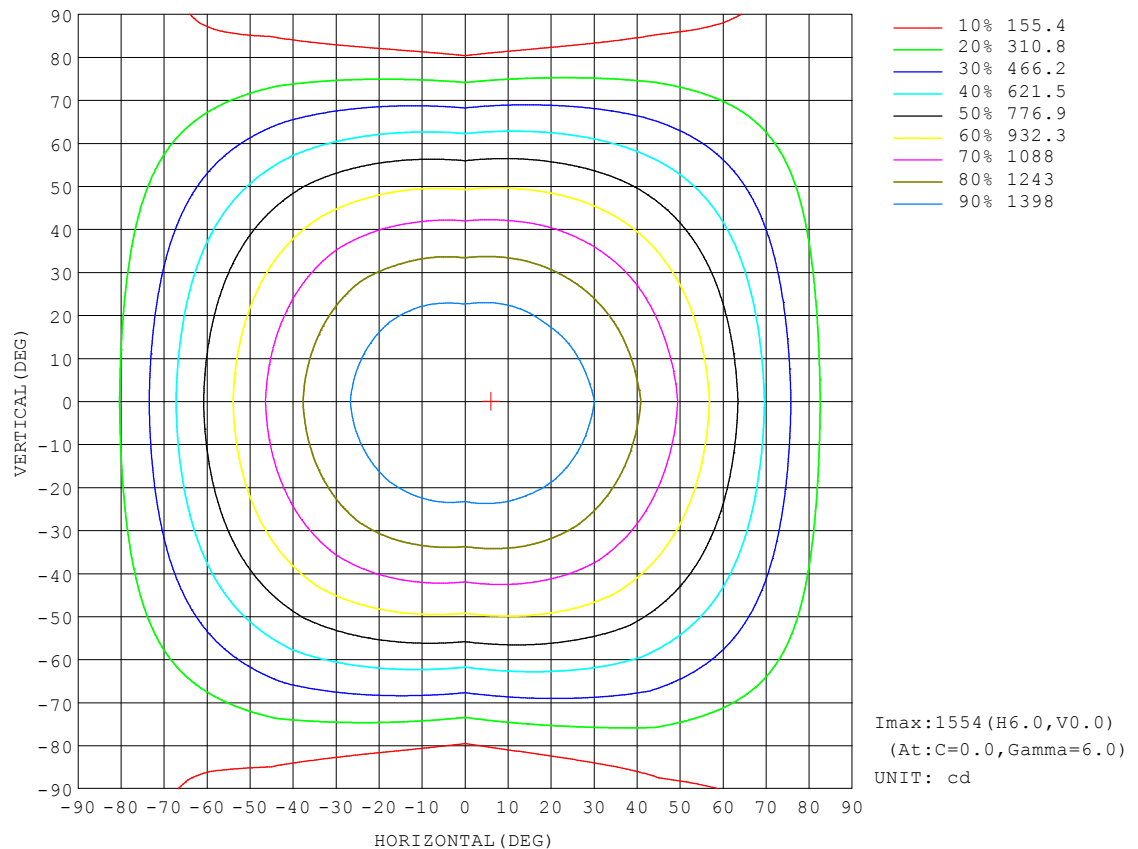


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.7V I:0.3310A P:39.90W PF:0.9950 Freq:50.00Hz Lamp Flux:5328.81x1 lm		
NAME: 24代	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

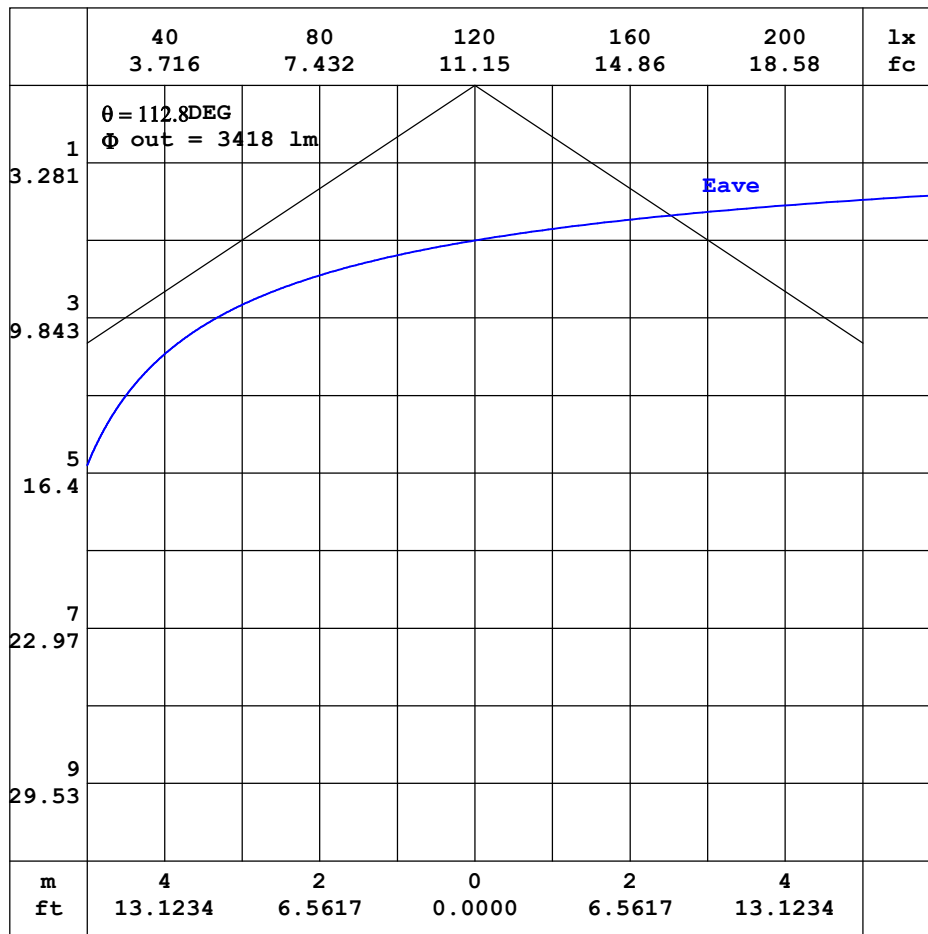


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.7V I:0.3310A P:39.90W PF:0.9950 Freq:50.00Hz Lamp Flux:5328.81x1 lm		
NAME: 24代	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

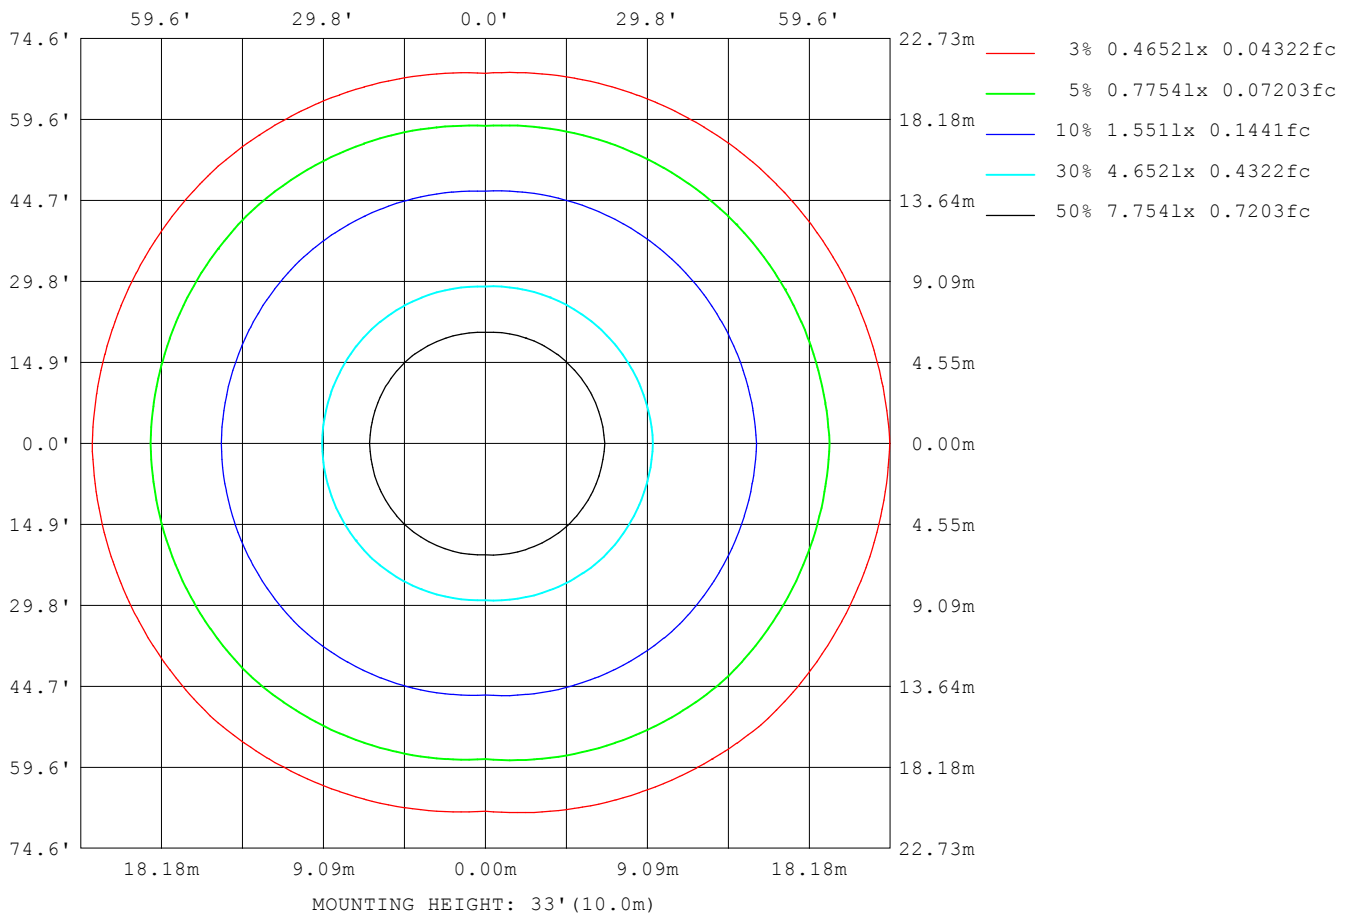

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.7V I:0.3310A P:39.90W PF:0.9950 Freq:50.00Hz Lamp Flux:5328.81x1 lm		
NAME: 24代	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	10592
L_0~180 (75) av	11170
L_0~180 (85) av	17944
L_90~270 (65) av	8146
L_90~270 (75) av	6814
L_90~270 (85) av	3878
L_45 (65) av	9797
L_45 (75) av	9816
L_45 (85) av	13372

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

Planar Illuminance Curve

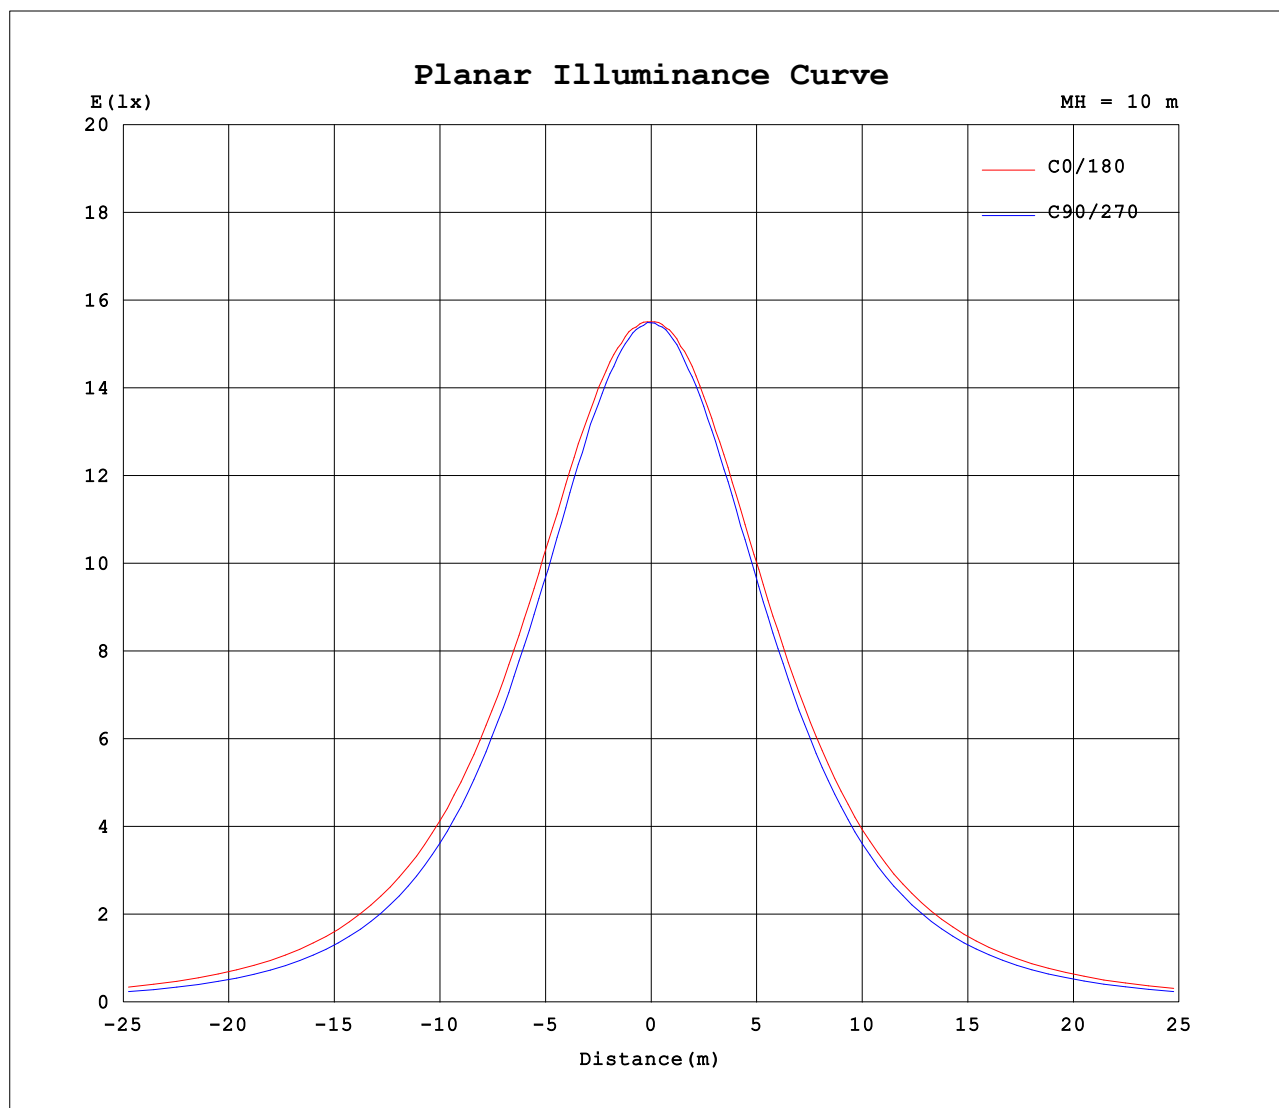

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.7V I:0.3310A P:39.90W PF:0.9950 Freq:50.00Hz Lamp Flux:5328.81x1 lm								
NAME: 24代					TYPE:3000K			WEIGHT:
SPEC.:					DIM.: 4FT			SERIAL No.:
MFR.: WS					SUR.:0.0505*3.14715			Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1548	1548	1548	1548	1548	1548	1548	1548										
5	1550	1543	1541	1543	1547	1544	1539	1542										
10	1543	1532	1516	1529	1533	1524	1509	1525										
15	1523	1504	1487	1497	1503	1494	1475	1500										
20	1493	1472	1438	1459	1466	1456	1429	1463										
25	1450	1425	1374	1408	1413	1402	1369	1411										
30	1397	1361	1303	1344	1353	1339	1295	1346										
35	1331	1291	1221	1272	1285	1262	1212	1277										
40	1253	1213	1128	1190	1204	1179	1123	1193										
45	1168	1124	1025	1097	1111	1087	1022	1100										
50	1074	1025	914	994	1012	985	915	999										
55	972	917	797	886	909	874	798	891										
60	857	804	668	769	796	760	676	778										
65	739	683	538	646	675	633	550	654										
70	610	559	404	519	551	508	420	526										
75	485	430	270	393	428	382	287	401										
80	363	308	145	273	317	266	163	281										
85	266	205	47.3	177	228	173	59.5	181										
90	198	137	0.61	124	189	130	2.41	123										
95	180	124	0.64	118	182	124	2.01	116										
100	174	117	0.93	114	175	119	2.12	111										
105	167	116	1.05	109	166	113	2.04	106										
110	159	110	1.11	98.9	157	102	1.53	100										
115	150	103	1.07	90.1	145	88.4	1.34	94.0										
120	140	94.2	1.21	86.1	124	86.9	1.51	85.6										
125	129	84.8	1.30	80.5	119	79.4	1.28	76.5										
130	117	78.2	1.41	74.2	91.8	72.7	1.37	68.9										
135	106	71.3	1.56	66.9	97.2	65.8	1.44	60.1										
140	97.0	60.0	1.69	59.4	86.6	58.1	1.53	46.7										
145	86.3	49.2	1.78	52.1	74.8	49.8	1.66	36.5										
150	73.5	40.2	2.01	43.9	62.5	40.8	2.08	27.1										
155	60.4	30.5	2.16	34.7	49.6	31.5	2.28	18.8										
160	45.3	21.0	2.27	25.2	36.4	21.9	2.34	13.7										
165	30.6	14.3	2.35	16.8	22.4	13.9	2.40	9.26										
170	17.5	9.00	2.41	9.75	11.5	7.23	2.43	5.15										
175	7.17	4.11	2.43	4.01	3.16	3.02	2.41	2.76										
180	2.59	2.49	2.41	2.41	2.58	2.50	2.44	2.38										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: