


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.8V I:0.1540A P:18.60W PF:0.9980 Freq:50.00Hz Lamp Flux:2710.19x1 lm		
NAME: 24代	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 145.71 lm/W			
MODEL	DLC6.0	I _{max} (cd)	786.5	S/MH(C0/180)	1.30
NOMINAL POWER(W)	20W	LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	2710.2	η UP,DN(C0-180)	4.4,46.3
NOMINAL FLUX(lm)	2710.19	CIE CLASS	DIRECT	η UP,DN(C180-360)	4.2,45.1
LAMPS INSIDE	1	η up(%)	8.6	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	120	η down(%)	91.4	CIBSE SHR MAX	1.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

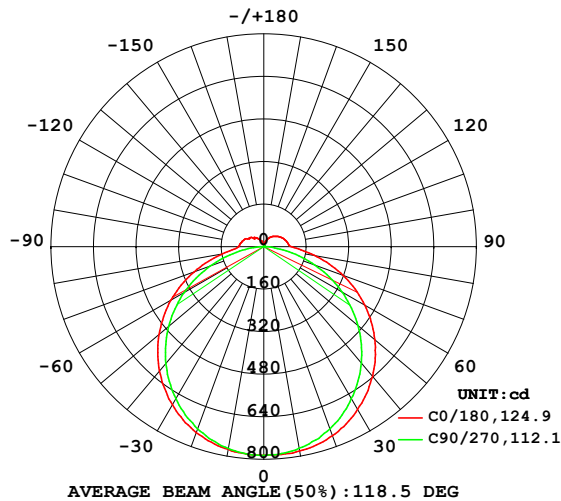

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

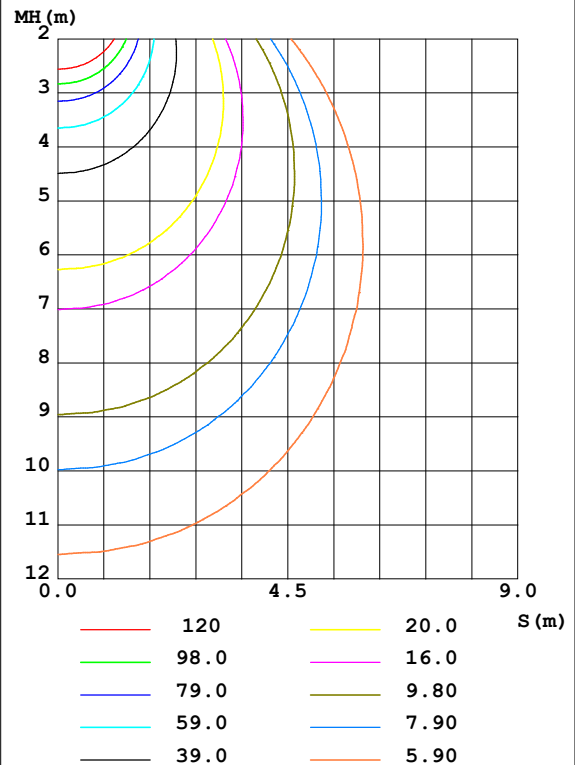

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	779.7	776.6	769.5	774.3	774.0	773.4	770.2	774.2	0- 10	74.44	74.44	2.75,2.75
20	756.6	747.0	728.5	740.5	744.1	738.9	729.4	741.8	10- 20	214.8	289.3	10.7,10.7
30	706.9	691.2	659.2	683.9	686.6	678.9	661.0	684.1	20- 30	329.3	618.6	22.8,22.8
40	637.7	616.9	571.4	602.7	610.5	599.3	573.4	605.1	30- 40	403.2	1022	37.7,37.7
50	545.8	521.3	462.2	505.6	513.7	499.3	466.7	506.9	40- 50	427.9	1450	53.5,53.5
60	438.5	408.1	338.7	390.0	403.7	385.7	347.0	394.5	50- 60	399.8	1849	68.2,68.2
70	318.2	283.4	205.0	263.4	279.0	259.1	214.3	268.7	60- 70	322.4	2172	80.1,80.1
80	193.9	157.0	73.95	136.7	159.9	135.5	82.01	143.8	70- 80	208.2	2380	87.8,87.8
90	103.9	69.81	0.3242	62.66	94.90	65.91	1.190	62.91	80- 90	96.82	2477	91.4,91.4
100	91.13	59.66	0.4744	57.63	87.70	60.43	1.049	56.71	90-100	59.22	2536	93.6,93.6
110	82.93	55.97	0.5664	49.86	78.88	51.88	0.7695	51.10	100-110	52.47	2588	95.5,95.5
120	72.78	48.50	0.6149	43.44	61.59	44.12	0.7624	44.25	110-120	42.45	2631	97.1,97.1
130	61.61	40.20	0.7212	37.37	46.23	36.95	0.6804	35.38	120-130	32.79	2664	98.3,98.3
140	49.83	30.56	0.8544	30.09	44.07	29.52	0.7725	24.24	130-140	23.14	2687	99.1,99.1
150	36.95	20.23	1.019	22.14	31.83	20.71	1.046	14.05	140-150	14.16	2701	99.7,99.7
160	22.47	10.43	1.150	12.67	17.97	11.13	1.186	7.048	150-160	6.825	2708	99.9,99.9
170	8.409	4.517	1.220	4.884	5.786	3.674	1.232	2.598	160-170	2.105	2710	100,100
180	1.175	1.268	1.223	1.209	1.180	1.271	1.232	1.204	170-180	0.2444	2710	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.8V I:0.1540A P:18.60W PF:0.9980 Freq:50.00Hz Lamp Flux:2710.19x1 lm		
NAME: 24代	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

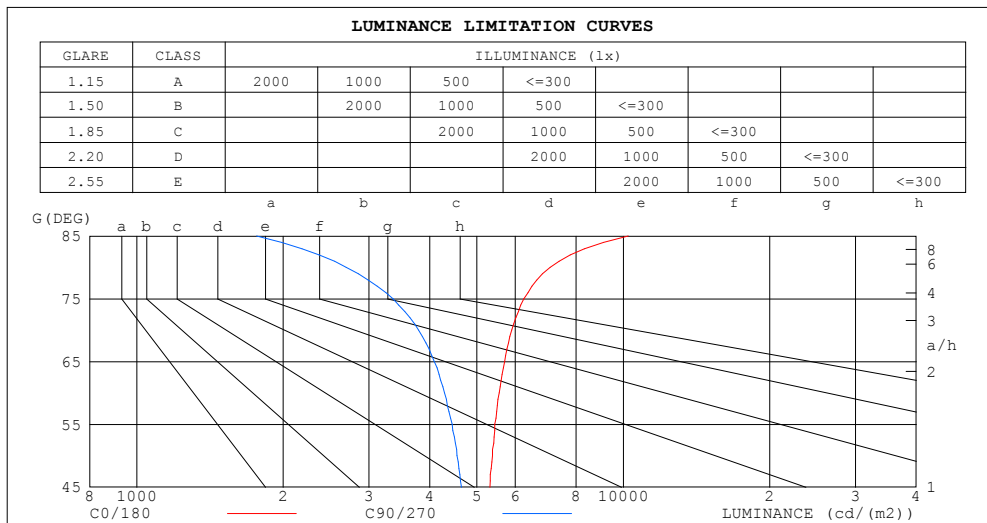

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	10237	1763
80	7078	2696
75	6243	3362
70	5896	3795
65	5700	4090
60	5559	4289
55	5446	4446
50	5382	4552
45	5320	4647


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.8V I:0.1540A P:18.60W PF:0.9980 Freq:50.00Hz Lamp Flux:2710.19x1 lm		
NAME: 24代	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.17	1.17	1.17	1.13	1.13	1.13	1.06	1.06	1.06	.00	.00	.00	.94	.94	.94	.91
1.0	1.01	.96	.92	.97	.93	.89	.92	.88	.85	.86	.83	.81	.81	.79	.77	.74
2.0	.87	.80	.74	.84	.78	.72	.79	.74	.69	.75	.70	.66	.71	.67	.64	.61
3.0	.76	.68	.61	.74	.66	.60	.70	.63	.58	.66	.60	.55	.62	.57	.53	.51
4.0	.67	.58	.51	.65	.57	.50	.62	.54	.49	.58	.52	.47	.55	.50	.46	.43
5.0	.60	.51	.44	.58	.49	.43	.55	.48	.42	.52	.46	.41	.49	.44	.39	.37
6.0	.54	.44	.38	.52	.44	.37	.49	.42	.36	.47	.40	.35	.45	.39	.34	.32
7.0	.48	.40	.33	.47	.39	.33	.45	.37	.32	.43	.36	.31	.41	.35	.30	.28
8.0	.44	.36	.30	.43	.35	.29	.41	.34	.29	.39	.33	.28	.37	.32	.27	.25
9.0	.40	.32	.27	.39	.32	.26	.38	.31	.26	.36	.30	.25	.34	.29	.24	.23
10.0	.37	.29	.24	.36	.29	.24	.35	.28	.23	.33	.27	.23	.32	.26	.22	.20

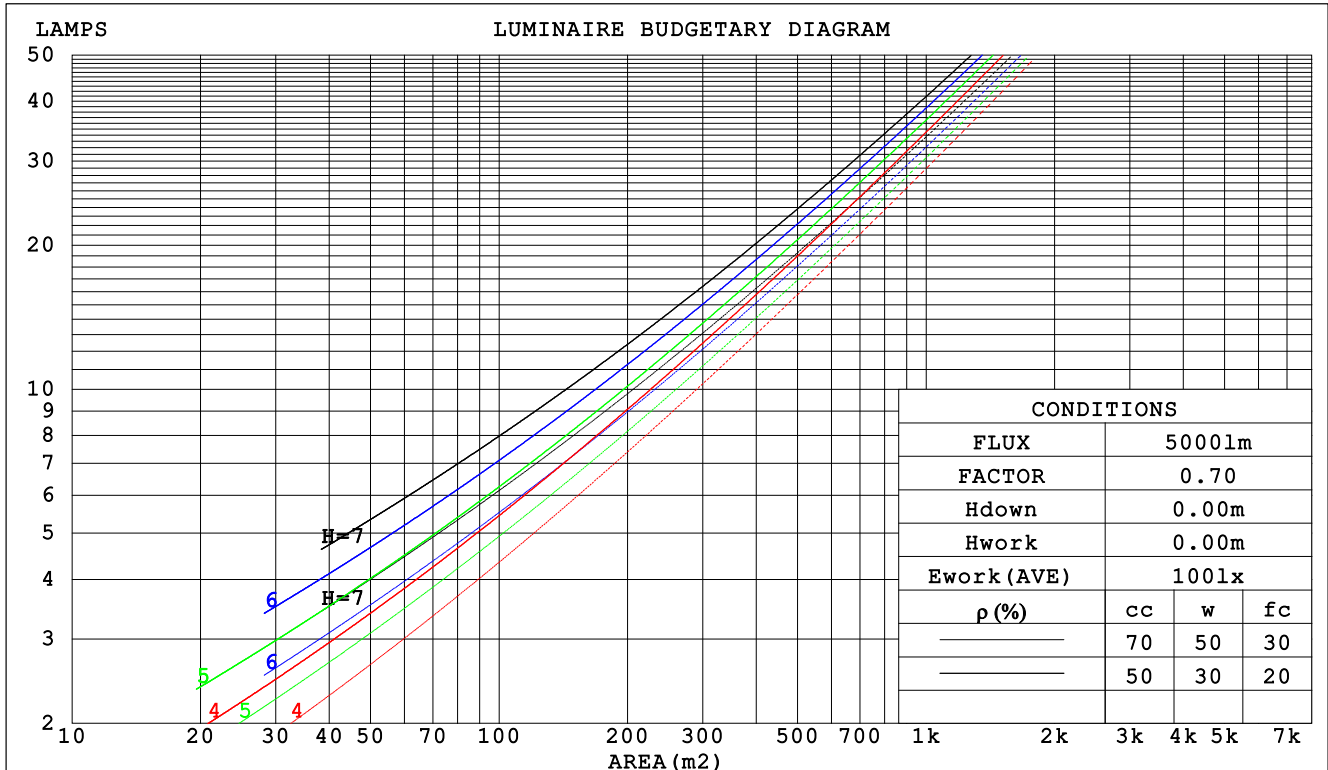

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.8V I:0.1540A P:18.60W PF:0.9980 Freq:50.00Hz Lamp Flux:2710.19x1 lm					
NAME: 24代			TYPE:3500K		WEIGHT:
SPEC.:			DIM.: 4FT		SERIAL No.:
MFR.: WS			SUR.:0.0505*3.14715		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.333	.190	.060	.324	.185	.059	.305	.175	.056	.289	.166	.053	.273	.158	.051		
2.0	.305	.167	.051	.296	.163	.050	.280	.155	.048	.265	.148	.046	.251	.142	.045		
3.0	.278	.148	.044	.270	.145	.044	.256	.139	.042	.242	.133	.041	.229	.127	.039		
4.0	.254	.132	.039	.247	.130	.038	.234	.124	.037	.222	.119	.036	.211	.114	.035		
5.0	.234	.119	.035	.228	.117	.034	.216	.112	.033	.205	.108	.032	.194	.104	.031		
6.0	.216	.108	.031	.210	.106	.031	.200	.102	.030	.190	.099	.029	.180	.095	.028		
7.0	.200	.099	.028	.195	.097	.028	.186	.094	.027	.176	.090	.026	.168	.087	.026		
8.0	.187	.091	.026	.182	.090	.025	.173	.087	.025	.165	.084	.024	.157	.081	.023		
9.0	.175	.084	.024	.170	.083	.023	.162	.080	.023	.155	.078	.022	.147	.075	.022		
10.0	.164	.079	.022	.160	.077	.022	.153	.075	.021	.146	.072	.021	.139	.070	.020		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.256	.256	.256	.219	.219	.219	.149	.149	.149	.086	.086	.086	.027	.027	.027	
1.0	.248	.222	.199	.212	.191	.171	.145	.131	.118	.084	.076	.069	.027	.024	.022	
2.0	.241	.198	.163	.206	.171	.141	.141	.118	.098	.081	.069	.058	.026	.022	.019	
3.0	.233	.181	.140	.200	.156	.121	.137	.109	.085	.079	.063	.050	.025	.021	.016	
4.0	.225	.168	.125	.193	.145	.108	.133	.101	.076	.077	.059	.045	.025	.019	.015	
5.0	.218	.158	.114	.187	.137	.099	.129	.096	.070	.075	.056	.042	.024	.018	.014	
6.0	.211	.150	.106	.181	.130	.093	.125	.091	.066	.073	.054	.039	.023	.017	.013	
7.0	.204	.143	.101	.175	.124	.088	.121	.087	.062	.070	.051	.037	.023	.017	.012	
8.0	.197	.138	.097	.170	.119	.084	.118	.084	.060	.068	.049	.036	.022	.016	.012	
9.0	.191	.133	.093	.165	.115	.081	.114	.081	.058	.067	.048	.034	.022	.016	.011	
10.0	.186	.129	.091	.160	.112	.079	.111	.079	.056	.065	.046	.034	.021	.015	.011	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.8V I:0.1540A P:18.60W PF:0.9980 Freq:50.00Hz Lamp Flux:2710.19x1 lm										
NAME: 24代					TYPE:3500K			WEIGHT:		
SPEC.:					DIM.: 4FT			SERIAL No.:		
MFR.: WS					SUR.:0.0505*3.14715			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.5	20.0	18.9	20.3	20.7	17.6	19.1	18.0	19.4	19.8
3H	20.5	21.8	20.9	22.2	22.6	19.1	20.4	19.5	20.8	21.2
4H	21.4	22.7	21.9	23.1	23.5	19.6	20.9	20.1	21.3	21.7
6H	22.3	23.5	22.8	23.9	24.4	20.0	21.2	20.4	21.6	22.0
8H	22.7	23.9	23.2	24.3	24.8	20.0	21.2	20.5	21.6	22.1
12H	23.2	24.3	23.7	24.8	25.2	20.1	21.2	20.5	21.6	22.1
4H 2H	19.1	20.4	19.6	20.8	21.2	18.5	19.7	18.9	20.1	20.6
3H	21.3	22.4	21.8	22.8	23.3	20.1	21.2	20.6	21.7	22.2
4H	22.4	23.4	22.9	23.8	24.3	20.8	21.8	21.3	22.3	22.8
6H	23.4	24.3	23.9	24.8	25.4	21.3	22.2	21.8	22.7	23.3
8H	23.9	24.8	24.5	25.3	25.9	21.4	22.3	22.0	22.8	23.4
12H	24.5	25.3	25.1	25.8	26.4	21.5	22.3	22.1	22.8	23.4
8H 4H	22.6	23.5	23.2	24.0	24.6	21.3	22.2	21.9	22.7	23.3
6H	23.9	24.6	24.5	25.2	25.8	22.0	22.7	22.6	23.3	23.9
8H	24.6	25.2	25.2	25.8	26.4	22.3	22.9	22.9	23.5	24.1
12H	25.3	25.9	25.9	26.5	27.1	22.5	23.0	23.1	23.6	24.3
12H 4H	22.6	23.4	23.2	23.9	24.5	21.4	22.2	22.0	22.7	23.3
6H	24.0	24.6	24.6	25.2	25.8	22.2	22.9	22.8	23.4	24.1
8H	24.7	25.3	25.3	25.8	26.5	22.6	23.1	23.2	23.7	24.4
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.5				

CIE Pub.117 Corrected 2710 lm Total Lamp Luminous Flux.(8log(F/F0) = 3.5)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.8V I:0.1540A P:18.60W PF:0.9980 Freq:50.00Hz Lamp Flux:2710.19x1 lm		
NAME: 24代	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	53	41	34	52	41	34	51	40	34	27
0.80	63	51	43	62	50	43	59	49	42	35
1.00	71	59	52	70	59	51	67	59	50	42
1.25	78	67	59	76	66	59	73	64	57	49
1.50	83	73	65	81	71	64	77	69	63	54
2.00	90	81	74	88	79	73	83	76	70	61
2.50	95	86	79	92	84	78	87	80	75	65
3.00	98	90	84	95	88	82	90	84	79	69
4.00	102	96	90	99	93	89	94	89	85	73
5.00	105	99	95	102	97	92	96	92	88	76
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.8V I:0.1540A P:18.60W PF:0.9980 Freq:50.00Hz Lamp Flux:2710.19x1 lm		
NAME: 24代	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

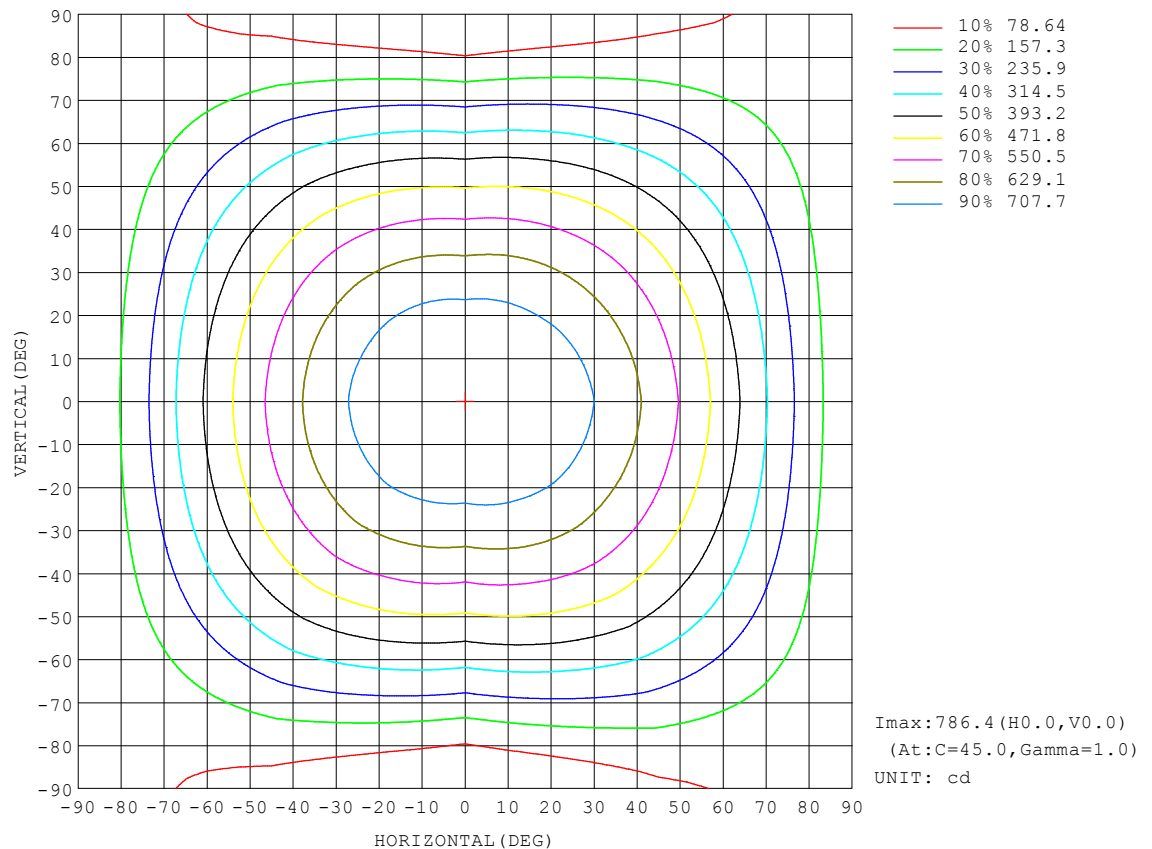


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.8V I:0.1540A P:18.60W PF:0.9980 Freq:50.00Hz Lamp Flux:2710.19x1 lm		
NAME: 24代	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

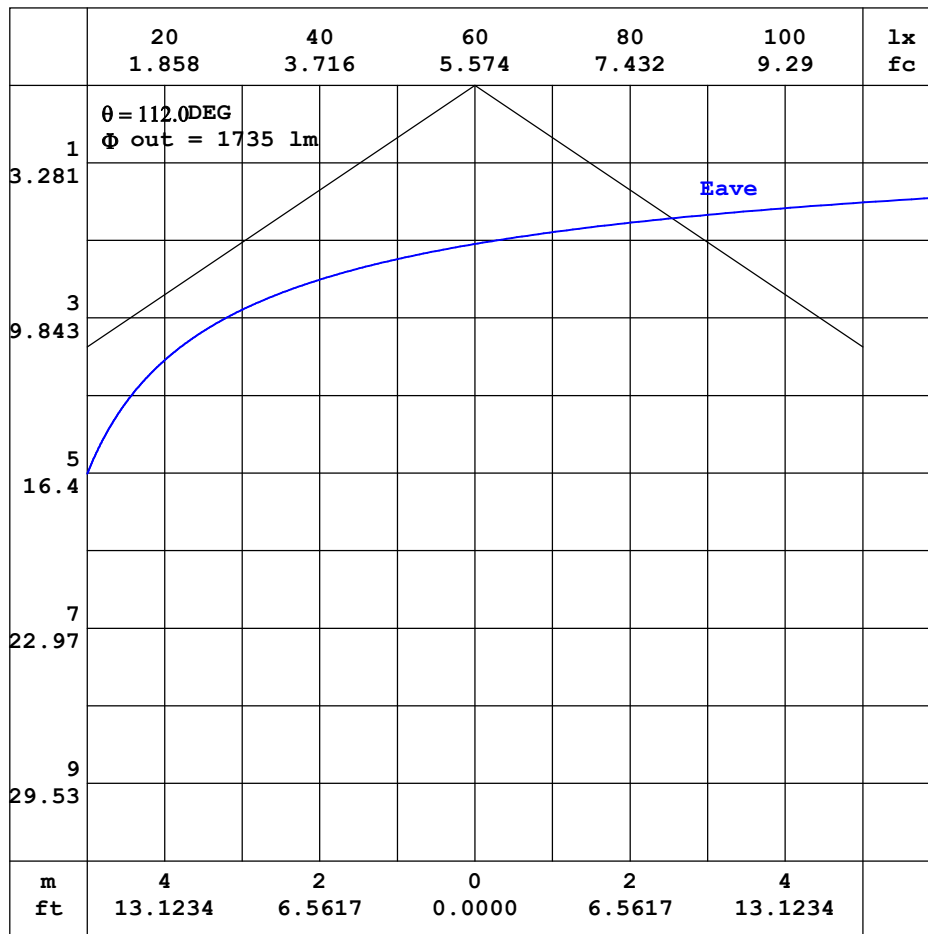


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.8V I:0.1540A P:18.60W PF:0.9980 Freq:50.00Hz Lamp Flux:2710.19x1 lm		
NAME: 24代	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

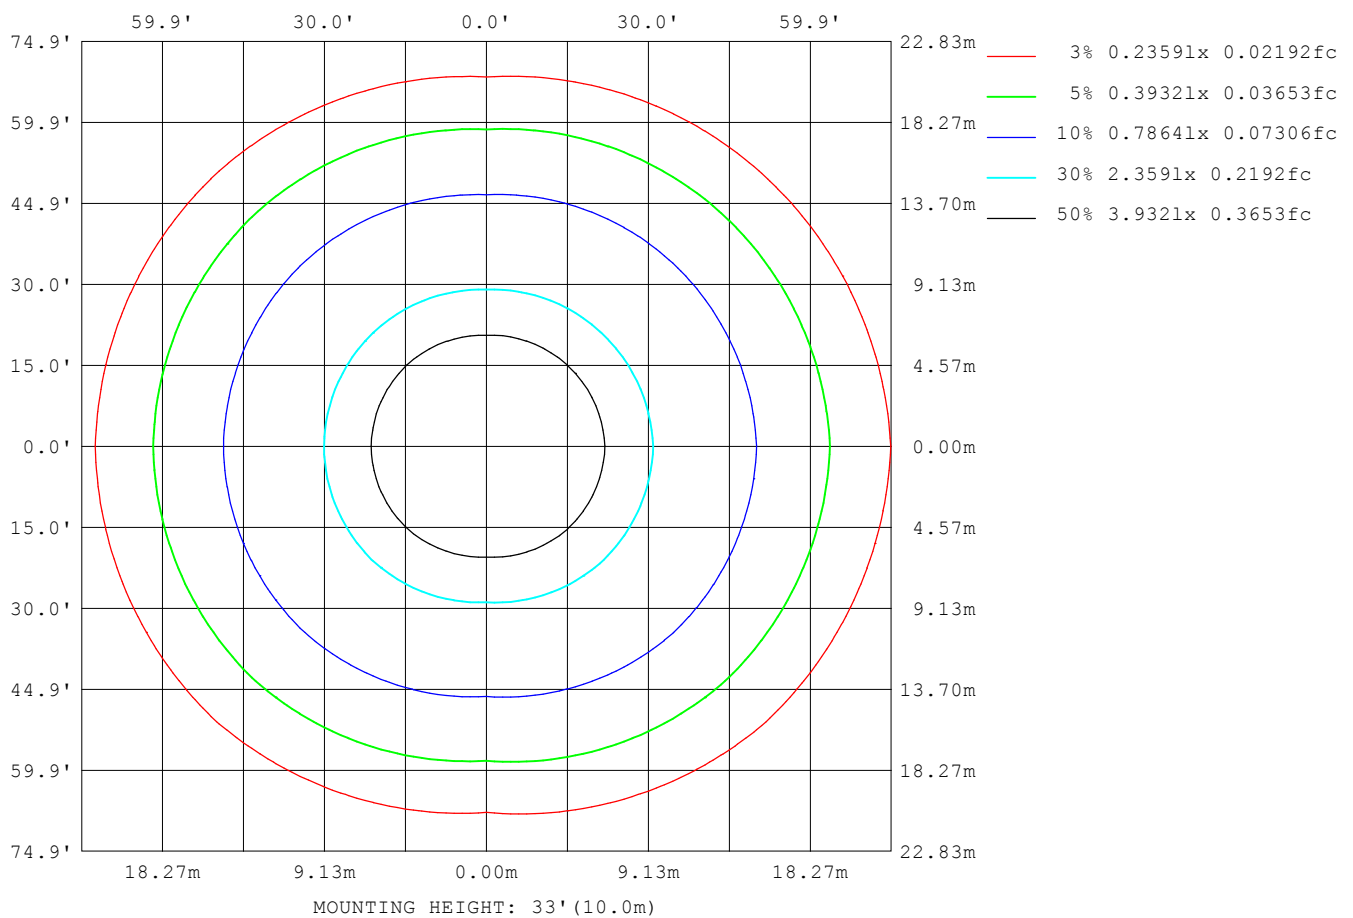

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.8V I:0.1540A P:18.60W PF:0.9980 Freq:50.00Hz Lamp Flux:2710.19x1 lm		
NAME: 24代	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	5412
L_0~180 (75) av	5766
L_0~180 (85) av	9228
L_90~270 (65) av	4158
L_90~270 (75) av	3469
L_90~270 (85) av	1984
L_45 (65) av	4982
L_45 (75) av	5004
L_45 (85) av	6762

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

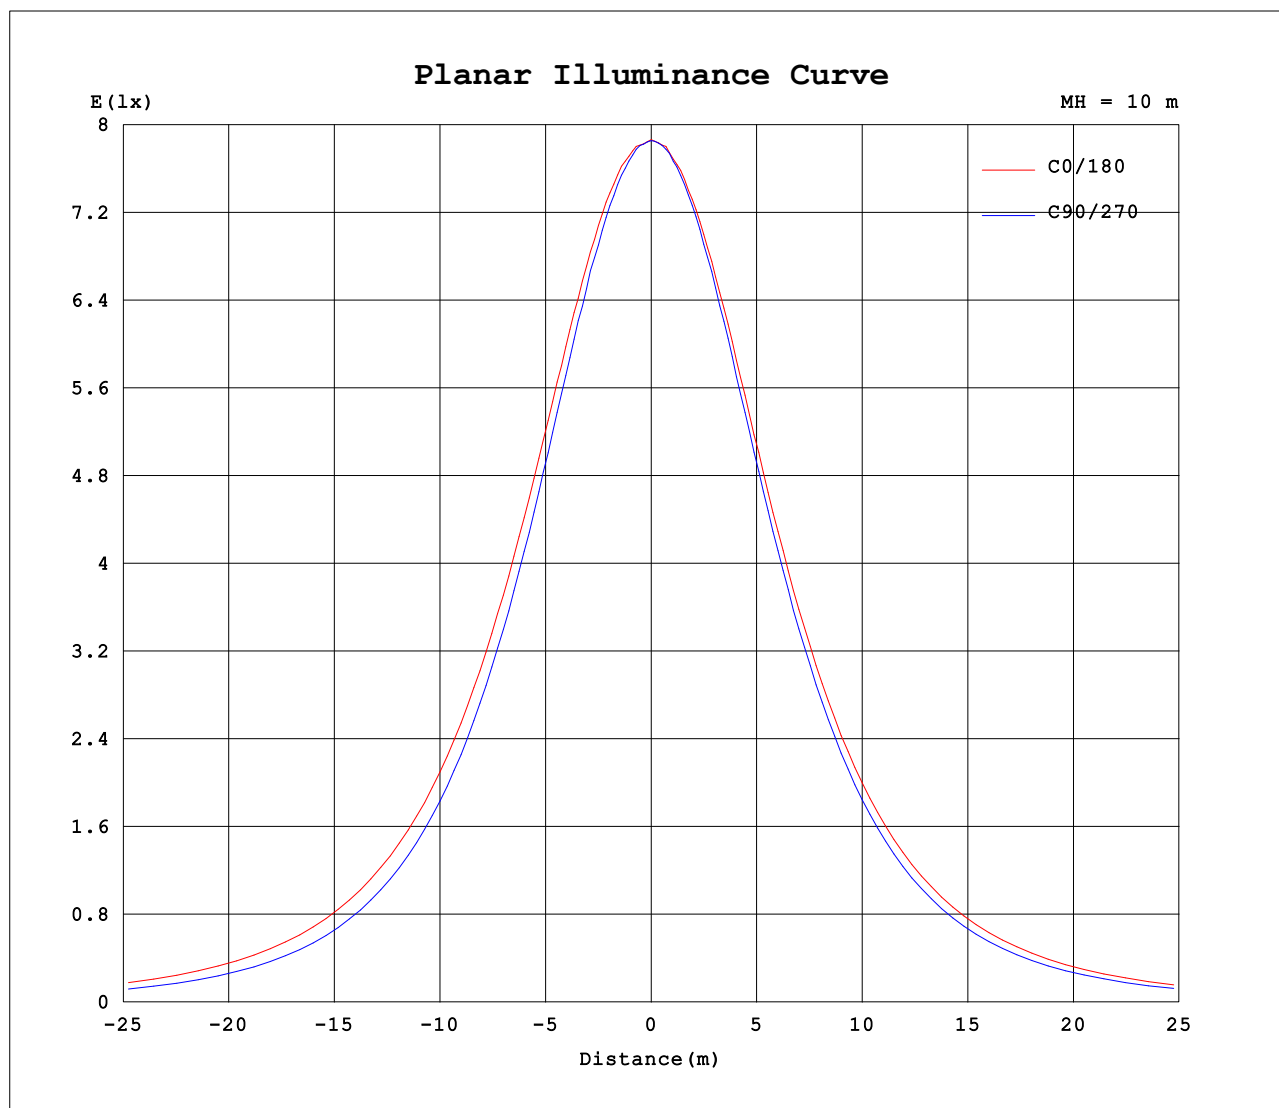

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.8V I:0.1540A P:18.60W PF:0.9980 Freq:50.00Hz Lamp Flux:2710.19x1 lm		
NAME: 24代	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	785	785	785	785	785	785	785	785										
5	784	783	781	782	782	782	782	782										
10	780	777	770	774	774	773	770	774										
15	771	764	753	761	762	760	753	762										
20	757	747	729	740	744	739	729	742										
25	735	724	698	715	718	712	699	714										
30	707	691	659	684	687	679	661	684										
35	674	657	618	645	651	642	619	647										
40	638	617	571	603	610	599	573	605										
45	593	572	519	557	565	551	522	558										
50	546	521	462	506	514	499	467	507										
55	493	466	403	450	460	445	408	453										
60	439	408	339	390	404	386	347	395										
65	380	347	273	328	343	323	282	333										
70	318	283	205	263	279	259	214	269										
75	255	218	137	200	217	195	146	205										
80	194	157	74.0	137	160	136	82.0	144										
85	141	103	24.3	88.4	113	88.5	30.4	92.8										
90	104	69.8	0.32	62.7	94.9	65.9	1.19	62.9										
95	94.2	63.2	0.33	59.9	91.3	63.2	0.95	59.1										
100	91.1	59.7	0.47	57.6	87.7	60.4	1.05	56.7										
105	87.3	59.0	0.53	55.0	83.6	57.4	1.01	54.1										
110	82.9	56.0	0.57	49.9	78.9	51.9	0.77	51.1										
115	78.0	52.5	0.54	45.9	70.0	45.2	0.67	47.9										
120	72.8	48.5	0.61	43.4	61.6	44.1	0.76	44.3										
125	67.2	43.4	0.66	40.6	60.8	40.2	0.67	38.8										
130	61.6	40.2	0.72	37.4	46.2	36.9	0.68	35.4										
135	55.7	36.5	0.79	33.6	49.5	33.5	0.73	30.9										
140	49.8	30.6	0.85	30.1	44.1	29.5	0.77	24.2										
145	43.7	25.0	0.91	26.4	38.1	25.3	0.85	18.8										
150	36.9	20.2	1.02	22.1	31.8	20.7	1.05	14.1										
155	30.1	15.3	1.10	17.5	25.1	15.9	1.16	9.79										
160	22.5	10.4	1.15	12.7	18.0	11.1	1.19	7.05										
165	15.0	7.13	1.20	8.43	11.2	7.04	1.22	4.72										
170	8.41	4.52	1.22	4.88	5.79	3.67	1.23	2.60										
175	3.15	2.04	1.24	2.00	1.57	1.55	1.22	1.36										
180	1.18	1.27	1.22	1.21	1.18	1.27	1.23	1.20										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: