


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.8V I:0.3300A P:39.70W PF:0.9950 Freq:50.00Hz Lamp Flux:5472.88x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 137.86 lm/W			
MODEL	DLC6.0	I _{max} (cd)	1588	S/MH(C0/180)	1.30
NOMINAL POWER(W)	40W	LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	5472.9	η UP,DN(C0-180)	4.5,46.3
NOMINAL FLUX(lm)	5472.88	CIE CLASS	DIRECT	η UP,DN(C180-360)	4.2,45.1
LAMPS INSIDE	1	η up(%)	8.6	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	120	η down(%)	91.4	CIBSE SHR MAX	1.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

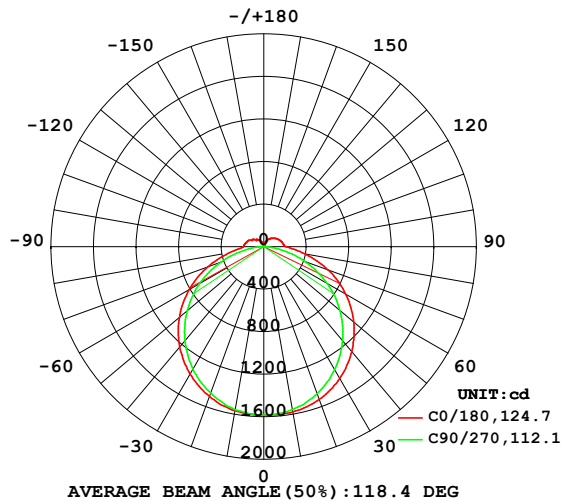

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

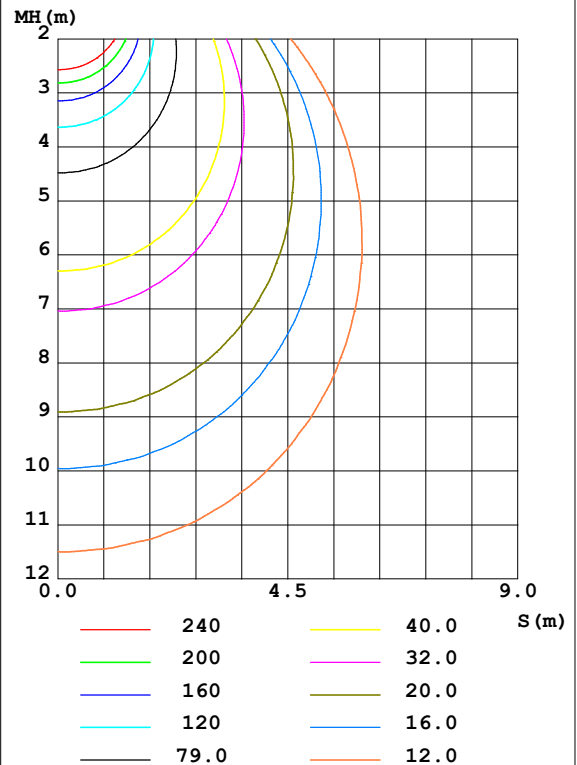

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1578	1568	1557	1564	1566	1565	1555	1566	0- 10	150.4	150.4	2.75,2.75
20	1530	1504	1470	1492	1497	1492	1464	1500	10- 20	433.8	584.2	10.7,10.7
30	1431	1396	1335	1377	1384	1375	1332	1385	20- 30	664.4	1249	22.8,22.8
40	1288	1243	1155	1216	1231	1209	1153	1227	30- 40	814.0	2063	37.7,37.7
50	1107	1049	936.5	1020	1036	1012	940.1	1028	40- 50	863.7	2926	53.5,53.5
60	888.3	823.7	686.5	788.1	812.0	779.6	696.3	800.4	50- 60	807.6	3734	68.2,68.2
70	643.6	572.4	414.4	533.4	562.5	522.1	431.8	542.8	60- 70	650.6	4384	80.1,80.1
80	391.1	316.7	149.7	280.0	321.7	272.8	167.5	289.0	70- 80	420.0	4804	87.8,87.8
90	209.8	144.9	0.6085	126.4	192.6	133.7	2.332	127.5	80- 90	196.3	5001	91.4,91.4
100	184.3	120.3	0.9797	116.3	178.4	122.4	2.084	115.1	90-100	119.9	5121	93.6,93.6
110	167.5	113.0	1.176	100.8	160.3	105.0	1.543	104.0	100-110	106.2	5227	95.5,95.5
120	147.8	97.42	1.270	87.82	121.6	89.20	1.502	88.38	110-120	85.95	5313	97.1,97.1
130	125.4	80.67	1.475	75.61	93.35	75.07	1.401	71.54	120-130	66.27	5379	98.3,98.3
140	101.9	61.49	1.747	60.64	87.20	59.56	1.570	49.03	130-140	46.70	5426	99.1,99.1
150	76.20	40.80	2.095	44.84	60.93	41.86	2.105	28.65	140-150	28.56	5454	99.7,99.7
160	46.42	21.17	2.356	25.64	35.78	22.32	2.388	14.35	150-160	13.76	5468	99.9,99.9
170	17.33	9.266	2.492	9.899	11.37	7.287	2.490	5.299	160-170	4.276	5472	100,100
180	2.413	2.573	2.465	2.473	2.406	2.565	2.521	2.456	170-180	0.4960	5473	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.8V I:0.3300A P:39.70W PF:0.9950 Freq:50.00Hz Lamp Flux:5472.88x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

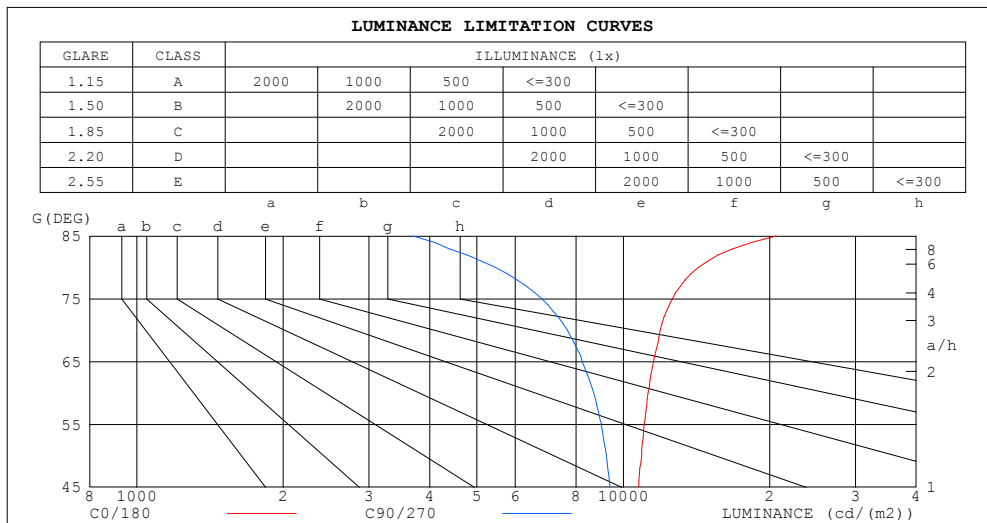

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	20629	3693
80	14262	5461
75	12614	6797
70	11915	7677
65	11544	8236
60	11250	8698
55	11040	9010
50	10902	9230
45	10760	9388


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.8V I:0.3300A P:39.70W PF:0.9950 Freq:50.00Hz Lamp Flux:5472.88x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.17	1.17	1.17	1.13	1.13	1.13	1.06	1.06	1.06	.00	.00	.00	.94	.94	.94	.91
1.0	1.01	.96	.92	.97	.93	.89	.92	.88	.85	.86	.83	.81	.81	.79	.77	.74
2.0	.87	.80	.74	.84	.78	.72	.79	.74	.69	.75	.70	.66	.71	.67	.64	.61
3.0	.76	.68	.61	.74	.66	.60	.70	.63	.58	.66	.60	.55	.62	.57	.53	.51
4.0	.67	.58	.51	.65	.57	.50	.62	.54	.49	.58	.52	.47	.55	.50	.46	.43
5.0	.60	.51	.44	.58	.49	.43	.55	.48	.42	.52	.46	.41	.49	.44	.39	.37
6.0	.54	.44	.38	.52	.44	.37	.49	.42	.36	.47	.40	.35	.45	.39	.34	.32
7.0	.48	.40	.33	.47	.39	.33	.45	.37	.32	.43	.36	.31	.41	.35	.30	.28
8.0	.44	.36	.30	.43	.35	.29	.41	.34	.29	.39	.33	.28	.37	.32	.27	.25
9.0	.40	.32	.27	.39	.32	.26	.38	.31	.26	.36	.30	.25	.34	.29	.24	.23
10.0	.37	.29	.24	.36	.29	.24	.35	.28	.23	.33	.27	.23	.32	.26	.22	.20

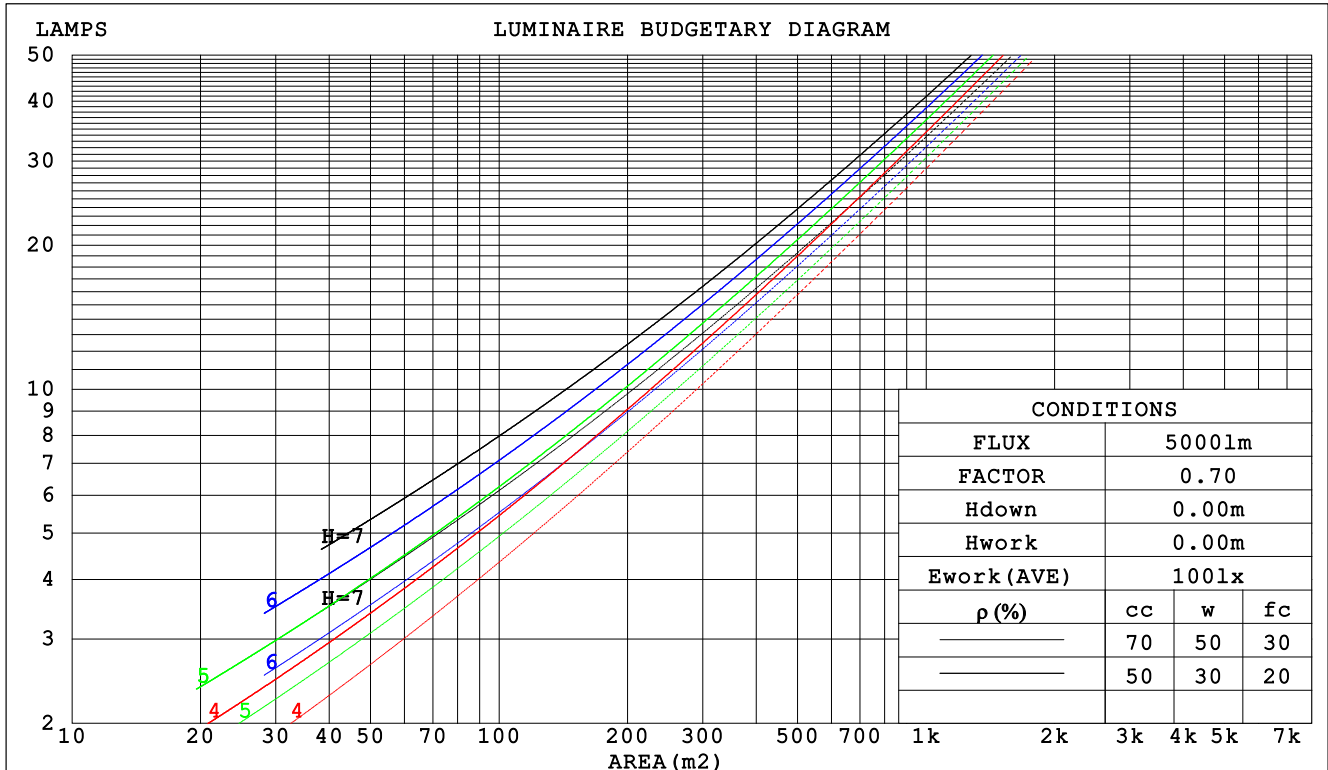

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.8V I:0.3300A P:39.70W PF:0.9950 Freq:50.00Hz Lamp Flux:5472.88x1 lm					
NAME: 24代			TYPE:4000K		WEIGHT:
SPEC.:			DIM.: 4FT		SERIAL No.:
MFR.: WS			SUR.:0.0505*3.14715		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.334	.190	.060	.324	.185	.059	.306	.175	.056	.289	.167	.053	.273	.158	.051		
2.0	.305	.167	.051	.296	.163	.050	.280	.156	.048	.265	.148	.046	.251	.142	.045		
3.0	.278	.148	.044	.270	.145	.044	.256	.139	.042	.242	.133	.041	.229	.127	.039		
4.0	.254	.132	.039	.247	.130	.038	.234	.124	.037	.222	.119	.036	.211	.114	.035		
5.0	.234	.119	.035	.228	.117	.034	.216	.112	.033	.205	.108	.032	.194	.104	.031		
6.0	.216	.108	.031	.210	.106	.031	.200	.102	.030	.190	.099	.029	.180	.095	.028		
7.0	.200	.099	.028	.195	.097	.028	.186	.094	.027	.176	.090	.026	.168	.087	.026		
8.0	.187	.091	.026	.182	.090	.025	.173	.087	.025	.165	.084	.024	.157	.081	.023		
9.0	.175	.084	.024	.170	.083	.023	.162	.080	.023	.155	.078	.022	.147	.075	.022		
10.0	.164	.079	.022	.160	.077	.022	.153	.075	.021	.146	.072	.021	.139	.070	.020		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.256	.256	.256	.219	.219	.219	.149	.149	.149	.086	.086	.086	.027	.027	.027	
1.0	.248	.222	.199	.212	.191	.171	.145	.131	.118	.084	.076	.069	.027	.024	.022	
2.0	.241	.199	.163	.206	.171	.141	.141	.118	.098	.081	.069	.058	.026	.022	.019	
3.0	.233	.181	.140	.200	.157	.122	.137	.109	.085	.079	.063	.050	.025	.021	.016	
4.0	.226	.168	.125	.194	.146	.108	.133	.101	.076	.077	.059	.045	.025	.019	.015	
5.0	.218	.158	.114	.187	.137	.099	.129	.096	.070	.075	.056	.042	.024	.018	.014	
6.0	.211	.150	.107	.181	.130	.093	.125	.091	.066	.073	.054	.039	.023	.018	.013	
7.0	.204	.143	.101	.175	.124	.088	.121	.087	.062	.070	.051	.037	.023	.017	.012	
8.0	.198	.138	.097	.170	.119	.084	.118	.084	.060	.068	.049	.036	.022	.016	.012	
9.0	.191	.133	.093	.165	.115	.081	.114	.081	.058	.067	.048	.034	.022	.016	.011	
10.0	.186	.129	.091	.160	.112	.079	.111	.079	.056	.065	.046	.034	.021	.015	.011	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.8V I:0.3300A P:39.70W PF:0.9950 Freq:50.00Hz Lamp Flux:5472.88x1 lm										
NAME: 24代					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.: 4FT			SERIAL No.:		
MFR.: WS					SUR.:0.0505*3.14715			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.0	22.4	21.4	22.8	23.1	20.1	21.5	20.5	21.9	22.3
3H	22.9	24.3	23.4	24.7	25.1	21.5	22.9	22.0	23.3	23.7
4H	23.9	25.1	24.3	25.5	26.0	22.1	23.3	22.5	23.8	24.2
6H	24.8	25.9	25.2	26.4	26.8	22.4	23.6	22.9	24.0	24.5
8H	25.2	26.3	25.7	26.8	27.2	22.5	23.6	23.0	24.1	24.5
12H	25.7	26.8	26.1	27.2	27.7	22.5	23.6	23.0	24.1	24.5
4H 2H	21.6	22.8	22.0	23.2	23.7	20.9	22.2	21.3	22.6	23.0
3H	23.7	24.8	24.2	25.3	25.8	22.6	23.7	23.1	24.1	24.6
4H	24.8	25.8	25.3	26.3	26.8	23.3	24.3	23.8	24.7	25.3
6H	25.8	26.7	26.4	27.2	27.8	23.7	24.6	24.3	25.1	25.7
8H	26.4	27.2	26.9	27.7	28.3	23.9	24.7	24.4	25.2	25.8
12H	26.9	27.7	27.5	28.2	28.8	23.9	24.7	24.5	25.2	25.8
8H 4H	25.1	25.9	25.6	26.4	27.0	23.8	24.6	24.3	25.1	25.7
6H	26.3	27.0	26.9	27.6	28.2	24.5	25.2	25.1	25.7	26.3
8H	27.0	27.6	27.6	28.2	28.8	24.7	25.4	25.3	25.9	26.6
12H	27.8	28.3	28.4	28.9	29.6	24.9	25.5	25.5	26.0	26.7
12H 4H	25.1	25.9	25.6	26.4	27.0	23.9	24.6	24.4	25.2	25.8
6H	26.4	27.0	27.0	27.6	28.2	24.7	25.3	25.3	25.9	26.5
8H	27.2	27.7	27.8	28.3	29.0	25.0	25.6	25.6	26.2	26.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.5				

CIE Pub.117 Corrected 5473 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.9)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.8V I:0.3300A P:39.70W PF:0.9950 Freq:50.00Hz Lamp Flux:5472.88x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	53	41	34	52	41	34	51	40	34	27
0.80	63	51	43	62	50	43	59	49	42	35
1.00	71	59	52	70	58	51	67	59	50	42
1.25	78	67	59	76	66	59	73	64	57	49
1.50	83	73	65	81	71	64	77	69	63	54
2.00	90	81	74	88	79	73	83	76	70	61
2.50	95	86	79	92	84	78	87	80	75	65
3.00	98	90	84	95	88	82	90	84	79	69
4.00	102	96	90	99	93	89	94	89	85	73
5.00	105	99	95	102	97	92	96	92	88	76
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.8V I:0.3300A P:39.70W PF:0.9950 Freq:50.00Hz Lamp Flux:5472.88x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

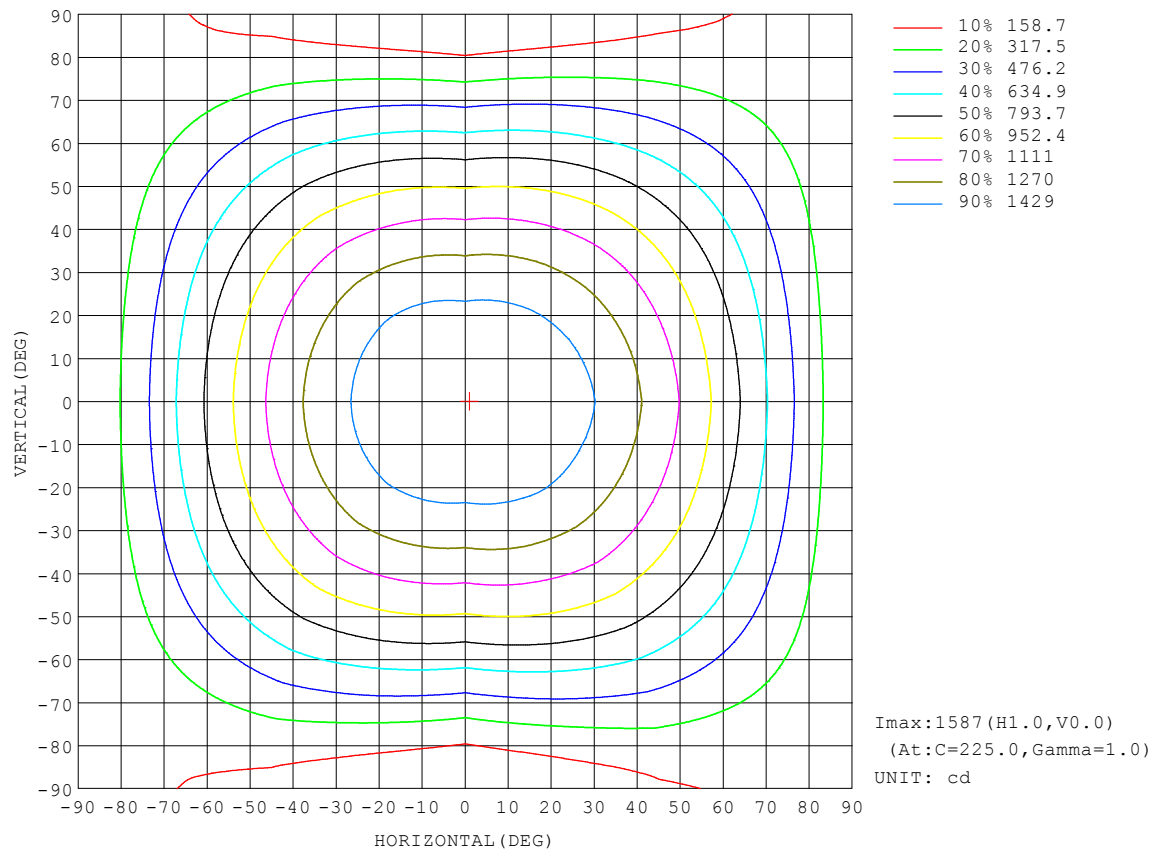


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.8V I:0.3300A P:39.70W PF:0.9950 Freq:50.00Hz Lamp Flux:5472.88x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

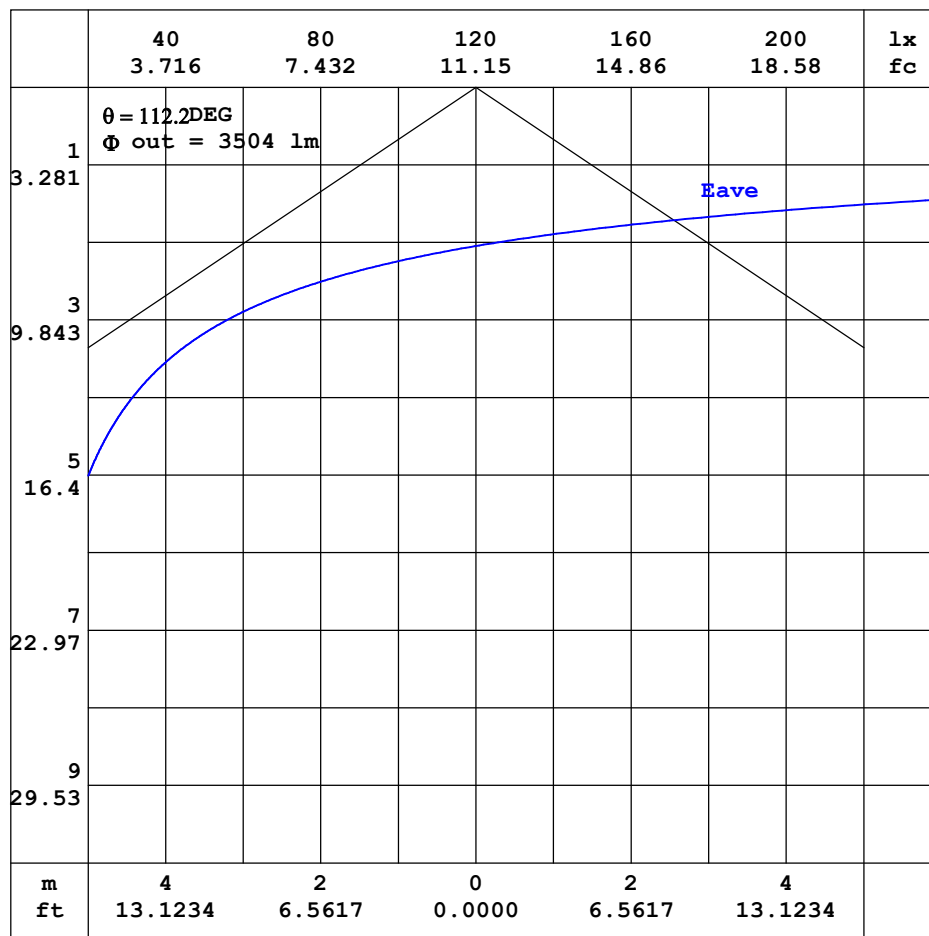


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.8V I:0.3300A P:39.70W PF:0.9950 Freq:50.00Hz Lamp Flux:5472.88x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

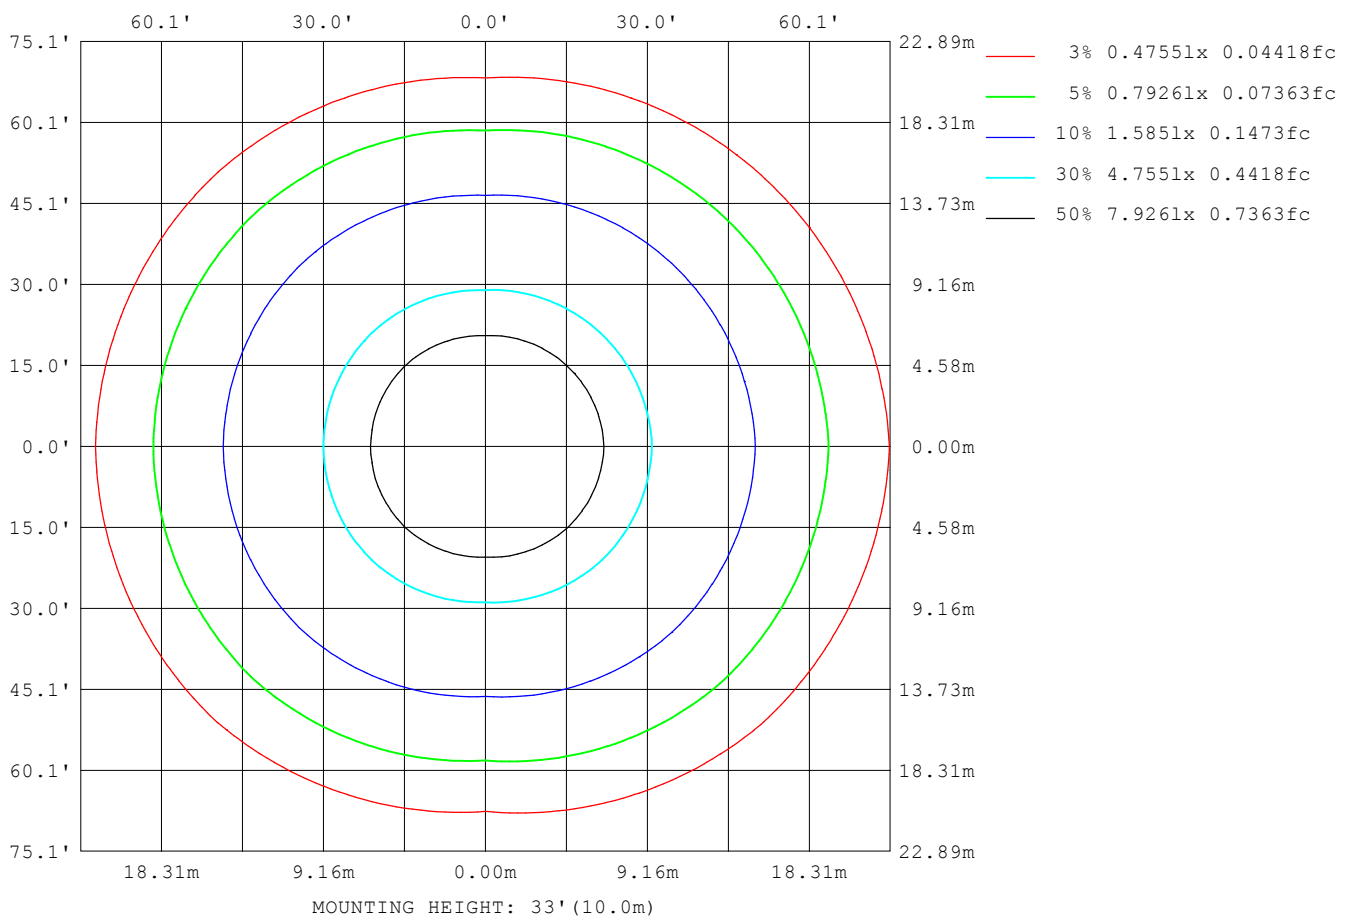

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.8V I:0.3300A P:39.70W PF:0.9950 Freq:50.00Hz Lamp Flux:5472.88x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	10933
L_0~180 (75) av	11640
L_0~180 (85) av	18707
L_90~270 (65) av	8362
L_90~270 (75) av	7005
L_90~270 (85) av	4062
L_45 (65) av	10051
L_45 (75) av	10088
L_45 (85) av	13732

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

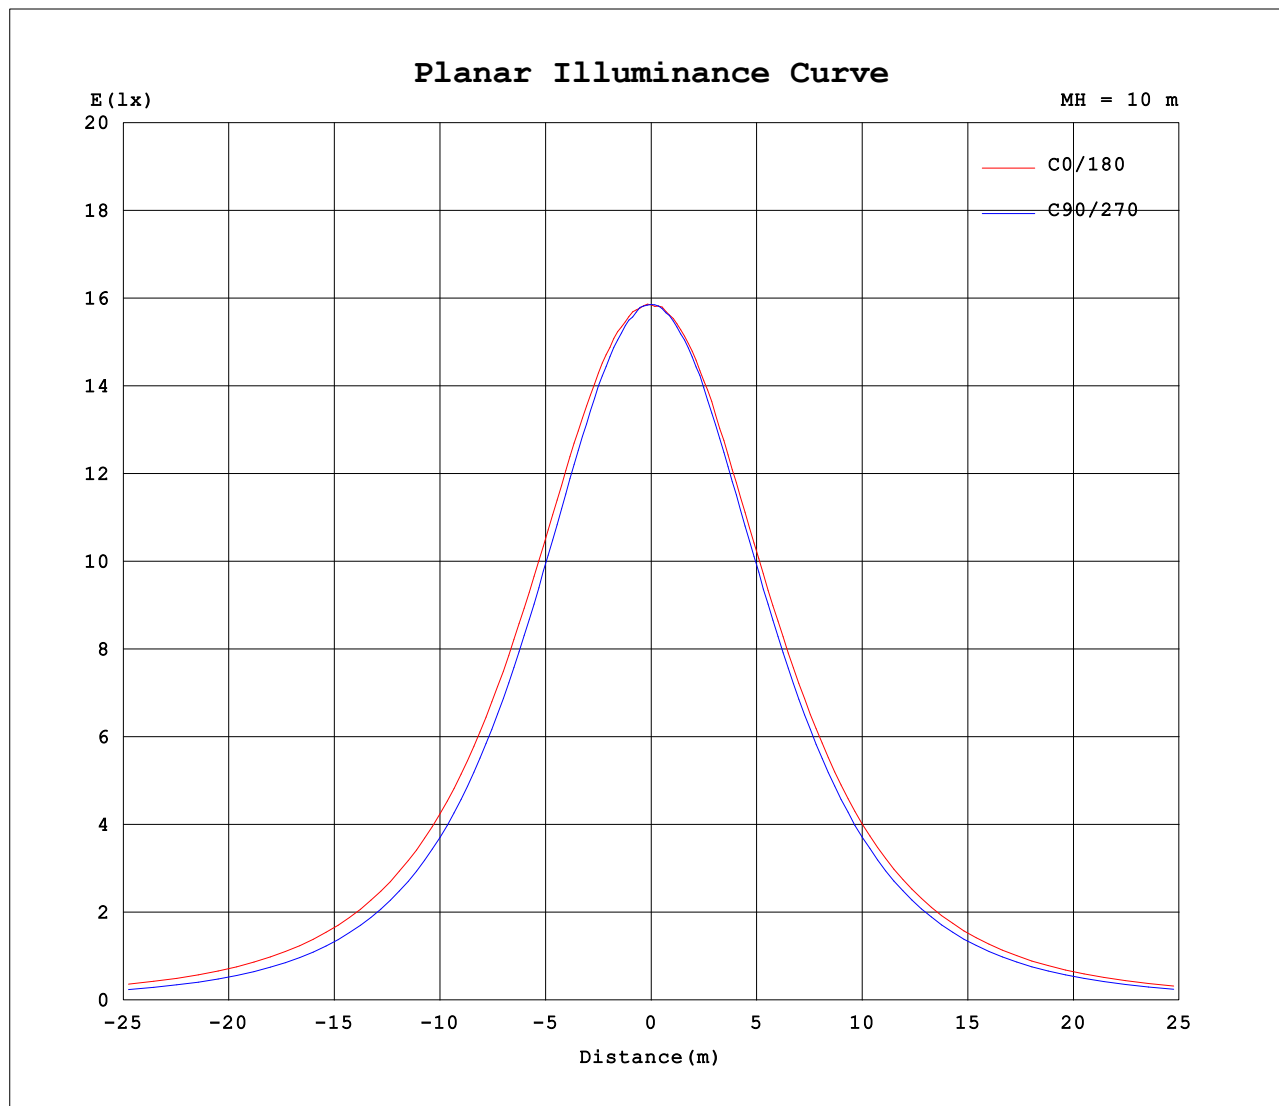

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-02-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.8V I:0.3300A P:39.70W PF:0.9950 Freq:50.00Hz Lamp Flux:5472.88x1 lm		
NAME: 24代	TYPE:4000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.: WS	SUR.:0.0505*3.14715	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1584	1584	1584	1584	1584	1584	1584	1584										
5	1586	1580	1574	1584	1579	1583	1577	1578										
10	1578	1568	1557	1564	1566	1565	1555	1566										
15	1558	1546	1521	1536	1543	1535	1516	1539										
20	1530	1504	1470	1492	1497	1492	1464	1500										
25	1486	1454	1408	1440	1445	1443	1404	1446										
30	1431	1396	1335	1377	1384	1375	1332	1385										
35	1363	1325	1250	1301	1313	1297	1247	1308										
40	1288	1243	1155	1216	1231	1209	1153	1227										
45	1202	1149	1048	1122	1136	1116	1050	1129										
50	1107	1049	936	1020	1036	1012	940	1028										
55	1000	940	816	905	928	901	821	917										
60	888	824	686	788	812	780	696	800										
65	770	700	549	663	690	652	567	670										
70	644	572	414	533	562	522	432	543										
75	516	443	278	402	436	393	295	413										
80	391	317	150	280	322	273	168	289										
85	284	210	50.8	181	231	178	61.1	187										
90	210	145	0.61	126	193	134	2.33	127										
95	191	128	0.67	121	186	128	1.96	120										
100	184	120	0.98	116	178	122	2.08	115										
105	176	119	1.10	111	170	116	2.03	110										
110	168	113	1.18	101	160	105	1.54	104										
115	158	106	1.11	91.5	145	90.5	1.36	97.6										
120	148	97.4	1.27	87.8	122	89.2	1.50	88.4										
125	137	87.7	1.35	82.1	122	81.4	1.32	79.1										
130	125	80.7	1.48	75.6	93.4	75.1	1.40	71.5										
135	114	73.5	1.64	68.4	98.0	67.5	1.49	62.7										
140	102	61.5	1.75	60.6	87.2	59.6	1.57	49.0										
145	89.3	50.2	1.85	53.3	75.6	51.2	1.71	38.5										
150	76.2	40.8	2.09	44.8	60.9	41.9	2.11	28.6										
155	62.3	30.8	2.26	35.3	48.5	32.3	2.32	19.9										
160	46.4	21.2	2.36	25.6	35.8	22.3	2.39	14.3										
165	31.1	14.6	2.43	17.1	22.1	14.3	2.45	9.63										
170	17.3	9.27	2.49	9.90	11.4	7.29	2.49	5.30										
175	6.51	4.23	2.50	4.04	3.16	3.07	2.48	2.83										
180	2.41	2.57	2.47	2.47	2.41	2.57	2.52	2.46										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-02-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: