


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.0V I:0.0850A P:10.10W PF:0.9870 Freq:60.00Hz Lamp Flux:1071.72x1 lm		
NAME: cove5代 3500k 40F	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.3*0.003	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 112.89 lm/W			
MODEL		I _{max} (cd)	1751	S/MH(C0/180)	0.98
NOMINAL POWER(W)	10W	LOR(%)	106.4	S/MH(C90/270)	0.63
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	1140.2	η UP,DN(C0-180)	1.0,58.6
NOMINAL FLUX(lm)	1071.72	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.7,46.1
LAMPS INSIDE	1	η up(%)	1.7	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120.0	η down(%)	104.7	CIBSE SHR MAX	0.65

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

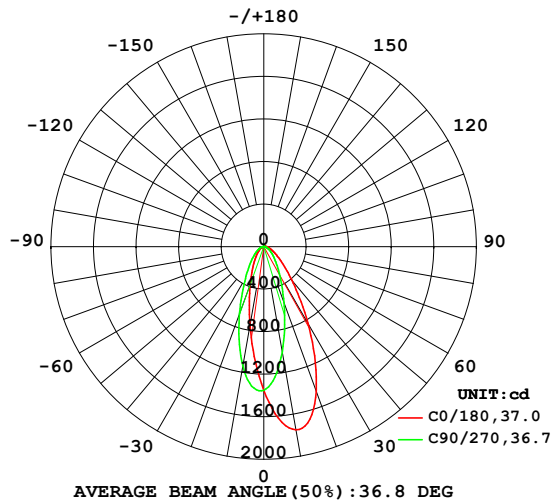

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

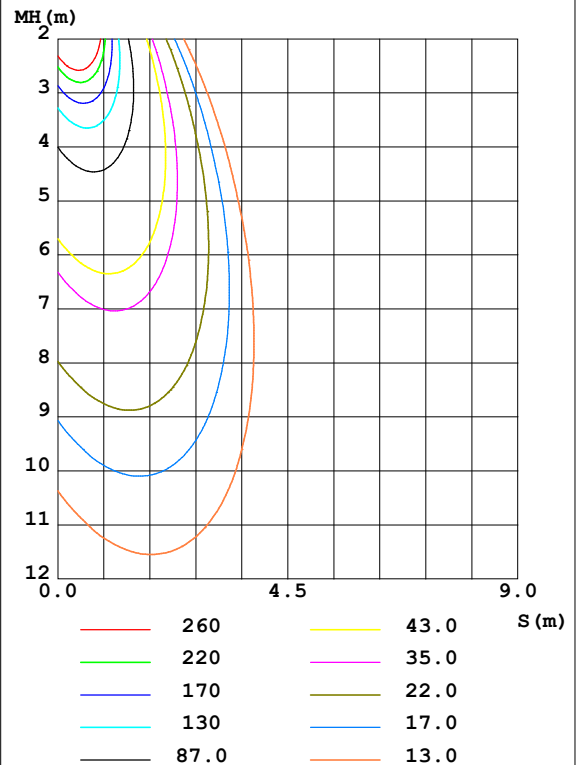

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-04-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1749	1369	1006	803.3	752.9	877.1	1142	1531	0- 10	119.4	119.4	10.5,11.1
20	1444	919.9	557.2	407.0	373.8	456.6	668.9	1103	10- 20	264.1	383.5	33.6,35.8
30	832.3	495.3	295.3	212.8	194.3	236.3	348.7	595.3	20- 30	254.6	638.0	56,59.5
40	412.4	262.7	167.5	118.9	108.1	132.0	192.6	305.3	30- 40	184.2	822.3	72.1,76.7
50	212.7	148.7	99.93	70.17	62.57	77.58	112.1	168.4	40- 50	123.6	945.9	83,88.3
60	119.0	87.68	59.14	39.69	34.86	44.27	66.94	98.83	50- 60	81.92	1028	90.1,95.9
70	68.08	51.92	30.14	19.22	17.03	22.25	35.96	58.19	60- 70	51.74	1080	94.7,101
80	38.64	28.02	9.753	6.429	7.986	8.310	13.54	31.53	70- 80	28.78	1108	97.2,103
90	19.34	12.13	0.0127	5.106	7.822	5.514	0.2257	12.72	80- 90	13.57	1122	98.4,105
100	8.352	6.032	0.0203	4.004	6.973	4.060	0.0229	5.604	90-100	6.355	1128	99,105
110	7.898	5.469	0.0431	2.635	5.498	2.730	0.0406	5.013	100-110	4.359	1133	99.3,106
120	6.820	4.511	0.0836	1.274	3.189	1.358	0.0735	4.062	110-120	3.217	1136	99.6,106
130	5.533	3.264	0.1367	0.2054	1.608	0.1924	0.1395	2.836	120-130	2.006	1138	99.8,106
140	3.944	1.950	0.2405	0.3648	0.4684	0.3510	0.2383	1.595	130-140	1.123	1139	99.9,106
150	2.101	0.3892	0.4102	0.5724	0.6954	0.5461	0.4183	0.3090	140-150	0.5840	1140	100,106
160	0.4632	0.5127	0.6181	0.7389	0.8334	0.7097	0.6337	0.5214	150-160	0.2973	1140	100,106
170	0.7042	0.7075	0.7575	0.7992	0.8778	0.7772	0.7578	0.7194	160-170	0.1972	1140	100,106
180	0.8543	0.7892	0.7779	0.8112	0.8566	0.7892	0.7804	0.8088	170-180	0.0750	1140	100,106
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-04-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.0V I:0.0850A P:10.10W PF:0.9870 Freq:60.00Hz Lamp Flux:1071.72x1 lm		
NAME: cove5代 3500k 40F	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.3*0.003	Shielding Angle:

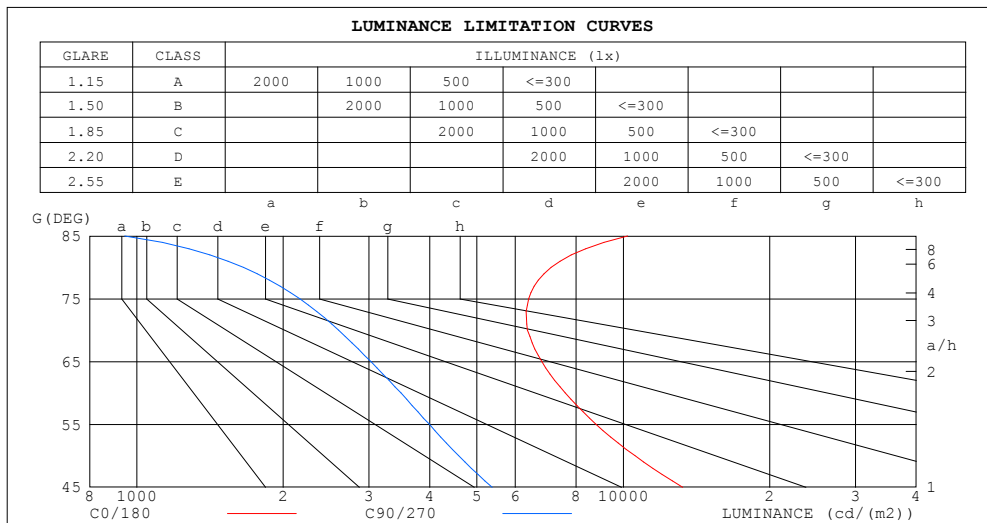

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	10210	945
80	7106	1657
75	6388	2163
70	6357	2600
65	6805	3027
60	7600	3489
55	8787	3993
50	10565	4586
45	13239	5378


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-04-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.0V I:0.0850A P:10.10W PF:0.9870 Freq:60.00Hz Lamp Flux:1071.72x1 lm		
NAME: cove5代 3500k 40F	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.3*0.003	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.26	1.26	1.26	1.23	1.23	1.23	1.17	1.17	1.17	1.12	1.12	1.12	1.07	1.07	1.07	1.05
1.0	1.15	1.11	1.08	1.12	1.09	1.06	1.07	1.05	1.03	1.03	1.01	.99	.99	.98	.96	.94
2.0	1.04	.99	.95	1.02	.97	.93	.99	.94	.91	.95	.92	.89	.92	.89	.87	.85
3.0	.96	.89	.84	.94	.88	.83	.91	.86	.82	.88	.84	.80	.85	.82	.79	.77
4.0	.88	.81	.76	.87	.80	.75	.84	.78	.74	.82	.77	.73	.79	.75	.72	.70
5.0	.81	.74	.69	.80	.73	.68	.78	.72	.67	.76	.71	.67	.74	.70	.66	.64
6.0	.76	.68	.63	.75	.68	.63	.73	.67	.62	.71	.66	.62	.69	.65	.61	.59
7.0	.71	.63	.58	.70	.63	.58	.68	.62	.58	.67	.61	.57	.65	.60	.57	.55
8.0	.66	.59	.54	.66	.59	.54	.64	.58	.54	.63	.57	.53	.62	.57	.53	.51
9.0	.62	.55	.51	.62	.55	.50	.61	.54	.50	.59	.54	.50	.58	.53	.50	.48
10.0	.59	.52	.47	.58	.52	.47	.57	.51	.47	.56	.51	.47	.55	.50	.47	.45

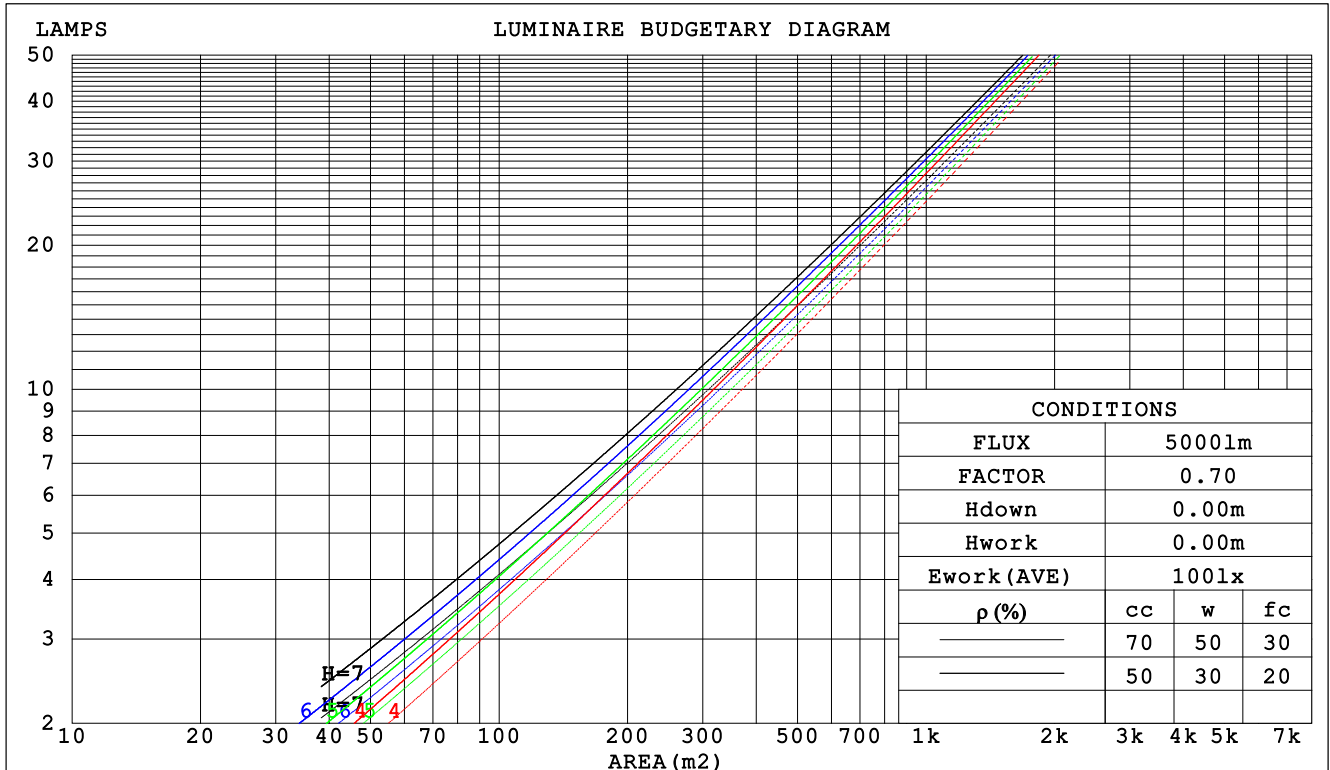

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-04-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.0V I:0.0850A P:10.10W PF:0.9870 Freq:60.00Hz Lamp Flux:1071.72x1 lm								
NAME: cove5代 3500k 40F				TYPE:3500K			WEIGHT:	
SPEC.:				DIM.: 1FT			SERIAL No.:	
MFR.: WS				SUR.:0.3*0.003			Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.243	.138	.044	.235	.134	.043	.220	.126	.040	.207	.119	.038	.195	.113	.036		
2.0	.228	.125	.038	.221	.122	.038	.209	.116	.036	.197	.111	.035	.186	.105	.033		
3.0	.213	.113	.034	.207	.111	.033	.196	.106	.032	.186	.102	.031	.177	.098	.030		
4.0	.199	.104	.030	.194	.102	.030	.185	.098	.029	.176	.094	.028	.167	.091	.028		
5.0	.187	.095	.028	.182	.094	.027	.174	.091	.027	.166	.088	.026	.159	.085	.025		
6.0	.176	.088	.025	.172	.087	.025	.164	.084	.024	.157	.082	.024	.150	.079	.024		
7.0	.165	.082	.023	.162	.081	.023	.155	.078	.023	.149	.076	.022	.143	.074	.022		
8.0	.156	.076	.021	.153	.075	.021	.147	.074	.021	.142	.072	.021	.136	.070	.020		
9.0	.148	.072	.020	.145	.071	.020	.140	.069	.020	.135	.068	.019	.130	.066	.019		
10.0	.141	.067	.019	.138	.067	.019	.133	.065	.018	.129	.064	.018	.124	.062	.018		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.216	.216	.216	.184	.184	.184	.126	.126	.126	.072	.072	.072	.023	.023	.023	
1.0	.199	.180	.163	.170	.154	.140	.116	.106	.097	.067	.061	.056	.021	.020	.018	
2.0	.185	.154	.127	.159	.132	.110	.109	.092	.077	.063	.053	.045	.020	.017	.015	
3.0	.174	.134	.103	.149	.116	.089	.102	.080	.062	.059	.047	.037	.019	.015	.012	
4.0	.164	.119	.085	.141	.103	.074	.097	.072	.052	.056	.042	.031	.018	.014	.010	
5.0	.155	.107	.072	.133	.093	.063	.092	.065	.044	.053	.038	.026	.017	.012	.009	
6.0	.147	.098	.062	.126	.085	.054	.087	.059	.038	.051	.035	.023	.016	.011	.008	
7.0	.140	.090	.055	.120	.078	.048	.083	.055	.034	.048	.032	.020	.016	.011	.007	
8.0	.134	.084	.049	.115	.072	.043	.080	.051	.030	.046	.030	.018	.015	.010	.006	
9.0	.128	.078	.045	.110	.068	.039	.076	.048	.028	.044	.028	.016	.014	.009	.005	
10.0	.122	.073	.041	.106	.064	.036	.073	.045	.025	.043	.027	.015	.014	.009	.005	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-04-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.0V I:0.0850A P:10.10W PF:0.9870 Freq:60.00Hz Lamp Flux:1071.72x1 lm										
NAME: cove5代 3500k 40F						TYPE:3500K			WEIGHT:	
SPEC.:						DIM.: 1FT			SERIAL No.:	
MFR.: WS						SUR.:0.3*0.003			Shielding Angle:	
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.6	20.7	19.9	20.9	21.1	16.3	17.4	16.5	17.6	17.8
3H	20.5	21.6	20.8	21.8	22.1	17.0	18.0	17.3	18.2	18.5
4H	21.0	22.0	21.4	22.3	22.5	17.2	18.2	17.5	18.4	18.7
6H	21.6	22.5	21.9	22.8	23.1	17.3	18.3	17.7	18.5	18.8
8H	21.9	22.7	22.2	23.0	23.3	17.4	18.2	17.7	18.5	18.8
12H	22.2	23.0	22.5	23.3	23.7	17.3	18.2	17.7	18.5	18.8
4H 2H	19.7	20.7	20.0	21.0	21.2	17.0	17.9	17.3	18.2	18.5
3H	20.9	21.7	21.2	22.0	22.4	17.9	18.7	18.2	19.0	19.4
4H	21.5	22.3	21.9	22.6	23.0	18.3	19.1	18.7	19.4	19.7
6H	22.2	22.9	22.7	23.3	23.7	18.5	19.2	18.9	19.6	20.0
8H	22.6	23.3	23.1	23.7	24.1	18.6	19.2	19.0	19.6	20.0
12H	23.1	23.7	23.5	24.1	24.5	18.6	19.2	19.1	19.6	20.0
8H 4H	21.6	22.3	22.1	22.7	23.1	18.7	19.4	19.2	19.8	20.2
6H	22.5	23.1	23.0	23.5	23.9	19.2	19.7	19.7	20.2	20.6
8H	23.0	23.5	23.5	24.0	24.4	19.4	19.9	19.9	20.3	20.8
12H	23.7	24.1	24.2	24.5	25.1	19.5	19.9	20.0	20.4	20.9
12H 4H	21.6	22.2	22.1	22.6	23.0	18.8	19.4	19.3	19.8	20.3
6H	22.5	23.0	23.0	23.5	23.9	19.4	19.9	19.9	20.3	20.8
8H	23.1	23.5	23.6	24.0	24.5	19.7	20.1	20.2	20.6	21.1
Variations with the observer position at spacings:										
S = 1.0H	+ 0.5 / - 0.4					+ 0.5 / - 0.5				
1.5H	+ 0.9 / - 0.6					+ 0.3 / - 0.6				
2.0H	+ 1.1 / - 0.7					+ 0.5 / - 0.9				

CIE Pub.117 Corrected 1072 lm Total Lamp Luminous Flux.(8log(F/F0) = 0.2)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-04-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.0V I:0.0850A P:10.10W PF:0.9870 Freq:60.00Hz Lamp Flux:1071.72x1 lm		
NAME: cove5代 3500k 40F	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.3*0.003	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	79	70	64	78	70	64	77	69	64	59
0.80	88	79	74	87	79	73	86	78	73	68
1.00	95	86	81	94	86	80	92	86	80	74
1.25	100	92	87	99	92	87	97	90	86	80
1.50	104	97	92	103	96	91	100	94	90	84
2.00	109	103	98	107	101	97	104	99	95	88
2.50	112	106	101	110	104	100	106	102	98	90
3.00	114	109	105	112	107	103	108	104	101	93
4.00	117	113	109	115	111	108	110	107	105	96
5.00	119	115	112	116	113	110	112	109	107	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-04-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.0V I:0.0850A P:10.10W PF:0.9870 Freq:60.00Hz Lamp Flux:1071.72x1 lm		
NAME: cove5代 3500k 40F	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.3*0.003	Shielding Angle:

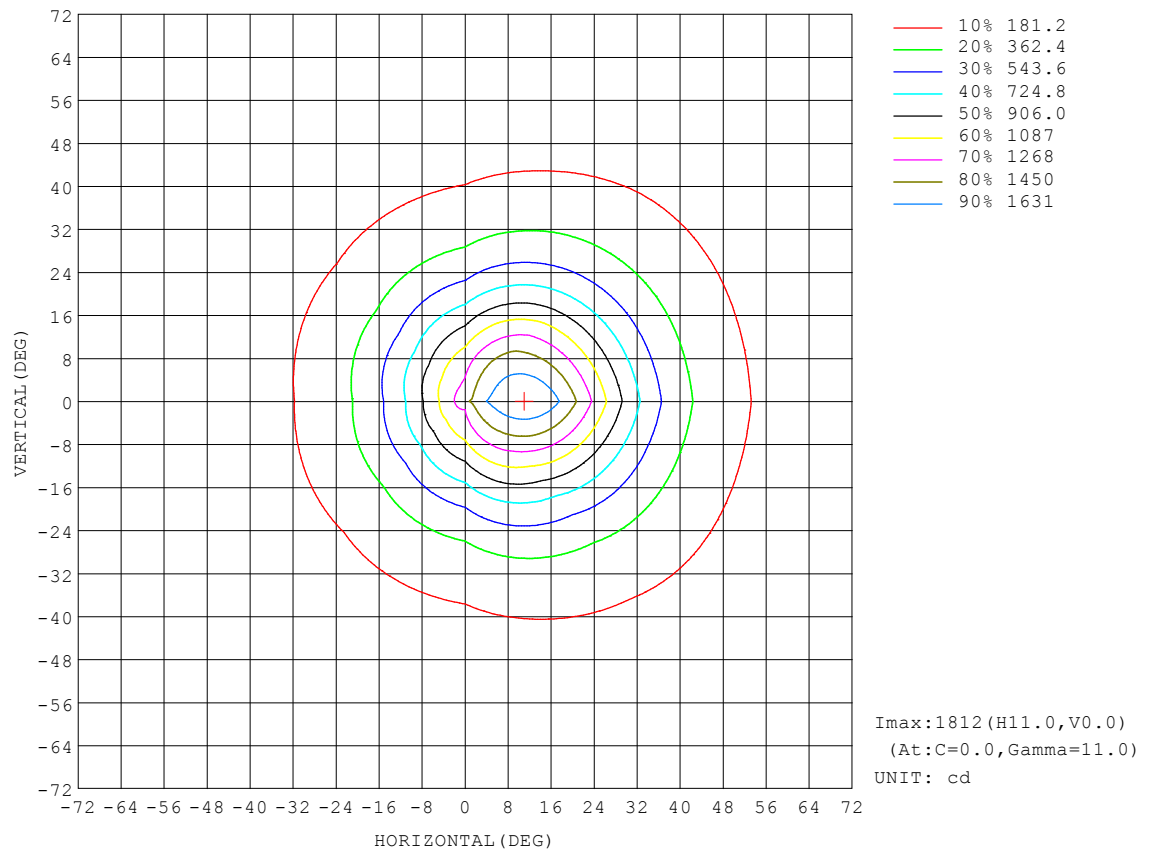


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-04-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.0V I:0.0850A P:10.10W PF:0.9870 Freq:60.00Hz Lamp Flux:1071.72x1 lm		
NAME: cove5代 3500k 40F	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.3*0.003	Shielding Angle:

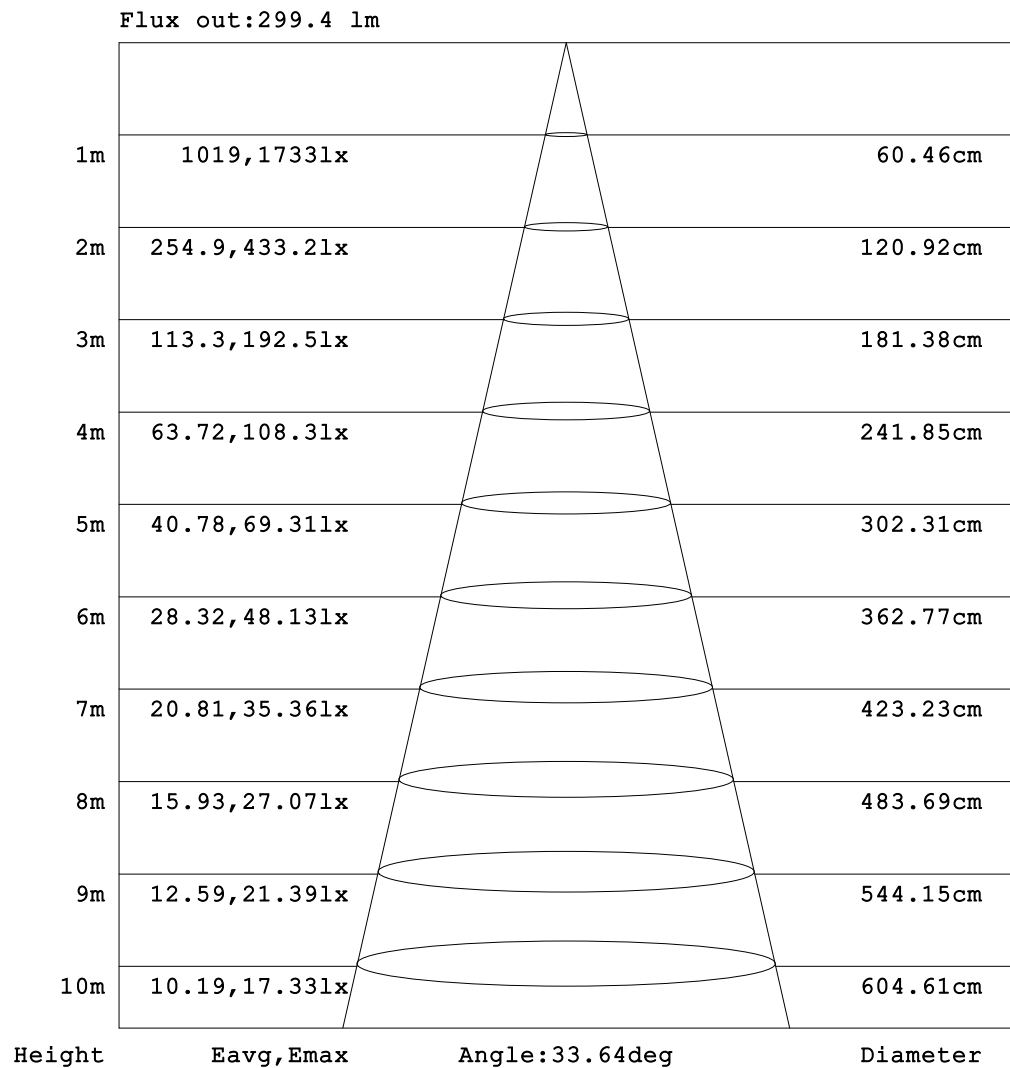


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-04-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.0V I:0.0850A P:10.10W PF:0.9870 Freq:60.00Hz Lamp Flux:1071.72x1 lm		
NAME: cove5代 3500k 40F	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.3*0.003	Shielding Angle:

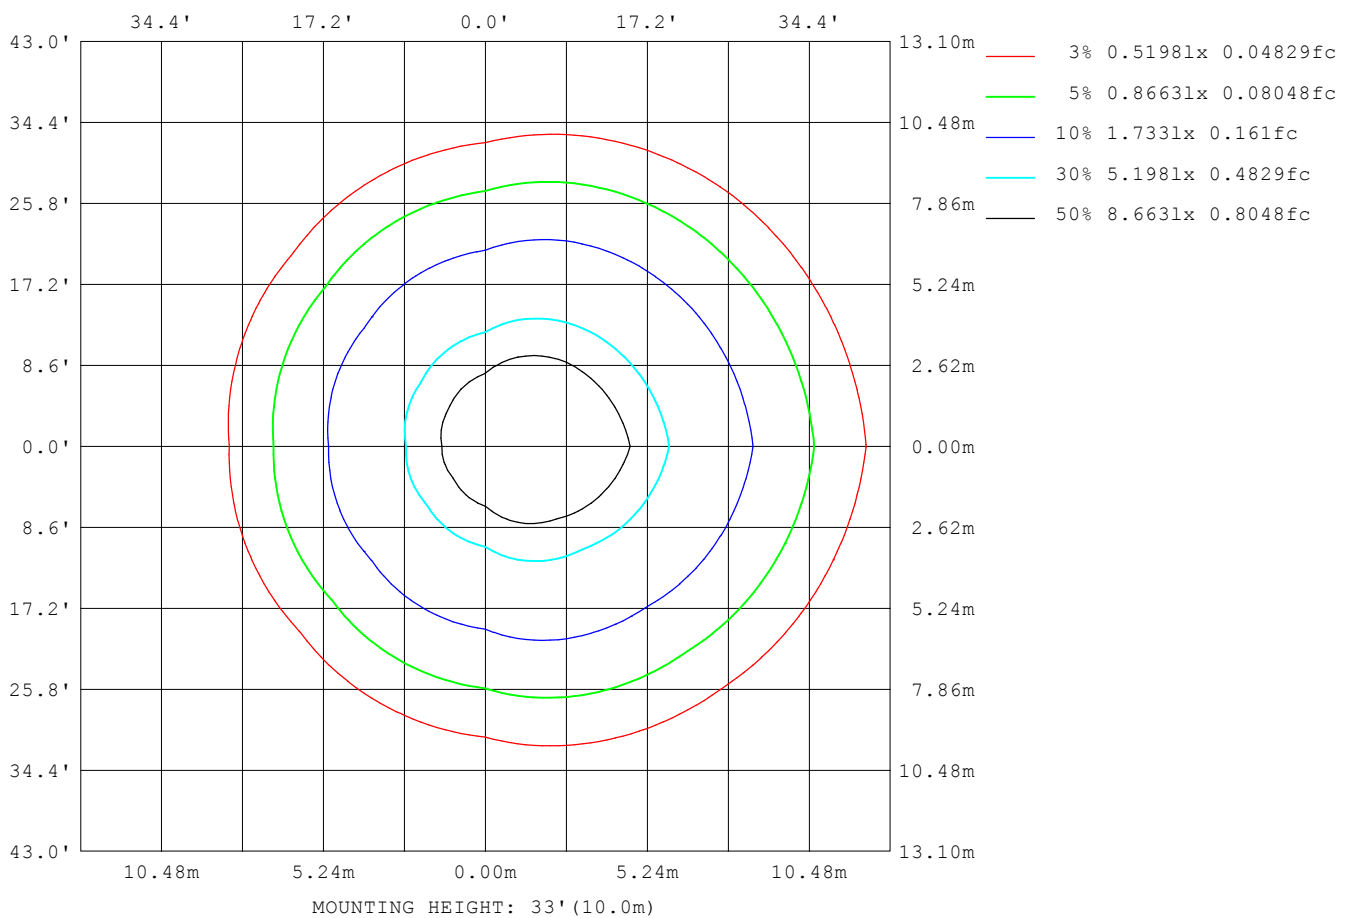

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-04-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.0V I:0.0850A P:10.10W PF:0.9870 Freq:60.00Hz Lamp Flux:1071.72x1 lm		
NAME: cove5代 3500k 40F	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.3*0.003	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	4197
L_0~180 (75) av	3741
L_0~180 (85) av	6345
L_90~270 (65) av	3418
L_90~270 (75) av	2546
L_90~270 (85) av	1482
L_45 (65) av	3742
L_45 (75) av	3250
L_45 (85) av	4617

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-04-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

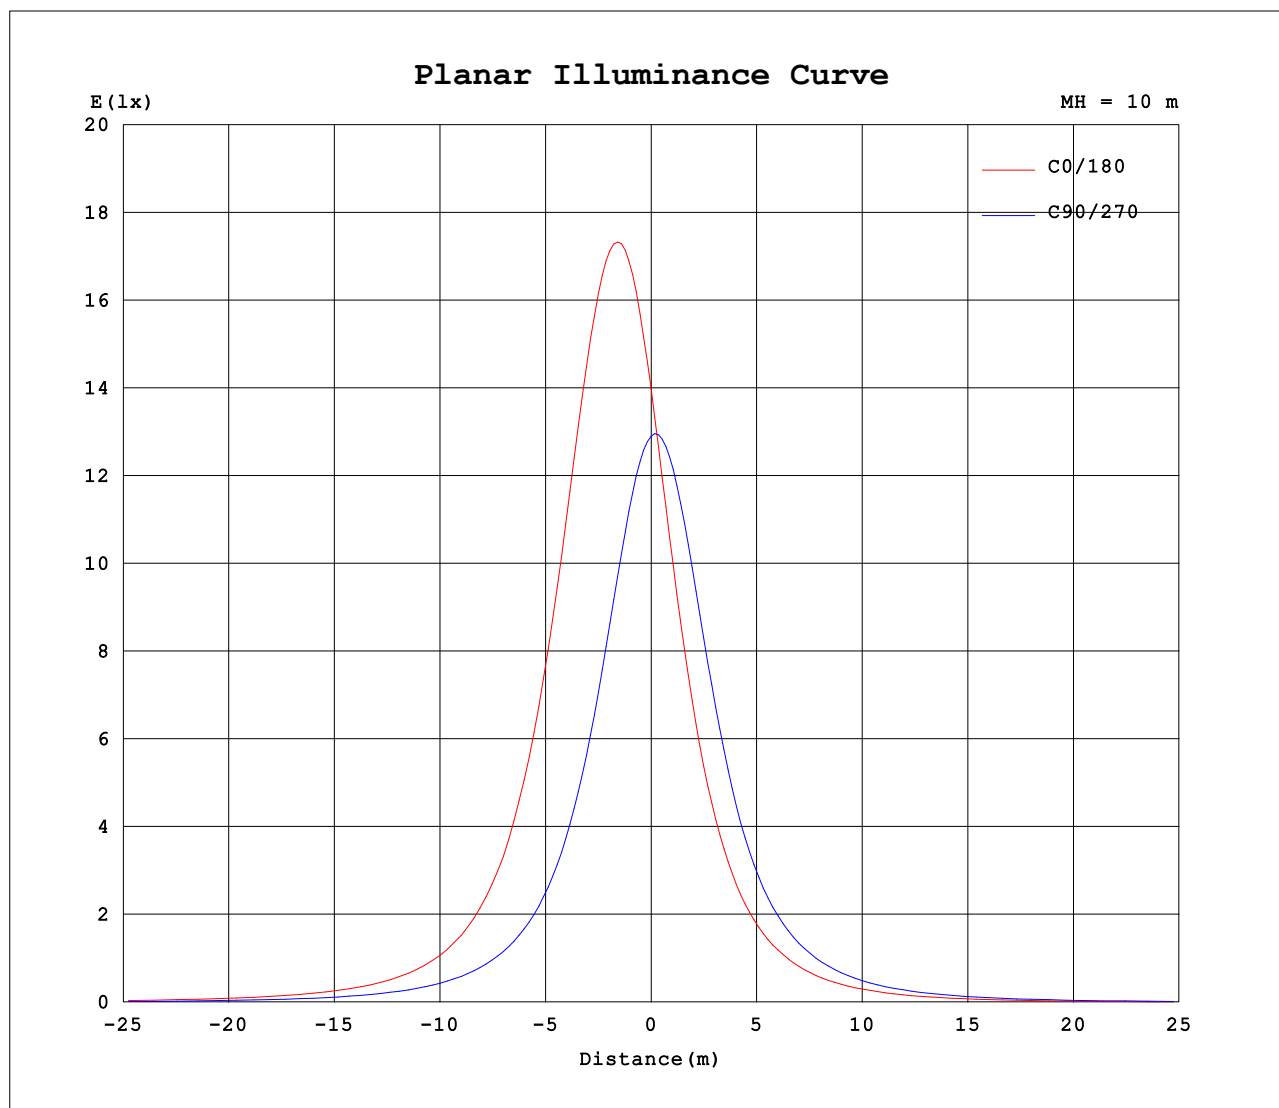

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-04-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.0V I:0.0850A P:10.10W PF:0.9870 Freq:60.00Hz Lamp Flux:1071.72x1 lm		
NAME: cove5代 3500k 40F	TYPE:3500K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.3*0.003	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1350	1350	1350	1350	1350	1350	1350	1350										
5	1621	1441	1229	1080	1038	1135	1316	1524										
10	1749	1369	1006	803	753	877	1142	1531										
15	1680	1172	763	574	531	640	901	1367										
20	1444	920	557	407	374	457	669	1103										
25	1133	683	403	291	267	326	483	827										
30	832	495	295	213	194	236	349	595										
35	585	358	220	159	144	175	256	425										
40	412	263	167	119	108	132	193	305										
45	293	196	129	91.3	82.1	101	145	225										
50	213	149	99.9	70.2	62.6	77.6	112	168										
55	158	113	77.6	53.4	47.2	59.1	87.0	128										
60	119	87.7	59.1	39.7	34.9	44.3	66.9	98.8										
65	90.1	67.9	43.4	28.4	24.9	32.2	50.2	76.4										
70	68.1	51.9	30.1	19.2	17.0	22.3	36.0	58.2										
75	51.8	38.9	19.0	11.9	11.0	14.4	23.7	43.7										
80	38.6	28.0	9.75	6.43	7.99	8.31	13.5	31.5										
85	27.9	19.1	2.79	5.48	7.97	6.18	5.58	21.4										
90	19.3	12.1	0.01	5.11	7.82	5.51	0.23	12.7										
95	12.9	6.87	0.02	4.61	7.50	4.69	0.02	7.37										
100	8.35	6.03	0.02	4.00	6.97	4.06	0.02	5.60										
105	8.16	5.82	0.04	3.34	6.29	3.43	0.04	5.36										
110	7.90	5.47	0.04	2.64	5.50	2.73	0.04	5.01										
115	7.33	5.03	0.06	1.94	4.50	2.06	0.06	4.57										
120	6.82	4.51	0.08	1.27	3.19	1.36	0.07	4.06										
125	6.31	3.91	0.10	0.56	2.42	0.69	0.10	3.40										
130	5.53	3.26	0.14	0.21	1.61	0.19	0.14	2.84										
135	4.69	2.60	0.17	0.28	0.83	0.26	0.17	2.21										
140	3.94	1.95	0.24	0.36	0.47	0.35	0.24	1.59										
145	3.02	1.24	0.33	0.46	0.59	0.44	0.31	0.87										
150	2.10	0.39	0.41	0.57	0.70	0.55	0.42	0.31										
155	1.14	0.40	0.51	0.67	0.78	0.64	0.53	0.41										
160	0.46	0.51	0.62	0.74	0.83	0.71	0.63	0.52										
165	0.59	0.62	0.70	0.78	0.87	0.75	0.71	0.63										
170	0.70	0.71	0.76	0.80	0.88	0.78	0.76	0.72										
175	0.79	0.76	0.78	0.81	0.89	0.79	0.78	0.78										
180	0.85	0.79	0.78	0.81	0.86	0.79	0.78	0.81										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-04-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: