


室内灯具光度数据

实测参数: U:120.0V I:0.0850A P:10.10W PF:0.9860 Freq:60.00Hz 实检光通:772.879x1 lm		
灯具名称: COVE5 10w3500k 60F	灯具类型:3500K	灯具重量:
灯具规格:	外型尺寸: 1FT	测试编号:
制造厂商: WS	发光口面:0.3*0.003	遮光角:

光源数据		光度数据				光效: 111.40 lm/W
型号		峰值光强(cd)	1199	S/MH(C0/180)	0.85	
标称功率(W)	10W	灯具效率(%)	145.6	S/MH(C90/270)	0.72	
额定电源电压(V)	120.0	总光通量(lm)	1125.1	η UP,DN(C0-180)	1.5,73.2	
额定光通量(lm)	772.879	CIE分类	直接	η UP,DN(C180-360)	1.3,69.5	
灯具内光源数(只)	1	上射光通比(%)	2.9	CIBSE SHR NOM	0.75	
实测电源电压(V)	120.0	下射光通比(%)	142.7	CIBSE SHR MAX	0.80	

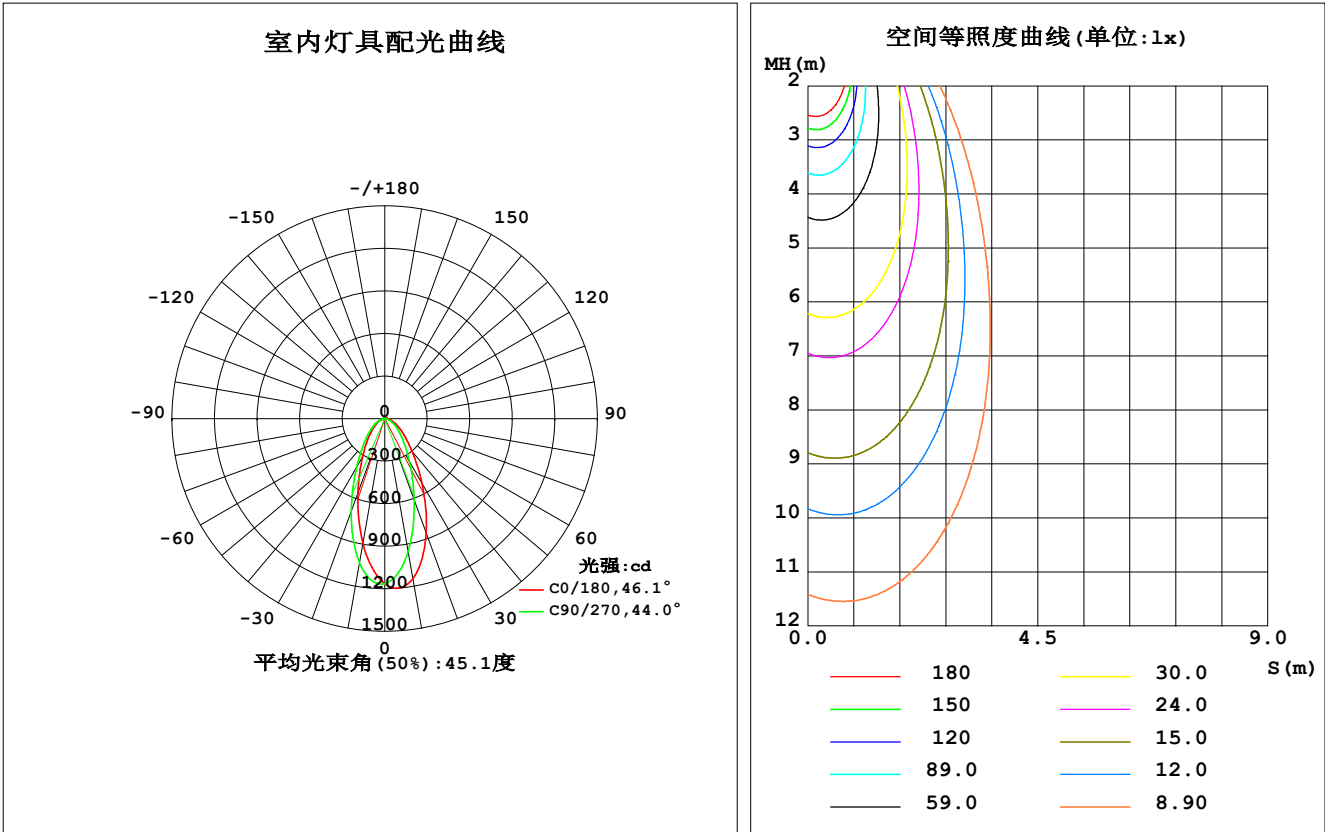

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2026-04-08

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000B_V1系统 V2.0.353
环境湿度:65.0%
测试距离:7.540米 [K=1.0000]
备注:

灯具环带光通量

环带光通量：


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ(°)	Φ环	Φ总	%lum, lamp
10	1146	1054	951.6	909.4	892.9	949.4	1032	1098	0- 10	103.3	103.3	9.18,13.4
20	854.9	732.2	608.8	567.3	555.5	608.1	692.9	781.9	10- 20	233.9	337.1	30,43.6
30	524.7	434.3	349.4	323.3	317.8	348.7	399.6	464.6	20- 30	239.4	576.5	51.2,74.6
40	300.4	250.5	203.4	187.9	184.7	201.5	229.8	264.3	30- 40	188.3	764.8	68,99
50	175.0	149.1	122.5	111.5	108.6	121.1	136.6	156.3	40- 50	136.2	901.0	80.1,117
60	104.6	89.31	72.61	65.86	63.99	71.92	81.92	94.00	50- 60	94.36	995.4	88.5,129
70	60.40	51.27	37.04	35.49	34.71	38.97	43.70	54.13	60- 70	60.63	1056	93.9,137
80	32.61	25.51	12.38	15.58	16.47	17.06	15.86	27.35	70- 80	33.32	1089	96.8,141
90	15.17	9.698	0.0267	7.310	10.89	7.314	0.0217	9.872	80- 90	13.72	1103	98,143
100	11.50	7.578	0.0315	6.258	10.25	6.128	0.0219	7.254	90-100	7.139	1110	98.7,144
110	10.20	6.396	0.0679	4.637	8.606	4.410	0.0559	6.002	100-110	5.974	1116	99.2,144
120	8.783	4.704	0.1068	2.856	5.382	2.434	0.0947	4.322	110-120	4.280	1120	99.6,145
130	6.236	2.886	0.1748	1.146	2.690	0.6883	0.1579	2.545	120-130	2.563	1123	99.8,145
140	3.744	1.031	0.2888	0.3157	1.040	0.3142	0.2672	0.7646	130-140	1.155	1124	99.9,145
150	1.301	0.4097	0.4394	0.4831	0.5352	0.4726	0.4349	0.3943	140-150	0.4282	1125	100,146
160	0.5664	0.5899	0.6190	0.6551	0.6957	0.6481	0.6218	0.5880	150-160	0.2535	1125	100,146
170	0.7245	0.7263	0.7525	0.7603	0.7929	0.7529	0.7455	0.7267	160-170	0.1936	1125	100,146
180	0.8098	0.7847	0.7698	0.7889	0.8171	0.7847	0.7722	0.7818	170-180	0.0734	1125	100,146
单位:°	光强:cd									单位:lm		

C角度范围： 0度 - 360度
C角度间隔：45.0度
测试速度：快速
环境温度:25.3℃
测试人员：
测试日期:2026-04-08

γ角度范围： 0度 - 180度
γ角度间隔： 1.0度
测试系统：远方(EVERFINE) GO-2000B_V1系统 V2.0.353
环境湿度:65.0%
测试距离:7.540米 [K=1.0000]
备注：

灯具亮度限制曲线

实测参数: U:120.0V I:0.0850A P:10.10W PF:0.9860 Freq:60.00Hz 实检光通:772.879x1 lm		
灯具名称: COVE5 10w3500k 60F	灯具类型:3500K	灯具重量:
灯具规格:	外型尺寸: 1FT	测试编号:
制造厂商: WS	发光口面:0.3*0.003	遮光角:

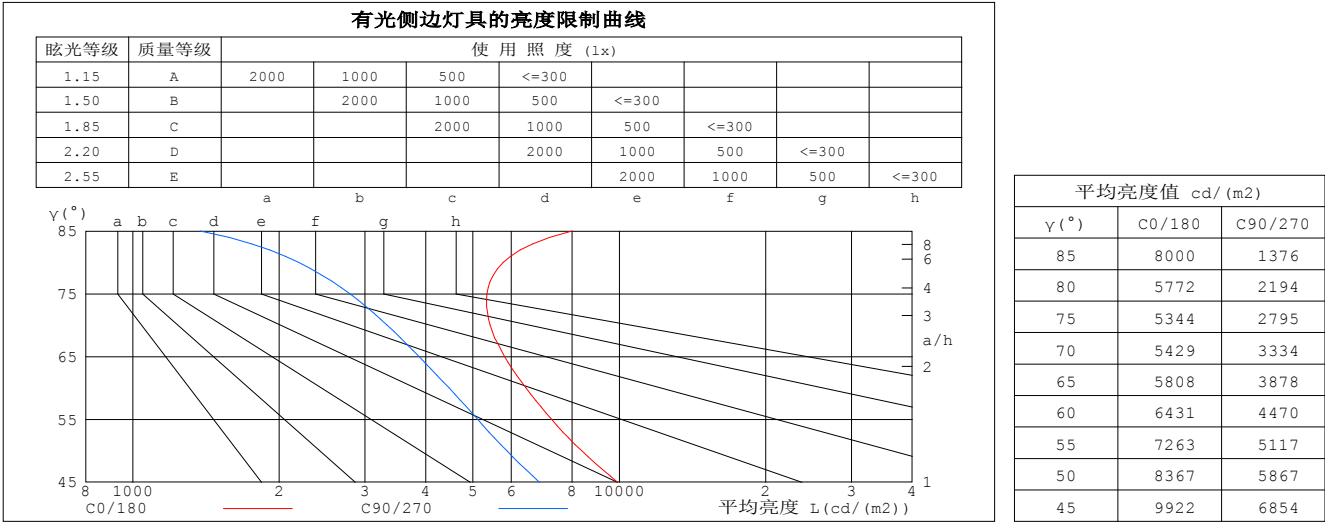


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2026-04-08

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.353
环境湿度:65.0%
测试距离:7.540米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:120.0V I:0.0850A P:10.10W PF:0.9860 Freq:60.00Hz 实检光通:772.879x1 lm		
灯具名称: COVE5 10w3500k 60F	灯具类型:3500K	灯具重量:
灯具规格:	外型尺寸: 1FT	测试编号:
制造厂商: WS	发光口面:0.3*0.003	遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.73	1.73	1.73	1.68	1.68	1.68	1.60	1.60	1.60	1.53	1.53	1.53	1.46	1.46	1.46	1.43
1.0	1.56	1.51	1.47	1.52	1.48	1.44	1.46	1.42	1.39	1.40	1.37	1.34	1.34	1.32	1.30	1.27
2.0	1.41	1.33	1.27	1.38	1.31	1.25	1.33	1.27	1.22	1.28	1.23	1.19	1.23	1.20	1.16	1.13
3.0	1.29	1.19	1.12	1.26	1.18	1.11	1.22	1.14	1.08	1.18	1.12	1.06	1.14	1.09	1.04	1.02
4.0	1.18	1.08	.00	1.16	1.06	.99	1.12	1.04	.98	1.09	1.02	.96	1.05	.99	.95	.92
5.0	1.08	.98	.90	1.07	.97	.90	1.04	.95	.89	1.01	.93	.87	.98	.92	.86	.84
6.0	1.00	.90	.82	.99	.89	.82	.96	.88	.81	.94	.86	.80	.91	.85	.79	.77
7.0	.93	.83	.76	.92	.82	.75	.90	.81	.75	.88	.80	.74	.86	.79	.73	.71
8.0	.87	.77	.70	.86	.76	.70	.84	.75	.69	.82	.74	.69	.81	.73	.68	.66
9.0	.82	.72	.65	.81	.71	.65	.79	.70	.64	.77	.70	.64	.76	.69	.64	.61
10.0	.77	.67	.61	.76	.67	.61	.75	.66	.60	.73	.65	.60	.72	.65	.60	.57

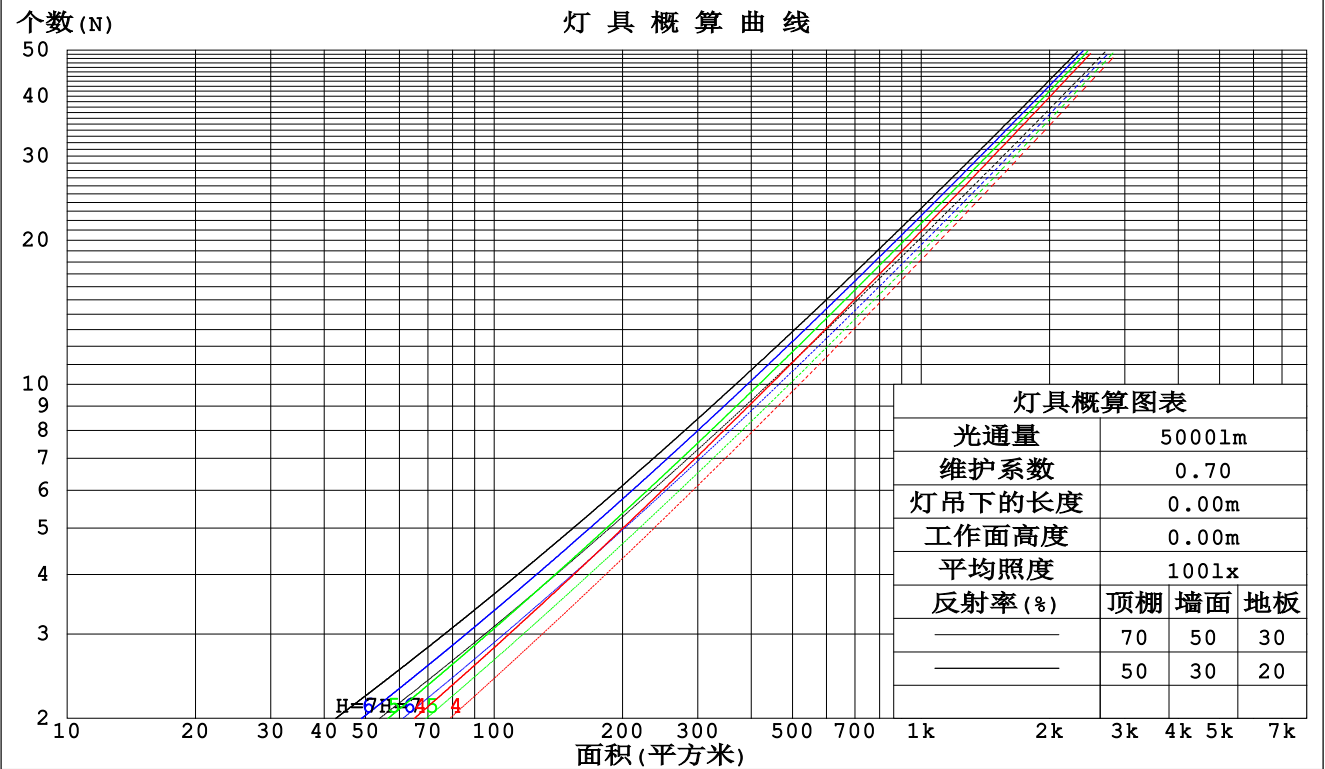

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2026-04-08

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.353
环境湿度:65.0%
测试距离:7.540米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:120.0V I:0.0850A P:10.10W PF:0.9860 Freq:60.00Hz 实检光通:772.879x1 lm					
灯具名称: COVE5 10w3500k 60F			灯具类型:3500K		灯具重量:
灯具规格:			外型尺寸: 1FT		测试编号:
制造厂商: WS			发光口面:0.3*0.003		遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.347	.197	.063	.336	.192	.061	.316	.181	.058	.297	.171	.055	.280	.162	.052	
2.0	.327	.179	.055	.317	.175	.054	.300	.167	.052	.283	.159	.050	.268	.152	.048	
3.0	.305	.162	.049	.297	.159	.048	.282	.153	.046	.267	.147	.045	.254	.141	.044	
4.0	.285	.148	.044	.278	.145	.043	.264	.140	.042	.252	.135	.041	.240	.130	.040	
5.0	.267	.136	.039	.260	.134	.039	.248	.129	.038	.237	.125	.037	.227	.121	.036	
6.0	.250	.125	.036	.245	.124	.036	.234	.120	.035	.224	.116	.034	.215	.113	.034	
7.0	.236	.116	.033	.231	.115	.033	.221	.112	.032	.212	.109	.032	.204	.106	.031	
8.0	.222	.109	.031	.218	.107	.030	.209	.105	.030	.201	.102	.029	.194	.099	.029	
9.0	.210	.102	.028	.206	.100	.028	.198	.098	.028	.191	.096	.027	.184	.094	.027	
10.0	.199	.096	.027	.196	.095	.026	.189	.092	.026	.182	.090	.026	.176	.088	.025	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天花板利用系数															
0.0	.299	.299	.299	.256	.256	.256	.174	.174	.174	.100	.100	.100	.032	.032	.032	
1.0	.277	.250	.226	.237	.215	.194	.162	.148	.134	.093	.085	.078	.030	.028	.025	
2.0	.260	.215	.177	.222	.185	.153	.152	.128	.106	.088	.074	.062	.028	.024	.020	
3.0	.245	.188	.143	.210	.162	.124	.144	.113	.087	.083	.066	.051	.027	.021	.017	
4.0	.231	.168	.119	.199	.145	.103	.137	.101	.073	.079	.059	.043	.025	.019	.014	
5.0	.220	.152	.101	.189	.131	.088	.130	.092	.062	.075	.054	.037	.024	.018	.012	
6.0	.209	.139	.088	.180	.120	.077	.124	.084	.054	.072	.049	.032	.023	.016	.011	
7.0	.199	.128	.078	.171	.111	.068	.118	.078	.048	.069	.046	.029	.022	.015	.010	
8.0	.190	.119	.070	.164	.103	.061	.113	.073	.044	.066	.043	.026	.021	.014	.009	
9.0	.182	.112	.064	.157	.097	.056	.109	.068	.040	.063	.040	.024	.021	.013	.008	
10.0	.175	.106	.059	.151	.092	.052	.105	.065	.037	.061	.038	.022	.020	.013	.007	

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2026-04-08

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.353
环境湿度:65.0%
测试距离:7.540米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:120.0V I:0.0850A P:10.10W PF:0.9860 Freq:60.00Hz 实检光通:772.879x1 lm										
灯具名称: COVE5 10w3500k 60F					灯具类型: 3500K			灯具重量:		
灯具规格:					外型尺寸: 1FT			测试编号:		
制造厂商: WS					发光口面: 0.3*0.003			遮光角:		
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉 (Viewed crosswise)					向前 (Viewed endwise)				
x = 2H y = 2H	18.4	19.6	18.7	19.8	20.0	17.0	18.2	17.3	18.4	18.6
3H	19.5	20.5	19.8	20.8	21.0	17.8	18.9	18.1	19.1	19.4
4H	20.0	21.0	20.3	21.2	21.5	18.1	19.1	18.4	19.3	19.6
6H	20.5	21.4	20.8	21.7	22.0	18.2	19.2	18.6	19.5	19.8
8H	20.7	21.6	21.1	21.9	22.2	18.2	19.2	18.6	19.5	19.8
12H	21.0	21.9	21.3	22.2	22.5	18.2	19.1	18.6	19.4	19.8
4H 2H	18.7	19.7	19.0	20.0	20.3	17.5	18.5	17.8	18.8	19.1
3H	19.9	20.8	20.3	21.1	21.5	18.5	19.4	18.9	19.7	20.0
4H	20.6	21.4	21.0	21.7	22.1	18.9	19.7	19.3	20.1	20.4
6H	21.2	21.9	21.6	22.3	22.7	19.2	19.9	19.6	20.3	20.7
8H	21.6	22.2	22.0	22.6	23.0	19.3	19.9	19.7	20.3	20.7
12H	21.9	22.6	22.4	23.0	23.4	19.3	19.9	19.7	20.3	20.7
8H 4H	20.7	21.4	21.1	21.8	22.2	19.2	19.9	19.6	20.3	20.7
6H	21.5	22.1	22.0	22.5	23.0	19.7	20.2	20.1	20.6	21.1
8H	22.0	22.5	22.5	22.9	23.4	19.8	20.3	20.3	20.8	21.3
12H	22.5	23.0	23.0	23.4	24.0	19.9	20.3	20.4	20.8	21.3
12H 4H	20.7	21.3	21.1	21.7	22.2	19.3	19.9	19.7	20.3	20.7
6H	21.6	22.1	22.1	22.5	23.0	19.8	20.3	20.3	20.7	21.2
8H	22.1	22.5	22.6	23.0	23.5	20.0	20.4	20.5	20.9	21.4
不同间隔布灯时, 观察者位置引起的UGR变化:										
S = 1.0H	+ 0.3 / - 0.4					+ 0.4 / - 0.5				
1.5H	+ 0.3 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.6 / - 0.5					+ 0.5 / - 0.7				

依据CIE Pub.117计算, 表格已按772.91lm光源光通进行修正 ($81\log(F/F_0) = -0.9$).

C角度范围: 0度 - 360度
 C角度间隔: 45.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员:
 测试日期: 2026-04-08

γ角度范围: 0度 - 180度
 γ角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.353
 环境湿度: 65.0%
 测试距离: 7.540米 [K=1.0000]
 备注:

UF利用系数表

实测参数: U:120.0V I:0.0850A P:10.10W PF:0.9860 Freq:60.00Hz 实检光通:772.879x1 lm		
灯具名称: COVE5 10w3500k 60F	灯具类型:3500K	灯具重量:
灯具规格:	外型尺寸: 1FT	测试编号:
制造厂商: WS	发光口面:0.3*0.003	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	104	91	83	103	91	83	102	90	83	76
0.80	117	104	96	116	104	96	114	103	95	88
1.00	127	115	107	125	114	106	122	114	105	97
1.25	135	123	116	133	122	115	129	120	114	105
1.50	140	130	122	138	129	121	134	126	120	111
2.00	147	138	131	145	136	130	140	133	127	118
2.50	151	143	136	149	141	135	143	137	132	121
3.00	155	147	141	152	145	140	146	141	136	125
4.00	159	153	148	156	150	146	150	145	141	129
5.00	162	157	152	158	154	150	152	148	145	132
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2026-04-08

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.353
环境湿度: 65.0%
测试距离: 7.540米 [K=1.0000]
备注:

灯具等光强曲线

实测参数: U:120.0V I:0.0850A P:10.10W PF:0.9860 Freq:60.00Hz 实检光通:772.879x1 lm		
灯具名称: COVE5 10w3500k 60F	灯具类型: 3500K	灯具重量:
灯具规格:	外型尺寸: 1FT	测试编号:
制造厂商: WS	发光口面: 0.3*0.003	遮光角:

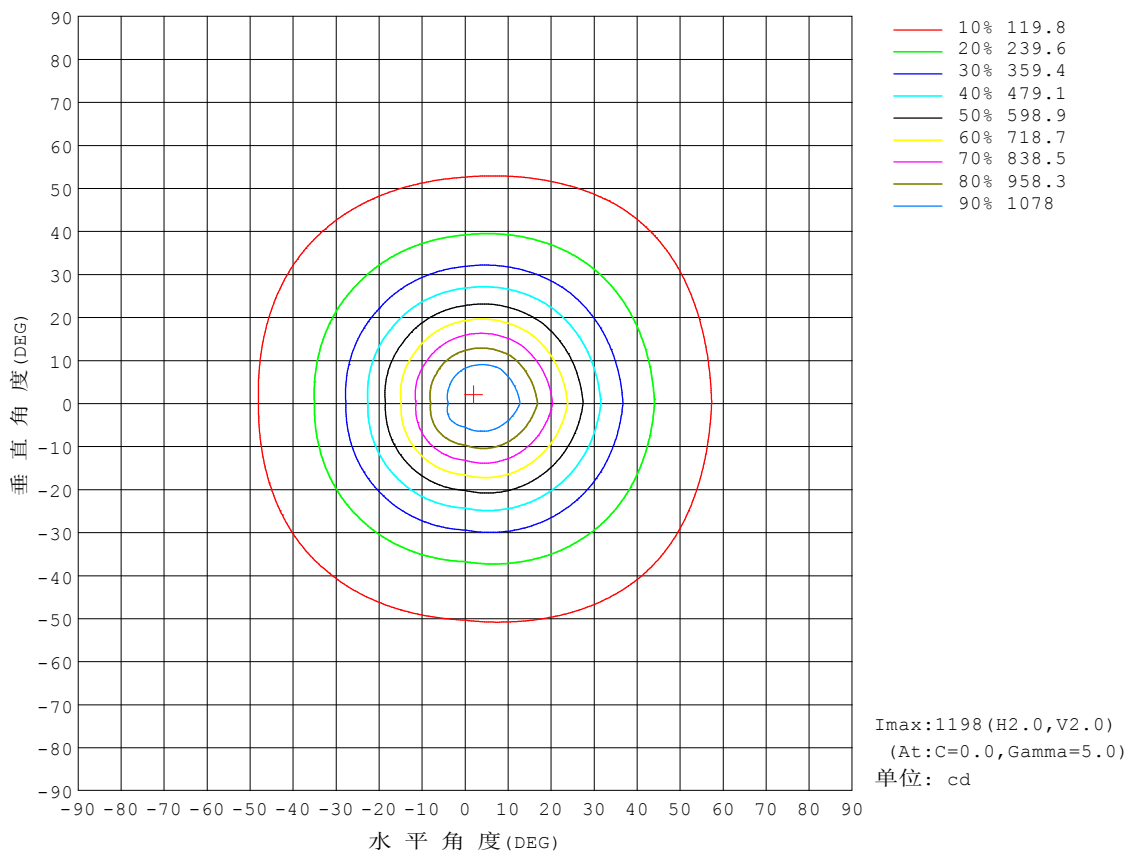


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2026-04-08

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.353
环境湿度: 65.0%
测试距离: 7.540米 [K=1.0000]
备注:

灯具有效平均照度图

实测参数: U:120.0V I:0.0850A P:10.10W PF:0.9860 Freq:60.00Hz 实检光通:772.879x1 lm		
灯具名称: COVE5 10w3500k 60F	灯具类型:3500K	灯具重量:
灯具规格:	外型尺寸: 1FT	测试编号:
制造厂商: WS	发光口面:0.3*0.003	遮光角:

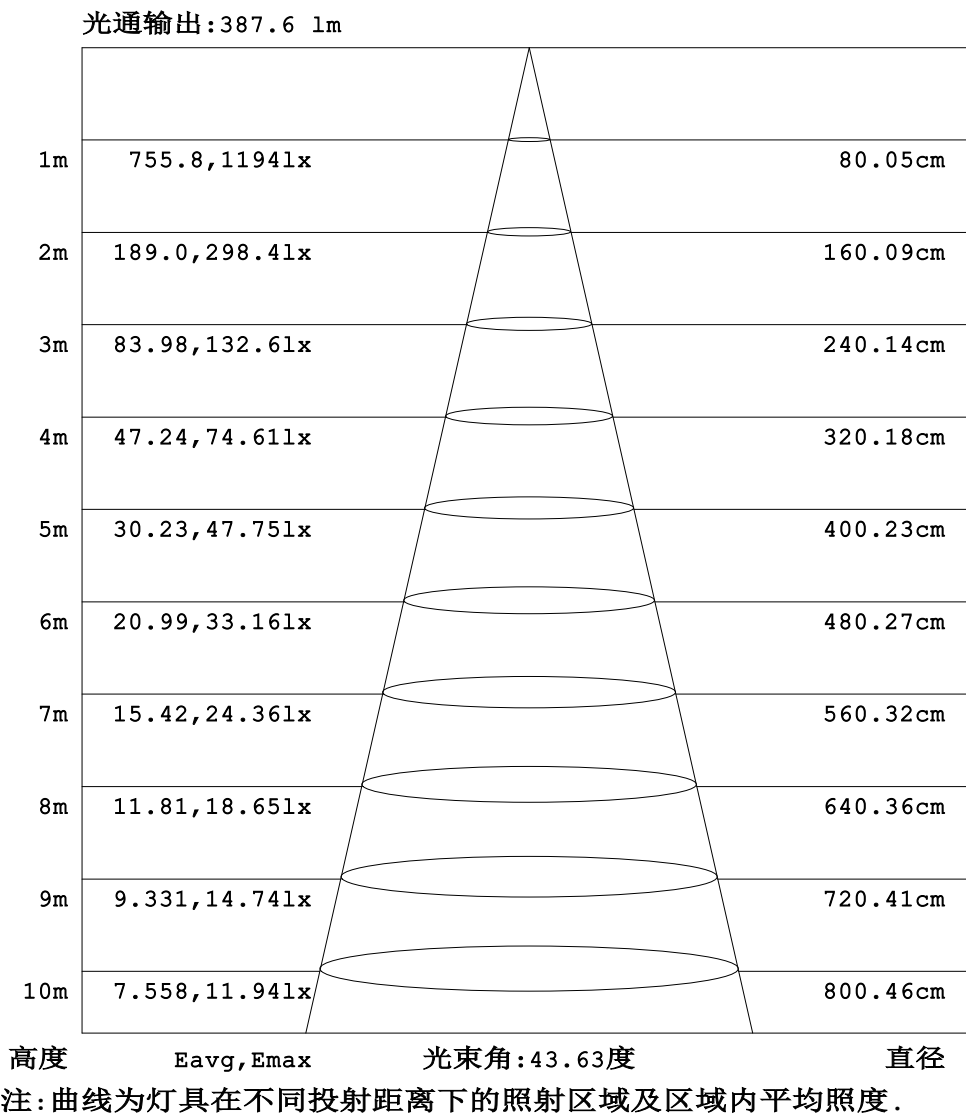


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2026-04-08

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.353
环境湿度:65.0%
测试距离:7.540米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:120.0V I:0.0850A P:10.10W PF:0.9860 Freq:60.00Hz 实检光通:772.879x1 lm		
灯具名称: COVE5 10w3500k 60F	灯具类型:3500K	灯具重量:
灯具规格:	外型尺寸: 1FT	测试编号:
制造厂商: WS	发光口面:0.3*0.003	遮光角:

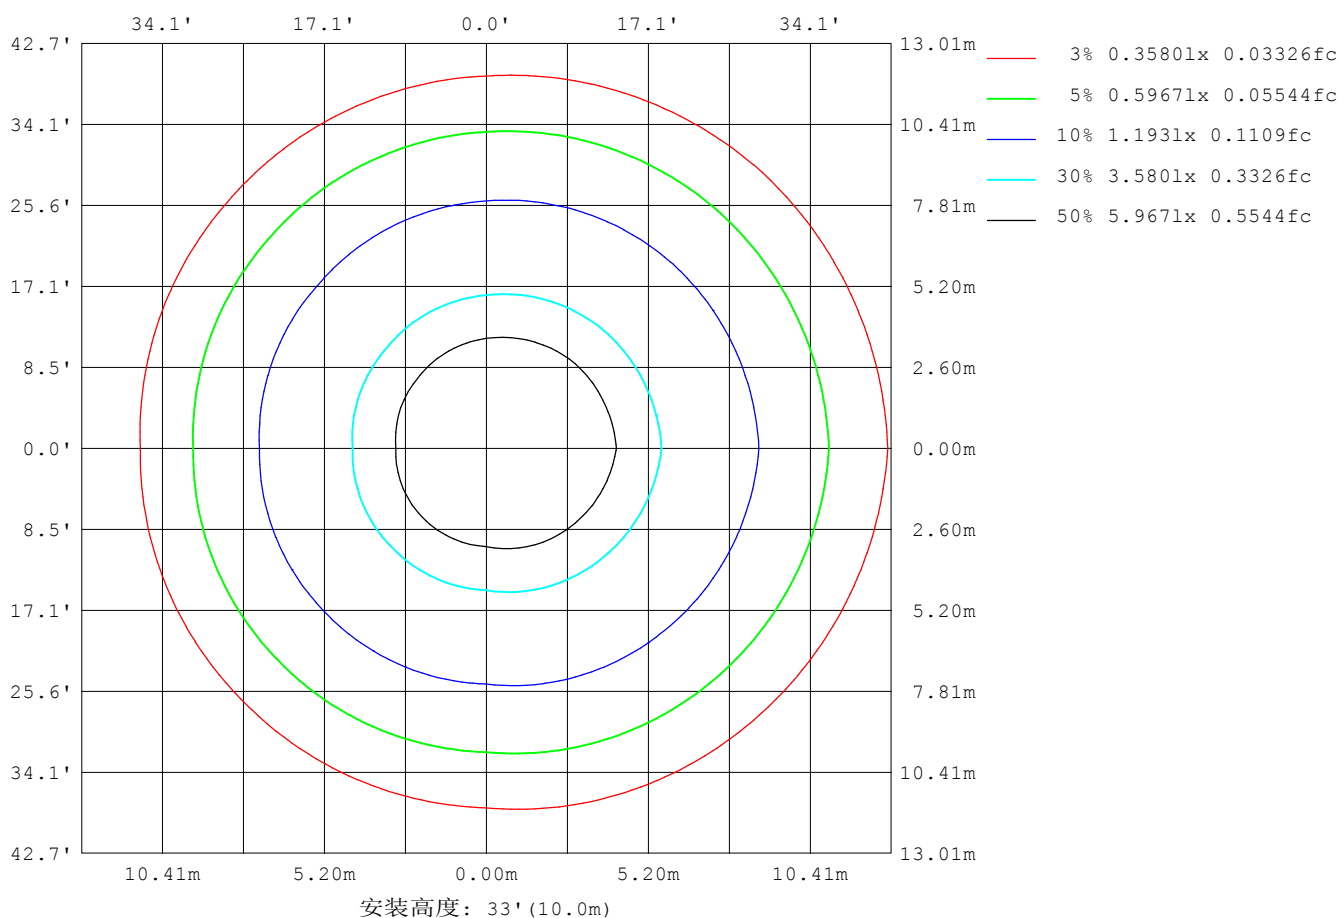

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2026-04-08

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.353
环境湿度: 65.0%
测试距离: 7.540米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:120.0V I:0.0850A P:10.10W PF:0.9860 Freq:60.00Hz 实检光通:772.879x1 lm		
灯具名称: COVE5 10w3500k 60F	灯具类型:3500K	灯具重量:
灯具规格:	外型尺寸: 1FT	测试编号:
制造厂商: WS	发光口面:0.3*0.003	遮光角:


平均亮度	数值 (cd/m2)
L横 (65) av	4661
L横 (75) av	4137
L横 (85) av	5970
L纵 (65) av	4183
L纵 (75) av	3107
L纵 (85) av	1483
L45 (65) av	4450
L45 (75) av	3809
L45 (85) av	4658

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2026-04-08

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.353
环境湿度:65.0%
测试距离:7.540米 [K=1.0000]
备注:

平面照度曲线

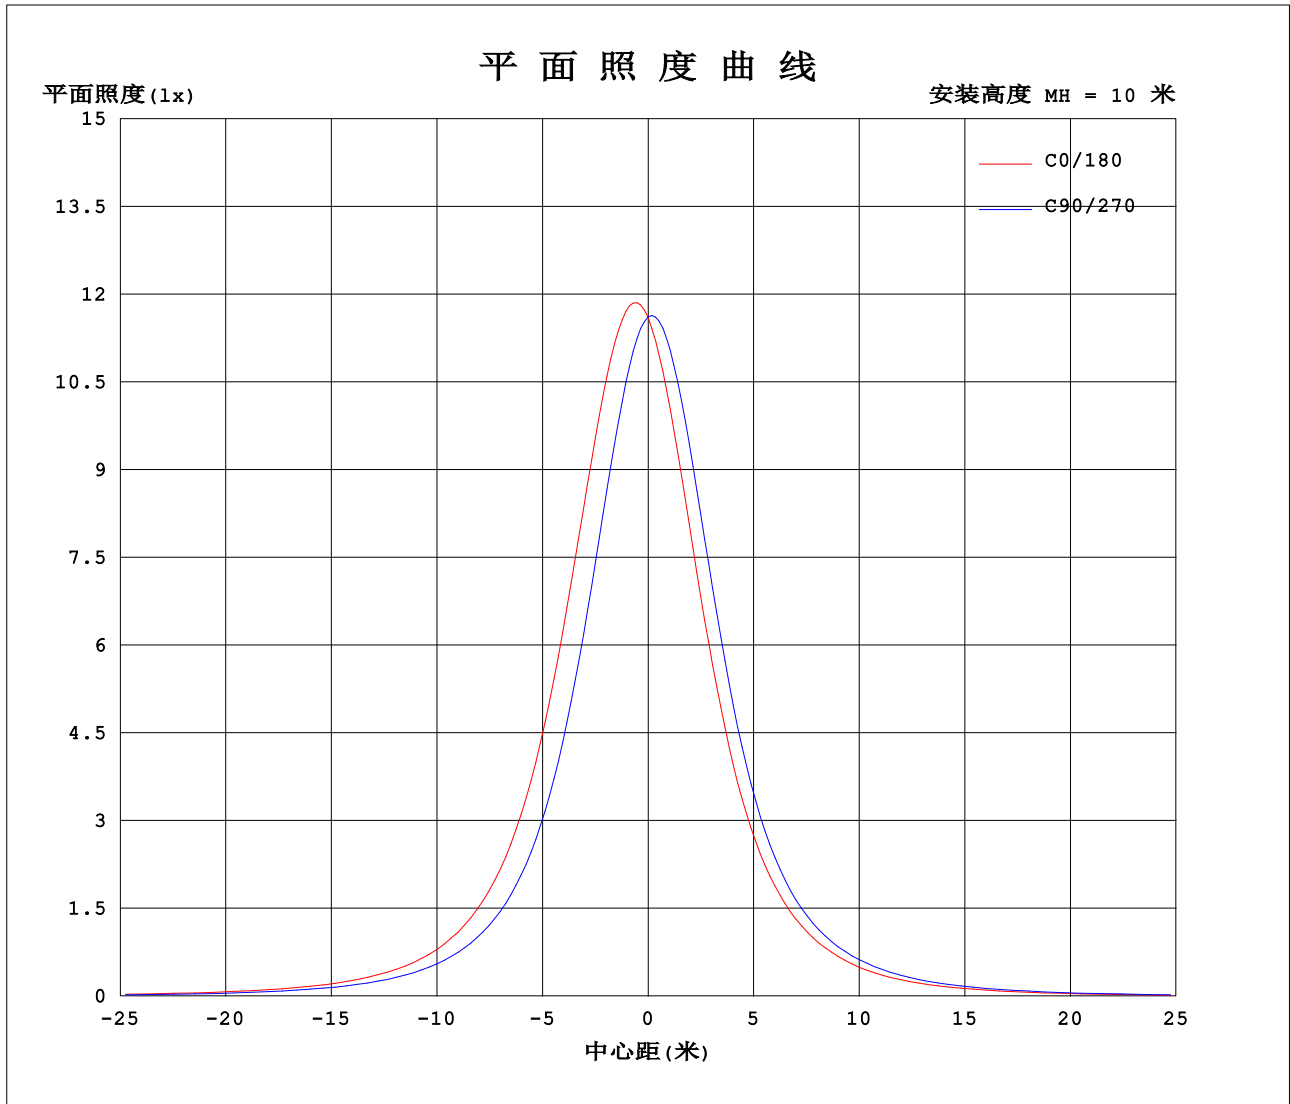

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2026-04-08

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.353
环境湿度: 65.0%
测试距离: 7.540米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:120.0V I:0.0850A P:10.10W PF:0.9860 Freq:60.00Hz 实检光通:772.879x1 lm		
灯具名称: COVE5 10w3500k 60F	灯具类型:3500K	灯具重量:
灯具规格:	外型尺寸: 1FT	测试编号:
制造厂商: WS	发光口面:0.3*0.003	遮光角:

表--1										单位: cd									
C (DEG) γ (DEG)	0	45	90	135	180	225	270	315											
0	1164	1164	1164	1164	1164	1164	1164	1164											
5	1199	1150	1093	1066	1053	1091	1141	1176											
10	1146	1054	952	909	893	949	1032	1098											
15	1021	903	779	733	717	777	869	955											
20	855	732	609	567	555	608	693	782											
25	682	570	464	429	421	462	531	611											
30	525	434	349	323	318	349	400	465											
35	397	328	265	245	241	264	301	350											
40	300	251	203	188	185	201	230	264											
45	228	193	157	145	140	156	177	202											
50	175	149	123	111	109	121	137	156											
55	136	115	95.3	86.2	83.8	93.7	106	121											
60	105	89.3	72.6	65.9	64.0	71.9	81.9	94.0											
65	79.9	68.4	53.2	49.2	47.8	53.9	61.3	72.3											
70	60.4	51.3	37.0	35.5	34.7	39.0	43.7	54.1											
75	45.0	37.0	23.5	24.4	24.4	26.9	28.6	39.5											
80	32.6	25.5	12.4	15.6	16.5	17.1	15.9	27.4											
85	22.7	16.5	3.90	8.95	11.0	9.46	4.48	17.8											
90	15.2	9.70	0.03	7.31	10.9	7.31	0.02	9.87											
95	11.6	7.95	0.02	6.87	10.7	6.79	0.01	7.70											
100	11.5	7.58	0.03	6.26	10.2	6.13	0.02	7.25											
105	11.2	7.06	0.04	5.49	9.54	5.31	0.04	6.68											
110	10.2	6.40	0.07	4.64	8.61	4.41	0.06	6.00											
115	9.20	5.58	0.09	3.75	7.16	3.41	0.07	5.18											
120	8.78	4.70	0.11	2.86	5.38	2.43	0.09	4.32											
125	7.56	3.81	0.14	2.00	4.22	1.63	0.12	3.43											
130	6.24	2.89	0.17	1.15	2.69	0.69	0.16	2.55											
135	5.04	1.96	0.22	0.26	1.99	0.26	0.21	1.65											
140	3.74	1.03	0.29	0.32	1.04	0.31	0.27	0.76											
145	2.58	0.33	0.35	0.39	0.45	0.40	0.34	0.31											
150	1.30	0.41	0.44	0.48	0.54	0.47	0.43	0.39											
155	0.47	0.50	0.53	0.57	0.63	0.56	0.52	0.49											
160	0.57	0.59	0.62	0.66	0.70	0.65	0.62	0.59											
165	0.66	0.67	0.68	0.72	0.76	0.72	0.69	0.67											
170	0.72	0.73	0.75	0.76	0.79	0.75	0.75	0.73											
175	0.78	0.77	0.76	0.78	0.81	0.78	0.77	0.77											
180	0.81	0.78	0.77	0.79	0.82	0.78	0.77	0.78											

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2026-04-08

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.353
环境湿度:65.0%
测试距离:7.540米 [K=1.0000]
备注: