


室内灯具光度数据

实测参数: U:120.0V I:0.0850A P:10.10W PF:0.9870 Freq:60.00Hz 实检光通:1188.87x1 lm		
灯具名称: cove5代 3500k 120F	灯具类型:3500K	灯具重量:
灯具规格:	外型尺寸: 1FT	测试编号:
制造厂商: WS	发光口面:0.3*0.003	遮光角:

光源数据		光度数据				光效: 108.74 lm/W
型号		峰值光强(cd)	819.5	S/MH(C0/180)	0.88	
标称功率(W)	10W	灯具效率(%)	92.4	S/MH(C90/270)	0.91	
额定电源电压(V)	120.0	总光通量(lm)	1098.3	η UP,DN(C0-180)	0.9,43.4	
额定光通量(lm)	1188.87	CIE分类	直接	η UP,DN(C180-360)	0.9,47.1	
灯具内光源数(只)	1	上射光通比(%)	1.8	CIBSE SHR NOM	0.75	
实测电源电压(V)	120.0	下射光通比(%)	90.6	CIBSE SHR MAX	0.95	

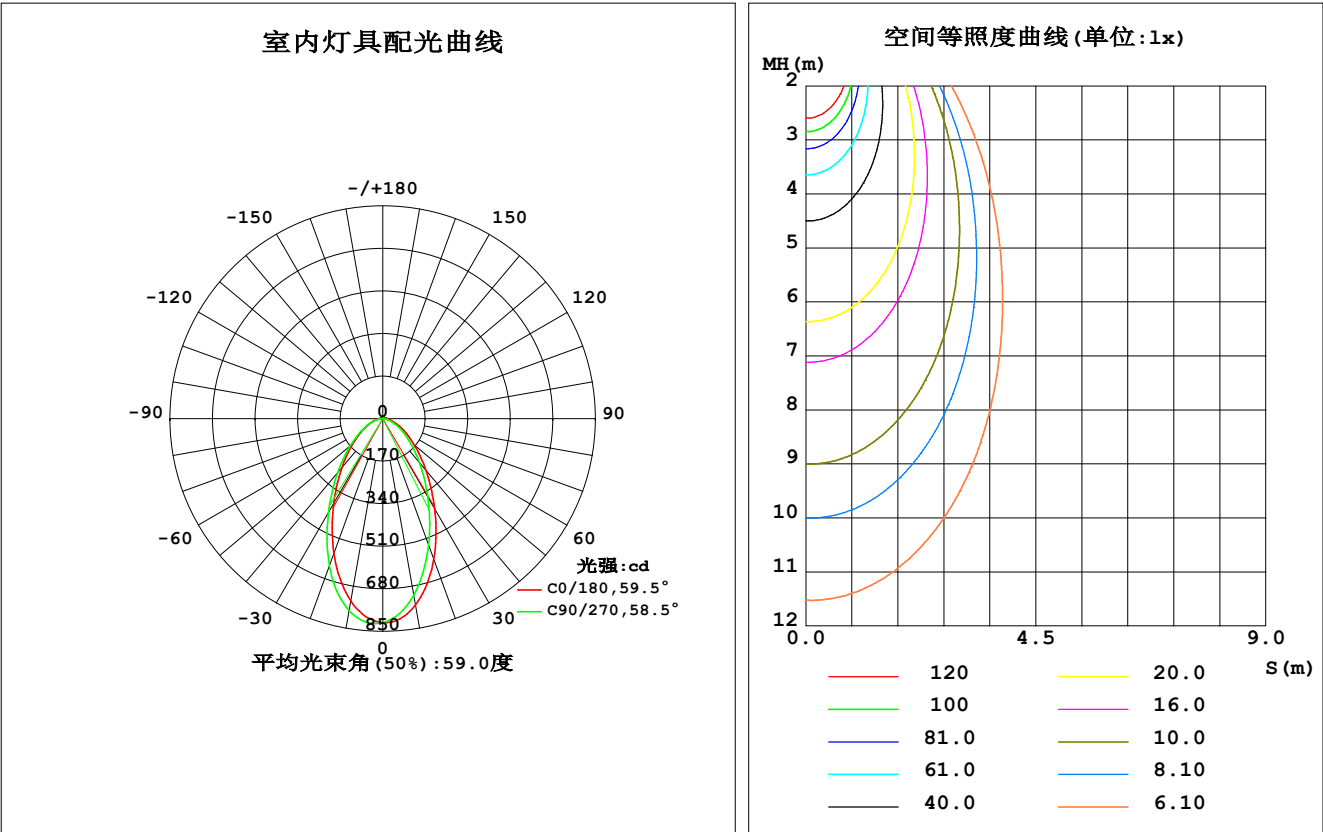

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2026-04-08

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000B_V1系统 V2.0.353
环境湿度:65.0%
测试距离:7.540米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ(°)	Φ环	Φ总	%lum, lamp
10	755.8	725.0	715.2	733.3	739.4	771.9	779.0	759.4	0- 10	74.53	74.53	6.79, 6.27
20	597.2	551.0	536.0	561.8	572.0	618.0	624.8	596.6	10- 20	187.2	261.8	23.8, 22
30	415.0	374.6	360.7	384.6	393.6	432.4	435.9	412.2	20- 30	224.1	485.9	44.2, 40.9
40	268.4	238.5	227.5	246.3	253.8	278.9	279.7	263.8	30- 40	202.4	688.3	62.7, 57.9
50	165.9	145.9	138.0	151.9	157.4	172.1	170.9	161.9	40- 50	157.0	845.3	77, 71.1
60	99.46	85.78	80.21	89.63	93.63	102.7	98.91	95.68	50- 60	109.8	955.1	87, 80.3
70	55.14	46.72	39.94	49.47	52.25	56.88	52.27	52.54	60- 70	69.80	1025	93.3, 86.2
80	26.91	20.74	12.53	22.43	25.20	26.34	19.67	23.91	70- 80	37.36	1062	96.7, 89.4
90	11.20	8.031	0.0194	7.730	11.02	7.993	0.5045	7.826	80- 90	14.27	1077	98, 90.6
100	10.90	7.068	0.0386	6.919	10.65	6.561	0.0339	6.683	90-100	6.967	1084	98.7, 91.1
110	9.665	5.565	0.0749	5.530	9.447	5.187	0.0605	5.184	100-110	5.954	1089	99.2, 91.6
120	7.690	3.720	0.1280	3.868	6.325	3.539	0.1136	3.426	110-120	4.333	1094	99.6, 92
130	5.158	1.865	0.2028	2.217	4.289	1.233	0.1814	1.618	120-130	2.586	1096	99.8, 92.2
140	2.635	0.3107	0.2995	0.4033	2.054	0.2772	0.2780	0.2959	130-140	1.098	1098	99.9, 92.3
150	0.3947	0.4176	0.4179	0.4068	0.3949	0.3932	0.4012	0.4210	140-150	0.3527	1098	100, 92.3
160	0.5166	0.5367	0.5412	0.5438	0.5193	0.5121	0.5389	0.5533	150-160	0.2156	1098	100, 92.4
170	0.6142	0.6240	0.6330	0.6353	0.6191	0.6068	0.6259	0.6448	160-170	0.1640	1098	100, 92.4
180	0.6507	0.6506	0.6621	0.6785	0.6507	0.6433	0.6669	0.6713	170-180	0.0614	1098	100, 92.4
单位:°	光强:cd									单位:lm		

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2026-04-08

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.353
环境湿度: 65.0%
测试距离: 7.540米 [K=1.0000]
备注:

灯具亮度限制曲线

实测参数: U:120.0V I:0.0850A P:10.10W PF:0.9870 Freq:60.00Hz 实检光通:1188.87x1 lm		
灯具名称: cove5代 3500k 120F	灯具类型:3500K	灯具重量:
灯具规格:	外型尺寸: 1FT	测试编号:
制造厂商: WS	发光口面:0.3*0.003	遮光角:

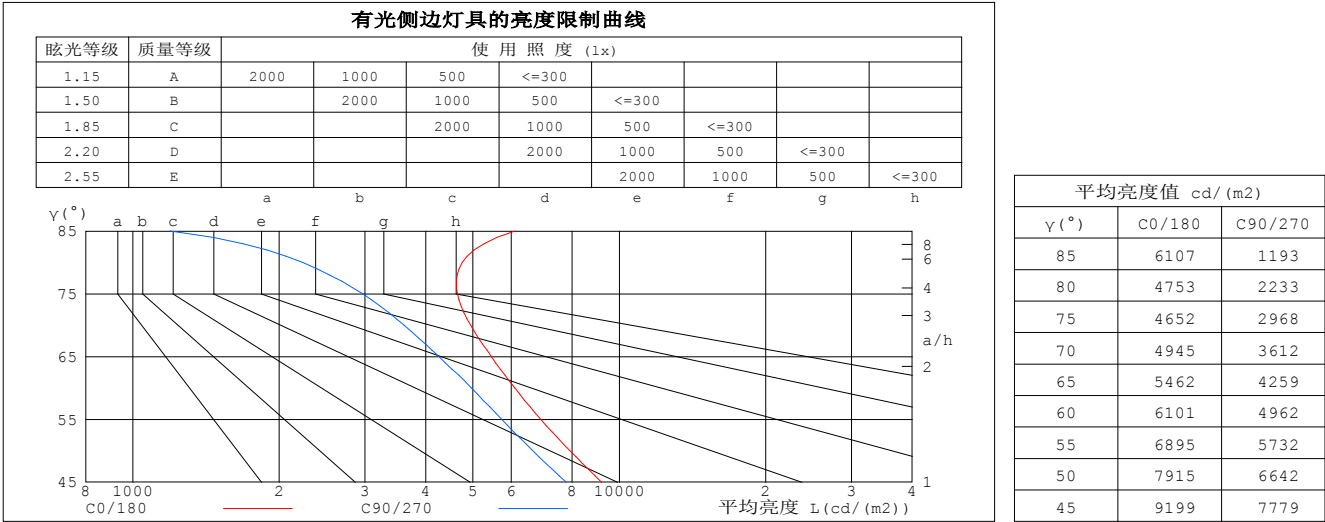


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2026-04-08

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.353
环境湿度:65.0%
测试距离:7.540米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:120.0V I:0.0850A P:10.10W PF:0.9870 Freq:60.00Hz 实检光通:1188.87x1 lm		
灯具名称: cove5代 3500k 120F	灯具类型:3500K	灯具重量:
灯具规格:	外型尺寸: 1FT	测试编号:
制造厂商: WS	发光口面:0.3*0.003	遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.10	1.10	1.10	1.07	1.07	1.07	1.02	1.02	1.02	.97	.97	.97	.93	.93	.93	.91
1.0	.98	.95	.92	.96	.93	.90	.92	.89	.87	.88	.86	.84	.84	.83	.82	.80
2.0	.88	.83	.79	.86	.82	.78	.83	.79	.76	.80	.77	.74	.77	.74	.72	.70
3.0	.80	.73	.68	.78	.72	.68	.75	.70	.66	.73	.68	.65	.70	.67	.64	.62
4.0	.72	.66	.60	.71	.65	.60	.69	.63	.59	.66	.62	.58	.64	.60	.57	.55
5.0	.66	.59	.54	.65	.58	.53	.63	.57	.53	.61	.56	.52	.59	.55	.51	.50
6.0	.61	.54	.49	.60	.53	.48	.58	.52	.48	.56	.51	.47	.55	.50	.47	.45
7.0	.56	.49	.44	.55	.49	.44	.54	.48	.43	.52	.47	.43	.51	.46	.43	.41
8.0	.52	.45	.40	.51	.45	.40	.50	.44	.40	.49	.43	.40	.48	.43	.39	.38
9.0	.48	.42	.37	.48	.41	.37	.47	.41	.37	.46	.40	.37	.45	.40	.36	.35
10.0	.45	.39	.34	.45	.38	.34	.44	.38	.34	.43	.38	.34	.42	.37	.34	.32

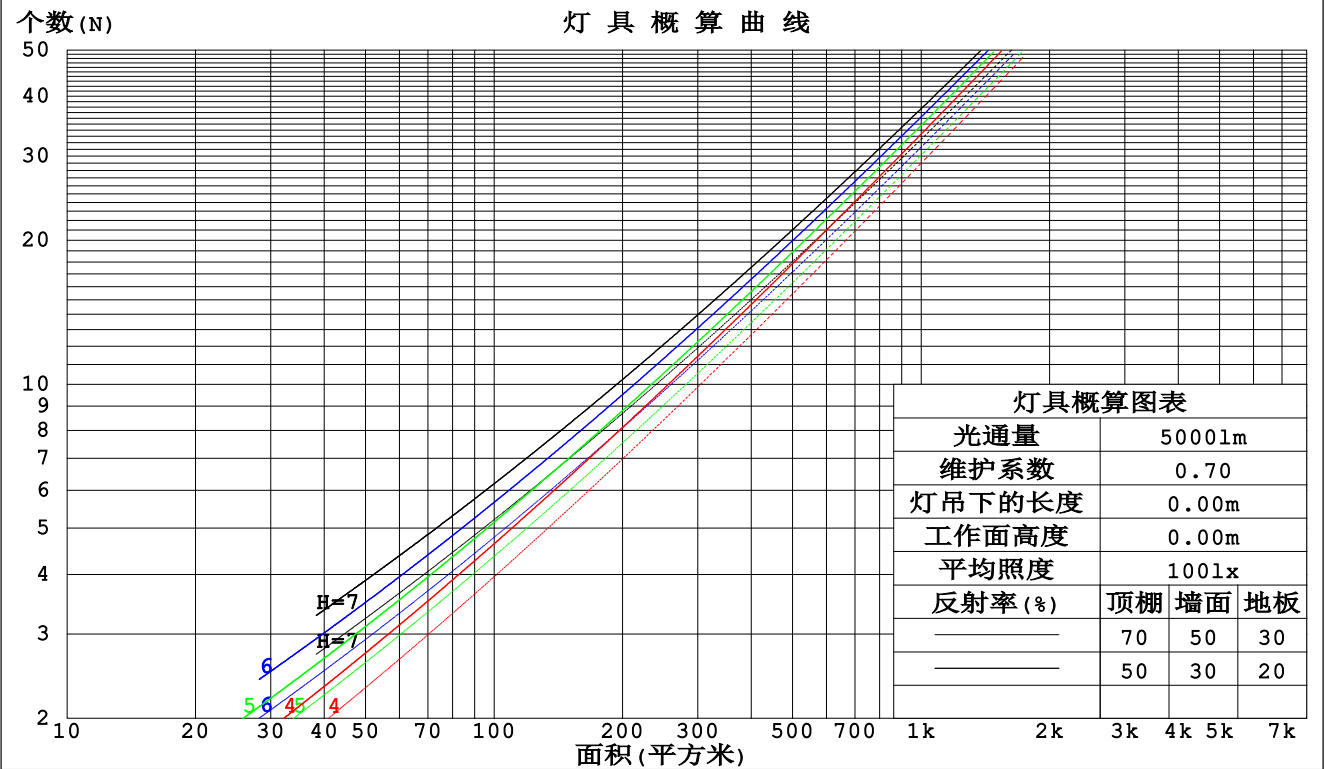

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2026-04-08

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.353
环境湿度:65.0%
测试距离:7.540米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:120.0V I:0.0850A P:10.10W PF:0.9870 Freq:60.00Hz 实检光通:1188.87x1 lm					
灯具名称: cove5代 3500k 120F			灯具类型:3500K		灯具重量:
灯具规格:			外型尺寸: 1FT		测试编号:
制造厂商: WS			发光口面:0.3*0.003		遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.233	.133	.042	.226	.129	.041	.213	.122	.039	.201	.116	.037	.190	.110	.036	
2.0	.220	.121	.037	.214	.118	.036	.203	.113	.035	.192	.108	.034	.183	.103	.033	
3.0	.206	.110	.033	.201	.107	.032	.191	.103	.031	.181	.099	.031	.173	.096	.030	
4.0	.192	.100	.029	.188	.098	.029	.179	.095	.028	.171	.092	.028	.163	.089	.027	
5.0	.180	.092	.027	.176	.090	.026	.168	.087	.026	.161	.085	.025	.154	.082	.025	
6.0	.168	.084	.024	.165	.083	.024	.158	.081	.024	.151	.079	.023	.145	.076	.023	
7.0	.158	.078	.022	.155	.077	.022	.149	.075	.022	.143	.073	.021	.138	.071	.021	
8.0	.149	.073	.020	.146	.072	.020	.141	.070	.020	.135	.069	.020	.130	.067	.020	
9.0	.141	.068	.019	.138	.067	.019	.133	.066	.019	.128	.064	.018	.124	.063	.018	
10.0	.133	.064	.018	.131	.063	.018	.126	.062	.017	.122	.061	.017	.118	.059	.017	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.190	.190	.190	.162	.162	.162	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.177	.159	.142	.151	.136	.123	.104	.094	.085	.060	.054	.049	.019	.017	.016	
2.0	.167	.136	.111	.143	.117	.096	.098	.081	.067	.056	.047	.039	.018	.015	.013	
3.0	.158	.120	.089	.135	.103	.077	.093	.072	.054	.054	.042	.032	.017	.014	.010	
4.0	.150	.107	.074	.129	.092	.064	.088	.064	.045	.051	.038	.027	.016	.012	.009	
5.0	.143	.097	.063	.122	.084	.055	.084	.058	.039	.049	.034	.023	.016	.011	.008	
6.0	.136	.089	.055	.117	.077	.048	.081	.054	.034	.047	.032	.020	.015	.010	.007	
7.0	.130	.082	.049	.112	.071	.042	.077	.050	.030	.045	.029	.018	.014	.010	.006	
8.0	.124	.077	.044	.107	.066	.038	.074	.047	.027	.043	.028	.016	.014	.009	.005	
9.0	.119	.072	.040	.103	.062	.035	.071	.044	.025	.041	.026	.015	.013	.009	.005	
10.0	.114	.068	.037	.099	.059	.032	.068	.042	.023	.040	.025	.014	.013	.008	.005	

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2026-04-08

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.353
环境湿度:65.0%
测试距离:7.540米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:120.0V I:0.0850A P:10.10W PF:0.9870 Freq:60.00Hz 实检光通:1188.87x1 lm										
灯具名称: cove5代 3500k 120F					灯具类型:3500K			灯具重量:		
灯具规格:					外型尺寸: 1FT			测试编号:		
制造厂商: WS					发光口面:0.3*0.003			遮光角:		
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉(Viewed crosswise)					向前(Viewed endwise)				
x = 2H y = 2H	18.1	19.3	18.4	19.6	19.8	17.3	18.6	17.6	18.8	19.0
3H	19.1	20.2	19.4	20.5	20.7	18.1	19.3	18.4	19.5	19.8
4H	19.5	20.6	19.8	20.9	21.1	18.4	19.5	18.7	19.7	20.0
6H	19.9	20.9	20.2	21.2	21.5	18.5	19.5	18.9	19.8	20.1
8H	20.1	21.1	20.4	21.4	21.7	18.5	19.5	18.9	19.8	20.1
12H	20.3	21.2	20.6	21.5	21.9	18.5	19.5	18.9	19.8	20.1
4H 2H	18.4	19.4	18.7	19.7	20.0	17.7	18.8	18.1	19.1	19.4
3H	19.5	20.5	19.9	20.8	21.1	18.7	19.6	19.1	20.0	20.3
4H	20.1	20.9	20.5	21.3	21.7	19.1	19.9	19.5	20.3	20.6
6H	20.6	21.4	21.0	21.8	22.2	19.3	20.1	19.7	20.5	20.9
8H	20.9	21.6	21.3	22.0	22.4	19.4	20.1	19.8	20.5	20.9
12H	21.2	21.8	21.6	22.2	22.7	19.4	20.0	19.8	20.4	20.9
8H 4H	20.2	20.9	20.6	21.3	21.7	19.3	20.0	19.7	20.4	20.8
6H	20.9	21.5	21.3	21.9	22.4	19.6	20.2	20.1	20.7	21.1
8H	21.2	21.8	21.7	22.2	22.7	19.8	20.3	20.3	20.7	21.2
12H	21.6	22.1	22.1	22.6	23.1	19.8	20.3	20.3	20.8	21.3
12H 4H	20.2	20.8	20.6	21.2	21.7	19.3	19.9	19.7	20.4	20.8
6H	20.9	21.4	21.4	21.9	22.4	19.7	20.2	20.2	20.7	21.2
8H	21.3	21.8	21.8	22.2	22.7	19.9	20.3	20.4	20.8	21.3
不同间隔布灯时,观察者位置引起的UGR变化:										
S = 1.0H	+ 0.3 / - 0.4					+ 0.4 / - 0.5				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.6 / - 0.5					+ 0.7 / - 0.7				

依据CIE Pub.117计算,表格已按1189lm光源光通进行修正($8\log(F/F_0) = 0.6$)。

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2026-04-08

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000B_V1系统 V2.0.353
环境湿度: 65.0%
测试距离: 7.540米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:120.0V I:0.0850A P:10.10W PF:0.9870 Freq:60.00Hz 实检光通:1188.87x1 lm		
灯具名称: cove5代 3500k 120F	灯具类型:3500K	灯具重量:
灯具规格:	外型尺寸: 1FT	测试编号:
制造厂商: WS	发光口面:0.3*0.003	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	63	54	49	62	54	49	61	54	49	44
0.80	72	63	57	71	63	57	69	62	57	52
1.00	78	70	65	77	69	64	75	70	64	58
1.25	84	76	71	82	75	70	80	74	69	64
1.50	88	80	75	86	79	75	83	78	74	68
2.00	92	86	81	91	85	81	88	83	79	72
2.50	95	89	85	93	88	84	90	85	82	75
3.00	97	92	88	96	91	87	92	88	85	78
4.00	100	96	93	98	94	91	94	91	89	81
5.00	102	99	96	100	97	94	96	93	91	82
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2026-04-08

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.353
环境湿度: 65.0%
测试距离: 7.540米 [K=1.0000]
备注:

灯具等光强曲线

实测参数: U:120.0V I:0.0850A P:10.10W PF:0.9870 Freq:60.00Hz 实检光通:1188.87x1 lm		
灯具名称: cove5代 3500k 120F	灯具类型:3500K	灯具重量:
灯具规格:	外型尺寸: 1FT	测试编号:
制造厂商: WS	发光口面:0.3*0.003	遮光角:

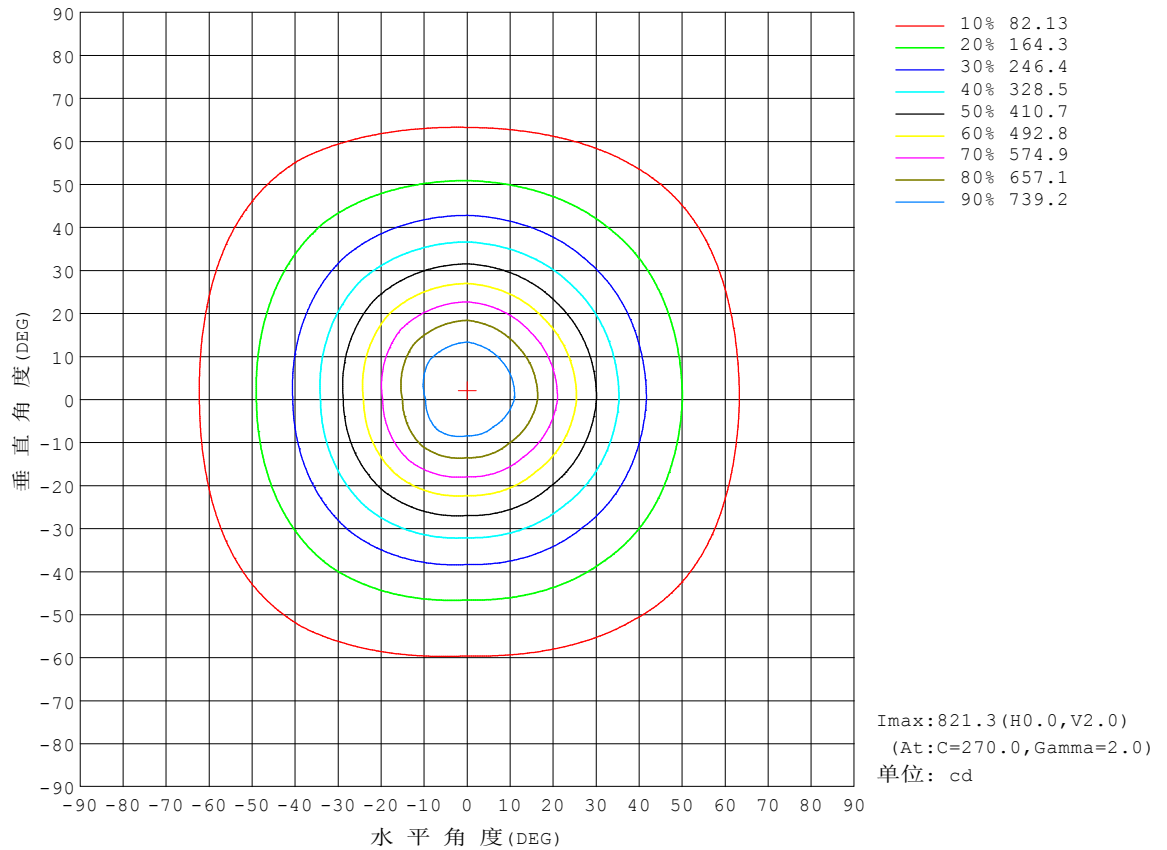


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2026-04-08

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.353
环境湿度: 65.0%
测试距离: 7.540米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:120.0V I:0.0850A P:10.10W PF:0.9870 Freq:60.00Hz 实检光通:1188.87x1 lm		
灯具名称: cove5代 3500k 120F	灯具类型:3500K	灯具重量:
灯具规格:	外型尺寸: 1FT	测试编号:
制造厂商: WS	发光口面:0.3*0.003	遮光角:

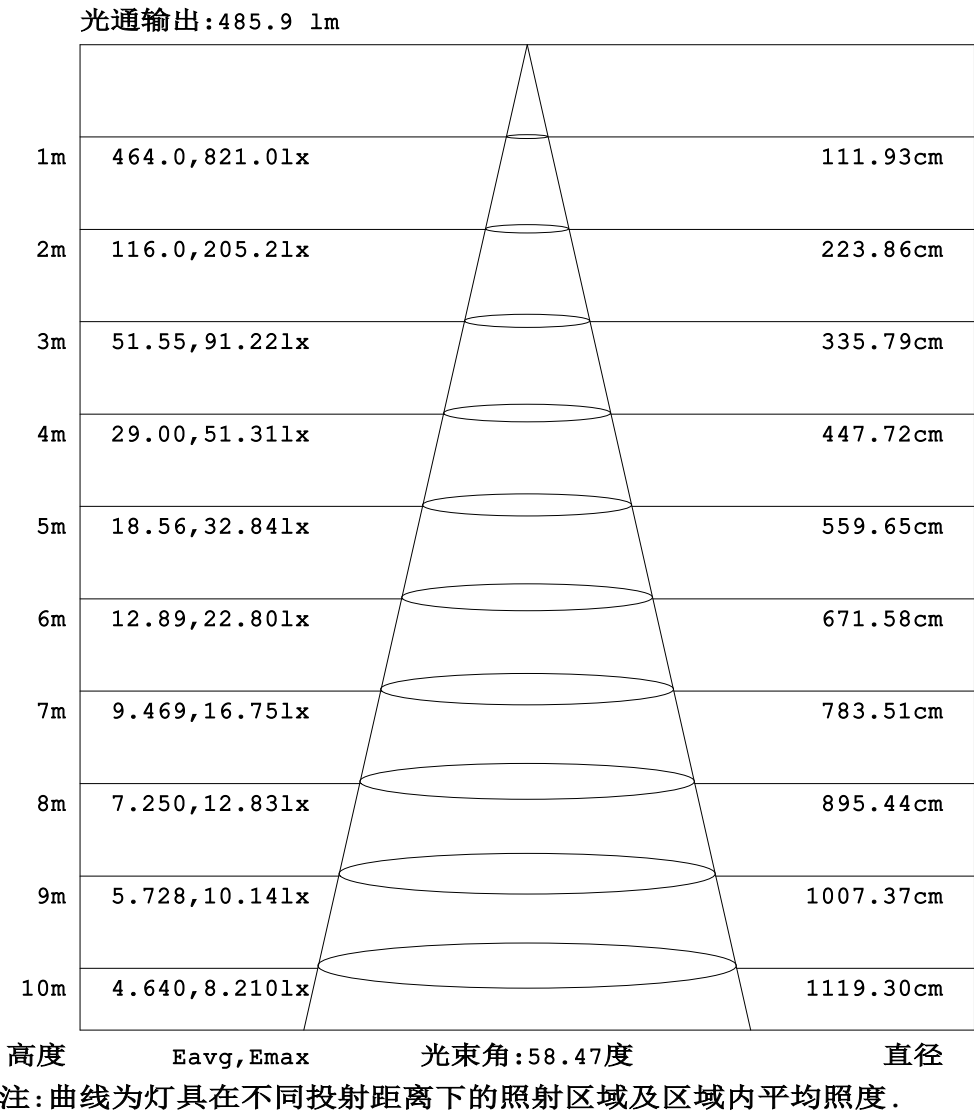


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2026-04-08

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.353
环境湿度:65.0%
测试距离:7.540米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:120.0V I:0.0850A P:10.10W PF:0.9870 Freq:60.00Hz 实检光通:1188.87x1 lm		
灯具名称: cove5代 3500k 120F	灯具类型:3500K	灯具重量:
灯具规格:	外型尺寸: 1FT	测试编号:
制造厂商: WS	发光口面:0.3*0.003	遮光角:

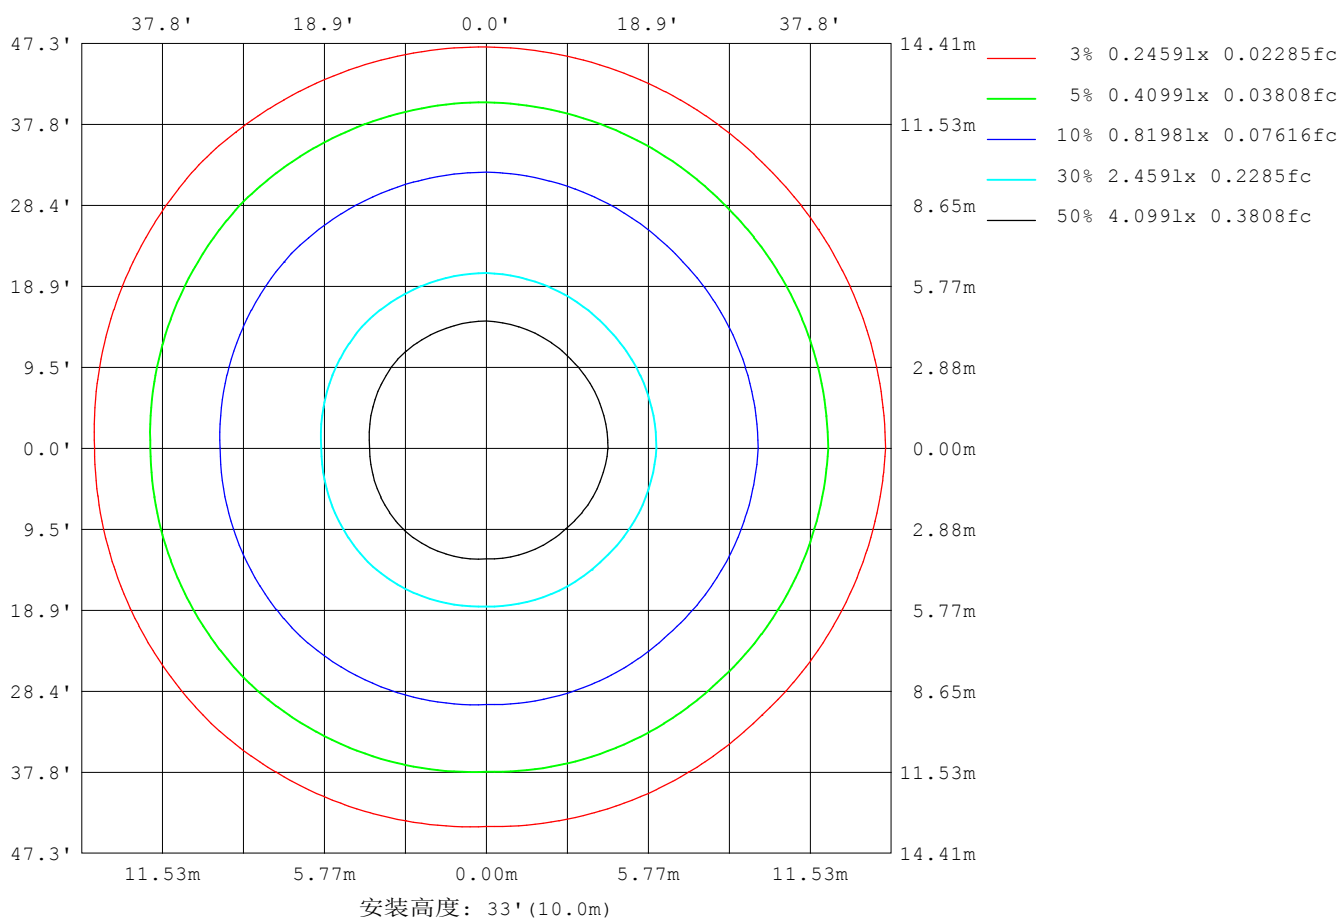

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2026-04-08

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.353
环境湿度: 65.0%
测试距离: 7.540米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:120.0V I:0.0850A P:10.10W PF:0.9870 Freq:60.00Hz 实检光通:1188.87x1 lm		
灯具名称: cove5代 3500k 120F	灯具类型:3500K	灯具重量:
灯具规格:	外型尺寸: 1FT	测试编号:
制造厂商: WS	发光口面:0.3*0.003	遮光角:


平均亮度	数值 (cd/m2)
L横 (65) av	5339
L横 (75) av	4554
L横 (85) av	5918
L纵 (65) av	4807
L纵 (75) av	3533
L纵 (85) av	2052
L45 (65) av	5147
L45 (75) av	4283
L45 (85) av	4875

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2026-04-08

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.353
环境湿度:65.0%
测试距离:7.540米 [K=1.0000]
备注:

平面照度曲线

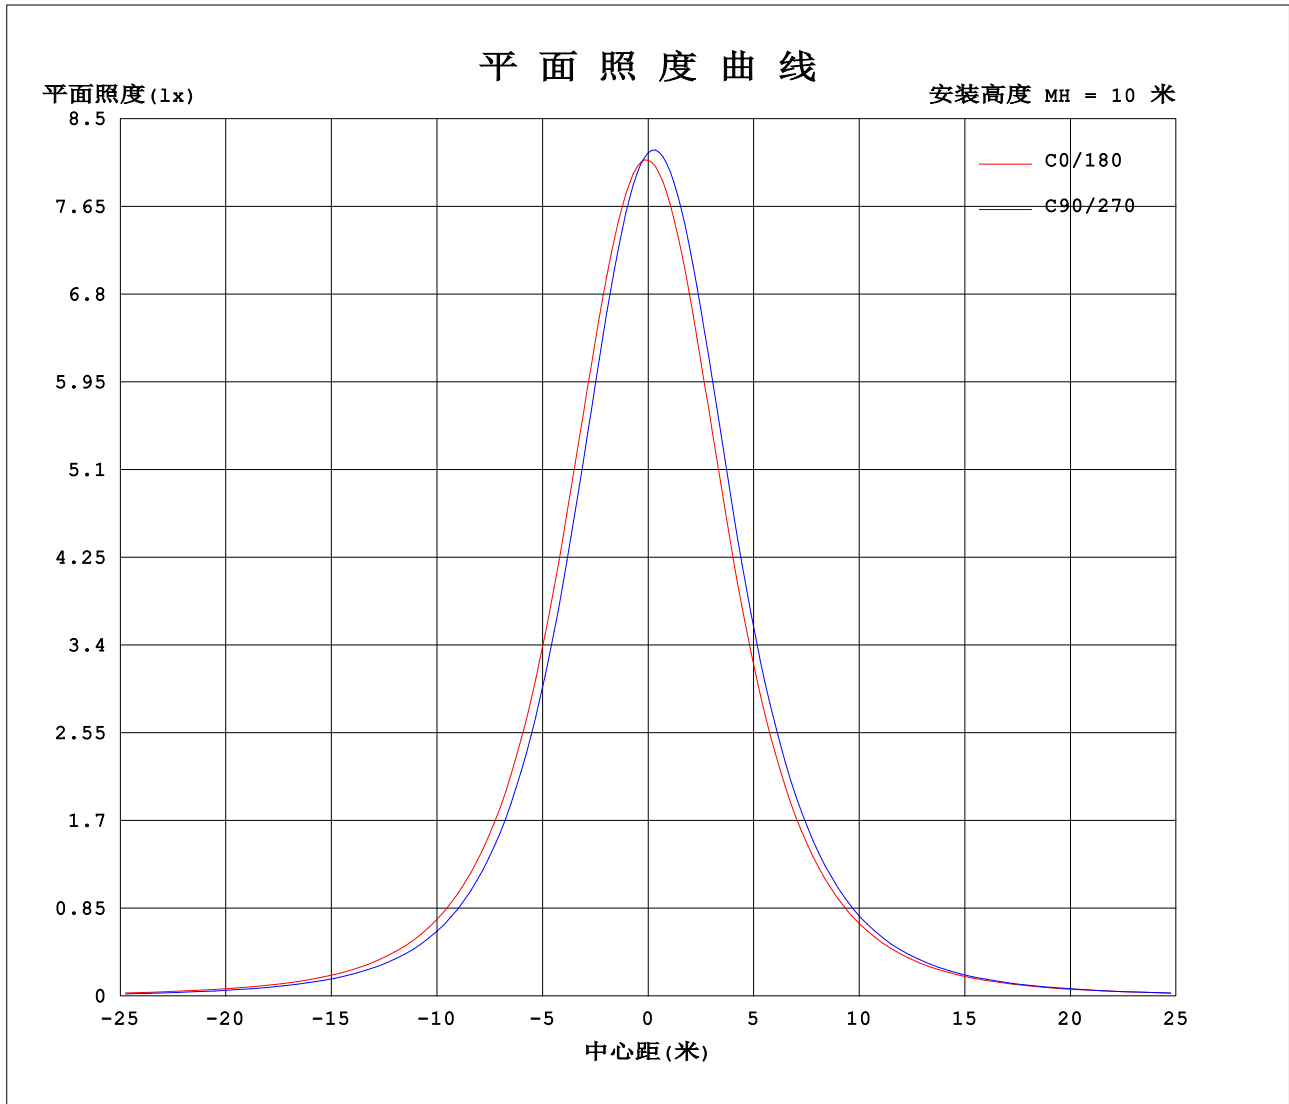

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2026-04-08

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.353
环境湿度: 65.0%
测试距离: 7.540米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:120.0V I:0.0850A P:10.10W PF:0.9870 Freq:60.00Hz 实检光通:1188.87x1 lm		
灯具名称: cove5代 3500k 120F	灯具类型:3500K	灯具重量:
灯具规格:	外型尺寸: 1FT	测试编号:
制造厂商: WS	发光口面:0.3*0.003	遮光角:

表--1									单位: cd										
C (DEG) γ (DEG)	0	45	90	135	180	225	270	315											
0	815	815	815	815	815	815	815	815											
5	802	785	780	790	793	811	815	805											
10	756	725	715	733	739	772	779	759											
15	684	643	630	653	662	704	712	686											
20	597	551	536	562	572	618	625	597											
25	504	459	444	470	480	524	529	502											
30	415	375	361	385	394	432	436	412											
35	335	301	288	310	318	350	352	332											
40	268	238	227	246	254	279	280	264											
45	212	188	178	194	200	220	220	208											
50	166	146	138	152	157	172	171	162											
55	129	112	106	117	121	134	130	125											
60	99.5	85.8	80.2	89.6	93.6	103	98.9	95.7											
65	75.3	64.4	58.2	67.7	70.9	77.7	73.5	72.2											
70	55.1	46.7	39.9	49.5	52.2	56.9	52.3	52.5											
75	39.3	32.3	24.8	34.5	37.1	40.1	34.4	36.8											
80	26.9	20.7	12.5	22.4	25.2	26.3	19.7	23.9											
85	17.4	12.0	3.36	13.2	16.1	15.8	8.23	14.1											
90	11.2	8.03	0.02	7.73	11.0	7.99	0.50	7.83											
95	10.7	7.69	0.03	7.42	10.9	7.10	0.02	7.26											
100	10.9	7.07	0.04	6.92	10.7	6.56	0.03	6.68											
105	10.4	6.37	0.06	6.29	10.2	5.94	0.05	5.98											
110	9.67	5.57	0.07	5.53	9.45	5.19	0.06	5.18											
115	8.75	4.63	0.10	4.72	8.33	4.38	0.08	4.33											
120	7.69	3.72	0.13	3.87	6.33	3.54	0.11	3.43											
125	6.50	2.79	0.16	3.02	5.33	2.52	0.14	2.53											
130	5.16	1.86	0.20	2.22	4.29	1.23	0.18	1.62											
135	3.94	0.84	0.24	1.36	3.03	0.68	0.22	0.67											
140	2.64	0.31	0.30	0.40	2.05	0.28	0.28	0.30											
145	1.30	0.35	0.36	0.34	0.96	0.33	0.34	0.36											
150	0.39	0.42	0.42	0.41	0.39	0.39	0.40	0.42											
155	0.47	0.49	0.48	0.48	0.46	0.45	0.47	0.49											
160	0.52	0.54	0.54	0.54	0.52	0.51	0.54	0.55											
165	0.57	0.59	0.59	0.59	0.57	0.57	0.58	0.61											
170	0.61	0.62	0.63	0.64	0.62	0.61	0.63	0.64											
175	0.64	0.65	0.66	0.66	0.64	0.63	0.65	0.67											
180	0.65	0.65	0.66	0.68	0.65	0.64	0.67	0.67											

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2026-04-08

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.353
环境湿度:65.0%
测试距离:7.540米 [K=1.0000]
备注: