


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.4V I:0.0960A P:11.60W PF:0.9930 Freq:60.00Hz Lamp Flux:1031.77x1 lm		
NAME: WL-2CLD3IN12WB5D3HVWH	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.0245*3.1415	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 88.95 lm/W			
MODEL		I _{max} (cd)	1270	S/MH(C0/180)	0.81
NOMINAL POWER(W)	12W	LOR(%)	100.0	S/MH(C90/270)	0.80
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	1031.8	η UP,DN(C0-180)	0.1,50.7
NOMINAL FLUX(lm)	1031.77	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,49.2
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.85

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

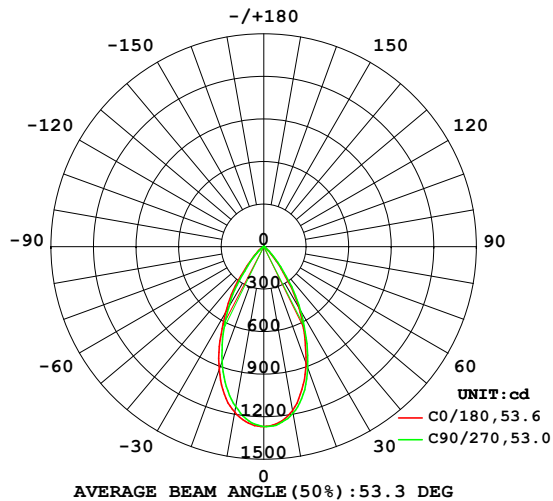

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

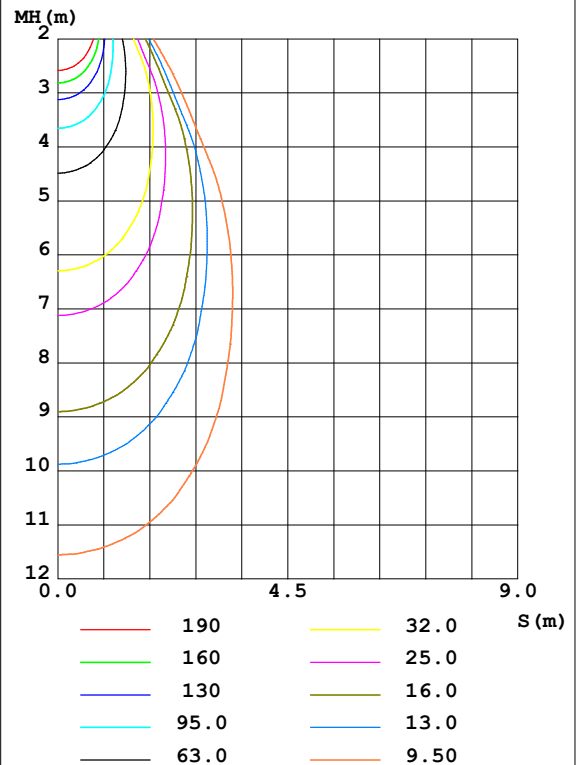

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1173	1179	1193	1216	1183	1169	1145	1125	0- 10	116.5	116.5	11.3,11.3
20	874.9	885.0	906.8	973.4	922.0	903.5	862.7	810.0	10- 20	292.6	409.1	39.7,39.7
30	498.4	498.3	517.7	586.9	542.4	518.0	500.7	452.7	20- 30	319.2	728.3	70.6,70.6
40	158.4	170.3	187.8	233.4	203.2	187.1	177.2	145.6	30- 40	209.3	937.6	90.9,90.9
50	29.15	29.87	40.51	61.83	57.42	54.04	46.08	29.67	40- 50	76.00	1014	98.2,98.2
60	1.042	1.094	1.952	6.771	5.010	3.864	3.422	0.9978	50- 60	16.23	1030	99.8,99.8
70	0.0436	0.0460	0.0509	0.0581	0.0508	0.0582	0.0460	0.0412	60- 70	0.5627	1030	99.9,99.9
80	0.0193	0.0242	0.0194	0.0339	0.0266	0.0267	0.0193	0.0169	70- 80	0.0362	1030	99.9,99.9
90	0	0.0024	0	0.0048	0	0.0000	0	0	80- 90	0.0122	1030	99.9,99.9
100	0	0	0	0	0	0.0024	0	0	90-100	0.0004	1030	99.9,99.9
110	0.0072	0.0170	0.0072	0.0025	0	0.0048	0	0.0072	100-110	0.0014	1030	99.9,99.9
120	0.0629	0.0607	0.0484	0.0484	0.0218	0.0314	0.0315	0.0459	110-120	0.0198	1030	99.9,99.9
130	0.2057	0.2037	0.1887	0.1673	0.1019	0.1137	0.1261	0.1548	120-130	0.0829	1031	99.9,99.9
140	0.4428	0.4338	0.4113	0.3804	0.2763	0.2856	0.3054	0.3509	130-140	0.1942	1031	99.9,99.9
150	0.7142	0.7050	0.6729	0.6542	0.5087	0.5301	0.5525	0.5956	140-150	0.3026	1031	99.9,99.9
160	0.9613	0.9690	0.9274	0.9133	0.7655	0.7844	0.8116	0.8668	150-160	0.3419	1031	100,100
170	1.155	1.158	1.131	1.129	1.037	1.039	1.061	1.107	160-170	0.2786	1032	100,100
180	1.201	1.196	1.196	1.218	1.206	1.204	1.196	1.218	170-180	0.1098	1032	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:121.4V I:0.0960A P:11.60W PF:0.9930 Freq:60.00Hz Lamp Flux:1031.77x1 lm		
NAME: WL-2CLD3IN12WB5D3HVWH	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.0245*3.1415	Shielding Angle:

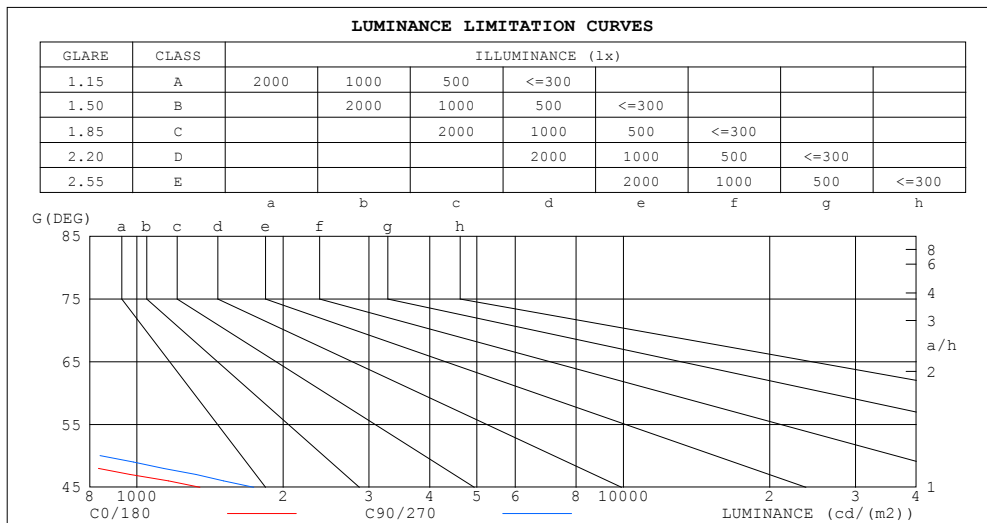


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.4V I:0.0960A P:11.60W PF:0.9930 Freq:60.00Hz Lamp Flux:1031.77x1 lm		
NAME: WL-2CLD3IN12WB5D3HVWH	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.0245*3.1415	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.05	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.96	1.01	.98	.95	.98	.95	.93	.95	.93	.91	.92	.90	.89	.87
3.0	.96	.91	.87	.95	.90	.87	.92	.88	.85	.90	.86	.84	.87	.85	.82	.81
4.0	.90	.84	.80	.89	.84	.80	.87	.82	.79	.84	.81	.78	.83	.79	.77	.75
5.0	.84	.78	.74	.83	.78	.74	.81	.77	.73	.80	.76	.72	.78	.75	.72	.70
6.0	.79	.73	.69	.78	.73	.68	.77	.72	.68	.75	.71	.67	.74	.70	.67	.66
7.0	.74	.68	.64	.74	.68	.64	.72	.67	.63	.71	.67	.63	.70	.66	.63	.61
8.0	.70	.64	.60	.69	.64	.60	.68	.63	.60	.67	.63	.59	.66	.62	.59	.58
9.0	.66	.60	.56	.66	.60	.56	.65	.59	.56	.64	.59	.56	.63	.59	.56	.54
10.0	.63	.57	.53	.62	.57	.53	.61	.56	.53	.60	.56	.53	.60	.55	.52	.51

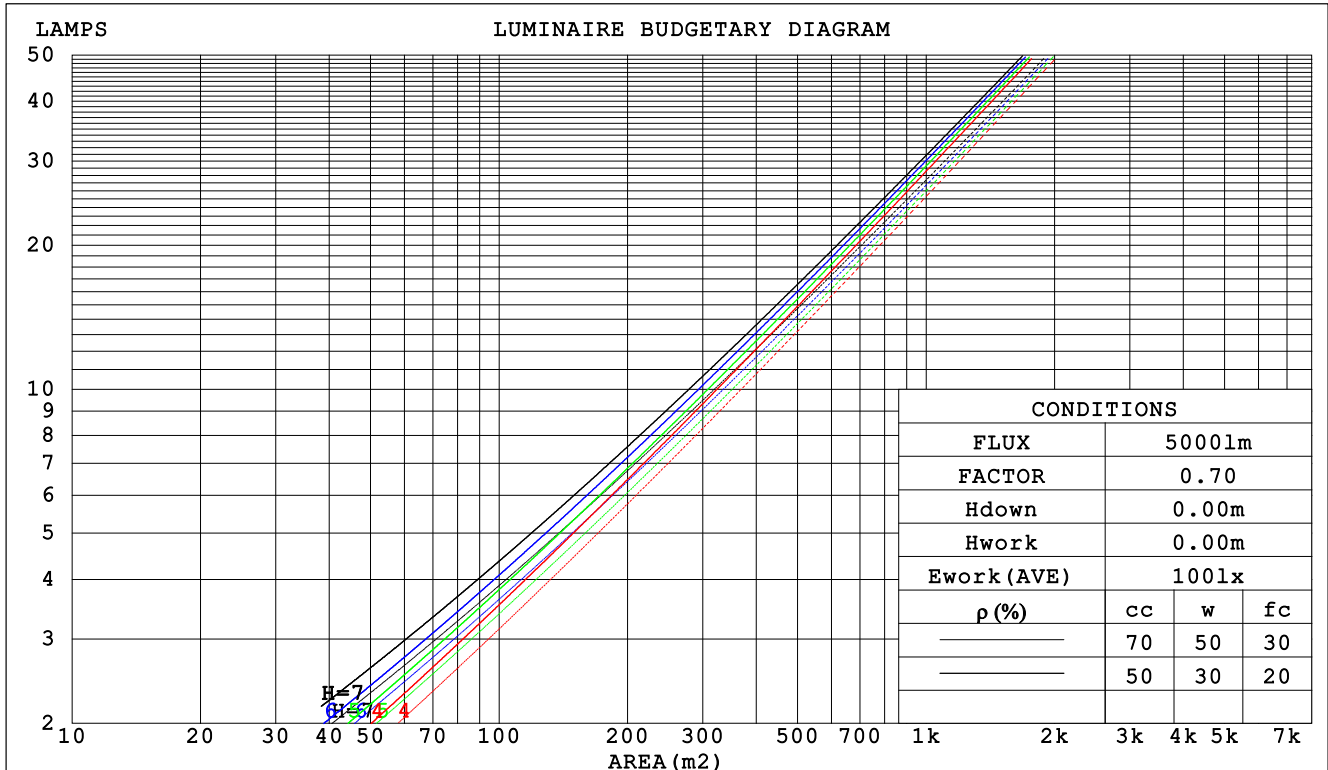

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:121.4V I:0.0960A P:11.60W PF:0.9930 Freq:60.00Hz Lamp Flux:1031.77x1 lm					
NAME: WL-2CLD3IN12WB5D3HVWH			TYPE:3000K		WEIGHT:
SPEC.:			DIM.: 3IN		SERIAL No.:
MFR.: WS			SUR.:0.0245*3.1415		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.177	.101	.032	.170	.097	.031	.157	.090	.029	.146	.084	.027	.135	.078	.025		
2.0	.170	.093	.029	.164	.090	.028	.154	.085	.027	.144	.081	.025	.135	.076	.024		
3.0	.162	.086	.026	.157	.084	.025	.148	.080	.024	.140	.077	.024	.132	.073	.023		
4.0	.155	.080	.024	.151	.079	.023	.143	.076	.023	.136	.073	.022	.129	.070	.021		
5.0	.148	.075	.022	.144	.074	.022	.137	.072	.021	.131	.069	.021	.125	.067	.020		
6.0	.141	.071	.020	.138	.070	.020	.132	.068	.020	.126	.066	.019	.121	.064	.019		
7.0	.135	.067	.019	.132	.066	.019	.127	.064	.018	.122	.062	.018	.117	.061	.018		
8.0	.129	.063	.018	.127	.062	.018	.122	.061	.017	.117	.060	.017	.113	.058	.017		
9.0	.124	.060	.017	.122	.059	.017	.117	.058	.016	.113	.057	.016	.109	.056	.016		
10.0	.119	.057	.016	.117	.056	.016	.113	.055	.016	.109	.054	.015	.106	.053	.015		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.172	.158	.146	.147	.136	.126	.101	.093	.087	.058	.054	.050	.019	.017	.016	
2.0	.157	.133	.114	.134	.115	.098	.092	.080	.069	.053	.046	.040	.017	.015	.013	
3.0	.145	.115	.091	.124	.099	.078	.085	.069	.055	.049	.040	.032	.016	.013	.011	
4.0	.135	.100	.073	.116	.086	.064	.079	.060	.045	.046	.035	.027	.015	.011	.009	
5.0	.126	.088	.060	.108	.076	.053	.075	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.119	.079	.051	.102	.068	.044	.070	.048	.031	.041	.028	.019	.013	.009	.006	
7.0	.112	.072	.043	.097	.062	.037	.067	.043	.027	.039	.026	.016	.013	.008	.005	
8.0	.107	.065	.037	.092	.057	.032	.064	.040	.023	.037	.023	.014	.012	.008	.005	
9.0	.102	.060	.032	.088	.052	.028	.061	.037	.020	.035	.022	.012	.011	.007	.004	
10.0	.097	.056	.028	.084	.048	.025	.058	.034	.018	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:121.4V I:0.0960A P:11.60W PF:0.9930 Freq:60.00Hz Lamp Flux:1031.77x1 lm										
NAME: WL-2CLD3IN12WB5D3HVWH					TYPE:3000K			WEIGHT:		
SPEC.:					DIM.: 3IN			SERIAL No.:		
MFR.: WS					SUR.:0.0245*3.1415			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	9.1	10.0	9.3	10.2	10.4	9.6	10.6	9.9	10.7	10.9
3H	8.9	9.8	9.2	10.0	10.2	9.5	10.3	9.7	10.5	10.7
4H	8.8	9.7	9.1	9.9	10.1	9.4	10.2	9.6	10.4	10.6
6H	8.7	9.5	9.0	9.8	10.0	9.3	10.0	9.6	10.3	10.5
8H	8.7	9.4	9.0	9.7	10.0	9.2	10.0	9.5	10.2	10.5
12H	8.6	9.4	9.0	9.6	9.9	9.2	9.9	9.5	10.2	10.4
4H 2H	8.8	9.7	9.1	9.9	10.1	9.4	10.2	9.6	10.4	10.6
3H	8.7	9.4	9.0	9.6	9.9	9.2	9.9	9.5	10.2	10.4
4H	8.6	9.2	8.9	9.5	9.8	9.1	9.7	9.4	10.0	10.3
6H	8.5	9.0	8.8	9.4	9.7	9.0	9.6	9.4	9.9	10.2
8H	8.4	8.9	8.8	9.3	9.7	8.9	9.5	9.3	9.8	10.2
12H	8.4	8.8	8.8	9.2	9.6	8.9	9.4	9.3	9.7	10.1
8H 4H	8.4	8.9	8.8	9.3	9.7	8.9	9.5	9.3	9.8	10.2
6H	8.3	8.7	8.7	9.1	9.6	8.8	9.3	9.3	9.7	10.1
8H	8.3	8.6	8.7	9.1	9.5	8.8	9.2	9.2	9.6	10.0
12H	8.2	8.5	8.7	9.0	9.4	8.7	9.1	9.2	9.5	10.0
12H 4H	8.4	8.8	8.8	9.2	9.6	8.9	9.4	9.3	9.7	10.1
6H	8.3	8.6	8.7	9.1	9.5	8.8	9.2	9.2	9.6	10.0
8H	8.2	8.5	8.7	9.0	9.4	8.7	9.1	9.2	9.5	10.0
Variations with the observer position at spacings:										
S = 1.0H	+ 3.0 / -20.6					+ 3.3 / -16.8				
1.5H	+ 5.0 / -13.4					+ 5.1 / -12.5				
2.0H	+ 7.0 / -33.4					+ 7.2 / -32.0				

CIE Pub.117 Corrected 1032 lm Total Lamp Luminous Flux.(8log(F/F0) = 0.1)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:121.4V I:0.0960A P:11.60W PF:0.9930 Freq:60.00Hz Lamp Flux:1031.77x1 lm		
NAME: WL-2CLD3IN12WB5D3HVWH	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.0245*3.1415	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	79	75	85	79	75	84	78	75	71
0.80	94	87	84	93	87	83	92	86	83	79
1.00	98	93	89	98	92	89	96	92	88	84
1.25	103	97	94	102	97	93	100	96	93	88
1.50	105	101	97	104	100	97	102	98	96	91
2.00	108	104	101	107	103	100	104	101	99	93
2.50	110	106	103	108	105	102	105	103	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	109	112	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:121.4V I:0.0960A P:11.60W PF:0.9930 Freq:60.00Hz Lamp Flux:1031.77x1 lm		
NAME: WL-2CLD3IN12WB5D3HVWH	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.0245*3.1415	Shielding Angle:

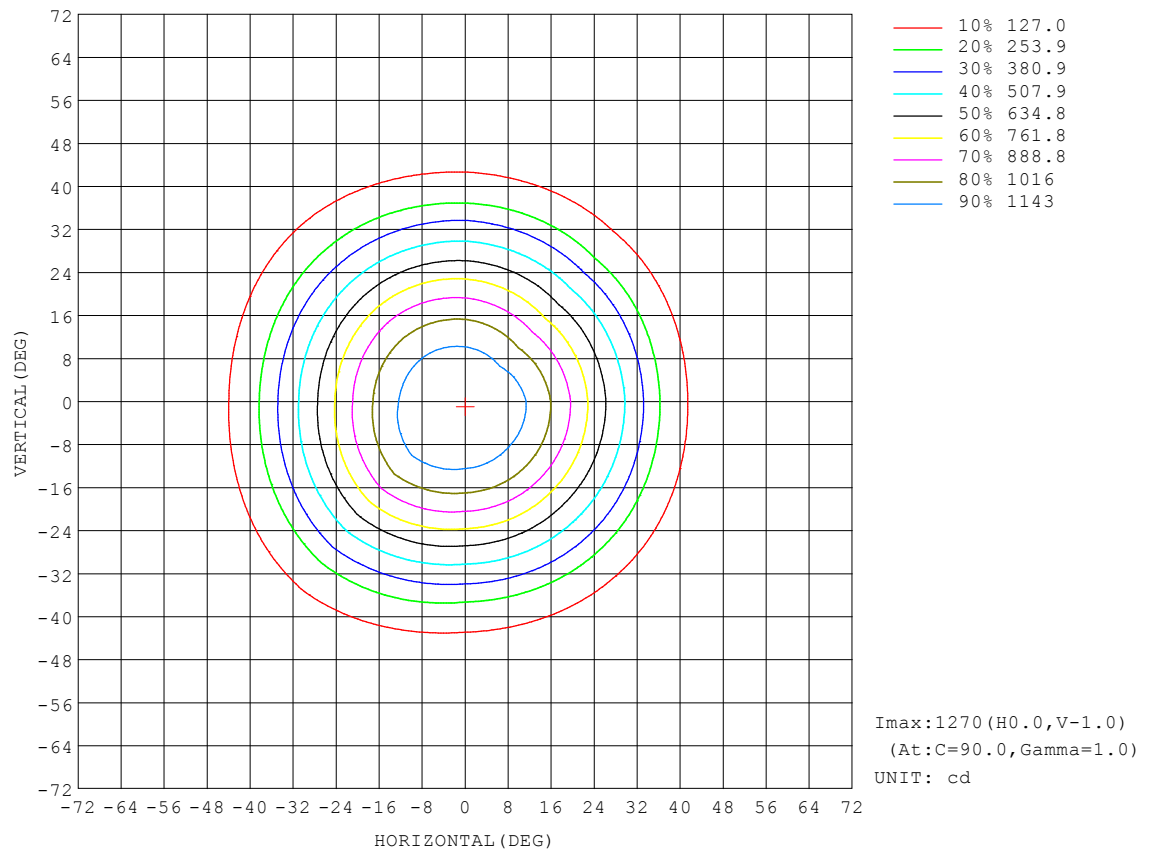


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:121.4V I:0.0960A P:11.60W PF:0.9930 Freq:60.00Hz Lamp Flux:1031.77x1 lm		
NAME: WL-2CLD3IN12WB5D3HVWH	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.0245*3.1415	Shielding Angle:

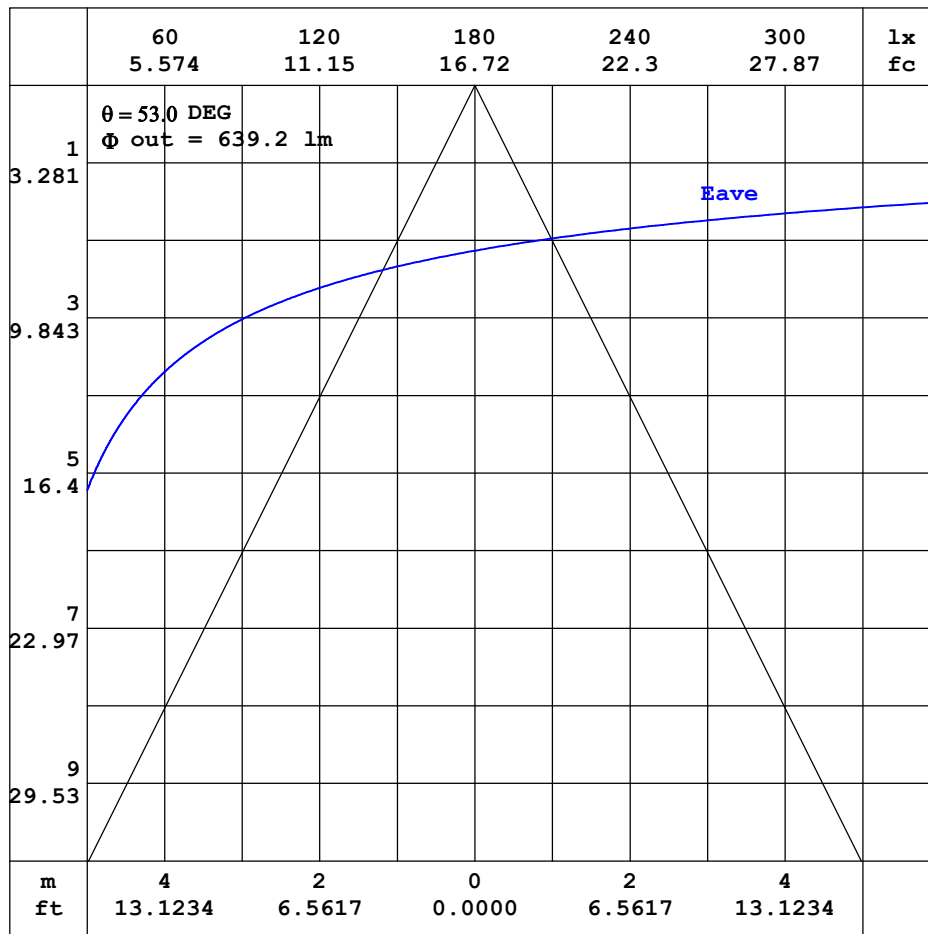


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:121.4V I:0.0960A P:11.60W PF:0.9930 Freq:60.00Hz Lamp Flux:1031.77x1 lm		
NAME: WL-2CLD3IN12WB5D3HVWH	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.0245*3.1415	Shielding Angle:

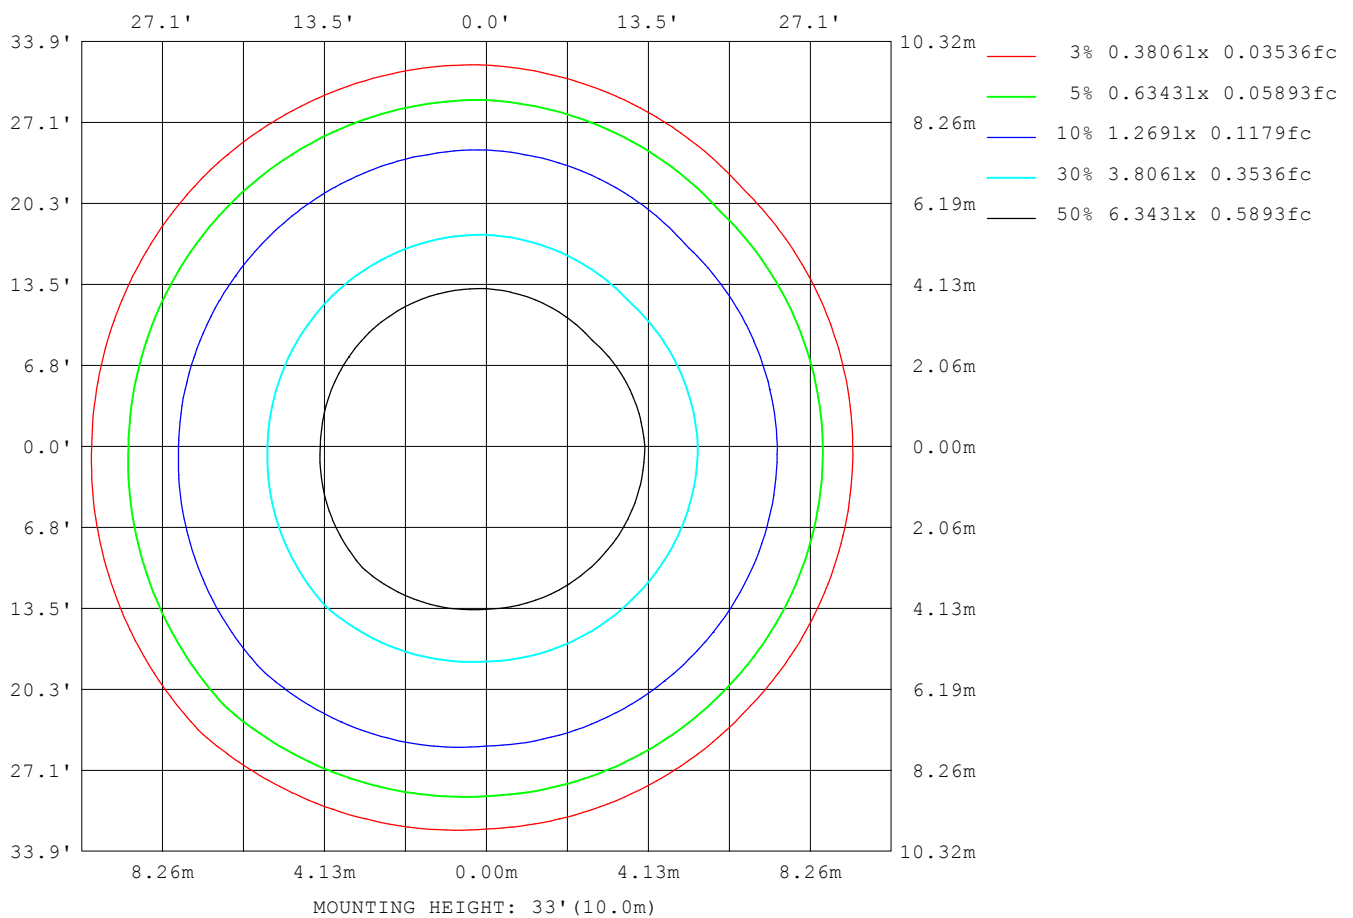

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:121.4V I:0.0960A P:11.60W PF:0.9930 Freq:60.00Hz Lamp Flux:1031.77x1 lm		
NAME: WL-2CLD3IN12WB5D3HVWH	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.0245*3.1415	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	4
L_0~180 (75) av	2
L_0~180 (85) av	2
L_90~270 (65) av	2
L_90~270 (75) av	2
L_90~270 (85) av	1
L_45 (65) av	6
L_45 (75) av	2
L_45 (85) av	2

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

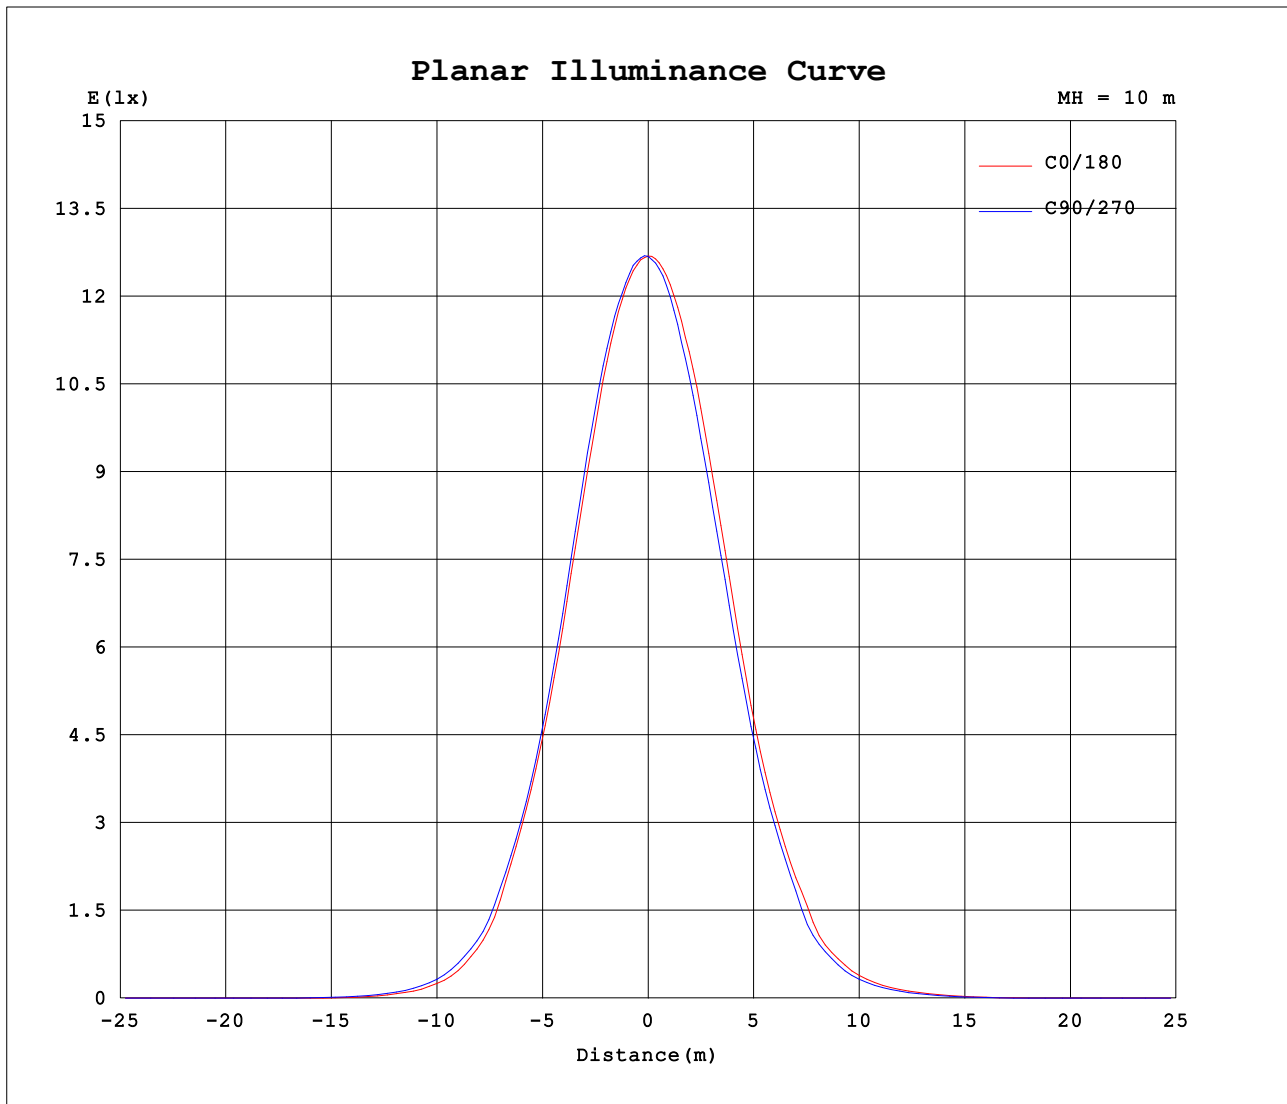

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.4V I:0.0960A P:11.60W PF:0.9930 Freq:60.00Hz Lamp Flux:1031.77x1 lm		
NAME: WL-2CLD3IN12WB5D3HVWH	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 3IN	SERIAL No.:
MFR.: WS	SUR.:0.0245*3.1415	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1269	1269	1268	1265	1269	1269	1268	1265										
5	1244	1250	1253	1263	1249	1241	1233	1217										
10	1173	1179	1193	1216	1183	1169	1145	1125										
15	1043	1059	1078	1120	1079	1053	1022	986										
20	875	885	907	973	922	904	863	810										
25	679	684	708	786	732	711	680	629										
30	498	498	518	587	542	518	501	453										
35	306	316	344	413	375	352	334	264										
40	158	170	188	233	203	187	177	146										
45	71.5	74.6	92.2	127	111	105	91.9	70.2										
50	29.1	29.9	40.5	61.8	57.4	54.0	46.1	29.7										
55	7.58	7.61	13.1	27.2	24.8	21.7	18.5	7.45										
60	1.04	1.09	1.95	6.77	5.01	3.86	3.42	1.00										
65	0.06	0.07	0.07	0.37	0.19	0.25	0.06	0.06										
70	0.04	0.05	0.05	0.06	0.05	0.06	0.05	0.04										
75	0.03	0.04	0.03	0.04	0.03	0.04	0.03	0.03										
80	0.02	0.02	0.02	0.03	0.03	0.03	0.02	0.02										
85	0.01	0.01	0.01	0.02	0.01	0.02	0.00	0.01										
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.01	0.02	0.01	0.00	0.00	0.00	0.00	0.01										
115	0.03	0.03	0.02	0.02	0.00	0.01	0.01	0.02										
120	0.06	0.06	0.05	0.05	0.02	0.03	0.03	0.05										
125	0.12	0.12	0.10	0.09	0.05	0.07	0.07	0.10										
130	0.21	0.20	0.19	0.17	0.10	0.11	0.13	0.15										
135	0.32	0.31	0.29	0.26	0.18	0.20	0.21	0.25										
140	0.44	0.43	0.41	0.38	0.28	0.29	0.31	0.35										
145	0.59	0.57	0.55	0.51	0.38	0.40	0.42	0.47										
150	0.71	0.71	0.67	0.65	0.51	0.53	0.55	0.60										
155	0.85	0.84	0.80	0.79	0.63	0.66	0.69	0.74										
160	0.96	0.97	0.93	0.91	0.77	0.78	0.81	0.87										
165	1.07	1.08	1.04	1.02	0.91	0.92	0.95	1.00										
170	1.16	1.16	1.13	1.13	1.04	1.04	1.06	1.11										
175	1.20	1.20	1.19	1.20	1.14	1.14	1.15	1.18										
180	1.20	1.20	1.20	1.22	1.21	1.20	1.20	1.22										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: